

iHRIS Administrator Handbook

Adding Fields to the Person Form - 4.0

This tutorial applies to version 4.0 of iHRIS Manage. To see this tutorial for different versions of the software see the following:

In this tutorial, we will look at adding a new fields to the person form to iHRIS Manage. We will add two fields, one called "Favorite Color" which will be a drop-down list of values, and one will be "Favorite Animal" which will be a free-text field. There are many ways to skin my favorite animal, a cat. Likewise, there are many ways to add a field to a form. In order to better maintain the code and the customizations we are making, we will do so by creating a sub-module **Demo_ManagePerson** of the Demo site-module which contain the all of our changes. To look at a similar customization, look at [CSSC ^[1]]'s customizations and in particular under *modules/Person*.

Warning: In this tutorial we will be modifying the Demo site of *ihris-manage* directly. This is not the recommended method for doing this in a production environment. Please read Technical Overview: Creating a Site for details on creating a site.

Pre-Requisites

It is recommended to read over the following articles and to refer to them as you read through this tutorial:

- Technical Overview: Module Structure
- Technical Overview: Configuration (Magic) Data
- Technical Overview: Forms and Fields

Directories

You may wish to look at Customizing iHRIS Manage for an overview of some of the directories that are relevant for customizations. We will make our customizations to the iHRIS Manage Demo site. On unix you might be working under:

<Base Dir>

`/var/lib/iHRIS`

<Site Dir>

`/var/lib/iHRIS/4.0/ihris-manages/sites/Demo`

If you have installed Windows iHRIS Manage you will be working under the directories:

<Base Dir>

`C:\Program Files\ihris-suite`

<Site Dir>

`C:\Program Files\ihris-suite\sites\ihris-manage`

Creating a New Module

The looking at:

- **<SITE DIR>/iHRIS-Manage-Demo.xml** for Linux
- **<SITE DIR>/iHRIS-Manage-Demo.xml** for Windows

we see that we can put sub-modules into the subdirectory *modules* of the site directory, which already exists. So lets do (on unix):

```
mkdir <SITE DIR>/modules/DemoPerson
```

which will contains our **DemoPerson** sub-module. Then save to the file:

```
<SITE DIR>/modules/DemoPerson/DemoPerson.xml
```

the following contents:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='DemoPerson'>
  <metadata>
    <displayName>Demo Person</displayName>
    <category>Form</category>
    <description>Sets up the Demo Person form with extra fields for favorite animals and favorite color</description>
    <version>4.0.0</version>
    <requirement name='Person'>
      <atLeast version='4.0' />
      <lessThan version='4.1' />
    </requirement>
    <path name='templates'>
      <value>./templates</value>
    </path>
    <priority>300</priority>
  </metadata>
</I2CEConfiguration>
```

This is (almost) the minimal amount of things we need to do create a new module. Right now, there is no functionality, but we have said that the module *DemoPerson* requires the module *Person*, which is incidentally a sub-module of *ihris-common*. We also set the priority for the module, so that we know that the template files we will create will take precedence over anything in the modules *ihris-manage* or *ihris-common*.

Forms and Form Classes and Inheritance

There are really two parts to defining a "form", a form and a form class. The forms are referenced by their *shortname*, for example *person*. The second is referenced by the name of a PHP class, for example, *iHRIS_Person*.

All of the magic data for forms lives under */modules/forms*. The magic data to define forms is under */modules/forms/forms* and for form classes under */modules/forms/formClasses*. For example, the configuration file **<BASE DIR>/ihris-common/modules/Person/Person.xml** defines the *Person* module. Here you will see two nodes:

```
<configurationGroup name='person'>
</configurationGroup>
```

and

```
<configurationGroup name='iHRIS_Person'>
</configurationGroup>
```

The later defines some of the fields associated with the class `iHRIS_Person`, and the former tells us the class that the *person* form uses is *iHRIS_Person*.

Now if we look at the configuration file **<BASE DIR>/ihris-manage/iHRIS-Manage-Configuration.xml** we will see two things: that *ihris-manage* requires the module *Person*, and we will also see a similar `<configurationGroup name='person'>` node. This time the *person* form now uses the class *iHRIS_ManagePerson*. Since *ihris-manage* requires *Person*, the class associated to the form *person* is loaded from *iHRIS-Manage-Configuration.xml* and not from *Person.xml*

If we look further in the this file, we will see the `<configurationGroup name='iHRIS_ManagePerson'>` node which defines the *iHRIS_ManagePerson* class. Here you will notice two things:

- *iHRIS_ManagePerson* extends *iHRIS_Person*, so it has all of the same fields of *iHRIS_Person*
- *iHRIS_ManagePerson* adds in the field named *password* with type 'STRING_PASS' but that this field is not saved to the database

Adding the Fields to Magic Data

We will add the two fields **fav_color** and **fav_animal** to the *DemoPerson* class. Since we wish for *fav_color* to be a drop-down list, we will also need to create a form called *fav_color* which will contain the colors we wish. To setup these forms and fields, we are going to have to add in configuration (magic) data. Add to:

<SITE DIR>/modules/DemoPerson/DemoPerson.xml

the following just after the `</metadata>` tag:

```
<configurationGroup name='DemoPerson' path='/'>

  <status>overwrite:true</status>

  <configurationGroup name='forms' path='/modules/forms/forms'>

    <configurationGroup name='fav_color'>

      <!-- define the 'fav_color' form -->

      <configuration name='class' values='single'>

        <value>I2CE_SimpleList</value>

        <!-- fav_color uses the 'I2CE_SimpleList' form defined in i2ce/modules/Forms/modules/Lists-->

      </configuration>

      <configuration name='display' values='single'>

        <value>Favorite Color</value>

        <!-- the name of this form that is displayed to a user is 'Favorite Color'-->

      </configuration>

    </configurationGroup>

  </configurationGroup>

  <configurationGroup name='person'>

    <!-- the form 'person' is defined in ihris-common/modules/Person/Person.xml. -->

    <configuration name='class'>

      <value>DemoPerson</value>

      <!-- Here we are changing the form class it uses to be 'DemoPerson' which is defined below -->

    </configuration>

  </configurationGroup>

</configurationGroup>

<configurationGroup name='formClasses' path='/modules/forms/formClasses'>
```

```

<configurationGroup name='DemoPerson'>

    <!-- We are defining the DemoPerson class -->

    <configuration name='extends'>

        <value>iHRIS_ManagePerson</value>

        <!-- The DemoPerson class extends the 'iHRIS_ManagePerson' class defined in <BASE DIR>/iHRIS-Manage-Configuration.xml -->

    </configuration>

    <configurationGroup name='fields'>

        <!-- Under here we add in the new fields that DemoPerson has -->

        <configurationGroup name='fav_animal'>

            <!-- The data definining the 'fav_animal' field of DemoPerson -->

            <configuration name='formfield'>

                <value>STRING_LINE</value>

                <!-- Set the field to have type 'STRING_LINE' which is a single line of text e.g. an <input type='text'> in a form-->

            </configuration>

            <configuration name='headers' type='delimited' values='many'>

                <value>default:Favorite Animal</value>

                <!-- Set the default header for this field to be 'Favorite Animal'-->

            </configuration>

        </configurationGroup>

        <configurationGroup name='fav_color'>

            <!-- The data definining the 'fav_color' field of DemoPerson -->

            <configuration name='formfield'>

                <value>MAP</value>

                <!-- Set the field to have type MAP. By default, this field will be one of the ids of the form fav_color-->

            </configuration>

            <configuration name='headers' type='delimited' values='many'>

                <value>default:Favorite Color</value>

                <!-- Set the default header for this field to be 'Favorite Color'-->

            </configuration>

        </configurationGroup>

    </configurationGroup>

</configurationGroup>

```

The **tomato** colored text are comments which you may leave out if you wish.

The **olive** colored text can be removed before release, but it is useful for development purposes. It ensures that any changes that you make to the configuration file will be updated.

Customizing the Template Files

In the previous step, we enabled the two fields to be saved to the database. We now need to edit the user interface to show the fields where appropriate. There are three areas we need to add these fields:

- Displaying a person's record shows their favorite animal and color
- Editing a person's record lets you update favorite animal and color
- Add a place in the *Administer Database* page to add in the allowed colors

Displaying the Favorites

The page titled *View Person* and referenced in the URL as **view** is first provided in the *Person* sub-module of *ihris-common*. Here, looking at **<BASE DIR>/ihris-common/modules/Person/Person.xml** we see that the page *view* loads the default template file **view.html** which can be found in **<BASE DIR>/ihris-common/modules/Person/templates/view.html**.

The *ihris-manage* module overrides the *view.html* by providing it in **<BASE DIR>/templates/view.html**

Since the *view.html* file is not specific to the DemoPerson module, it is not appropriate to put our modified version in the DemoPerson sub-module. Instead we will put in the templates directory of the Demo site module. Here is the (unix) command:

```
cp <BASE DIR>/ihris-manage/templates/view.html <SITE DIR>/templates/view.html
```

To display the favorite animal and color of a person after their nationality, open up the newly created **<SITE DIR>/templates/view.html**. Find the line:

```
<span type="form" name="person:nationality" showhead="default" class="even"></span>
```

and add the following to lines just after it:

```
<span type="form" name="person:fav_color" showhead="default" ></span>
<span type="form" name="person:fav_animal" showhead="default" class="even"></span>
```

Editing the Favorites

In the *View Person*, the first *Update This Information* link lets us change the person's basic information such as name and nationality. We will add the fields to change their favorite color and animal to this page. Clicking on the link and looking at the URL, we see that this page is named **person**.

We start by looking at the *Person* sub-module of *ihris-common* to find correct template file to edit. Looking at **<BASE DIR>/ihris-common/modules/Person/Person.xml**, we see that *person* page loads the default html template file *form_person.html*. This file is found in **<BASE DIR>/ihris-common/modules/Person/templates/form_person.html**. It is not overridden by *ihris-manage*.

Since this template file is specific to a person and does not involve any other forms, we will put this in our *DemoPerson* module. We will create a templates sub-directory and copy this file over to this directory. Here are the (unix) commands:

```
mkdir <SITE DIR>/modules/DemoPerson/templates
cp <BASE DIR>/ihris-common/modules/Person/templates/form_person.html <SITE DIR>/modules/DemoPerson/templates/form_person.html
```

Now we open the newly created **<SITE DIR>/modules/DemoPerson/templates/form_person.html** and find the following line:

```
<span type="form" name="othername" showhead="default"></span>
```

and add the following:

```
<span type="form" name="fav_color" showhead="default"></span>
<span type="form" name="fav_animal" showhead="default"></span>
```

just after it.

Add to the Database Lists

The lists stored in the database are managed through the page titled *Administer Database* and referenced by **lists**. We need to add a link to administer the *Favorite Color* list.

This basic functionality of the *list* page is provided by *I2CE* by the *Lists* sub-module of the *Forms* sub-module. Here the *lists* page is handled by the class in **<BASE DIR>/I2CE/modules/Forms/modules/Lists/lib/I2CE_PageFormLists**, and we see that a template file **lists.html** is loaded. The **lists.html** is a template file which contains all of the database lists that we wish to administer. (Technically, we should have a file **<BASE DIR>/I2CE/modules/Forms/modules/Lists/templates/lists.html** but we forgot to add it.)

The *lists* pages is extended in *ihris-common* through the class at **<BASE DIR>/ihris-common/lib/iHRIS_PageFormLists**. We also notice there is a template file **<BASE DIR>/ihris-common/templates/lists.html** that has all the lists provided by *ihris-common*.

The *ihris-manage* module overrides the *lists.html* provided by *ihris-common* by providing its own at **<BASE DIR>/ihris-manage/tempalte/lists.html**. You will see that it has all the lists provided by *ihris-common* as well the new lists provided by *ihris-manage*. This is the template file we will modify for our site to add it the *Favorite Color* list.

Since the *lists.html* file is not specific to the *DemoPerson* module, it is not appropriate to put our modified version in the *DemoPerson* sub-moudule. Instead we will put in the templates directory of the Demo site module. Here is the (unix) command:

```
cp <BASE DIR>/ihris-manage/templates/lists.html <SITE DIR>/templates/lists.html
```

Now open the file **<SITE DIR>/templates/lists.html** and add the following line:

```
<li task='can_edit_database_list_fav_color' ><a href="lists?type=fav_color">Favorite Color</a></li>
```

in the **** block under **Employee Lists**.

You will notice, that we have a *task* attribute in the **** tag. A user with the role *HR Manager* or *Administrator* can edit any database list. However, for purposes of an example, we will add this task which we can assign to a user with the *Training Manager* role. This we do in the next section

Creating Edit Favorite Color Template

We need to create a template called 'view_list_fav_color.html' in our templates directory which will contain:

```
<!-- WARNING: If you do not create the tasks as decribed below, you will need to remove
<div id="list_display" class='recordsData' task="can_view_database_list_fav_color">

    <div class="editRecord">
        <p>Edit This Information</p>
        <ul>
            <li task='can_edit_database_list_fav_color'><span type="form" nam
            <li><a href="lists?type=emp_status">Select another Favorite Color
        </ul>
    </div> <!-- editRecord -->
```

```

<div class="dataTable">
  <table border="0" cellspacing="0" cellpadding="0">
    <tr>
      <th colspan="2">Favorite Color</th>
    </tr>
    <span type="form" name="fav_color:name" showhead="default"></span>
  </table>
</div> <!-- dataTable -->

</div> <!-- list_display -->

```

Setting the Edit Database List Favorite Color Task (Optional)

In the last section, we made use of a task *can_edit_database_list*. In this section we perform the **optional** task of adding this to the configuration data.

Insert the following code into **<SITE DIR>/modules/DemoPerson/DemoPerson.xml** just after the **<status>overwrite:true</status>** tag:

```

<configurationGroup name='tasks'
path='/I2CE/tasks/task_description'>
  <!-- This node has all of the tasks available to the system and a
description of what they are -->
  <configuration name='can_edit_database_list_fav_color'>
    <!-- This is the task that we added to edit the database list
associated with the form fav_color
    The class I2CE_PageFormList checks for the existence of
"can_edit_database_list_$formname" for editing the list in the action()
method-->
    <value>Edit the Favorite Color list</value>
    <!-- The description of the task. It is displayed in the
task/role management page -->
  </configuration>
  <configuration name='can_view_database_list_fav_color'>
    <!-- This is the task that we added to view an existing entry
in the database list associated with the form fav_color
    The class I2CE_PageViewList checks for the existence of
"can_view_database_list_$formname" for editing the list in the action()
method-->
    <value>View the training course status list</value>
    <!-- The description of the task. It is displayed in the
task/role management page -->
  </configuration>
</configurationGroup>
<configurationGroup name='tasks_trickle_down'
path='/I2CE/tasks/task_trickle_down/' >
  <!-- This node is used to describes all the sub-tasks that are a
specific task has-->

```



```

    <configuration name='can_view_database_list_fav_color'
values='many'>
    <!--If we can view the database list for 'fav_color' we want to
make sure we have permission to view
        database lists in general.
        The 'many' attribute says to treat this like an array of
values -->
    <value>can_view_database_lists</value>
</configuration>
    <configuration name='can_edit_database_list_fav_color'
values='many'>
    <!-- If we can edit the database list 'fav_color' we need to
make sure we can view it as well as edit
        database lists in general.
        The 'many' attribute says to treat this like an array of
values -->
    <value>can_view_database_list_fav_color</value>
    <value>can_edit_database_lists</value>
</configuration>
</configurationGroup>
<configurationGroup name='role_trickle_down'
path='/I2CE/tasks/role_trickle_down'>
    <!-- This node is used to describes all the tasks that are
assigned to various role -->
    <configuration name='training_manager' values='many'>
    <!-- This node defines the tasks that are assigned to the
'training_manager' role.
        The 'many' attribute says to treat this like an array of
values -->
    <status>uniquemerge:true</status>
    <!-- We want to merge the existing tasks for the
training_manager role to the ones we define below.
        The existing values for 'training_manager' are defined in
<BASE DIR>/ihris-common/modules/TrainingCourse/TrainingCourse.xml
-->
    <value>can_edit_database_list_fav_color</value>
    <!-- Here we assign the 'can_edit_database_list_fav_color' to
the 'training_manager' role -->
    </configuration>
</configurationGroup>

```

Enabling the Module

Now that we have everything good to go, we just need to enable the 'DemoPerson' module in the site. Open up the file:

```
<SITE DIR>/iHRIS-Manage-Demo.xml
```

and add in the following:

```
<requirement name='DemoPerson'>
  <atLeast version='4.0'>
  <lessThan version='4.1'>
</requirement>
```

in the <metadata> section after the requirement for *ihris-manage*. Also, ensure you have:

```
<path name='modules'>
  <value>./modules</value>
</path>
```

Changing The Favorite Animal Header

Suppose that you want to change the header for the fav_animal field from "Favorite Animal" to "Favorite Mammal." To do this, we need to update the module version as well as add in a <version> tag where we have changed the header. The changes are highlighted. In the <metatdata> section we have:

```
<metadata>
<displayName>Demo Person</displayName>
<category>Form</category>
<description>Sets up the Demo Person form with extra fields for favorite animals and favorite color</description>
  <version>4.0.1</version>
<requirement name='Person'>
  <atLeast version='4.0'>
  <lessThan version='4.1'>
</requirement>
<path name='templates'>
  <value>./templates</value>
</path>
<priority>300</priority>
</metadata>
```

and in the definition of field 'fav_animal' we have:

```
<configuration name='headers' type='delimited' values='many'>
  <version>4.0.1</version>
  <value>default:Favorite Mammal</value>
</configuration>
```

Happy Debugging

References

[1] <http://bazaar.launchpad.net/~ihris%2Bcssc/ihris-manage/4.0-central/files>

Adding Forms and Fields

This will describe how to add a new module to iHRIS Manage to add in two new forms for tracking Professional Development for an employee. These instructions could be modified for iHRIS Qualify with a few minor changes. There will be one form for Professional Development for courses to be logged for employees. Any number of these forms can be associated with an employee. There will also be a link to Add Continuous Professional Development. Only one of these forms will be associated with an employee. It can be used to save the current training needs requested by the employee for professional and personal development.

Step 1: Create the module

Change into your site's modules directory and create a new directory called ProfDevelopment and change into this directory. Create lib and templates directory in the ProfDevelopment directory. Create and edit a new file called ProfDevelopment.xml (in the ProfDevelopment directory) with the following contents:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='ProfDevelopment'>
  <metadata>
    <displayName>Professional Development</displayName>
    <className>iHRIS_Module_ProfDevelopment</className>
    <category>Site</category>
    <description>Adds in two new forms for tracking professional development</description>
    <version>3.1.4</version>
    <path name='classes'>
      <value>./lib</value>
    </path>
    <path name='templates'>
      <value>./templates</value>
    </path>
    <priority>325</priority>
  </metadata>

  <configurationGroup name='ProfDevelopment' path='/I2CE'>
    <displayName>Professional Development</displayName>

    <configurationGroup name='tasks' path='/I2CE/tasks/task_description' locale='en_US'>
      <configuration name='person_can_view_child_form_person_profdev'>
        <value>Can view person_profdev child form of a person</value>
      </configuration>
      <configuration name='person_can_edit_child_form_person_profdev'>
        <value>Can edit person_profdev child forms of a person</value>
      </configuration>
      <configuration name='person_can_view_child_form_person_continuous_profdev'>
```

```

    <value>Can view person_continuous_profdev child form of a person</value>
  </configuration>
  <configuration name='person_can_edit_child_form_person_continuous_profdev'>
    <value>Can edit person_continuous_profdev child forms of a person</value>
  </configuration>
</configurationGroup>

<configurationGroup name='tasks_trickle_down' path='/I2CE/tasks/task_trickle_down/'>
  <configuration name='person_can_view_child_form_person_profdev' values='many'>
    <value>person_can_view</value>
  </configuration>
  <configuration name='person_can_edit_child_form_person_profdev' values='many'>
    <value>person_can_view_child_form_person_profdev</value>
    <value>person_can_view</value>
  </configuration>
  <configuration name='person_can_view_child_form_person_continuous_profdev' values='many'>
    <value>person_can_view</value>
  </configuration>
  <configuration name='person_can_edit_child_form_person_continuous_profdev' values='many'>
    <value>person_can_view_child_form_person_continuous_profdev</value>
    <value>person_can_view</value>
  </configuration>
  <configuration name='person_can_view_child_forms' values='many'>
    <value>person_can_view_child_form_person_profdev</value>
    <value>person_can_view_child_form_person_continuous_profdev</value>
  </configuration>
  <configuration name='person_can_edit_child_forms' values='many'>
    <value>person_can_edit_child_form_person_profdev</value>
    <value>person_can_edit_child_form_person_continuous_profdev</value>
  </configuration>
</configurationGroup>

<configurationGroup name='forms' path='/modules/forms'>
  <displayName>Forms</displayName>
  <description>Information about the forms made available by ProfDevelopment</description>

  <configurationGroup name='forms'>
    <displayName>Forms available to the form factory</displayName>
    <status>advanced:true</status>
    <status>required:true</status>

    <!-- This section is to add a new form called person_profdev with the associated
         class. The class will be defined in the classes section
below. -->
    <configurationGroup name='person_profdev'>
      <displayName>Person Professional Development</displayName>

```

```

    <description>The Person Professional Development Form</description>
    <configuration name='class' values='single'>
      <displayName>Class Name</displayName>
      <description>The name of the class providing the form</description>
      <value>iHRIS_PersonProfDevelopment</value>
    </configuration>
    <configuration name='display' values='single'>
      <displayName>Display name</displayName>
      <description>The display name for this form</description>
      <value>Person Professional Development</value>
    </configuration>
  </configurationGroup> <!-- person_profdev -->

  <!-- This section is to add a new form called person_continuous_profdev with the
        class. The class will be defined in the classes section
below. -->
  <configurationGroup name='person_continuous_profdev'>
    <displayName>Person Continuous Professional Development</displayName>
    <description>The Person Continuous Professional Development Form</description>
    <configuration name='class' values='single'>
      <displayName>Class Name</displayName>
      <description>The name of the class providing the form</description>
      <value>iHRIS_PersonContinuousProfDev</value>
    </configuration>
    <configuration name='display' values='single'>
      <displayName>Display name</displayName>
      <description>The display name for this form</description>
      <value>Person Continuous Professional Development</value>
    </configuration>
  </configurationGroup> <!-- person_continuous_profdev -->

  <!-- This section will modify the existing information for the person form to include
        two new child forms which are the new forms created for
this module. -->
  <configurationGroup name='person_meta' path='/modules/forms/forms/person/meta'>
    <displayName>MetaData on the form</displayName>
    <configuration name='child_forms' values='many' >
      <status>uniquemerge:true</status>
      <displayName>Child Forms</displayName>
      <value>person_profdev</value>
      <value>person_continuous_profdev</value>
    </configuration>
  </configurationGroup> <!-- person_meta -->

</configurationGroup> <!-- End /modules/forms/forms-->

```

```

<configurationGroup name="formClasses" >
  <displayName>Form Class Configuration</displayName>

  <!-- This section will define the person_profdev form class with all the fields a
        This class will be created dynamically since no extra
  functionality needs to be added for it. -->

  <configurationGroup name="iHRIS_PersonProfDevelopment">
    <displayName>Configuration for the class 'iHRIS_PersonProfDevelopment'</display
    <configuration name="extends">
      <displayName>The class this form extends</displayName>
      <value>I2CE_Form</value>
    </configuration>
    <configurationGroup name="fields">
      <displayName>The fields defined for this form.</displayName>

      <configurationGroup name="year">
        <displayName>The fields 'year'</displayName>
        <configuration name="formfield">
          <displayName>The form field type</displayName>
          <value>DATE_Y</value>
        </configuration>
        <configuration name="headers" type="delimited">
          <displayName>The headers for this field.</displayName>
          <value>default:Year</value>
        </configuration>
        <configuration name="default_eval">
          <displayName>The default value for this field as an eval() string</displa
          <value>I2CE_Date::now()</value>
        </configuration>
      </configurationGroup> <!-- year -->
      <configurationGroup name="course">
        <displayName>The fields 'course'</displayName>
        <configuration name="formfield">
          <displayName>The form field type</displayName>
          <value>STRING_LINE</value>
        </configuration>
        <configuration name="headers" type="delimited">
          <displayName>The headers for this field.</displayName>
          <value>default:Course</value>
        </configuration>
      </configurationGroup> <!-- course -->
      <configurationGroup name="duration">
        <displayName>The fields 'duration'</displayName>
        <configuration name="formfield">
          <displayName>The form field type</displayName>

```

```

        <value>INT</value>
    </configuration>
    <configuration name="headers" type="delimited">
        <displayName>The headers for this field.</displayName>
        <value>default:Duration (in Days)</value>
    </configuration>
</configurationGroup> <!-- duration -->
<configurationGroup name="certification">
    <displayName>The fields 'certification'</displayName>
    <configuration name="formfield">
        <displayName>The form field type</displayName>
        <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
        <displayName>The headers for this field.</displayName>
        <value>default:Certification</value>
    </configuration>
</configurationGroup> <!-- certification -->

</configurationGroup> <!-- fields -->
</configurationGroup> <!-- iHRIS_PersonProfDevelopment -->

<!-- This section will define the person_continuous_profdev form class with all the
fields and field types.
This class will be created dynamically since no extra
functionality needs to be added for it. -->
<configurationGroup name="iHRIS_PersonContinuousProfDev">
    <displayName>Configuration for the class 'iHRIS_PersonContinuousProfDev'</displayName>
    <configuration name="extends">
        <displayName>The class this form extends</displayName>
        <value>I2CE_Form</value>
    </configuration>
    <configurationGroup name="fields">
        <displayName>The fields defined for this form.</displayName>

        <configurationGroup name="work_training_1">
            <displayName>The fields 'work_training_1'</displayName>
            <configuration name="formfield">
                <displayName>The form field type</displayName>
                <value>STRING_LINE</value>
            </configuration>
            <configuration name="headers" type="delimited">
                <displayName>The headers for this field.</displayName>
                <value>default:Training Priority 1</value>
            </configuration>
        </configurationGroup> <!-- work_training_1 -->
        <configurationGroup name="work_training_2">

```

```

    <displayName>The fields 'work_training_2'</displayName>
    <configuration name="formfield">
      <displayName>The form field type</displayName>
      <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
      <displayName>The headers for this field.</displayName>
      <value>default:Training Priority 2</value>
    </configuration>
  </configurationGroup> <!-- work_training_2 -->
  <configurationGroup name="work_training_3">
    <displayName>The fields 'work_training_3'</displayName>
    <configuration name="formfield">
      <displayName>The form field type</displayName>
      <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
      <displayName>The headers for this field.</displayName>
      <value>default:Training Priority 3</value>
    </configuration>
  </configurationGroup> <!-- work_training_3 -->

  <configurationGroup name="personal_training_1">
    <displayName>The fields 'personal_training_1'</displayName>
    <configuration name="formfield">
      <displayName>The form field type</displayName>
      <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
      <displayName>The headers for this field.</displayName>
      <value>default:Priority 1</value>
    </configuration>
  </configurationGroup> <!-- personal_training_1 -->
  <configurationGroup name="personal_training_2">
    <displayName>The fields 'personal_training_2'</displayName>
    <configuration name="formfield">
      <displayName>The form field type</displayName>
      <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
      <displayName>The headers for this field.</displayName>
      <value>default:Priority 2</value>
    </configuration>
  </configurationGroup> <!-- personal_training_2 -->
  <configurationGroup name="personal_training_3">
    <displayName>The fields 'personal_training_3'</displayName>
    <configuration name="formfield">

```



```

        <displayName>The form field type</displayName>
        <value>STRING_LINE</value>
    </configuration>
    <configuration name="headers" type="delimited">
        <displayName>The headers for this field.</displayName>
        <value>default:Priority 3</value>
    </configuration>
</configurationGroup> <!-- personal_training_3 -->

</configurationGroup> <!-- fields -->
</configurationGroup> <!-- iHRIS_PersonContinuousProfDev-->

</configurationGroup> <!-- End /modules/forms/formClasses -->

</configurationGroup> <!-- End /modules/forms -->

<configurationGroup name='page'>
    <displayName>Pages</displayName>
    <description>Information about various pages made available by the system</description>
    <status>required:true</status>

    <!-- This section will create the person_profdev page so that new professional development
         forms can be created and assigned to a person's record. -->
    <configurationGroup name='person_profdev'>
        <displayName>Person Professional Development Page</displayName>
        <description> The page 'person_profdev' which has the action of: Add/Update
Professional Development</description>
        <configuration name='class' values='single'>
            <displayName>Page Class</displayName>
            <description>The class responsible for displaying this page</description>
            <status>required:true</status>
            <value>iHRIS_PageFormParentPerson</value>
        </configuration>
        <configuration name='style' values='single'>
            <displayName>Page Style</displayName>
            <description>The Page Style</description>
            <value>ihris_common_page_form_parent_person</value>
        </configuration>
        <configurationGroup name='args'>
            <displayName>Page Options</displayName>
            <description>The options that control the access and display of all pages</description>
            <configuration name='title' values='single'>
                <displayName>Page Title</displayName>
                <description>Page Title</description>
                <status>required:true</status>
            </configuration>
        </configurationGroup>
    </configurationGroup>
</configurationGroup>

```

```

        <value>Add/Update Professional Development</value>
    </configuration>
    <configuration name='page_form' values='single'>
        <displayName>Form</displayName>
        <description>The form this page is using</description>
        <status>required:true</status>
        <value>person_profdev</value>
    </configuration>
</configurationGroup>
</configurationGroup> <!-- person_profdev -->

<!-- This section will create the person_continuous_profdev page so that a new cont
development form can be created and assigned to a person's
record. -->
<configurationGroup name='person_continuous_profdev'>
    <displayName>Person Continuous Professional Development Page</displayName>
    <description> The page 'person_continuous_profdev' which has the action of:
Add/Update Continuous Professional Development</description>
    <configuration name='class' values='single'>
        <displayName>Page Class</displayName>
        <description>The class responsible for displaying this page</description>
        <status>required:true</status>
        <value>iHRIS_PageFormParentPerson</value>
    </configuration>
    <configuration name='style' values='single'>
        <displayName>Page Style</displayName>
        <description>The Page Style</description>
        <value>ihريس_common_page_form_parent_person</value>
    </configuration>
    <configurationGroup name='args'>
        <displayName>Page Options</displayName>
        <description>The options that control the access and display of all pages</desco
    <configuration name='title' values='single'>
        <displayName>Page Title</displayName>
        <description>Page Title</description>
        <status>required:true</status>
        <value>Add/Update Continuous Professional Development</value>
    </configuration>
    <configuration name='page_form' values='single'>
        <displayName>Form</displayName>
        <description>The form this page is using</description>
        <status>required:true</status>
        <value>person_continuous_profdev</value>
    </configuration>
</configurationGroup>
</configurationGroup> <!-- person_continuous_profdev -->

```

```

        </configurationGroup> <!-- page -->

        </configurationGroup> <!-- ProfDevelopment -->
    </I2CEConfiguration>

```

Step 2: Create the Module Class

We need to create a new class in the lib directory called `iHRIS_Module_ProfDevelopment.php` with the following content. This is so the new forms will show up on the view person page.

```

<?php
class iHRIS_Module_ProfDevelopment extends I2CE_Module {
    public static function getMethods() {
        return array(
            'iHRIS_PageView->action_person_profdev' =>
            'action_person_profdev'
            'iHRIS_PageView->action_person_continuous_profdev' =>
            'action_person_continuous_profdev'
        );
    }

    public function action_person_profdev($obj) {
        if (!$obj instanceof iHRIS_PageView) {
            return;
        }
        return $obj->addChildForms('person_profdev');
    }

    public function action_person_continuous_profdev($obj) {
        if (!$obj instanceof iHRIS_PageView) {
            return;
        }
        return $obj->addChildForms('person_continuous_profdev',
        'siteContent');
    }
}
?>

```

Copy the `view.html` template file from the `ihris-manage` templates directory to the site templates directory. Make the following changes. The changes are surround by comments. This should be in the site in case multiple modules update the `view.html` template.

```

    <span task="person_can_edit_child_form_demographic" type="form"
    name="person:id" href="demographic?parent="
    ifset="!demographic:id">Add Demographic Information</span>
    <!-- New professional development section for the Professional
    Development module -->

```

```

    <span type='module' name='ProfDevelopment' ifenabled='true'>
      <span
task="person_can_edit_child_form_person_continuous_profdev" type="form"
name="person:id" href="person_continuous_profdev?parent="
ifset="!person_continuous_profdev:id">Add Continuous Professional
Development</span>
    </span>
<!-- End of Professional Development additions -->

```

```

<div class="recordsData">
  <h3><a
name="jump_qualification">Qualifications</a></h3>
  <p class="editRecordsData"><a href="" class="hide"
title="Hide" onclick="return hideDiv('qualification',
this);">Hide</a>
  <span role='hr_staff' type="form" name="person:id"
href="person_language?parent=" text="Add Language
Proficiency"></span>
  <span type='module' name='simple-competency'
ifenabled='true'>
    <span role='hr_staff' type="form" name="person:id"
href="person_competency?parent=">Add Competency</span>
    <span role='hr_staff' type="form" name="person:id"
href="person_competency_history?parent=">Competency
Evaluations</span>
  </span>
</p>

  <div id="qualification">

    <div id="person_language" />
    <div id="person_competency" />

  </div> <!-- qualification -->

  <br style="clear: both;" />
</div> <!-- recordsData -->

```

```

<!-- New professional development section for the Professional
Development module -->
<span type="module" name="ProfDevelopment" ifenabled="true">
  <div class="recordsData">
    <h3><a name="jump_profdev">Professional
Development</a></h3>
    <p class="editRecordsData" id="profdev_links"><a href=""
class="hide" title="Hide" onclick="return hideDiv('profdev', this
);">Hide</a>

```

```

    <span task='person_can_edit_child_form_person_profdev'
type="form" name="person:id" href="person_profdev?parent=">Add
Professional Development</span>
</p>

<div id="person_profdev"></div>
<div id="person_continuous_profdev"></div>
<br style="clear: both;" />
</div> <!-- recordsData -->
</span>
<!-- End of Professional Development additions -->

```

Copy the menu_view_person.html template file from the ihris-manage templates directory to the site templates directory. Make the following changes:

```

<li><a href="#jump_qualification" onclick="if (prevAnchor)
prevAnchor.className=''; this.className='active';
prevAnchor=this;">Qualifications</a></li>
<!-- Additions for the Professional Development module -->
<span type="module" name="ProfDevelopment" ifenabled="true">
    <li><a href="#jump_profdev" onclick="if (prevAnchor)
prevAnchor.className=''; this.className='active';
prevAnchor=this;">Professional Development</a></li>
</span>
<!-- End of additions -->

```

Step 3: Add in the Professional Development templates

In the templates directory create the following files and contents:

view_person_profdev.html

```

<div>
    <div class="editRecord">
        <p>Edit This Information</p>
        <ul>
            <li
task='person_can_edit_child_form_person_profdev'><span
type="form" name="person_profdev:id" href="person_profdev?id="
parent="true">Update this Information</span></li>
        </ul>
    </div> <!-- editRecord -->

    <div class="dataTable">
        <table border="0" cellspacing="0" cellpadding="0">
            <tr>
                <th colspan="2">Other Training</th>
            </tr>
            <span type="form" name="person_profdev:year"

```

```

showhead="default"></span>
        <span type="form" name="person_profdev:course"
showhead="default" class="even"></span>
        <span type="form" name="person_profdev:duration"
showhead="default"></span>
        <span type="form" name="person_profdev:certification"
showhead="default" class="even"></span>
    </table>
</div> <!-- dataTable -->
</div>

```

form_person_profdev.html

```

<tbody id="person_form">
<tr>
    <th colspan="2">Other Training (of more than 7 days)</th>
</tr>
<tr>
    <td>
        <span type="form" name="person_profdev:year" showhead="default"></span>
        <span type="form" name="person_profdev:course" showhead="default"></span>
    </td><td>
        <span type="form" name="person_profdev:duration" showhead="default"></span>
        <span type="form" name="person_profdev:certification" showhead="default"></span>
    </td>
</tr>
</tbody>

```

view_person_continuous_profdev.html

```

<div>
    <div class="editRecord">
        <p>Edit This Information</p>
        <ul>
            <li>
                role='person_can_edit_child_form_person_continuous_profdev'><span
                    type="form" ifset="person_continuous_profdev:id"
                    name="person_continuous_profdev:id" href="demographic?id="
                    parent="true">Update this Information</span></li>
        </ul>
    </div> <!-- editRecord -->

    <div class="dataTable">
        <table border="0" cellspacing="0" cellpadding="0">
            <tbody>
                <tr>
                    <th colspan="2">Training needs that would improve
everyday work</th>
                </tr>

```

```

        <span type="form"
name="person_continuous_profdev:work_training_1"
showhead="default"></span>

        <span type="form"
name="person_continuous_profdev:work_training_2" showhead="default"
class="even"></span>

        <span type="form"
name="person_continuous_profdev:work_training_3"
showhead="default"></span>

    <tr>
        <th colspan="2">Training needs for personal
development</th>
    </tr>

    <span type="form"
name="person_continuous_profdev:personal_training_1"
showhead="default"></span>

    <span type="form"
name="person_continuous_profdev:personal_training_2"
showhead="default"></span>

    <span type="form"
name="person_continuous_profdev:personal_training_3"
showhead="default"></span>

</tbody>
</table>
</div> <!-- dataTable -->

</div>

```

form_person_continuous_profdev.html

```

<tbody>
<tr>
    <th>Training needs that would improve everyday work</th>
    <th>Training needs for personal development</th>
</tr>
<tr id="list_fields">
    <td>
        <span type="form" name="person_continuous_profdev:work_training_1" showhead="default"></span>
        <span type="form" name="person_continuous_profdev:work_training_2" showhead="default"></span>
        <span type="form" name="person_continuous_profdev:work_training_3" showhead="default"></span>
    </td>
    <td>
        <span type="form" name="person_continuous_profdev:personal_training_1" showhead="default"></span>
        <span type="form" name="person_continuous_profdev:personal_training_2" showhead="default"></span>
        <span type="form" name="person_continuous_profdev:personal_training_3" showhead="default"></span>
    </td>
</tr>
</tbody>

```

Step 4: Enable the module in the site config file

Edit your site configuration file and add in the following line below any requirements and above the paths:

```
<enable name="ProfDevelopment" />
```

Adding ISCO 88 Job Codes to iHRIS Manage

The ISCO 88 Job Codes can be found here ^[1] and represent an international standard for classifying jobs. They are broken up hierachically into major, sub-major , minor groups under which the job codes (called unit) are under the minor groups.

We will create a module for each of the major groups, all of which will sit under a meta-module.

Getting The Data

The data file with all of the codes compiled can be found in the launchpad bzt ^[1] repository for I2CE. All of the codes, names, and descriptions were downloaded from the International Labor Organization's website ^[2].

Creating The XML Magic(Configuration) Data

The ISCO 88 codes are going to be separated into 10 different xml files, each representing a major group. Each xml file will contain the number and description of the major number followed by all the sub-major, minor, and then unit. The php code is provided here ^[3] and needs to be in the same directory as the isco88 codes file to run.

Creating The Modules

Since this data is related to Jobs in iHRIS Manage, we will put everything as sub-modules under the **ihris-manage-Job**. This can be found in the directory:

```
[BASE INSTALLATION PATH]/ihris-manage/modules/ManageJob
```

All instructions below assume that you are in this directory.

The first thing we will need to do is to enable sub-modules for *ihris-manage-Job* (you may wish to read the module structure overview before proceeding). To do this

```
gedit Job.xml
```

and make sure the following lines are in the appropriate place in the metadata section:

```
<path name='modules'>
  <value>./modules</value>
</path>
```

Now we add the modules directory

```
mkdir modules
```


Creating The Meta-Module

We will create a meta-module to contain general information about the ISCO Codes

```
cd [BASE INSTALLATION PATH]/ihris-manage/modules/ManageJob/modules
mkdir isco_88
cd isco_88
mkdir modules
gedit ISCO_88.xml
```

Add the following contents and save:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='isco-88'>
  <metadata>
    <displayName>ISCO 88 Job Codes</displayName>
    <description>The ISCO 88 Job Codes</description>
    <version>3.2.0</version>
    <path name='modules'>
      <value>./modules</value>
    </path>
  </metadata>
  <configurationGroup name='isco-88' path='/'>

    <configurationGroup name='isco_88_forms' path='/modules/forms/formClasses'>
      <!--we will add a form class for each of the isco 88 groupings -->
      <!--each form class will extend the class I2CE_List -->
      <!--each form class will provide the field 'name' and 'description' of which name is
      <!--the forms will map to each other in a heirarchical relationship as follows:
        iHRIS_ISCO_88_Sub_Major has a field isco_88_major which will
map to the isco_88_major form
        iHRIS_ISCO_88_Minor has a field isco_88_sub_major which will
map to the isco_88_sub_major form
        iHRIS_ISCO_88_Unit has a field isco_88_minor which will map to
the isco_88_minor form
      -->
      <!--we will specify a header (or title) for each of the fields we add in the forms -->
      <!--the corrspeonding forms are defined in the block following this one -->
      <configurationGroup name='iHRIS_ISCO_88_Major'>
        <configuration name="extends">
          <!-- This form class extends I2CE_List class -->
          <value>I2CE_List</value>
        </configuration>
        <configurationGroup name="fields">
          <!-- The fields defined for this form -->
          <configurationGroup name="name">
            <configuration name="formfield">
              <!-- The field type is string-->
              <value>STRING_LINE</value>
```

```

</configuration>
<configuration name="headers" type="delimited">
  <!-- The headers for this field. -->
  <value>default:Major Group</value>
</configuration>
<configuration name="required" type="boolean">
  <!--This field is requried -->
  <value>true</value>
</configuration>
</configurationGroup>
<configurationGroup name="description">
  <configuration name="formfield">
    <!-- The field type is a multi-line string -->
    <value>STRING_MLINE</value>
  </configuration>
  <configuration name="headers" type="delimited">
    <!-- The headers for this field. -->
    <value>default:Description</value>
  </configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>
<configurationGroup name='iHRIS_ISCO_88_Sub_Major'>
  <configuration name="extends">
    <!-- this form class extends I2CE_List -->
    <value>I2CE_List</value>
  </configuration>
  <configurationGroup name="fields">
    <!-- The fields defined for this form -->
    <configurationGroup name="name">
      <configuration name="formfield">
        <!--The field type is string_line -->
        <value>STRING_LINE</value>
      </configuration>
      <configuration name="headers" type="delimited">
        <!-- The headers for this field. -->
        <value>default:Sub-Major Group</value>
      </configuration>
      <configuration name="required" type="boolean">
        <!--This field is requried -->
        <value>true</value>
      </configuration>
    </configurationGroup>
    <configurationGroup name="description">
      <configuration name="formfield">
        <!--The field type is multi-line string -->
        <value>STRING_MLINE</value>
      </configuration>
    </configurationGroup>
  </configurationGroup>
</configurationGroup>

```

```

</configuration>
<configuration name="headers" type="delimited">
  <!-- The headers for this field. -->
  <value>default:Description</value>
</configuration>
</configurationGroup>
<configurationGroup name="isco_88_major">
  <configuration name="formfield">
    <!--The field is a mapped value -->
    <value>MAP</value>
  </configuration>
  <configuration name="headers" type="delimited">
    <!-- The headers for this field. -->
    <value>default:Major Group</value>
  </configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>
<configurationGroup name='iHRIS_ISCO_88_Minor'>
  <configurationGroup name="fields">
    <!-- The fields defined for this form -->
    <configurationGroup name="name">
      <configuration name="formfield">
        <!--The field type is string -->
        <value>STRING_LINE</value>
      </configuration>
      <configuration name="headers" type="delimited">
        <!-- The headers for this field. -->
        <value>default:Minor Group</value>
      </configuration>
      <configuration name="required" type="boolean">
        <!--This field is required -->
        <value>true</value>
      </configuration>
    </configurationGroup>
    <configurationGroup name="description">
      <configuration name="formfield">
        <!--The field type is multi-line string -->
        <value>STRING_MLINE</value>
      </configuration>
      <configuration name="headers" type="delimited">
        <!-- The headers for this field. -->
        <value>default:Description</value>
      </configuration>
    </configurationGroup>
  </configurationGroup>
  <configurationGroup name="isco_88_sub_major">
    <configuration name="formfield">

```

```

        <!--The field is a mapped value -->
        <value>MAP</value>
    </configuration>
    <configuration name="headers" type="delimited">
        <!-- The headers for this field. -->
        <value>default:Sub-Major Group</value>
    </configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>
<configurationGroup name='iHRIS_ISCO_88_Unit'>
    <configurationGroup name="fields">
        <!-- The fields defined for this form-->
        <configurationGroup name="name">
            <configuration name="formfield">
                <!--The field type is string -->
                <value>STRING_LINE</value>
            </configuration>
            <configuration name="headers" type="delimited">
                <!-- The headers for this field. -->
                <value>default:Unit</value>
            </configuration>
            <configuration name="required" type="boolean">
                <!--This field is requiried -->
                <value>true</value>
            </configuration>
        </configurationGroup>
        <configurationGroup name="description">
            <configuration name="formfield">
                <!--The field type is a mult-line string -->
                <value>STRING_LINE</value>
            </configuration>
            <configuration name="headers" type="delimited">
                <!-- The headers for this field. -->
                <value>default:Description</value>
            </configuration>
        </configurationGroup>
        <configurationGroup name="isco_88_sub_major">
            <configuration name="formfield">
                <!--The field is a mapped-value -->
                <value>MAP</value>
            </configuration>
            <configuration name="headers" type="delimited">
                <!-- The headers for this field. -->
                <value>default:Minor Group</value>
            </configuration>
        </configurationGroup>
    </configurationGroup>

```

```

    </configurationGroup>
  </configurationGroup>
</configurationGroup>

<configurationGroup name='isco_88_forms' path='/modules/forms/forms'>
  <!--we will add a form for each of the isco 88 groupings -->
  <configurationGroup name='isco_88_major'>
    <configuration name='class' values='single'>
      <!-- The name of the class providing the form -->
      <value>iHRIS_ISCO_88_Major</value>
    </configuration>
    <configuration name='display' values='single'>
      <!-- The display name for this form -->
      <value>ISCO 88 Major</value>
    </configuration>
    <configuration name="storage" values='single'>
      <!-- The storage mechanism for this form. --!>
      <value>magicdata</value>
    </configuration>
  </configurationGroup>
  <configurationGroup name='isco_88_sub_major'>
    <configuration name='class' values='single'>
      <!-- The name of the class providing the form -->
      <value>iHRIS_ISCO_88_Sub_Major</value>
    </configuration>
    <configuration name='display' values='single'>
      <!-- The display name for this form -->
      <value>ISCO 88 Sub-Major</value>
    </configuration>
    <configuration name="storage" values='single'>
      <!-- The storage mechanism for this form. --!>
      <value>magicdata</value>
    </configuration>
  </configurationGroup>
  <configurationGroup name='isco_88_minor'>
    <configuration name='class' values='single'>
      <!-- The name of the class providing the form -->
      <value>iHRIS_ISCO_88_Minor</value>
    </configuration>
    <configuration name='display' values='single'>
      <!-- The display name for this form -->
      <value>ISCO 88 Minor</value>
    </configuration>
    <configuration name="storage" values='single'>
      <!-- The storage mechanism for this form. -->
      <value>magicdata</value>
    </configuration>
  </configurationGroup>

```

```

    </configuration>
  </configurationGroup>
  <configurationGroup name='isco_88_unit'>
    <configuration name='class' values='single'>
      <!-- The name of the class providing the form -->
      <value>iHRIS_ISCO_88_Unit</value>
    </configuration>
    <configuration name='display' values='single'>
      <!-- The display name for this form -->
      <value>ISCO 88 Unit</value>
    </configuration>
    <configuration name="storage" values='single'>
      <!-- The storage mechanism for this form. -->
      <value>magicdata</value>
    </configuration>
  </configurationGroup>
</configurationGroup>

<configurationGroup name='isco_88_field' path='/modules/forms/formClasses/iHRIS_Job/fi
  <!--Add the isco_88_unit field into iHRIS_Job which will point to the isco_88_units/
  <configuration name="formfield">
    <!-- This is a mapped value-->
    <value>MAP</value>
  </configuration>
  <configuration name="headers" type="delimited">
    <!-- The headers for this field. -->
    <value>default:ISCO 88 Code</value>
  </configuration>
  <configurationGroup name="display">
    <configurationGroup name="default">
      <configuration name="fields">
        <!--This describes the default display and select isco_88_unit field. We start
          in the lowest part of the hierarchy of forms,
        isco_88_unit and proceed up to the top
          part, the isco_88_major. The forms are separated by
        colons.

          When a value is selected, the full hierarchy is
        displayed.

          When a value is displayed, we only display the the
        isco_88_unit data, as the
          other forms' display is suppressed by the [ ] -->

        <value>isco_88_unit:[isco_88_minor]:[isco_88_sub_major]:[isco_88_major]</value>
      </configuration>

```

```

        </configurationGroup>
    </configurationGroup>
</configurationGroup>
</I2CEConfiguration>

```

Creating The Sub-Modules

We are going to create a sub-module for each of the Major Groups.

The template for the configuration file is:

```

<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='isco-88-major-XX'>
  <metadata>
    <displayName>ISCO 88 Job Codes</displayName>
    <description>The ISCO 88 Job Codes</description>
    <version>3.2.0</version>
    <requirement name='isco-88'>
      <atLeast version='3.2' />
      <lessThan version='3.3' />
    </requirement>
  </metadata>
  <configurationGroup name='isco-88-major-XX' path='/'>
    <!--Form Data Goes here -->
  </configurationGroup>
</I2CEConfiguration>

```

where **XX** is the Major Group number.

For each Major Group number **XX**, we will do:

```
mkdir [BASE INSTALLATION PATH]/ihris-manage/modules/ManageJob/modules/isco_88/modules/isco_88_major_XX
```

and put the generated configuration file in this directory.

References

- [1] <http://BLAH>
- [2] <http://www.ilo.org/public/english/bureau/stat/isco/isco88/index.htm>
- [3] http://bazaar.launchpad.net/~intrahealth%2Binformatics/ihris-manage/3.2-dev/files/head%3A/modules/ManageJob/modules/isco_88/tools/

Automatically Generated Integers

Automatically Generated Integers (INT_GENERATE)

Automatically generated integers (or INT_GENERATE) are used when a form needs an incremented number to use for an ID but the data entrant may not know what the next available value is. The user can check a checkbox to increment to the next value or if necessary can type in the number if it is known. As of version 4.0.2 INT_GENERATE is only supported when the form uses the entry form storage mechanism. It uses the field_sequence table to keep track of the current maximum value for each form field.

In the field_sequence table there will be an entry with the form field id and the highest value that has been used. The system checks two possibilities for determining the next available number. It looks at the field_sequence table if a row exists there for the form field and in the last_entry table for the highest assigned value. Whichever is higher is then incremented by one and saved to the field_sequence table so it can be accessed the next time a record is added.

If you want to start at 1000 you can just add the form field id and 1000 to field_sequence. You only need to add something to the field_sequence table if you want it to start higher than the currently saved values. For example, if you imported data that ranges from 100-400 but you want the generated numbers to start at 1000 then you'll need to add a row to the field_sequence table. But if you just want the next number to be 401 then you don't need to do anything.

Configuration (Magic) Data

Warning: The API for Magic Data has been fairly significantly updated from version 3.1 to version 4.0. Although this article applies to the version 4.0 API, much of it is relevant to version 3.1. See some of the Changes

What is Magic Data?

Magic Data is a mechanism intended to handle dynamic site level configuration data. It is the basis of much of the functionality provided by the Intrahealth Informatics Core Engine (I2CE) including how pages are served and how custom reports are made.

Magic Data is a rooted tree structure with benefits. If you wish you may think of it as the analogue of the Windows Registry for your web application. You may also think of it as a nested array.

There are two parts two parts to magic data. The magic data node class, defined in *I2CE/lib/I2CE_MagicDataNode* and the storage mechanisms for magic data. You may use magic data without using a storage mechanism, in which case the magic data saved does on persist across sessions. By default uses the following storage mechanisms for Magic Data:

- Database: The data is stored into a table in the database. In I2CE, this is set to be the *config* table.
- APC: The data is stored in to a memory cache provided by apc^[1] which persists across apaches session.

As APC is faster, reads are first done from APC. If the data is not found there, it is read from the database. Data is written first to the database and then to APC.

Scalar and Non-Scalar

There are two main types of nodes scalar and a parent node

A scalar node does not have any children. It does have a value which is a possibly empty string. A scalar node can be marked as being localized. In which case the value returned depends on the localization preferences for the user.

A parent node can have as many children as it wants. Each child of a parent node must have distinct names. It does not have a value. It is not localizable.

Names and Paths

With the exception of the root node, every magic data node has a name. For a name, any numeric value is allowed. Any non-empty string is valid as long as it does not start with '=' does not contain a '/' and is not '.' or '..'. However, it is best if you limit the strings to contain the following characters only:

```
_ - + . 0 1 2 3 4 5 6 7 8 9 a b c d e f g h i j k l m n o p q r s t u v w x y z A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
```

Absolute Paths

Magic Data nodes can be referenced by their path which is a concatenation of their names by '/'

The root node has path '/'.

If the root node has a child with name 'some', it is referenced by the path '/some'

If some is a parent node with a child with name 'thing', then that child is referenced by the path '/some/thing'

Relative Paths

Paths can also be relative. In the example above, if you were at the node '/some' then could reference the other nodes by:

- './' references '/some'
- '../' references '/'
- './thing' references the node '/some/thing'

Defining Magic Data in Configuration Files

A convenient way to get magic data loaded into the system is to do so through a [[Technical Overview: Module Structure#Module Configuration File|module configuration file] by specifying a <configurationGroup> node after the <metadata> node. This section serves double duty. It allows you to specify magic data as well as to provide a way to edit the data for the module.

The <configurationGroup> node is optional. If it is present it has to have the attribute name which has the same value as the module name, which is the name attribute in the containing <I2CEConfiguration> tag.

All magic data is relative to the path defined by the this configurationGroup. There are three options:

- The attribute path is not present. In the following example, the magic data is stored under /modules/mercury_javascript_path.

Example:

```
<configurationGroup name='mercury_javascript_popup'>
  SOME STUFF GOES HERE
</configurationGroup>
```

- The attribute path is present. In the following example, the magic data is stored under /some/other/place.

Example:

```
<configurationGroup name='mercury_javascript_popup' path='/some/other/place'>
  SOME STUFF GOES HERE
</configurationGroup>
```

- The module is 'I2CE'. The magic data is stored relative to /I2CE

In the remainder of this section we will describe **WHAT STUFF GOES THERE** which are <configurationGroup> and <configuration> tags.

<configurationGroup>

A <configurationGroup> can several subtags in this order::

- An optional <displayName>. A name displayed in the module configuration for this grouping of data
- An optional <description>. A description of the functionality of the grouping.
- An optional <version> tag.
- Any number (including zero) of <status> tags.
- Any number (including zero) of <configurationGroup> or <configuration> tags.

<configuration>

A <configuration> can several subtags in this order::

- An optional <displayName>. A name displayed in the module configuration for this grouping of data
- An optional <description>. A description of the functionality of the grouping.
- An optional <version> tag.
- Any number (including zero) of <value> tags.

Attributes

There are several attributes that both a <configuration> and a <configurationGroup> may have:

- name: This is a required attribute. Every child <configuration> or <configurationGroup> of a <configurationGroup> should have a distinct name. If the path attribute is not set, it is also says that this configuration node should apply to the magic data node with the given name and which is a child magic data node of the parent configurationGroup node.
- path: This is optional. It may be an absolute or relative path in magic data and describes the magic data at which this value should be stored at. If it is a relative path, it is relative to the magic data path of its parent node.
- locale: This is optional. If this is set, it means that the values under this node should be consider to be localizable.
- config: This is optional. If set, it sets the I2CE_Swiss object used to display the data in the configure modules menu.

A <configuration> may also have the following attributes:

- type: Defaults to 'string' and describes the type of data that is being set by the <value> tags of this node.
- values: Defaults to 'single' and describes if the data being set by this node should be an array of values or a single value based on what is stored in the <values> node

<value>

The <value> tag is a sub-tag of a <configuration> tag. It contains the value(s) which are stored in the magic data and depends on the *type* and *values* attributes.

Some common types and values are:

- *type*='string' *values*='single': The magic data node is a scalar type with value the contents of the single <value> tag.
- *type*='string' *values*='many': The magic data node is a parent type. The magic data node has a child node of scalar type for each <value> tag.
- *type*='delimited': The magic data node is a parent type. The value tags are expected to be of the form <value>'key':'value'</value> in which case a child magic data node is created of scalar type with name 'key' and value 'value'
- *type*='boolean': The values in the <value> tag are interpreted as booleans: F,f,False,false,0, etc. are stored in magic data is 0. Otherwise the value stored is 1.

<version>

The same magic data can be accessed by multiple modules configuration files. Suppose that a module moduleA requires a module moduleB and that they both set /some/data to have values valA and valB respectively. Suppose that both modules have version 1.0.

Excerpt from moduleA's configuration file

```
<configurationGroup name='some' path='/some'>
  <configuration name='data' >
    <value>valA</value>
  </configuration>
  <configuration name='data2'>
    <value>valA2</value>
  </configuration>
</configurationGroup>
```

Excerpt from moduleB's configuration file

```
<configurationGroup name='some' path='/some'>
  <configuration name='data'>
    <value>valB</value>
  </configuration>
  <configuration name='data2'>
    <value>valB2</value>
  </configuration>
</configurationGroup>
```

On site initialization, since moduleA requires moduleB, the value is first set to valB is first set by moduleB. It is then overwritten to be the value valA by moduleA. Similarly, after initialization, the value of '/some/data2' is 'valA2'

Suppose that version of moduleB is increased to version 1.1 but there are no other changes to the configuration file. This will cause the configuration file to be reprocessed. The *configurator* will remember that has already processed all the data up to and including version 1.0. Thus it will not re-read the or overwrite what is already stored in magic data.

Suppose now that moduleB wants to change the value it stores at /some/data to be newValB, as well as create a new value at /some/other_data We would need to increase the version number of the module to 1.2 and add a <version>

tag so that the configurator knows that in upgrading the module to version 1.2, we should reread the configuration data for anything greater than the previously loaded version of 3.1:

```
<configurationGroup name='some' path='/some'>
  <configuration name='data'>
    <version>1.2</version>
    <value>newValB</value>
  </configuration>
  <configuration name='other_data'>
    <version>1.2</version>
    <value>The new stuff</value>
  </configuration>
  <configuration name='data2'>
    <value>valB2</value>
  </configuration>
</configurationGroup>
```

Now the value at /some/data will be updated to be 'newValB' and we will add in the value 'The new stuff' at '/some/other_data.' The value at '/some/data2' remains unchanged and is 'valA2.'

<status>

A status tag consists of key value pairs:

```
<status>key:value</status>
```

Although you can use anything for the key (as long as it does not have a ':' in it!), the keys which have meaning are:

- version: Functions just like <version>
- overwrite: The value can be either true or false. Defaults to false. If true the magic data will be overwritten even if the version has not.
- merge: The value can be either true or false. Defaults to false. If true, the values read in are merged into the existing values by *array_merge()*
- mergerecursive: The value can be either true or false. Defaults to false. If true, the values read in are merged into the existing by *I2CE_Util::merge_recursive()*.
- uniquemerge: The value can be either true or false. Defaults to false except in the case where a <configuration> node has type='string' and values='many.' If true, the values read in are merged into the existing values by *I2CE_Util::merge_recursive()* and only the unique values are kept by *I2CE_Util::array_unique()*.
- visible: The value can be either true or false. Defaults to true. If true, this node is displayed in the module configuration menu.
- advanced: The value can be either true or false. Defaults to false. If true, this is considered an advanced option for the module configuration menu
- required: The value can be either true or false. Defaults to true. It says the the resulting values at the <configuration> node must be set
- showIndex: The value can be either true or false. Defaults to true. In which case we show the index in the module configuration menu

The values of the status keys are inherited as you go down a node.

Using Magic Data in PHP

Each node of magic data is an instance of the class **I2CE_MagicDataNode**. The "public variables" of a node are its child nodes which is done by making use of the `__get()` method. **I2CE_MagicDataNode** implements the **RecursiveIterator**, **ArrayAccess**, **SeekableIterator**, and **Countable** Interfaces.

I2CE has a root magic data instance which can be retrieved by:

```
$config=I2CE::getConfig();
```

Basic Access

Suppose `$data` is a magic data node, with a children named 'my_list' and 'amount' which are parent type and scalar type respectively. Suppose that the child node 'amount' has value 10. Suppose that there is no child named 'bad.' The children can be accessed in many ways:

Access Method	Result	Notes
<code>\$data->my_list</code>	I2CE_MagicDataNode	This is the 'my_list' node
<code>\$data->amount</code>	10	
<code>\$data->bad</code>	I2CE_MagicDataNode	The node did not exist, so it was created. It has an indeterminate type at the moment.
<code>\$data['my_list']</code>	I2CE_MagicDataNode	the 'my_list' node
<code>\$data['amount']</code>	10	the value of the 'amount' node
<code>\$data['bad']</code>	I2CE_MagicDataNode	We created the non-existent 'bad' node and returned it

Refined Access

To get more refined access to magic data nodes you may use the **traverse(\$path,\$create=false,\$return_value=true)** function:

<code>\$data->traverse('my_list',false,false)</code>	I2CE_MagicDataNode	This is the 'my_list' node
<code>\$data->traverse('bad',false,false)</code>	null	The second argument says not to create a node that doesn't exist
<code>\$data->traverse('amount',false,false)</code>	I2CE_MagicDataNode	The is the 'amount' node
<code>\$data->traverse('my_list',false,true)</code>	I2CE_MagicDataNode	This is the 'my_list' node
<code>\$data->traverse('amount',false,true)</code>	10	The value of the 'amount' node
<code>\$data->traverse('bad',false,true)</code>	null	The second argument says not to create a node that doesn't exist
<code>\$data->traverse('my_list',true,true)</code>	I2CE_MagicDataNode	This is the 'my_list' node
<code>\$data->traverse('amount',true,true)</code>	10	The value of the 'amount' node
<code>\$data->traverse('bad',true,true)</code>	I2CE_MagicDataNode	We created the non-existent 'bad' node and returned it

If a node has scalar type, you can get its value by `getValue()`. If you call `getAsArray()` on it, it will also return its value.

If a node has parent or indeterminate type, calling `getValue()` returns the node itself. If you call `getAsArray()` on it it will return a nested array. The keys at each depth are the child node's names. The values are either an array or a sting, depending on if that child is scalar or not.

Checking Existence and Type

You can use the following method to see if a Magic Data node, exists and what its type is:

- **pathExists(\$path)**
- **is_scalar(\$path=null)**
- **is_parent(\$path=null)**
- **is_indeterminate(\$path=null)**
- **is_root(\$path=null)**

Here, we the path defaults to *null*, the value that method is called on the node itself (this would be the same as calling it on *\$path='./*).

You may do something like:

```
function set_node_to_scalar($node) {
    if (!$node instanceof I2CE_MagicDataNode) {
        echo "Why are you giving me garbage data?\n";
        return false;
    }
    if ($node->is_scalar()) {
        echo "This node is already a scalar. It has a value " . $node->getValue(). "\nI don't need to do anything.\n";
        return true;
    } else {
        echo "This node is a parent node. Although it may or may not have children, I can't set it to be scalar.\n";
        return false;
    } else{
        // $node->is_indeterminate() will return true
        echo "This node is indeterminate. Setting it to be scalar\n";
        $node->set_scalar();
        return true;
    }
}
```

Two other useful functions are

- **getAsArray(\$path=null)** which return the node and all of its children (recursively) as an array
- **setIfIsSet(&\$var,\$path,\$as_array=false)** which will check to see if \$path exists. If it does not, it returns false. If it does, it returns true and calls either *getValue()* or *getAsArray()* on the node referred to by the path.

Child Names and Iterators

To get the names of the child nodes of a node, we use the **getKeys()** method. Suppose that we magic data set up as follows:

Path	Type	Value
/	parent	NONE
/color	scalar	green
/modules	parent	NONE
/modules/modA	parent	NONE
/modules/modB	parent	NONE
/modules/modA/favorite_clay_animation	scalar	Mr. Bill

You may also something similar as:

```
echo "I like the color " . $config->color . "\n";
$keys = $config->getKeys();
foreach ($keys as $key) {
    if ($config->is_parent($key)) {
        echo "The node named $key under at " . $config->getPath(false) .
        " is a parent node. It has children " . implode(',',
$config->$key->getKeys()) . ".\n";
    } else if ($config->is_scalar($key)) {
        echo "The node named $key under at " . $config->getPath(false) .
        " is a scalar with value " . $config->$key . "\n";
    }
}
```

which would result in:

```
I like the color red.
The node named modules under / is a parent node. It has children modA,modB.
The node named color under / is a scalar node with value red.
```

As a magic data node is an iterator, we can do things like:

```
foreach ($config as $key=>$node) {
    if ($node instanceof I2CE_MagicDataNode) {
        echo "The node named $key under at " . $config->getPath(false) .
        " is a parent node. It has children " . implode(',',
$node->getKeys()) . ".\n";
    } else {
        echo "The node named $key under at " . $config->getPath(false) .
        " is a scalar with value " . $node . ".\n";
    }
}
```

which would result in:

```
The node named modules under / is a parent node. It has children modA,modB.
The node named color under / is a scalar node with value red.
```

or:

```
$modules = $config->modules;
foreach ($modules as $module=>$data) {
    if ($data->is_scalar('favorite_clay_animation')) {
        echo "The module $module thinks " . $data->favorite_clay_animation . " is a super star!\n";
    }
}
```

would result in:

```
The module modA things Mr. Bill is a super star!
```

Changes from 3.1

- Removed the `__` from method calls.
- Relaxed the rules for the names of Magic Data nodes.
- Implemented the various interfaces
- Added in support for localization of values

References

[1] <http://pecl.php.net/package/APC>

Configuring Form Cache Generation Timing

Cached forms are used to save forms to a consistent format for exporting and for generating custom reports more quickly. There are a few settings you can override in your site configuration file to change this behavior. You can also see how to Turn Off Background Processes if you wish to not have the form caches update automatically. You can also read more information about Form Caches.

Configuration Settings

/modules/CachedForms/times/background_time

Default value: **0**

This determines how much time in minutes that must pass before the background process starts to cache all forms if they are stale. This just causes the background process to spawn, the process itself determines what needs to be updated based on the other timing settings. If you set this to 0 then the background process will never start. This is currently the default behavior because the Custom Reports module automatically updates any form caches it needs for each individual report when it runs either by background process, the command line or from generating the report through the Custom Report interface. This doesn't mean that the caches will be run every X minutes, but if X minutes have passed the next time someone access the site the background process will be launched.

/modules/CachedForms/times/stale_time

Default value: **10**

This determines how much time must pass in minutes before a form is determined to be stale. So if a form was cached 5 minutes ago and the setting is 10 then it won't try to cache it when the caching starts. You can also force the cache generation to ignore this time. If the setting is 0 then the forms will always be considered stale.

/modules/CachedForms/times/fail_time

Default value: **15**

This determines how much time must pass in minutes before it's determined that the last cache form background process has failed and can be restarted. If you have a lot of data and lots of activity you may want to increase this time because it may take a while to run the form caches. This doesn't have any effect on command line or running caches through the cached forms page. To get around this you have to force the cache if a previous process got hung or died because the machine restarted or it failed for other reasons.

/modules/CachedForms/times/recache_time

Default value: **1440**

This determines how much time must pass before the entire form cache is dropped and recreated. This is to avoid issues with the cache getting out of sync either from manually importing and dropping data or other errors.

/modules/CachedForms/times/stale_time_by_storage

Default values:

- **entry:10**
- **magicadata:30**
- **flat:20**
- **mutli_flat:20**

This overrides the stale_time setting based on the storage mechanism for the form. Some form storage mechanisms may not be changed as often so the cache won't need to be updated as frequently. The values can be for any storage mechanism that you have available in the system.

/modules/CachedForms/times/stale_time_by_form

Default values: **person:3**

This overrides the stale_time and stale_time_by_storage settings based on the individual form. Some forms may need to be updated more frequently like the person form since it may be used more frequently.

Manually Caching Forms

You can manually cache a form by going to the Configure System section and clicking on Cached Forms. From there you can individually try to cache a form, force caching the form or dropping the form cache. You can also do this for all cached forms at once. You can also run the following commands from the command line from your site pages directory. The --nocheck option is to keep it from checking for updated files to save processing time. Note that when running commands like this from the command line you may need to clear the APC so that configuration variables can be updated from the database. You can also restart Apache to do this.

```
cd <SiteDirectory>/pages
php index.php --page=/CachedForms/<CacheCommand> --nocheck=1
```

The possible commands you can use are as follows:

cacheAll

Cache all forms if they are stale.

cacheAllForce

Cache all forms ignoring if they're stale or not

dropAll

Drop all form caches. You'd probably want to follow this with the command to cacheAll forms.

createCache/form

Create the cache for the given *form* i.e. `createCache/person`.

`forceCreateCache/form`

Create the cache for the given *form* ignoring staleness.

`dropCache/form`

Drop the cache for the given *form*. You'd probably want to follow this with the command: `createCache/form`.

Caching Forms Background Process

Every time a page is accessed the form cache checks to see if it needs to be run in the background. The following checks are made to determine if the cache needs to run.

1. Is `background_time` greater than 0?
 1. If yes, then has `background_time` in minutes passed since the last time the process was started?
 1. If yes, then is the caching status anything other than "done?"
 1. If yes, then has more than `fail_time` minutes passed since it started?
 1. If yes, then force caching all the forms.
 2. If no, then don't run.
 2. If no, then cache all the forms based on the stale times for those forms.
 2. If no, then don't run.
 2. If no, then don't run.

Caching Forms Process

When a cache all command is given through either background process, the command line or from the cached forms interface, the following process occurs:

1. Is there another process currently "in_progress?"
 1. If yes, then was the command forced?
 1. If yes, then force running the caches for each form.
 2. If no, then do nothing.
 2. If no, then run all the caches for each form.

When a cache command is given for an individual form the following process happens. This can be from a cache all or an individual cache command can be given for a form.

1. Has `stale_time` passed since this form was last cached? (Using any of the stale settings mentioned above: `stale_time`, `stale_time_by_storage` or `stale_time_by form`.)
 1. If yes, then is the form dirty? (Have any changes been made since the cache was last run?)
 1. If yes, then update the cache.
 2. If no, then do nothing.
 2. If no, was the command forced?
 1. If yes, then is the form dirty?
 1. If yes, then update the cache.
 2. If no, then do nothing.
 2. If no, then do nothing.

Configuration Example

You can add the following to your site config file to override these settings. You can add in only the settings you wish to change.

```
<configurationGroup name="CachedForm_times" path="/modules/CachedForms/times">
  <displayName>Times</displayName>
  <configuration name="background_time">
    <displayName>Stale Time</displayName>
    <description>The time (in minutes) after which to launch the background page.
      You can disable the launching of the background page by setting
this to be less
      than or equal to 0
    </description>
    <value>0</value>
  </configuration>
  <configuration name="stale_time">
    <displayName>Stale Time</displayName>
    <description>The time (in minutes) after which a cached table is consider stale.
```

Setting to be less than or equal to zero means that it is always considered stale.

```
    </description>
    <value>10</value>
  </configuration>
  <configuration name="fail_time">
    <displayName>Fail Time</displayName>
    <description>The time (in minutes) after which generation of a cached table is
consider to have failed</description>
    <status>required:true</status>
    <value>15</value>
  </configuration>
  <configuration name="recache_time">
    <displayName>Fail Time</displayName>
    <description>The time (in minutes) after which the cached table is recached</descript
    <status>required:true</status>
    <value>1440</value>
  </configuration>
  <configuration name='stale_time_by_storage' values='many' type='delimited'>
    <description>The default stale time in minutes for a form based on its storage
mechanism.
```

If set, overrides the value under times/stale_time. Setting to be less than or equal to zero means that it is always considered stale.

```
    </description>
    <value>entry:10</value>
    <value>magicadata:30</value>
    <value>flat:20</value>
```

```

    <value>mutli_flat:20</value>
  </configuration>
  <configuration name='stale_time_by_form' values='many' type='delimited'>
    <description>The default stale time in minutes for a specific form. If set,
    overrides the
      value under times/stale_time_by_storage and times/stale_time.
    Setting to be less than or
      equal to zero means that it is always considered stale.
    </description>
    <value>person:3</value>
  </configuration>
</configurationGroup>

```

Configuring Report Generation Timing

Custom Reports are cached on a regular basis when your site is accessed. There are a few settings you can override in your site configuration file to change this behavior. You can also see how to Turn Off Background Processes if you wish to not have the form caches update automatically.

This page is a work in progress

Configuration Settings

/modules/CustomReports/times/background

Default value: **10**

This determines how much time in minutes that must pass before the background process starts to cache the reports if they are stale. This just causes the background process to spawn, the process itself determines what needs to be updated based on the other timing settings. If you set this to 0 then the background process will never start. When Custom Reports are cached, then any required form caches are also run (if they are stale) before the report. This doesn't mean that the caches will be run every X minutes, but if X minutes have passed the next time someone access the site the background process will be launched.

Configuration Example

```

<configurationGroup name="CustomReports_times" path="/modules/CustomReports/times">
  <displayName>Times</displayName>
  <configuration name="stale">
    <displayName>Stale Time</displayName>
    <description>The time (in minutes) after which reports are considered stale. If
less than or equal to zero
      then it is always considered stale
    </description>
    <value>10</value>
  </configuration>
  <configuration name="stale_by_report" values="many" type="delimited">
    <displayName>Stale Time</displayName>
    <description>The time (in minutes) after which a specific report is considered

```

```

stale. Overrides the value in
    times/stale. If less than or equal to zero then it is always
considered stale
    </description>
    <value>report_name:10</value>
</configuration>
<configuration name="background">
    <displayName>Background Time</displayName>
    <description>The time (in minutes) after which to launch the background process
to generate reports. If less
        than or equal to zero we do not launch it.
    </description>
    <value>10</value>
</configuration>
<configuration name="fail">
    <displayName>Fail Time</displayName>
    <description>The time (in minutes) after which a report is considered to have
failed generation</description>
    <value>15</value>
</configuration>
</configurationGroup>

```

Creating a New Form Field

This tutorial applies to version 4.0 of the iHRIS Suite.

In this tutorial, we will create new form field data type. This form field will be a one line string which is capitalized. The capitalization will be enforced on the server-side as well as the client-side via java-script. We will wrap all of this into a module, **CapField** so that it can be shared easily.

Creating the Module

In one of your module directories (e.g. your site's modules directory) do the following:

```

mkdir CapField
gedit CapField/CapField.xml

```

and add in the following lines:

```

<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='CapField'>
    <metadata>
        <displayName>Capitalized Field</displayName>
        <category>System Component</category>
        <description>Provides an always capitalized field</description>
        <creator>Intrahealth Informatics</creator>
        <email>hris@capacityproject.org</email>
        <version>4.0.0</version>
    </metadata>

```

```

<requirement name='i2ce'>
  <atleast version='4.0' />
  <lessThan version='4.1' />
</requirement>
<priority>200</priority>
<path name='classes'>
  <!-- we need to create a php class to handle creating and validating our field. it
  <value>./lib</value>
</path>
</metadata>
<configurationGroup name='CapField' path='/'>
  <configuration name='STRING_CAP' path='/modules/forms/FORMFIELD/STRING_CAP'>
    <!-- This registers the form field class we create with the system as STRING_CAP-->
    <value>I2CE_FormField_STRING_CAP</value>
  </configuration>
</configurationGroup>
<I2CEConfiguration>

```

I2CE_FormField_STRING_CAP

We need to create a PHP class to handle the client-side validation of our capitalized field. The field we want has input which is a one line string, so we will subclass the existing one. We do this as follows:

```

mkdir CapField/lib
gedit CapField/lib/I2CE_FormField_STRING_CAP.php

```

and add in the following:

```

class I2CE_FormField_STRING_CAP extends I2CE_FormField_STRING_LINE {

    /**
     * Checks to see if the current value for this is set and valid.
     * This function is used to validate the input on the server-side.
     * We first check to see if it is valid using the parent class'
validation method.
     * If this passes, we then check the the capitalized version of the
value we have is the same
     * as the value we have (if so it is already capitalized and is
thus valid)
     * @return boolean
     */
    public function isValid() {
        if (!parent::isValid()) {
            return false;
        }
        $value = $this->getValue();
        return ($value === ucwords($value));
    }
}

```

```

/**
 *This is the method to create the input element for the
capitalized input string
 * @param DOMNode $node The node that we wish to add out input
element to
 * @param I2CE_Template $template. The page template object that
we are working in
 * @param DOMNode $form_node The node from the html template file
that requested this form field be displayed
 */
public function processDOMEditable($node,$template,$form_node) {
    $ele_name = $this->getHTMLName(); //this gets the name of the
input element which is used for the GET and POST variables
    $template->addHeaderLink('mootools.js'); //makes sure that the
mootools javascript library is available to us
    $element = $template->createElement( //creates the input
element that we will add
        "input",
        array(
            "name" => $ele_name,
            "id" => $ele_name,
            "type" => "text",
            "onblur"=>
"this.setValue(this.getValue().capitalize());"
            "value" => $this->getDBValue()
        ) );
    $this->setElement($element); //registers the input element that
we created
    $node->appendChild( $element); //add the input element node we
just created to the node it needs to be under
    }
}

```

Javascript

In the processDOMEditable() function we added some javascript for the onblur check. iHRIS uses version 1.2 of the mootools ^[1] javascript library. Mootools has a handy capitalization ^[2] function that we incorporated into our form field so that on a "blur" event the input element will capitalize.

Finishing Up

You are done, you just need to require the module you created where appropriate. You can now add a field to a form with type STRING_CAP.

References

- [1] <http://mootools.net/>
- [2] <http://mootools.net/docs/core/Native/String#String:capitalize>

Creating Translations

If you update an .xml for .html file that needs to be translated, you need to update the .pot file for the module that contains that file. You may do so by running:

```
<PATH_TO_I2CE>/tools/translate_create_templates.php
```

from the top-level directory of the package. This should be done before commit to bazaar. Supposedly, launchpad will watch the .pot files and update the translations available on launchpad.

Creating the POT Files For Launchpad Upload

There are two scripts. The first creates all the .pot files and any necessary localized module configuration files. The .pot files are stored under *translations/templates* and the module configuration file is stored under *<MODULE_DIR>/configs/en_US*.

Once you are satisfied with the results you create the tarball to upload to launchpad. **Hopefully**, you don't need to do this step any more as the translation setting for i2ce, ihris-common, ihris-manage, ihris-qualify have been updated to pull in .pot files from the trunk branches.

translate_create_templates.php

There is a utility to create .POT^[1] translation template files to upload to launchpad. The utility creates a .pot file for each module in a package (such as I2CE, ihris-common, ihris-manage, etc) and is found in the **I2CE** package under:

```
i2ce/tools/translate_create_templates.php
```

It should be run in the top-level directory *<DIR>* of a package. The usage as of version 4.0.0:

```
cd <DIR>
```

```
<I2CE_DIRECTORY>/tools/translate_create_templates.php --help
```

Usage: translate_create_templates.php

```
[--template_dir=$template_dir]: The directory to store .pot template files in
    If not set, we use ./translations/templates
[--remove-strings=T/F] set to true to always remove the string from a module's .pot
    which are no longer present in the module
[--modules=$module1,$module2..$moduleN]: The module(s) for which we wish to operate on
    If not specified, it uses every valid module
[--search_dirs=$dir1,$dir2]: Set the search directories for modules
    If not specified, we search <DIR>, <DIR>/sites/*
[--limit_search=T/F]: Limit the module search results of found sub-modules of a top-level
    Defaults to T.
[--categories=$cat1,$cat2]: The categories to search
    If not specified we search TEMPLATES
[--create-configs=T/F] set to true to always create ./configs
    directory and add to to config.xml if there are translatable strings.
```



```
[--overwrite-configs=T/F] set to true to always overwrite the translated
config.xml
```

create_launchpad_upload.php

This should no longer be needed for i2ce-XXX and i2ce as Launchpad is now configured to watch for .pot files. I'll leave it around in case someone else wants to use it.

Creates the tarball needed to upload into launchpad.

It should be the run in the top-level directory **<DIR>** of a package.

Looks for .pot files in translations/templates/

Creates the file translations/templates/launchpad/templates-**<PACKAGE>**.tgz

It tells you where to upload the file in launchpad.

Usage as of 4.0.0

```
Usage: translate_create_templates.php
  [--modules=$module1,$module2..$moduleN]: The module(s) for which we wish to operate on
  If not specified, it uses every valid module
  [--search_dirs=$dir1,$dir2]: Set the search directories for modules
  If not specified, we search <DIR>, <DIR>/sites/*
  [--limit_search=T/F]: Limit the module search results of found sub-modules of a top-level
  Defaults to T.
```

Downloading The Translations

You can download the translation at the following links:

- <https://translations.launchpad.net/i2ce/trunk/+export>
- <https://translations.launchpad.net/ihris-common/trunk/+export>
- <https://translations.launchpad.net/ihris-manage/trunk/+export>
- <https://translations.launchpad.net/ihris-qualify/trunk/+export>

Select to download the .MO files (and not the .PO files).

Wait a long time to get the e-mail. The emailed file should be saved under:

```
<PACKAGE_DIR>/translations/launchpad-export.tar.gz
```

translate_templates.php

The utility *translate_templates.php* is found under *i2ce/tools* and should be run from the top-level directory **<PACKAGE_DIR>** of the package. It create the translated html template files and configuration files.

Usage for Version 4.0.4

```
Usage: translate_templates.php
  [--read_po_files=$read_po_files]: Tries to read .po files for the given locale rather than an export
  Defaults to false
  [--templates_dir=$read_po_files]: Where to read .po files from
  Defaults to $templates_dir
  [--archive=$archive]: The archive consisting of all translationd
  Defaults to ./translations/launchpad-export.tar.gz
  [--locales=$locale1,$locale2..$localeN]: The locales we wish to translate for
  If not specified, it uses every valid subdirectory of in the translations archive file
```

```

[--only_changed=T/F]: produce translated files only when something was translated from the source document.
    Defaults to T=true
[--only_archive=T/F]: Only create the archive -- do not recreate template files.
    Defaults to F
[--create_archive=T/F]: generate the tarball and debian packaging info.
    If F, it output translated files within each e module as appropriate.
    If T (default), it outputs archive under ./translations/archive/ with a sub-directory for each locale
[--archive_dir=$archive_dir]: The directory to store archive in.
    Defaults to ./translations/archive/
[--categories=$cat1,$cat2]: The categories to search
    If not specified we search TEMPLATES
[--modules=$module1,$module2..$moduleN]: The module(s) for which we wish to operate on
    If not specified, it uses every valid module
[--search_dirs=$dir1,$dir2]: Set the search directories for modules
    If not specified, we search <PACKAGE_DIR>,<PACKAGE_DIR>/sites/*
[--limit_search=T/F]: Limit the module search results of found sub-modules of a
    top-level module to those that are real subdirectories of top-level's given directory
    Defaults to T.

```

Translation from .po files

As languages become completely translated, we will maintain the .po files in the source code. In this case you do not need to download the launchpad exports. This is the case, for example, with French. Translation now is easier as you do not need to wait on downloading from launchpad:

```
translate_templates.php --create_archive=false --read_po_files=true --locales=fr
```

in <PACKAGE_DIR> will produce the French translations in the source tree for use

Note: under version 4.0.6 the defaults for translate_templates.php have been changed, so you may simply do:

```
translate_templates.php --locales=fr
```

Packaging Translations

Download the launchpad translations as indicated above. Running

```
translate_templates.php --create_archive=true
```

in <PACKAGE_DIR> will produce *translation/archive* directory

References

[1] http://en.wikipedia.org/wiki/GNU_gettext

Custom Reporting -- An Overview

The Custom Reporting is a three part process:

- **Create A Form Relationship** This defines the relationship between the data in the system. It is intended for a relatively advanced user that has some understanding on how the data is related.
- **Create A Report Choosing**, a form relationship, this specifies the data fields for a report as well as the limits allowed for the various views of the report. It is intended for a data manager. Only a moderate understanding of the way the data is related in the system is required. It is in this step that generates the cached 'zebra_XXXX' report tables.
- **Create A Report View**. This is intended for all end user's that might need to create a different view of a report. For example, it would be useful for someone who needs to generate monthly reports for different slices of the data.

Tasks

There are a several tasks that control general access to the creation and view of custom reports:

- **custom_reports_can_access** Allows minimal access to the Custom Reporting System System
- **custom_reports_delete** Allows deletion of data defining custom reports
- **custom_reports_can_access_relationships** Allows access to the Custom Report Relationships
- **custom_reports_can_access_reports** Allows access to the Custom Reports
- **custom_reports_can_view_reportViews** Allows view of the Custom Report Views
- **custom_reports_can_edit_reportViews** Allows editing of the Custom Report Views
- **custom_reports_admin** Administrator for custom reports. Can perform all tasks associated with custom reports

In addition you may also limit access to a specific Report View \$view by specifying:

```
/modules/CustomReports/reportViews/$view/limit_report_to
```

to be any valid permission string.

Custom Reporting -- Creating a Staff List Example

This article describe you how to create a custom staff info report for iHRIS Manage. This is a three step process:

- Create the custom form relationship 'staff_info'.
Here you choose the forms that you are interested in and how they are related to each other.
- Create a custom report 'staff_report' based on the 'staff_info' relationship
Here you choose the fields you want for your report from the relationship you created. You can also choose which fields to limit by for all the report views created from this report.
- Create a custom report view for the staff report.
The various views of a report are intended for non-administrative users to view the data in the system.

Actually, this is a four step process, with the first step being to figure out which data you want and where it is stored. Let us suppose we have the following requirement from an HR Manager to:

Requirement: Create a staff list with the person's cadre and facility

The Form and Field Map

A good starting point is to look at the forms and fields and in particular the "graphic visualization" which is a map of the forms and fields in iHRIS Manage. When we construct a form relationship, we will **join** forms by traversing the arrows of the form field map, both forward and backward. There are two arrows in this map:


- black arrows: The source of an arrow, formA, is related to the target of the arrow form, formB, via a mapped field. If the arrow is not labeled, then the mapped field is also named formB. Otherwise it is the label of the arrow. Although, formA maps to a most one instance of formB, there may be many instances of formA mapping to formB. Thus, when you are going backward on a black arrow, you will probably need to limit the joined form so that a unique form is chosen.
- red arrows: The source of an arrow, formA, is the parent of the target of the arrow, formB. FormA may have many instances of formB as a child form, but formB can only have one parent form. Thus, when you go forward on a red arrow, you will probably need to limit the child form so that a unique child form is chosen.

Step 0: What data do you want?

This is the most important step, and requires some more advanced knowledge of how the data (forms) in the system are used. Based on the HR Manager's requirement and the form and field we see that we need to include the following forms:

- *facility*: We need the name of the facility
- *job*: we need to know the cadre the person is working in
- *person*: although not explicitly stated as a requirement, let us assume that the HR Manager also wanted to know the name of the people on staff

However, if we look at the data map, we see that there are no arrows that directly connect the *facility*, *job*, and *person* forms. Instead we see that we need to go from the *person* form, through the *person_position* form to the *position* form. From the position form, we can join the facility and job. Here is the relevant portion of the form field map:

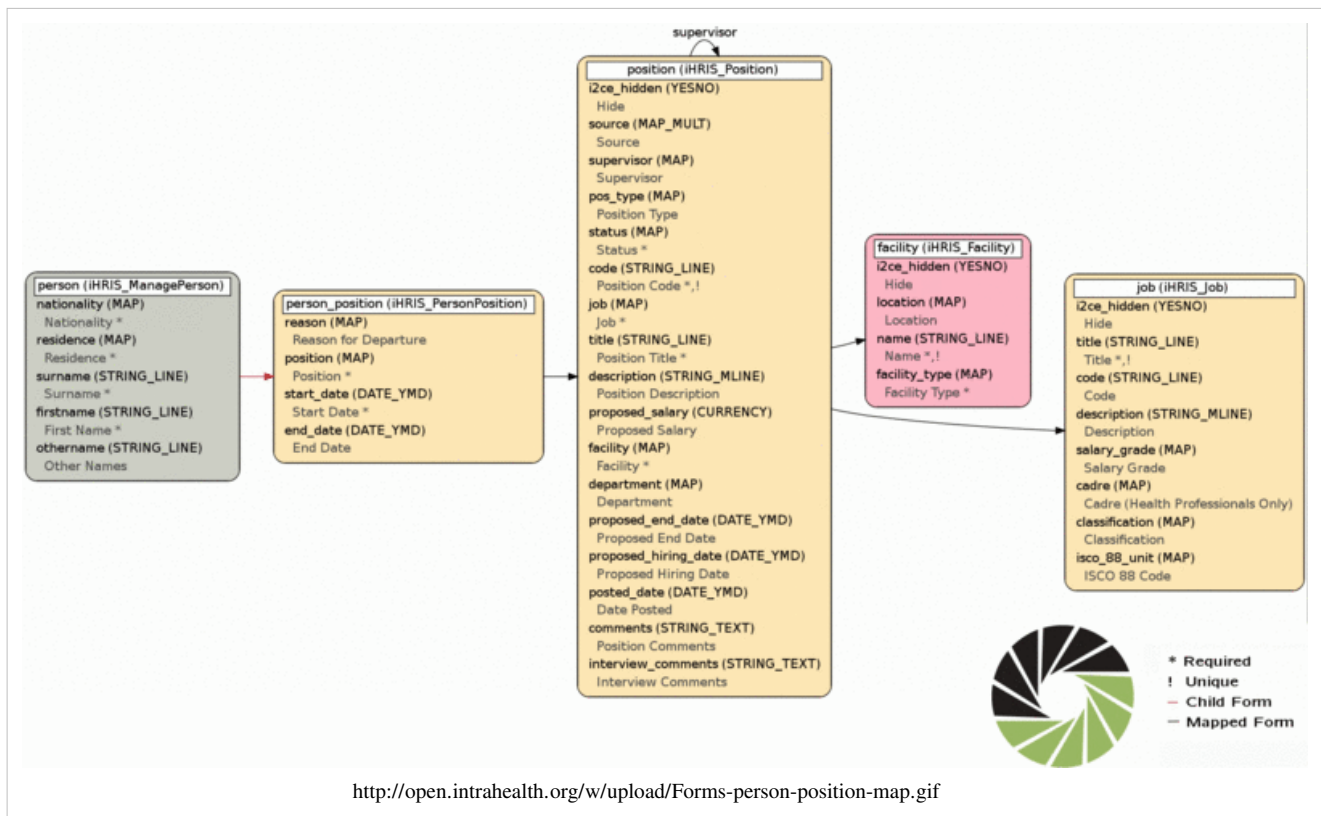

Notice that there is one red arrow here, connecting the *person* and *person_position*, while the rest of the arrows are black.

Step 1: Create the Form Relationship

We will create a form relationship called 'staff_info'. The form we starting traversing our map from is called the *primary form*. We are free to choose where we want to start the mapping from, but choosing different primary forms will produce a different data set. There are actually three main relationships that we can create here based on which primary form we choose.

- Option A: Choose the *person* form as the primary form. Then the reports based on the relationship "staff_info" will contain everyone in the system whether or not they have a position.
- Option B: Choose the *position* form as the primary form. Then the reports based on the relationship "staff_info" will only contain the people in the system that have a position. Also, if there are some positions which have no people assigned to them, then these will also show up in the report.
- Option C: Choose the *person_position* form as the primary form. The the reports based on the relationship "staff_info" will only currently filled positions.

Either option can make sense and your choice depends on the requirements from the HR Manager. Since the HR Manager did not give us enough details to go by, we will have to and ask him/her for clarification.

Option A: Person Report

Select **Configure System** and then **Form Relationships**. We create a report relationship called 'staff_info' and choose "person" as the primary form, enter a display name and description. Then click update.

You may either choose to modify an existing form relationship, or construct a new one. You may construct an existing form relationship with this page.

Edit an Existing Relationship

- Search People (search_people) – Search relationship for all person records. [Edit/ View/](#)
- Facility List (facility) – Facility information [Edit/ View/](#)
- Current Staff (staff) – A list of all current staff. [Edit/ View/](#)
- Positions (position) – All information related to a position. [Edit/ View/](#)

Construct a New Relationship

Please select either a form to use as the primary form for this form relationship or choose to copy an existing form relationship to a new one by clicking on the appropriate Options link below. Please select a form to use as the primary form for this form relationship by clicking on the Options link below.

Relationship Short Name: An internal key used to identify the form relationship. It may not be the same as the key for any of the existing form relationships.	staff_info
Display Name: The name of the form relationship that is displayed to the end user.	Staff Info
Description: A description of the form relationship that should be understandable to the end user.	Staffing Information
To construct a new form relationship, you will need to first choose a Primary Form person	person The Person form -- This form holds basic information about a person such as their names and residence
Select an existing relationship to copy. Do not copy	
Update	

Now that we have created the 'staff_info' relationship we can **edit** it. Now we need to join the "person_position" form to the "position" form. To do this click **Joined Forms** then **Add a New Form**. Select *person_position (child)* as the form to add, and the the "short name" to be 'person_position.' You should also set a display name and description for this form.

staff_info

The form `staff_info` in the relationship refers to the real form person.

Display Name:
The name of this relationship that is displayed to the end user.

Description:
A description of the relationship that should be understandable to the end user.

Staff Info

Staffing Information

Joined Forms

Add a new child form

Limit This form

Functions

Update

[Parent](#)

Add A New Form

Select a child form to join to this form:

`person_position(child)`

Short Name:
An internal key used to identify the form relationship. It may not be the same as the key for any of the existing named forms in this relationship.

`person_position`

Display Name:
The name of the joined form that is displayed to the end user.

`Person Position`

Description:
A description of the form and its role in the relationship that should be understandable to the end user.

`The position that the person holds`

Close **Add**

You will notice that we are traversing a red arrow forward, form *person* to *person_position*. By what we said above there may be many *person_positions* associated to a person, so we will need to limit the forms. We will need to limit the *person_position* form so that:

- The *start_date* is maximal among all the values of the *start_date* field for any *person_position* that is a child of the current *person* . This way we get the most recent position the person has started.
- The *end_date* is not null, so that we know that person still holds this position.

To do so, we click on **Joined Forms** once again and select **Person Position (person_position)**, which is the form that we just added. Now we can choose to **Limit This Form**. Since we have two limits to place on this form, we will need to select the "Operator Node" to be "And."

staff_info

The form staff_info in the relationship refers to the real form person.

Display Name: The name of this relationship that is displayed to the end user.	Staff Info
Description: A description of the relationship that should be understandable to the end user.	Staffing Information

 Joined Forms**Existing Joined Forms**

[Person Position \(person_position\)](#)

The position that the person holdsThis form is a child of staff_info.

Drop row if no form found: ☐ Yes / ☒ No

 Joined Forms **Limit This form****Choose Limit Node Type**

You have not defined any limiting information under this node. You may either choose to limit by a field or set this node to be an operator.

☒ Operator Node AND

☐ Limit by a field (end node)

☐ No limit

[Delete](#)

 Add a new child form **Limit This form** **Functions**

Update

Once we click the "Update" button, we can choose to **Add A New Operand**. We will do this twice, once for the 'start_date' and once for the 'end_date.' Once the operands have been added, we can **Edit** each of them and select to **Limit By A Field**:

Existing Joined Forms

[Person Position \(person_position\)](#)

The position that the person holdsThis form is a child of staff_info.

Drop row if no form found: ☐ Yes / ☒ No

 Joined Forms **Limit This form****Limits**

All limits under this node are grouped under the operator AND.

Existing Limits:

o Unspecified Limit -- [Edit](#)

Choose Limit Node Type

You have not defined any limiting information under this node. You may either choose to limit by a field or set this node to be an operator.

☐ Operator Node Select One

☒ Limit by a field (end node)

☐ No limit

[Delete](#)

o Unspecified Limit -- [Edit](#)

Choose Limit Node Type

You have not defined any limiting information under this node. You may either choose to limit by a field or set this node to be an operator.

☐ Operator Node Select One

☒ Limit by a field (end node)

☐ No limit

[Delete](#)

Add a new operand.

You may add a new operand to this operator. **Add**

[Delete](#)

Now click **Update** once again. We can now choose the two fields we want to limit by and how we want to limit them

Joined Forms

Existing Joined Forms

Person Position (person_position)
The position that the person holds. This form is a child of staff_info.

Drop row if no form found: ☐ Yes / ☒ No

Joined Forms

Limit This form

Limits

All limits under this node are grouped under the operator AND.

Existing Limits:

- [Edit](#)
Limit this form by a field
 Select a field and limit type to limit this form by.

Form field:	start_date
Field limit style:	max_parent

 Limit this field to be maximal among the values for this form as a child form.
[Delete](#)
- [Edit](#)
Limit this form by a field
 Select a field and limit type to limit this form by.

Form field:	end_date
Field limit style:	null

 Limit this field to be null (value not specified).
[Delete](#)

Next, we join the *person* form to the *person_position* form as a parent form. We do this by click **Joined Forms** and then **Add A New Child Form** underneath the *person_position* form. Note, we do not need to specify any limits here as we are traversing a black arrow in the correct direction.

Joined Forms

Existing Joined Forms

Person Position (person_position)
The position that the person holds. This form is a child of staff_info.

Drop row if no form found: ☐ Yes / ☒ No

Joined Forms

Add a new child form

Limit This form

Limits

All limits under this node are grouped under the operator AND.

Existing Limits:

- [Edit](#)
Existing Limit
 There is a limit on the field *start_date* with style *max_parent*.
 Limit this field to be maximal among the values for this form as a child form.
 You may [Remove](#) this limit.
[Delete](#)
- [Edit](#)
Existing Limit
 There is a limit on the field *end_date* with style *null*.
 Limit this field to be null (value not specified).
 You may [Remove](#) this limit.
[Delete](#)

Add a new operand.

You may add a new operand to this operator. [Add](#)

[Delete](#)

Add a new child form

Limit This form

Functions

[Update](#)

Add A New Form

Select a child form to join to this form: position (linked to by the field position)

Short Name:

An internal key used to identify the form relationship. It may not be the same as the key for any of the existing named forms in this relationship.

Display Name:

The name of the joined form that is displayed to the end user.

Description:

A description of the form and its role in the relationship that should be understandable to the end user.

[Close](#) [Add](#)

We finish by joining the "facility" and "job" forms to the "position" form by clicking **Joined Forms** and then **Add A New Child Form** underneath the *position* form. Note, we do not need to specify any limits here as we are traversing

a black arrow in the correct direction.

Variations for Option A

- Note: There is some potential ambiguity here. If a person was assigned to more than one position at a time with the same *start_date*, then there will be a *person_position* for each of the positions, so when the *person_position* form is joined it will choose one of *person_position* forms arbitrarily. If you expect that people can have more than one position, then you should choose option B
- Note: We chose to limit the *end_date* to be not null so as to only get current positions. If we did not set a limit on the *end_date*, then we would get the last position the person held, regardless of whether they hold it or not.
- Note: If we selected *Drop row if no form found* under the *person_position* form, then if a person did not have a *person_position* form associated to them, they would be removed from the report. Selecting to do so would make this a "Current Staff Report," rather than a "Person Report." We won't do this here, but you may choose to do so if this make sense for your requirements.

Option B: Position Report

Select **Configure System** and then **Form Relationships**. We create a report relationship called 'staff_info' and choose "position" as the primary form, enter a display name and description. Then click update.

Now that we have created the 'staff_info' relationship we can edit it.

First, we join the "facility" form to the "position" form by the mapped field "position." We also join the "job" form to the "position" form by the mapped field "job."

Next we need to join the "person_position" form as mapping to the *position* form via the *position* field. In the form field map, we are traversing a black arrow backwards, so we will need to add in some limits to choose a unique *person_position* form. There may be many *person_position* forms mapping to a given *position* as multiple people could have held the same position. However, there should only be one *person_position* form where the *end_date* is null and this will correspond to the person currently holding this position.

Next, we join the *person* form as to the *person_position* form as its parent form. Since we are traversing a red arrow backwards, there is no ambiguity about which form we are joining.

Variations for Option B

- If we chose to "Drop Row If No Form Found" when we joined in the *person_position* form, then we only will show those positions which have ever been assigned to someone so it becomes more of "Filled Positions" report, although not a Current Positions report.

Option C: Current Position Report

Select **Configure System** and then **Form Relationships**. We create a report relationship called 'staff_info' and choose "person_position" as the primary form, enter a display name and description. Then click update.

Now that we have created the 'staff_info' relationship we can edit it.

First, since we wish to only show the current positions, we will choose to limit the *person_position* form so that the *end_date* is not null.

Next, we join the *person* form which as the parent form of the *person_position* form. Since we are traversing a red arrow backwards, there is no ambiguity in which *person* we are joining.

Next we join the *position* form to *person_position* form via the mapped field *position*. Since we are traversing a black arrow forwards, there is no ambiguity in the *position* form we are joining.

Next we join the *job* and *facility* forms to the *position* form via their respective fields. Again, since we are traversing a black arrow forwards, there is no ambiguity in the forms we are joining.

Variations for Option C

- If we chose not to use the limit `end_date` is null, we would end up with a report in which shows the history of any position which has been filled.

Step 2: Create the Report

Now that we have the relationship 'staff_info' built, we can create a report from that relationship. Go to **Configure System** and then **Reports** and choose to create a new report, called 'staff_report' based on the 'staff_info' relationship. When we are done you will see the `zebra_staff_report` table in the database. Here, we can choose the limits that we will want for the report views (below) as well as all the fields that we may want to see in a report view. To do so, click on the "Reporting Forms" and then the "Fields" and you will be able to enable or disable fields from the relationship to include in the report. You will also be able to change the header text for the field and set the limits for the field.

Step 3: Create the Report View

Go to **Configure System** and then **Report Views** and choose to create a new report view based on the report "staff_report." Just select the fields you want to display and you are done.

Custom Reporting -- Creating Form Relationships

Overview

Intended Use

This is primarily intended for a developer or administrator of the system who has a good idea of how all the forms are related. The possible connections between the different forms are already mapped out in the system. A relationship is the description of a path between the various forms in the system.

A relationship is, at the moment, used for Custom Reports. We also intend to use it for Custom Pages.

A form relationship is used to build the SQL queries used in a Custom Report. Although you do not need to know any SQL to create a report, a passing familiarity with relational databases will help.

Example

You may wish to create a form relationship in iHRIS Manage that describes all current employees, their salaries, and their supervisors. Here is an outline of how to define this relationship:

- Start with the primary form 'person_position' and limit to those positions which the 'being_date' field is not null and the 'end_date' field is null.
 - Join to the primary form the 'person' form where the 'person' form is a parent of the 'person_position' form
 - Join to the primary form the 'salary' form where 'salary' is a child of 'person_position' and where the 'start_date' field for 'salary' is maximal
 - Join to the primary form the 'position' form where the field 'position' of the primary 'person_position' form maps to that position. Call this the 'employee_position' form.
 - Join to the 'position' form the 'position' form where the 'supervisor' field of the 'position' form maps to that position. Call this joined form the 'supervisor_position' to distinguish it from the 'employee_position' form.
-

- Join to the 'supervisor_position' the 'person_position' form whose 'position' field is the value of 'supervisor_position' form. Call this the 'supervisor_person_position'
- Join to the 'supervisor_person_position' form the 'person' form which is a parent of the form. Call is the 'supervisor'

Some Terminology

- A relationship is some times referred to as a "form relationship" or a "report relationship"
- The "primary_form" is the starting point in describing the form in your relationship.
- A form can be referenced several times in a relationship. In the example above, the person_position form was referenced twice. Once we gave it the "report form name" 'person_position' and once we gave it the "report form name" 'supervisor_person_position'. Similarly, the person form was referenced twice and given the two distinct "report form names" of 'person' and 'supervisor'
- Some of the terminology, such as 'join,' is borrowed from SQL.

Starting Out

A form relationship can be created following the "Configure System" and then the "Edit Form Relationship" linka. The first steps are to:

- select a "Display Name" for the relationship, the name of the relationship for the end user.
- select a "Short Name" for the report, which is a way to reference the relationship internally and can only contain alpha-numeric characters and some limited punctuation such as _ and -.
- A description of the relationship.
- The you must do one of the following:
 - Choose the "primary_form" for the relationship
 - Copy the details existing form relationship to modify

Joining a Form

Once a form, formA, is in a relationship, you can join to it any of its related forms. You must ensure, by adding a limit, that at most one instance of the formB is joined to another an instance of formA. There are four possible ways to join:

- (An instance of) formA is a parent of (an instance of) formB.
 - formA may have several child instances of formB. For example, a 'person' form may have may child 'salary' forms.
- (An instance of) formA is a child of (an instance of) formB.
 - Note that a form, if it has a parent form, is unique, so no limits are needed when joining in this manner.
- (An instance of) formA contains a mapped field whose value maps to (an instance of) formB.
- (An instance of) formB contains a mapped field whose value maps to (an instance of) formA.

Limiting a Form

The primary form and any joined forms in a relationship may be limited by using the limiting forms structure. The form relationship provides a nice interface to construct form limits.

Adding in a SQL Function

In addition to linking in forms to a report, we can define SQL functions that can be run on the data in the forms. To reference the field named \$fieldName in the form named \$reportFormName in the relationship you use:

```
`$reportFormName+$fieldName`
```

For example:

```
CONCAT (SUBSTR(`supervisor+name`,1,1), ' ', SUBSTR(`supervisor+surname`,1,1) , '.')
```

would return the initials of the supervisor.

To define a sql function, you need to define:

- A (short) name use to reference the function. For example, 'supervisor_initials.'
- A description of the function. For example, "The Initials of the Supervisor."
- The form field that the result of the SQL function should take values in. For example, "STRING_LINE"

Custom Reporting -- Creating Report Views

This document applies to the iHRIS Suite version 4.0. For version 3.1, the methods are similar although not identical.

Intended Users

The report view were intended to be as simple as possible to create and view for the end user.

You may wish to review the tasks for custom reporting.

Creating and Editing A Report View

Click on "Configure System" on the home page. Then, under "Manage Reports" click on "Report Views." Now you can choose either to edit an existing Report View or Create a New View.

To create a new Report View, you need to select the Report on which this view is based off of. You will also be prompted to name this report and provide a description.

Choosing Fields

You will have a list of the fields available from the selected Report. You can choose, with a checkbox, which of these fields you want displayed in the Report View. You can also change the name (header) for the fields.

Ordering Fields

You can choose the order in which the fields are listed by dragging and dropping the different fields.

Setting The Default Display

You can set the default display for a Report View as follows:

- Display the intended Report View
- Choose any limiting options you wish
- Choose any sorting you wish
- Select the "Set as Default" checkbox
- Click on the intended display button (e.g. "Print" or "View")

You can clear the default view from the Edit Report Views Page.

Adding Related Report Views

You may wish to create a quick "Jump" from one report view to another that will be shown at the bottom of the HTML Display. You can do so when editing the Report View.

Displaying A Report View

Simply select "Create Reports" from the home page and select the report you wish to use.

The Different Displays

HTML Display

This presents a interactive display of the data which allows you to limit and sort the data. If no default has been set for the Report View, this is the display that is used.

Limiting By Fields

Based on the fields that you chose to limit by in Custom Reporting -- Creating Reports you can limit the data shown by the different fields in the report. For example, you could limit a staff list by those employees in a given facility or a given district.

Sorting By Fields

You can choose the sorting order by clicking on the headers for each of the columns (fields). Clicking once makes it ascending order, twice is descending order, and a third time turns off the sort for that field. You can also click on the header of a second column. This will allow you to sort by two columns. For example you could sort by Department, then Surname, then First Name.

Print(PDF) Display

In this display you can choose to view your report as a PDF file. You can choose paper size and orientation.

To customize the colors and graphics, margins, spacing, you should modify the magic (configuration) data at:

```
/modules/CustomReports/displays/PDF/display_options
```

Export Display

In this display, you can export all of your data to a file. The file types are:

- 'html': exports the data into an html table
- 'csv': a comma separated values ^[1] file. this is suitable for import in to Excel or a database.
- 'tab': a tab separated values ^[2] file. this is suitable for import in to Excel or a database.

References

[1] http://en.wikipedia.org/wiki/Comma-separated_values

[2] http://en.wikipedia.org/wiki/Delimiter-separated_values

Custom Reporting -- Creating Reports

This documentation applies specifically to iHRIS 4.0, although much of it applies to version 3.1.

Intended Use

This step is intended who has a moderate understanding of how the data are related in the system. It consists of little more than choosing a form relationship and selecting the data you want in the report with checkboxes.

Once a report has been defined, you can create multiple views of the data in the report.

First Steps

To create a report, you first must first:

- chose a relationship
- select a "Display Name" for the report, the name of the report for the end user.
- select a "Short Name" for the report, which is a way to reference the report internally and can only contain alpha-numeric characters and some limited punctuation such as _ and -.
- A description of the report.
- A category for the report. This is used to group different report views together.

Report Tables Structure

Reports are based on a form relationship. Each set of forms which satisfy a relationship corresponds to one row of a report table. A report named **XXXXXX** will cause a table named 'zebra_XXXXXX' in the database to be created and populated.

The columns in the report table are as follows:

- ``$reportFormName+id``: The id's of each of the forms satisfying the relationship.
 - ``$reportFormName+$fieldName``: Any of the selected fields from each of the forms in the relationship as well as any field used to limit the report.
 - ``$function``: Any functions that are selected for the report
-

Selecting Fields

Any of the fields of any of the forms which satisfies the chosen form relationship can be included in the report.

Selecting Limits

Any of the fields of a form in the relationship can be selected to limit the report by. These limits will show up in the report views. There are various ways (styles) that a field can be limited, depending on the field, and are cataloged here.

For each limit style for a field, you can set the header text under which the limit is displayed in the report view.

Selecting Functions

Any of the functions defined for a relationship can be selected to include in the report. They can also be chosen as limits.

Report Table Generation

The **zerbra_XXXXX** tables contain the data of the report and are built from the form caches. These tables are generated by a background process once a report is consider stale. The background process is spawned by default every 10 minutes. This can be specified by setting the value in magic data at:

- /modules/CustomReports/times/background

The stale time for a report defaults to 10 minutes. This can be over-ridden by the following setting values in magic data:

- /modules/CustomReports/times/stale
 - /modules/CustomReports/times/stale_by_report/XXXXX
-

Customizing Form and Field Headers

Field Headers

You can customize the headers for a form field by updating the magic data associated with the headers. You can do this through the magic data browser, but the best way is to make the change in a module for your site or in your site configuration file. Headers are at the magic data location: `/modules/forms/formClasses/$formClass/fields/$field/headers/$headerType`

In your site or module configuration file, you can change the headers by adding the following lines:

```
<configuration name="custom_headers" path="/modules/forms/formClasses/$formClass/fields/$field/headers/$headerType"
  <value>$newHeader</value>
</configuration>
```

For example, to change the header of the region field in districts you can do this:

```
<configuration name="region_header" path="/modules/forms/formClasses/iHRIS_District/fields/$field/headers/$headerType"
  <value>State</value>
</configuration>
```

In most cases you'll use the "default" as the **\$headerType**. If you want to have multiple headers, then change the header type and in the template that is displaying your field set the **\$headerType** as the value for the showhead attribute.

```
<span type="form" name="$form:$field" showhead="$headerType"></span>
```

Replace \$form, \$field and \$headerType with the appropriate values for your template. For example:

```
<span type="form" name="country:name" showhead="my_header"></span>
```

Form Display Names

You may also want to change the display name associated with a form. You can do this by changing the magic data at `/modules/forms/forms/$form/display`. You can make this change in your site or module configuration file.

```
<configuration name="form_display" path="/modules/forms/forms/$form/display" locale="en_U
  <value>$newHeader</value>
</configuration>
```

For example, to change the display name for region to be State:

```
<configuration name="region_display" path="/modules/forms/forms/region/display" locale="e
  <value>State</value>
</configuration>
```

Some templates (like lists.html) may refer to the name in the template directly. You'll also need to modify this template to use the name you wish when linking to editing the database list for that form.

Geography Example

Here's a complete example that you can add to your site's configuration .xml file. It will change the names of the levels of geography to be Country/State/Council/Town or City. Country will stay the same, region will become State, district will become Council and county will be come Town or City. You will need to change the `<version>4.0.XXX</version>` as appropriate (see versions).

```
<configurationGroup name="forms_module" path="/modules/forms">
  <!-- Update display names for forms -->
  <version>4.0.XXX</version>
  <configurationGroup name="forms">
    <configuration name="region_display" path="region/display" locale="en_US">
      <value>State</value>
    </configuration>
    <configuration name="district_display" path="district/display" locale="en_US">
      <value>Council</value>
    </configuration>
    <configuration name="region_display" path="county/display" locale="en_US">
      <value>Town or City</value>
    </configuration>
  </configurationGroup>
  <!-- Update field headers for formClasses -->
  <configurationGroup name="formClasses">
    <configuration name="district_region_header" path="iHRIS_District/fields/region/headers">
      <value>State</value>
    </configuration>
    <configuration name="country_district_header" path="iHRIS_County/fields/district/headers">
      <value>Council</value>
    </configuration>
  </configurationGroup>
</configurationGroup>
```

Editing lists.html

As mentioned above, some .html template files refer to the form's name directly and will need to be edited. You will want to copy the existing lists.html from the iHRIS Manage (or iHRIS Qualify) module to the templates directory in your sites module. You will then edit this new copy. For example you may do:

```
sudo mkdir -p /var/lib/iHRIS/sites/my_site/templates/en_US
sudo cp /var/lib/iHRIS/lib/4.0.4/ihris-manage/templates/en_US/lists.html /var/lib/iHRIS/sites/my_site/templates/en_US
sudo gedit /var/lib/iHRIS/sites/my_site/templates/en_US
```

where you replace **4.0.4** with the appropriate version and **my_site** the name of the directory that your site is stored in. Once gedit appears, you will need to change the names of the forms. For example:

```
<li task="can_edit_database_list_county"><a href="lists?type=county&field=district">
```

becomes:

```
<li task="can_edit_database_list_county"><a href="lists?type=county&field=district">
```

Customizing iHRIS Manage

Customizing iHRIS Manage

iHRIS Manage can be customized in many places. Any of the HTML templates or CSS files can be modified to change the look, and new forms can be created or simply modified to add new fields.

iHRIS Manage is installed in the [home] directory. The core engine (I2CE) and iHRIS Common are also installed in this directory.

iHRIS Package Directory Structure

This section explains the layout of all the required packages for iHRIS. By default, any customized sites you create will be under the `ihris-manage/sites` directory. However, this directory can be placed anywhere on the file system. You can simply copy this directory somewhere else to make your changes. You'll just need to make sure the configuration file knows where to load the iHRIS Manage configuration file and the Apache document root has a link to the pages sub-directory.

I2CE/

This directory contains the class files and configuration for the core engine. All the iHRIS Manage files are built off of these core classes. No changes should need to be made to these files unless there are bugs that need to be fixed. The configuration file should be included by the `ihris-common` configuration file. In the documentation below this will be referred to as the I2CE directory.

- **I2CE/lib/** - This directory contains all the I2CE class files.

ihris-common/

This directory contains all the shared files for all iHRIS packages. No changes should need to be made to these files unless there are bugs that need to be fixed. It contains the common configuration file that should be included by the iHRIS Manage (or Qualify or Plan) configuration file. In the documentation below this will be referred to as the iHRIS Common directory.

- **ihris-common/lib/** - This directory contains all the shared classes. These are mostly a few form (`I2CE_Form`) objects and some specific page (`I2CE_Page`) objects that can be reused.
 - **ihris-common/images/** - This directory contains the shared images that all iHRIS packages use, mainly style and report graphics.
 - **ihris-common/templates/** - This directory includes all the HTML template files that the iHRIS Common classes load. To customize any of these files, simply copy them to your site templates directory, and that will be loaded instead.
-

ihris-manage/

This directory contains the shared files for all iHRIS Manage installations and the iHRIS Manage configuration file. The only files that should be changed are files under the sites directory. In the documentation below this will be referred to as the iHRIS Manage directory.

- **ihris-manage/lib/** - This directory contains all the form and page class files for all iHRIS Manage installations. These classes can be customized by extending them in the site lib directory and adding an entry to the site configuration file to register the new class with the I2CE_FormFactory instead of the default class.
- **ihris-manage/templates/** - This directory includes all the iHRIS Manage-specific template files. To make any changes, simply copy the file to the site templates directory with the same name, and that file will be loaded instead.
- **ihris-manage/sites/** - This directory is where multiple installations of iHRIS Manage can be installed. The Demo directory can be copied anywhere on the file system to be customized. The pages directory needs to be linked to the Apache document root somewhere for the site to display.
- **ihris-manage/sites/Demo/** - This is the demonstration installation of iHRIS Manage. Changes can be made directly to these files, or this whole directory structure can be copied for your installation. In the documentation below this will be referred to as the site directory.
- **ihris-manage/sites/Demo/lib/** - This is where you can place any custom class files for your installation. By default this directory is empty since it uses all the default classes from ihris-manage and ihris-common.
- **ihris-manage/sites/Demo/templates/** - Your custom templates will go here. A few files are included already, such as the main.html file that all pages use to display your site.
- **ihris-manage/sites/Demo/pages/** - This directory includes all the PHP files that are under the Apache document root to be displayed for your site. They create instances of I2CE_Page classes and display them.
- **ihris-manage/sites/Demo/css/** - This includes all the CSS files for your site. These can have a reference to a custom css file in the main.html template file. You can also copy a css file from another module into this directory and make changes to it. It will then take precedence over the original one.
- **ihris-manage/sites/Demo/images/** - This is where you can place any custom images for use on your site. Any images added in here will take precedence over any images found in other modules. Any template files you create can reference these images like so:

```

```

where *yourfile.jpg* is the new file you've added in the *ihris-manage/site/Demo/images* directory.

Sample Customizations

Making HTML Customizations

First, we can make some changes to the main template, which starts all pages. This is located in the site templates directory and is called "main.html".

1. Change the title element to "My HR" or whatever you would like it to be.
2. A little further down are two paragraph elements with the ids of "siteName" and "siteTag." Change the siteName to "My HR" and the siteTag to "iHRIS Manage."
3. Near the bottom of the page is a div element with the id of "siteFooter." You can add any text or images here, such as Ministry or USAID/Capacity Project logos. Any images placed here should be in the site pages/images directory.

Any other templates that are in the iHRIS Common or iHRIS Manage template directories should be copied to the site templates directory if you want to customize them. Then make the changes to that file.

Adding a New Field to a Form

Please see Adding Forms and Fields and Adding Fields to the Person Form.

Additional Documentation

Additional documentation will be added as it is completed to the Capacity iHRIS Suite Project page on the wiki ^[1]. Each PHP file should have documentation.

We strongly encourage you join the ihris development mailing list ^[2]. Use this list to ask questions and get help with bugs or making customizations.

Code changes and development are hosted at Launchpad ^[3]. You can also ask questions and report bugs at this location.

References

[1] http://open.intrahealth.org/wiki/index.php/Capacity_Project%27s_iHRIS_Suite

[2] <http://lists.intrahealth.org/mailman/listinfo/ihris-developers>

[3] <http://launchpad.net/ihris-suite/>

Data Interoperability

This article describe the data-interoperability features present in version 3.2 and later.

Data Structure

The data structures defined below are all declared to the iHRIS system by defining them in the configuration XML files for the various modules.

Forms and Fields

The individual data elements of the system are called fields, all of which are associated to a sub-class of I2CE_FormField. This class describes how the data defined for this field should be represented as a string as well as how it should be displayed to the end-user in either a read-only or edit context. Examples include dates, times, integers, mapped values (see below), strings, multi-line strings, currencies, and binary data.

Individual data elements, or fields, are collected together in forms. An instance of a form are the values associated with a particular unique ID. You may think of a form as a row in database table, and a field as a column of that table. For example a person form may be defined as:

- person
 - firstname (string)
 - surname (string)
 - date_of_birth (date -- month/day/year)

while an instance would be:

- person
 - id=9234
 - firstname := 'Jill'
-

- surname := 'Schwartz'
- date_of_birth := '04/04/1974'

Mapped Fields

There are special fields, which subclass `I2CE_FormField_MAPPED`, whose values are references to other forms which subclass `I2CE_List`. For example, we could amend the above 'person' form to include a field 'place_of_birth' which take values in any of the following list forms (and their fieldss):

- country
 - name (string)
- region
 - name (string)
 - country (map, with values in 'country')
- district
 - name (string)
 - region ((map, with values in 'region')
- county
 - name (string)
 - districy (map, with values in 'district')

Parent/Child Relationship

A second type of relationship between forms is the parent/child relationship. You may specify a form has having one or more forms as a child. For example, suppose we defined the 'salary' form as follows:

- salary
 - start_date (date -- month/day/year)
 - end_date (date -- month/day/year)
 - amount (currency)

then an instance of a 'person' form may many instances of the 'salary' form as children which reflects their change in salary over time.

Importing Data

One fundamental means available to the system of importing data from other information systems is through defining various storage mechanisms for the form data.

Exporting Data

The essential means by which data can be made to other systems is through the custom reporting system, which consists of two major components, the form relationship and the report. An alternative is to use the cached tables.

Cache Tables

To increase speed of access time, as well as to easily inspect the data, all the data for various forms are cached to individual tables within the database. Each form has its own cache table, with the default prefix *hippo_*. For example, the data in the *person* form is cached into the *hippo_person* table. The columns of the table are the fields of the form, as well as one for the id and parent form. There is a row for each instance of a form.

Dumping the hippo (cached) tables is one method to get at the raw data of the forms.

Form Relationships

A form relationship describes the basic relationships of the various forms within the system. A form relationship begins by choosing a primary form for the relationship. Once a primary form has been chosen for the relationship, you may limit the instances of the forms chosen by describing a limit as in Technical Overview: Limiting Forms.

For any form in a form relationship, you can adjoin an additional form which somehow links to that form. That link can either be either through the parent/child relationship or through the mapped values relationship. Any *joined* form can then be limited as the primary form was.

Form relationships can either be defined using configuration (XML) data, or via the on-line GUI tool.

Please take a look at the following example.

Custom Reports

Once a form relationship has been defined, a report can be built by selecting the data fields which are relevant to this report. The system will then create a table in the database which holds the data in the report, the columns of which are the selected fields, and the rows of which are each the collection of forms satisfying the form relationship.

Currently, this data can be viewed through the web browser, exported to a CSV file, exported to a HTML file, printed as PDF, and viewed with charting software. There are plans to make available the data via other formats, such as the Indicator Exchange Format (IXF). The various exports of the data are defined by subclassing `I2CE_CustomReport_Display` as appropriate.

Database Structure

iHRIS Database Structure

The iHRIS Database is abstracted so the object structure can be handled by forms within the site. All records saved for a site are an instance of `I2CE_Form`. This defines all the fields used for that form. The form and field names are saved in the form and field tables in the form definitions section below. These are combined in the `form_field` table to map all the fields associated with a given form.

The data for each form is saved as a record (see Record Tables). Each field is then saved in the `entry` and `last_entry` tables. The `entry` table keeps a history of all changes and the `last_entry` table is a quick lookup for the current value. So if you have an instance of a form with 2 fields there will be 1 row saved to the record table and 2 rows each in `entry` and `last_entry`. There will always only be 2 rows in the `last_entry` table but the rows in the `entry` table will increase each time a change is made.

User Tables

The user tables can be in the same main database as the rest of the site, or they can be in a shared database so names and passwords can be reused. The access table must be in the main database to give access for the site.

Table	Description	Table Definition
user	The user table holds the login and contact information for all users on the system. The password is encrypted with MD5() and the id is referenced in any other tables referring to the user. The username and id must be unique. The firstname and lastname are used for display purposes. The email address is used to contact the user for password changes or forgotten passwords. The creator is a reference to the user id that created this user.	<pre>CREATE TABLE `user` (id int(11) NOT NULL auto_increment, username varchar(20) NOT NULL, `password` varchar(50) NOT NULL, firstname varchar(50) NOT NULL, lastname varchar(100) NOT NULL, email varchar(100) default NULL, creator int(11) NOT NULL, PRIMARY KEY (id), UNIQUE KEY username (username)) ENGINE=InnoDB DEFAULT CHARSET=utf8;</pre>
user_log	The user_log table holds login and logout data for users. It also ties the login to the session_id associated with the user.	<pre>CREATE TABLE user_log (`user` int(11) NOT NULL, login datetime NOT NULL, logout datetime default NULL, session_id varchar(50) NOT NULL, activity datetime NOT NULL, KEY `user` (`user`), KEY login (login)) ENGINE=InnoDB DEFAULT CHARSET=utf8;</pre>
access	The access table controls access for the users to the site. The role is a string defined by the site to control what areas the user can see and what actions can be performed.	<pre>CREATE TABLE access (`user` int(11) NOT NULL, role varchar(255) collate utf8_bin NOT NULL, PRIMARY KEY (`user`)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>

Form Definitions

These tables define the forms and fields associated with the site.

Table	Description	Table Definition
form	The form table defines a short name for a form and links it to a unique id. The type field is deprecated.	<pre>CREATE TABLE form (id int(10) unsigned NOT NULL auto_increment, `name` varchar(50) collate utf8_bin NOT NULL, `type` tinyint(3) unsigned NOT NULL, PRIMARY KEY (id), UNIQUE KEY `name` (`name`)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
field	The field table defines a short name for all the fields used in the site. The type is the data type for the given field.	<pre>CREATE TABLE field (id int(10) unsigned NOT NULL auto_increment, `name` varchar(50) collate utf8_bin NOT NULL, `type` varchar(16) collate utf8_bin NOT NULL, PRIMARY KEY (id), UNIQUE KEY name_type (`name`,`type`)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
form_field	The form_field table maps a list of fields that are associated with the given form. Any saved data will then be associated with the unique id of the form_field.	<pre>CREATE TABLE form_field (id int(10) unsigned NOT NULL auto_increment, form int(10) unsigned NOT NULL, field int(10) unsigned NOT NULL, PRIMARY KEY (id), UNIQUE KEY form (form,field)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>

Record Tables

The record tables store specific information saved for each form associated with the site.

Table	Description	Table Definition
record	The record table is the main table associated with each instance of a form. There is a unique id for easy reference. The last_modified field is updated every time a change is made to the given record. The form is the id of the form this record is an instance of. If the record has a parent record then the parent field will be populated with that record id.	<pre>CREATE TABLE record (id int(10) unsigned NOT NULL auto_increment, last_modified datetime NOT NULL, form int(10) unsigned NOT NULL, parent int(10) unsigned default NULL, PRIMARY KEY (id), KEY parent (parent)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
entry last_entry	The entry and last_entry tables are very similar. The entry table holds a record of all changes made to a given form_field value for a record. The last_entry holds the latest entry for quicker access. The record is the id of the record this value is associated with for the given form_field. The date is the date this value was saved. Who is the user id of the person who made this entry. The change_type is set depending on if this is an initial entry, a correction or a regular update to this value. It can also be set to verified if the data has been double checked. One of the value fields will be populated based on the type of the form_field.	<pre>CREATE TABLE entry (record int(10) unsigned NOT NULL, form_field int(10) unsigned NOT NULL, `date` datetime NOT NULL, who int(10) unsigned NOT NULL, change_type tinyint(3) unsigned NOT NULL, string_value varchar(255) collate utf8_bin default NULL, integer_value int(11) default NULL, text_value text collate utf8_bin, date_value datetime default NULL, blob_value longblob, PRIMARY KEY (record,form_field,`date`), KEY `date` (`date`), KEY form_field (form_field), KEY record (record)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre> <pre>CREATE TABLE last_entry (record int(10) unsigned NOT NULL, form_field int(10) unsigned NOT NULL, `date` datetime NOT NULL, who int(10) unsigned NOT NULL, change_type tinyint(3) unsigned NOT NULL, string_value varchar(255) collate utf8_bin default NULL, integer_value int(11) default NULL, text_value text collate utf8_bin, date_value datetime default NULL, blob_value longblob, PRIMARY KEY (record,form_field), KEY form_field (form_field), KEY record (record)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
field_sequence	The field_sequence table is used to track an integer value for a form_field that will be automatically generated and incremented by the site. It keeps track of the last value used for the given form_field.	<pre>CREATE TABLE field_sequence (form_field int(11) NOT NULL, sequence int(11) unsigned NOT NULL, PRIMARY KEY (form_field)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>

deleted_record	The deleted_record is used to save records that are removed from the system in case it needs to be recovered. It is a mirror of the record table.	<pre>CREATE TABLE deleted_record (id int(10) unsigned NOT NULL auto_increment, last_modified datetime NOT NULL, form int(10) unsigned NOT NULL, parent int(10) unsigned default NULL, PRIMARY KEY (id), KEY parent (parent)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
-----------------------	---	---

Utility Tables

Table	Description	Table Definition
config	The config table stores all the configuration data for the site. This data is read from the configuration XML files for modules. The hash is a MD5 hash of the path. It is used for unique key look ups. It is shared with the hash that is stored in the APC. The path is a readable format of the path to the data. The type determines if this entry is a parent or an end node. If an end node then the value will be set with the value for the node. If it's a parent then children will be set with a list of children nodes for this entry.	<pre>CREATE TABLE config (`hash` char(32) character set latin1 NOT NULL, path varchar(10000) character set latin1 NOT NULL, `type` tinyint(4) NOT NULL, `value` varchar(2000) character set latin1 default NULL, children varchar(10000) character set latin1 default NULL, PRIMARY KEY (`hash`)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>
report_list	The report_list table is simply a place holder definition to create temporary tables when creating a cached report. It has primary and secondary records that will be saved depending on the report being cached.	<pre>CREATE TABLE report_list (`primary` int(11) NOT NULL, secondary int(11) NOT NULL, PRIMARY KEY (`primary`)) ENGINE=InnoDB DEFAULT CHARSET=utf8 COLLATE=utf8_bin;</pre>

Form Example

This is an example of how two forms would be saved to the database. The person form has a surname field and the demographic form has a birth_date field. The person form would be saved first since it is the parent form. Assuming no forms have ever been saved to the database the following would happen on saving.

1. Create the **form**, **field** and **form_field** entries.

1. An entry is added to the **form** table with the *name* being "person." This will automatically assign a form *id* of 1 since it's the first one.
2. An entry is added to the **field** table with the *name* being "surname." This will automatically assign a field *id* of 1.
3. An entry is added to the **form_field** table with the *form* being 1 (for person) and the *field* being 1 (for surname). This will automatically assign a form_field *id* of 1.
4. An entry is added to the **form** table with the *name* being "demographic." This will automatically assign a form *id* of 2 since it's the first one.
5. An entry is added to the **field** table with the *name* being "birth_date." This will automatically assign a field *id* of 2.
6. An entry is added to the **form_field** table with the *form* being 2 (for demographic) and the *field* being 2 (for birth_date). This will automatically assign a form_field *id* of 2.

2. Create the person record.
 1. A new record will be added to the **record** table. The record *id* will be generated automatically (1) and the *form* will be set to 1. There is no *parent* and the *last_modified* time will be set to the current time.
 2. An entry will be added to the **entry** and **last_entry** tables. The *record* will be set to 1 and the *form_field* will be set to 1 (the *form_field* id created above for person-surname). The *date* will be the current time and *who* will be set to the user id making the change. The *string_value* field will be set to the value for the surname.
3. Create the demographic record.
 1. A new record will be added to the **record** table. The record *id* will be generated automatically (2) and the *form* will be set to 2. The *parent* will be set to 1 since this is a child form for the person record that was just created. The *last_modified* time will be set to the current time.
 2. An entry will be added to the **entry** and **last_entry** tables. The *record* will be set to 2 and the *form_field* will be set to 2 (the *form_field* id created above for demographic-birth_date). The *date* will be the current time and *who* will be set to the user id making the change. The *date_value* field will be set to the value for the birth_date.

Decentralized iHRIS Data Policy

This decentralized implementation of iHRIS is our answer on how to manage data in any of these settings:

- high Internet connectivity
- low Internet connectivity
- no Internet connectivity

It is designed to work easily, with minimal configuration, and maximal functionality.

Suppose that we are interested in setting up a decentralized implementation of iHRIS Manage in the country Taifeki. Let us assume we are going to work on a three tier implementation: national, region and district. We will show how to take advantage of [1] to maintain the various customizations needed for each of the sites.

Data Management

We first need to decided on a data management policy that is compatible with our data structure.

Decentralized Data Structure

Our decentralized data module is "vertical" in that it allows data to flow from the district to the region to the national level. It also allows that the data flow in the reverse direction. We do not allow data to flow "horizontally." In other words, we do not have a mechanism for the data on a person in district A to be given to district B.

We always that there is only one site that can write each data component. A data block consists of all the data for one form in one site. Examples of data components are:

- all the jobs at the national level
 - all of the facilities in a specific region
 - all of the positions in a specific district
-

Data Management Policy

These questions need to be answered:

- Who can see which data?
 - (Examples) Should a district be able to see the facilities in another district?
- Who can edit which data?
 - (Examples) Who maintains the list of facilities? The jobs? The positions? Is it at the national, regional or district level?

These questions need to be answered for all the forms within iHRIS Manage and all sites (national, regional and district-level).

Example

If you decide that each facility is maintained at the regional level. This means the following:

- At the national level, the facility data needs to be componentized by regions and the facility and facility_contact forms will use the (read-only) multi-flat storage mechanism to aggregate the cached data tables from the regional level.
- At the regional level, the facility data is not componentized. Since the facility and facility contact information is not subject to frequent changes and you do not need to keep track of the history, you would choose to use the (read-write) magic data form storage mechanism in your data policy.
- At the district level, the facility and facility contact data is exported from the region within two modules: *ihris-manage-taifeki-northern-region-facility* and *ihris-manage-taifeki-northern-region-facility_contact*. You would choose to use (read-only) magic data form storage mechanism in your data policy.

References

- [1] <http://www.launchpad.net/launchpad>

Defining Forms

Please read the overview of forms and fields.

The data defining a form is saved into magic data and the paths below are paths in magic data.

Forms

Forms are the basic way to group data. A form \$form, such as 'person', is stored under:

```
/modules/forms/forms/$form
```

which contains the following children:

- **class:** Required. The class which implements the logic, such as validation, for the form. Example is 'iHRIS_Person'.
- **displayName:** Optional. An end-user name for this form. For example 'person' might have a display name 'Person'
- **storage:** Optional. Defaults to 'entry.' It is the storage mechanism that the form should use
- **meta:** Optional. A node with lots of children where information about displaying this form are saved. The data here is used by the implementing form class
 - **description:** A description of this form. It is displayed, for example, when creating a form relationship
 - **child_forms:** An list of any forms that are child forms of this form.
 - **child_form_data:** Optional. Meta data that are associated with child forms. There is possibly a node for each of the child forms.

The nodes in child forms data allow you to specify different groupings for child forms. For example the form 'training_course' has as a child form 'scheduled_training_course.' We may want to group the 'scheduled_training_courses' into *open* and *closed*. Then we can select to only display the open or closed scheduled training courses by specifying the limits as below. We can also chose to specify the order that the scheduled training courses are displayed in. For example:

```
'default' => Array [
  'scheduled_training_course' => Array [
    'order' => 'start_date,end_date'
  ]
]
'open' => Array [
  'scheduled_training_course' => Array [
    'limits' => Array [
      'operator' => 'FIELD_LIMIT'
      'field' => 'start_date'
      'style' => 'greaterthan_now'
    ]
    'order' => 'start_date,end_date'
  ]
]
'closed' => Array [
  'scheduled_training_course' => Array [
    'limits' => Array [
      'operator' => 'FIELD_LIMIT'
      'field' => 'start_date'
```

```

        'style' => 'lessthan_now'
    ]
    'order' => 'start_date,end_date'
]
]
```

The limits are specified according to this structure. The 'order' is a list of the fields to sort by. In the above we sort first by 'start_date' and then by 'end_date.' If we wanted to sort by a field in descending order we would prefix a -.

Componentized Forms

If you are setting up an aggregating instance of iHRIS Manage (or Qualify) some of your forms will be componentized. This means that the data for each of these forms is being managed by distinct localities (e.g. regions or districts or even departments) and you wish to aggregate this de-centralized data. Whether or not a form is localized is determined the form storage mechanism being used. If a form is componentized, then any id's that reference that form are appended with an '@' and the name of the component.

Form Classes

A form class `$formClass` is defined under:

```
/modules/forms/formClasses/$formClass
```

It has sub-nodes:

- **fields:** Optional. Contains information about the fields provided by this class
- **extends:** Required. Which class this form class extends. This needs to be either `I2CE_Form` or a subclass of it.

Dynamic Creation

If there is no file `$formClass.php` then the class is created dynamically as:

```
class $formClass extends $extendClass {}
```

where `$extendClass` is the value under the 'extends' node.

Lists

The form class `I2CE_List` is a special form which allows you to deal easily with lists of data. Any mapped field should take values in a form whose implementing class is a subclass of `I2CE_List`.

`I2CE_List` has a subclass `I2CE_SimpleList` whose only field is 'name'. Examples of simple lists are:

- gender
- marital_status
- language

Fields

Each form class `$formClass` contains a list of fields. A field `$field` in `$formClass` is defined at:

```
/modules/forms/formClasses/$formClass/fields/$field
```

which has the following sub-nodes

- `formfield`: Required. Needs should be on of the field type such as INT
- `in_db`: Optional. It should be either 0 or 1. If not set, defaults to 1. If 1, then this field should be saved into the database
- `required`: Optional. It should be either 0 or 1. If not set, defaults to 0. If 1, then this field needs to be set before it can be considered valid
- `unique`: Optional. It should be either 0 or 1. If not set, defaults to 0. If 1, then the value of this field needs to be unique among all instances of the form
- `headers`: Optional. It is itself a parent node, each child node is a string value. You can choose a different header by specifying the header attribute in a template file.
 - `default`: Optional. The default title/header displayed for the field.

Map Fields

A MAP or MAP_MULT takes values in a list, which is any form whose implementing class subclasses `I2CE_List`.

A field of type MAP or MAP_MULT can specify the following 'default' sub-node. This 'default' node can contain a sub-node for each of the displays that you wish to define for the field. The default display is specified by displaying the 'default' node. For example, `iHRIS_Person` has a mapped field, 'residence'. It's meta node contains the following sub-nodes:

```
'form' => Array [
    0 => county
    1 => district
]
display => Array [
    default => Array [
        fields => county:district:[region]:country
    ]
]
```

] The optional 'forms' is an array of list that tell us which lists this field is allowed to take values in. In this case, any member of the county or district list may be chosen as the residence for a person.

The 'display' node is optional. It's sub-node 'default' is optional. Its sub-node 'fields' is optional. The 'fields' entry is tells us how the field is mapped to other forms and should be displayed and selected. It has the general structure:

```
mapform1+mapfield1:mapform2+mapfield2:...:mapformN
```

If the `+mapFieldX` is not present, then we use `mapFormX+1` for the value of `mapFieldX`. If the 'fields' entry is is not set, then it is the mapped form is the the name of field.

When we select a value for the field, we start by displaying all the values for `mapFormN`. Under each one of these values, we display all values for `mapFormN-1` whose field `mapFieldN-1` is `mapFormN` is and continue down until we get to `mapForm1`.

If `mapFormXX+mapFieldXX` is surrounded in square brackets, [], then we don't display the data for that mapped form.

In the above example, when selecting a residence for a person, you first choose the country, then the region, then the district. You may further specify the county. When displaying a selected residence it will display either:

```
District, Country
```

or

```
County, Country District
```

depending if you have selected the district or county.

Finally, you can put limits and orders, per display style (e.g. default), by specifying the nodes 'limits' and 'orders.'

Field Types

Each field has a type. The types define how they are displayed to the end user in both an edit and view only context. It also contains information about the type of column the data should be saved in a database. The available types are:

- **BOOL** is implemented by the class `I2CE_FormField_BOOL` is a choice between true and false
- **DATE_HMS** is implemented by the class `I2CE_FormField_DATE_HMS` is a time only
- **DATE_MD** is implemented by the class `I2CE_FormField_DATE_MD` is a month and day
- **DATE_TIME** is implemented by the class `I2CE_FormField_DATE_TIME` is a year, month, day and time
- **DATE_YMD** is implemented by the class `I2CE_FormField_DATE_YMD` and is a year, month and day
- **DATE_Y** is implemented by the class `I2CE_FormField_DATE_Y` and is a year
- **INT_GENERATE** is implemented by the class `I2CE_FormField_INT_GENERATE` and is integer sequence that will populate the next value in the sequence
- **INT** is implemented by the class `I2CE_FormField_INT` is an integer
- **INT_LIST** is implemented by the class `I2CE_FormField_INT_LIST` is an array of integers
- **STRING_LINE** is implemented by the class `I2CE_FormField_STRING_LINE` and is a string
- **STRING_MLINE** is implemented by the class `I2CE_FormField_STRING_MLINE` and is multi-line string
- **STRING_PASS** is implemented by the class `I2CE_FormField_STRING_PASS` is a password value
- **STRING_TEXT** is implemented by the class `I2CE_FormField_STRING_TEXT` is a large multi-line string
- **YESNO** is implemented by the class `I2CE_FormField_YESNO` and is a choice between Yes and No
- **CURRENCY** is implemented by the class `iHRIS_FormField_CURRENCY` and is a currency type and an amount
- **MAP** is implemented by the class `I2CE_FormField_MAP` and is the name and id of a list form
- **MAP_MULT** is implemented by the class `I2CE_FormField_MAP_MULT` and is an array of names and ids for list forms

Enabling Translations

Main Languages

As of version 4.0.6 translations for French, Swahili, Portuguese, and Italian are automatically available to the system. These are called locales..

A **locale** is a language and country/location. The main locales are:

- French: fr_FR
- Italian: it_IT
- Portuguese: pt_PT
- Swahili: sw_TZ

Enabling the Locale Selector Module

- Go to "Configure System"
- Go to "Configure Modules"
- Scroll down to "Pages" and click the "Sub-Modules" link
- Check the checkbox next to "Locale Selector"
- Scroll to the bottom of the screen and click the "Enable" button

Adding A Locale

- Go to "Configure System"
- Go to "Manage Locales"
- "Add" the locale you want. For example fr_FR or it_IT

Other Languages

Some other languages have only been partially translated and you will need to generate the translations of .html and .xml files. For example, in order to add the locale pt_BR (Brazilian Portuguese) to the system, you will need to open a terminal on the server and:

```
cd /var/lib/iHRIS/lib/4.0/6/I2CE path may be different depending on your installation
php ../I2CE/tools/translate_templates.php --locales=pt_BR
cd ../ihris-common
php ../I2CE/tools/translate_templates.php --locales=pt_BR
cd ../ihris-manage if you are using iHRIS Manage
php ../I2CE/tools/translate_templates.php --locales=pt_BR
cd ../ihris-qualify if you are using iHRIS Qualify
```

```
php ../I2CE/tools/translate_templates.php --locales=pt_BR
```

Exporting and Updating Form Caches Using Profiles - 4.0.6

To see this tutorial for different versions of the software see the following:

In version **4.0.6** we add the ability to create *profiles* of form caches. A profile is a simply a list of forms that you can use to rapidly:

- Update the cache for each of the forms in the profile
- Export the cache, via a mysqldump, for each of the forms in the profile. This is particularly useful for exporting data from a regional or district office to the national level.

This functionality is part of the Cached Forms modules and can be accessed by clicking on the links for **Configure System** and then **Cached Forms**

Creating A Profile

The first step is to create a *profile* of the forms. A profile is a list of forms with a short name that you can use to help you identify the list.

1. Look under **Create/Edit Profile** on the *Cached Forms* page. Here make sure "Create a new profile" is selected in the drop-down, and then click the "Edit" button.
2. Now type a name for the profile. It is best to keep it short with limited punctuation such as "nightly_update"
3. Now select each of the forms you wish to include in the profile
4. Finally, click the "Submit" button at the bottom of the page

Updating the Cache of a Profile

You can update all of the forms in a profile under **Cache Forms** on the *Cached Forms* page.

1. Choose the profile for which you wish to cache forms
2. Click the "Cache" button

Exporting the Cache of a Profile

There are two main usages of exporting all of the forms in profile, you can either get all the data, or only the modifications to the data since the last date. Both can be accessed under **Export Cached Forms** on the *Cached Forms* page.

1. Choose the profile you wish to export
2. Choose to enable bzip2 compression or not
3. Optionally select the modification time.
 1. If you do not set the modification time, you will get all of the data for the forms. The mysqldump will include "DROP TABLE IF EXISTS" and "CREATE" statements for each of the hippo_XXXX tables. Data is populated via "INSERT" statements
 2. If you do not set the modification time, you will get all of the data for the forms. The mysqldump will include **neither the "DROP TABLE IF EXISTS" nor the "CREATE" statement** for each of the hippo_XXXX tables. Data is populated via "REPLACE" statements.
4. click the "Export" button

Note: When you export the cache, it does not first update it. You will need to do this manually.

Crontab and Command Line Interaction

For example, you may wish to put an update of the profile "nightly_update" in your crontab:

```
30 1 * * * /usr/bin/php /var/www/ihris-manage/index.php --page=/CachedForms/cache --get=profile=nightly_update
```

will cause all forms in the 'nightly_update' profile to be update at 1:30am. Putting:

```
10 * * * * /usr/bin/php /var/www/ihris-manage/index.php --page=/CachedForms/cache --get=profile=hourly_update
```

in your profile will update every form in the 'hourly_update' profile at ten minutes past the hour.

Exporting Standardized Data

In this tutorial we show how to export standardized *cadre* data from a central site to be shared among regional and district installations.

Note: This module assume that the *cadre* form is stored in magic data. This is the default for iHRIS Manage version 4.0.

Overview

We will create a module called **standard-data-cadre** that will contain all of the cadre's defined in the system. We will use the Magic Data Browser to automatically generate a configuration .xml file which we will save as **standard-data-cadre.xml**. Once we have created this module, we should make it available and required to each of the regional and district installations.

First Steps -- Enabling the Magic Data Browser

We will export the cadre list using the "Magic Data Browser" module. If it is not available under the "Configure System" menu, then follow these steps to enable it:

- Browse to "Configure System"
- Click the "Configure Modules" link
- Click the link "Sub-Modules" to the right of the "Pages" module
- Check the check box next to "Magic Data Browser"
- Click the "Enable" button at the bottom of the page


Creating the module

Browsing in Magic Data

Creating the module is very easy. Go to:

- Browse to "Configure System"
- Click the "Browse Magic Data" link
- Click the "I2CE" link
- Click the "formsData" link
- Click the "forms" link
- Click the "cadre" link

You should now see a page that looks like:

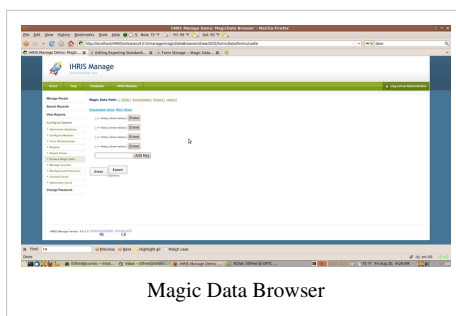


Magic Data Browser

Setting Export Options

Now that we have browser in magic data to `/I2CE/formsData/forms/cadre` we are ready to export the module:

- Click on the "(options)" link under the "Export" button
- Set the following data:
 - Module Name: "standard-data-cadre"
 - Displayed Named: "Standardized Cadre List"
 - Version: Change it from "1.0.2010.09.17" to "4.0.2010.09.17"
 - Description: "The Standardized Cadre list set by the central office of the Ministry of Health"

Your page should look like:

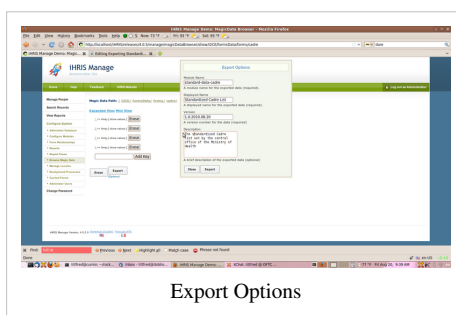

Export Options

Now click the "Export" button and your web-browser should ask you where to save the .xml file. We will save it as the file *standard-data-cadre.xml*. See the next section for some hints about where to save this file.

Note: The module in general should have version *4.0.YYYY.MM.DD* where we replace *YYYY* with the year, *MM* with the numeric month and *DD* with the numeric day. For example the version would be *4.0.2010.08.17* if the data was exported on August 17, 2010. If we update the cadre list, at a later date (August 20, 2010), then we can re-export the list into the same module *standard-data-cadre* but this time with version *4.0.2010.08.20*.

Managing Decentralized iHRIS with Launchpad

First please see the article Decentralized iHRIS Data Policy for some background explanation.

Please also read Managing A Site In Launchpad for some background information on creating teams and working with bazaar on Launchpad.

Let us assume that we are working with a national site (*National*), and four regional sites (*North, South, East and West*) in the fictional country *Taifeki*

For example create a launchpad team, called *ihris+taifeki*, which you and all members of your development team will join. You should also create a project *ihris-manage-taifeki* with the code hosted on Launchpad.

Code Layout

Here is a template for the directory layout for Taifeki's customizations which contains both the national and regional sites. Directories are indicated in blue.

- **modules**: the main modules directory which will contain all of the modules required by each of the sites.
 - **ihris-taifeki**: a sub-directory of the modules folder which will contain the ihris-taifeki module
 - **ihris-taifeki.xml**: Defines the module **ihris-taifeki** that will contain all of the requirements, html templates, etc. which are common to the national and regional sites. In particular, it will require the module standard-data-cadre. See below.
 - **standard-data-cadre**: a sub-directory of the modules directory which will hold our standard cadre list module
 - **standard-data-cadre.xml**: the module we exported from the magic data browser
- **sites**: A directory which will contain the four sites as well as the data management policy.
 - **data-policy-national.xml**: Contains the data storage policy for the national site (see below)
 - **data-policy-regional.xml**: Contains the data storage policy for each of the regional sites (see below)
 - **national**: contains the national site.
 - **national-site.xml**: The site configuration file for the southern site. Xincludes the data-policy-national.xml and requires the module ihris-taifeki. See below.
 - **north**: contains the northern region site.
 - **northern-site.xml**: The site configuration file for the northern site. Xincludes the data-policy-regional.xml and requires the module ihris-taifeki See below.
 - **south**: contains the southern region site.
 - **southern-site.xml**: The site configuration file for the southern site. Xincludes the data-policy-regional.xml and requires the module ihris-taifeki
 - **east**: contains the eastern region site.
 - **eastern-site.xml**: The site configuration file for the eastern site. Xincludes the data-policy-regional.xml and requires the module ihris-taifeki
 - **west**: contains the western region site.
 - **western-site.xml**: The site configuration file for the western site. Xincludes the data-policy-regional.xml and requires the module ihris-taifeki

Sample .XML Configuration Files

ihris-taifeki.xml

The is the module that contains all of the requirements, html templates, etc. which are common to the national and regional sites. In particular, it requires the module standard-data-cadre:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='ihris-taifeki'>
  <metadata>
    <displayName>iHRIS Manage Taifeki</displayName>
    <category>Site</category>
    <description>the iHRIS Manage customizations for Taifeki that apply across
regional and central offices</description>
    <version>4.0.5</version>
    <requirement name='ihris-manage'>
```

```

    <atLeast version='4.0' />
    <lessThan version='4.1' />
  </requirement>
  <requirement name='standard-data-cadre'>
    <atLeast version='4.0' />
    <lessThan version='4.1' />
  </requirement>
  <!-- you should create a standard-data-XXXX module for each form XXXX that is being
  <path name='templates'>
    <value>./templates</value>
  </path>
  <path name='images'>
    <value>./images</value>
  </path>
  <priority>400</priority>
</metadata>
</I2CEConfiguration>

```

national-site.xml

The is the site module for the nataional/central office site

```

<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='taifeki-national-site'>
  <metadata>
    <displayName>iHRIS Manage Taifeki National</displayName>
    <category>Site</category>
    <description>the iHRIS Manage customizations for National Region of Taikeki</descri
    <version>4.0.5</version>
    <requirement name='ihris-taifeki'>
      <atLeast version='4.0' />
      <lessThan version='4.1' />
    </requirement>
    <path name='modules'>
      <value>../../modules/value>
      <value>/var/lib/iHRIS/lib/4.0.5</value>
    </path>
    <path name='templates'>
      <value>./templates</value>
    </path>
    <path name='images'>
      <value>./images</value>
    </path>
    <priority>450</priority>
  </metadata>
  <configurationGroup name='taifeki-national-site' path='/'>

    <xi:include href="../../data-policy-national.xml" xmlns:xi="http://www.w3.org/2001/XIncl

```

```

<configurationGroup name='template' path='/I2CE/template'>
  <displayName>Template Information</displayName>
  <description>Various Default Information About The Templating System</description>
  <configuration name='prefix_title' values='single'>
    <displayName>Page title prefix</displayName>
    <value>iHRIS Manage Taifeki (Central Office)</value>
  </configuration>
</configurationGroup>

<configurationGroup name='custom_report_pdf_options' path='/modules/CustomReports/dis
  <displayName>PDF Options</displayName>
  <configurationGroup name='header'>
    <displayName>Header Options</displayName>
    <configuration name='text_prefix' >
      <displayName>Header Text</displayName>
      <value>iHRIS Manage Taifeki (Central Office)</value>
    </configuration>
  </configurationGroup>
</configurationGroup>

</configurationGroup>
</I2CEConfiguration>

```

northern-site.xml

The is the site module for the northern site

```

<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='taifeki-northern-site'>
  <metadata>
    <displayName>iHRIS Manage Taifeki Northern</displayName>
    <category>Site</category>
    <description>the iHRIS Manage customizations for Northern Region of Taikeki</descri
    <version>4.0.5</version>
    <requirement name='ihris-taifeki'>
      <atLeast version='4.0' />
      <lessThan version='4.1' />
    </requirement>
    <path name='modules'>
      <value>../../modules/value>
      <value>/var/lib/iHRIS/lib/4.0.5</value>
    </path>
    <path name='templates'>
      <value>./templates</value>
    </path>
    <path name='images'>

```

```

    <value>./images</value>
  </path>
  <priority>450</priority>
</metadata>
<configurationGroup name='taifeki-northern-site' path='/>

<xi:include href="../data-policy-regional.xml" xmlns:xi="http://www.w3.org/2001/XIncl

<configurationGroup name='template' path='/I2CE/template'>
  <displayName>Template Information</displayName>
  <description>Various Default Information About The Templating System</description>
  <configuration name='prefix_title' values='single'>
    <displayName>Page title prefix</displayName>
    <value>iHRIS Manage Taifeki (Northern Region)</value>
  </configuration>
</configurationGroup>

<configurationGroup name='custom_report_pdf_options' path='/modules/CustomReports/dis
  <displayName>PDF Options</displayName>
  <configurationGroup name='header'>
    <displayName>Header Options</displayName>
    <configuration name='text_prefix' >
      <displayName>Header Text</displayName>
      <value>iHRIS Manage Taifeki (Northern Region)</value>
    </configuration>
  </configurationGroup>
</configurationGroup>
</I2CEConfiguration>

```

data-policy-national.xml

In the data-policy-national.xml will be xincluded in our national site's configuration file. We want to set it so that the national site has the cadre list stored in magic data and is read-write.

We will also need to specify that we are aggregating data from each of the regional sites. This is done via the multi-flat form storage mechanism.

It should look like this:

```

<configurationGroup name='form_storage' path='/modules/forms/forms'>
  <version>4.0.5.0</version>

  <configuration name='multi_flat_componentized' path='/modules/forms/storage_options
    <value>1</value>
  </configuration>
  <configurationGroup name='multi_flat_components' path='/modules/forms/storage_options
    <configuration name='northern' values='many' type='delimited'>

```



```

        <value>database:manage_northern</value>
    </configuration>
    <configuration name='southern' values='many' type='delimited'>
        <value>database:manage_southern</value>
    </configuration>
    <configuration name='eastern' values='many' type='delimited'>
        <value>database:manage_eastern</value>
    </configuration>
    <configuration name='western' values='many' type='delimited'>
        <value>database:manage_western</value>
    </configuration>
</configurationGroup>

<configurationGroup name='cadre'>
    <configuration name='read_only' >
        <value>0</value>
    </configuration>
    <configuration name='storage'>
        <value>magicdata</value>
    </configuration>
</configurationGroup>

<!-- You need to repeat the read-write magic data storage for each of the forms we are aggregating -->

<configurationGroup name='person'>
    <configuration name='storage'>
        <value>multi_flat</value>
    </configuration>
</configurationGroup>

<!-- You need to repeat the multi_flat storage for each of the forms we are aggregating -->
</configurationGroup>

```

data-policy-regional.xml

In the data-policy-regional.xml will be included in our regional site's configuration files. We want to set it so that the regional sites have the cadre list stored in magic data and is read-only. It should look like this:

```

<configurationGroup name='form_storage' path='/modules/forms/forms'>
    <version>4.0.5.0</version>
    <configurationGroup name='cadre'>
        <configuration name='read_only' >
            <value>1</value>
        </configuration>
        <configuration name='storage'>
            <value>magicdata</value>
        </configuration>
    </configurationGroup>

    <!-- You need to repeat the read-only magic data storage for each of the forms we are aggregating -->

```

```
</configurationGroup>
```

File Search Paths

The I2CE (Intrahealth Informatics Core Engine) uses a File Search utility to organize the files into categories and define priorities for searching the directories. As of version 3.2 it also provides localization of files.

All files, with very few exceptions, are found using the *I2CE_FileSearch* class defined in *I2CE/lib/I2CE_FileSearch.php*. The exceptions are those files under *I2CE/lib*.

Path Categories

Commonly used pathed categories are:

- templates These are the directories to search for html template files
- images These are the directories to search for image files
- css These are the directories to search for CSS files
- scripts These are the directories to search for javascript files
- classes These are the directories to search for files containing php classes. The convention here is that MyClass is located in the file MyClass.php
- modules These are the directories to look for modules in

You are free to create your own path categories.

Priorities

Directories in a given category are searched for a file in order of lowest priority to highest priority. If two directories have the same priority and the same file, there is no guarantee which file will be returned.

The paths added by a module have the negative priority of that module. For example an template file in I2CE has priority 0, while a template file found in ihris-manage has priority -200 so that the template file in ihris-manage is found first. There are two exceptions: the paths added by a module in the 'classes' or 'modules' are added with the priority of the module so that a php class found in I2CE takes precedence over one in ihris-manage which has priority 200.

Adding Paths

The most common way to add a directory to a search path is to do so through a modules [[Technical Overview: Module Structure#Module Configuration File|configuration file]]. For example:

```
<path name='classes'>
  <value>./lib</value>
</path>
```

The <value> tags can be either absolute paths or relative paths. If they are relative paths, they are relative to the directory which contains this configuration file. Some Caveats:

- If you add a '*' to the end of a path which ends in '/' (or '\' for windows), this says that all sub-directories of this directory should be added to path. For example, <value>./my_path/*</value> adds in all sub-directories under ./my_path/

- If you add a '*' to the end of a path which does not end in a '/' (or '\' for windows) this says that we add all directories that match the file glob. For example, `<value>./my_paths/go*</value>` adds in all sub-directories of `my_paths` which start with `go`.
- If you add a '**' to the end of a path which ends in '/' (or '\' for windows) it will add in all sub-directories, sub-sub-directories, sub-sub-sub-directories etc of the given path.
- If a directory that you add has a sub-directory named 'local' it will first check relative to this subdirectory for this file. This is useful for development purposes to prevent things from getting committed to bazaar.
- See localization

Localization

Beginning with version 3.2, we have added in the ability to localize a path. When a path is added to the file search utility, it first checks to see if there is the sub-directory `en_US`. If it does not exist, the this directory is not considered to be localized. If it does exist, the path is considered to be localized. In this case, we consider each sub-directory to correspond to a locale.

The preferred locales are set per user. For example, if my preferred locales were `fr_RW` and then `fr_FR` and then `en_US` and I was looking for the file `main.html` in `./templates` which has `en_US` as a sub-directory I would look for `main.html` in this order:

- `./templates/fr_RW/main.html`
- `./templates/fr_FR/main.html`
- `./templates/en_US/main.html`

until I found the file I wanted. If it wasn't there, I would then check for `main.html` in a directory of higher priority.

Caching

Because of the high overhead of looking for files all the time, a successful file search will have its results cached in memory via apc^[1]. In version 3.1, these results are stored globally. Starting in version 3.2, because the localization preference is defined per user, these results are cached per user.

By default, a file is considered to be stale after 60 seconds. The cache can be turned off by modifying the magic data at `/I2CE/fileSearch/stale_time` (see `I2CE/I2CE_Configuration.xml`).

Caution: If you are developing a new module and add in a template file, the system won't file that file immediately because the file search results are cached. You can either wait the 60 seconds or clear the results stored in the apc^[1] memory cache.

Form Caches

The data for a form *XXXXX* may be cached into a table *hippo_XXXXX*. This hippo table can be used for:

- To generate reports to Custom Reporting
- To export data for decentralized data management

Hippo Table Structure

If a form *XXXXX* has a field *YYYYY* then the *hippo_XXXXX* table will have a column ``XXXXX+YYYYY``. There is also a column ``XXXXX+id`` containing the id of the form and a column ``XXXXX+parent`` containing the parent form, if any.

Cache Times and Command Line

The hippo tables are generated by a background process once a form cache is consider stale. See the [Configuring Form Cache Generation Timing](#) document for information on timing for form caches and information on manually creating the form caches from the command line.

Form Storage -- Entry/Last Entry

This is the default storage mechanism that a form uses

Features

This entry storage mechanism tracks changes made to the data by user and time.

Database Structure

This is a vertical database structure.

Entry and Last Entry

All data is stored in two structurally identical tables, **entry** and **last_entry**. The *entry* table contains all data saved into the system, while *last_entry* only saves the current version of the data. Each row of this table corresponds to one field of one instance of a form. These references are made by the columns *record* and *form_field* which are the id's of the tables *record* and *form_field*

Record

The record table has one row for each form instance. A form instance is the name of a form and an id.

The record table contains the columns *id*, *form*, *parent_form* and *parent_id*. The *form* column matches the *id* column in the *form* table and which tells us which form this record, or instance, is. The *parent_form* column is a string and tells us the name, if any, of a parent form for this form instance. Similarly, the *parent_id* tells us the id, if any, of the parent form. The parent form may or may not be saved into the entry table.

The id is referenced by the entry and last_entry tables

There is also a modification time which tracks the last time any field of this form instance was modified.

Form

The form table describe the forms which have been saved into the entry table. There are columns *id* and *name*. It's id is referenced by the form field table.

Field

The field table describe all of the fields and their database types. It contains the columns: id, name and type. There is one row for each pair (name of a field, field database type) which is assigned an id. The database type, tells us which column that the field data is saved in the last_entry and entry tables. It's id column is referenced by the form_field table.

Form Field

The form field table has on row for each pair of (form, field id). It's id column is referenced by the entry and last entry tables.

Sample SQL Queries

Getting all the data for a form

Suppose you want to get all the fields for the 'person' form with id '10260.' This can be done by:

```
SELECT
    field.name AS `Field`,
    field.type AS `Type`,
    last_entry.integer_value AS `Integer`,
    last_entry.string_value AS `String`,
    last_entry.text_value AS `Text`,
    last_entry.date_value AS `Date`
FROM last_entry
JOIN form_field ON last_entry.form_field = form_field.id
JOIN field ON form_field.field = field.id
WHERE last_entry.record = '10260'
AND last_entry.form_field IN
    (SELECT form_field.id FROM form_field
    JOIN form on form_field.form = form.id
    WHERE form.name = 'person')
```

Form Storage -- Flat Table

The *Flat Table* storage mechanism allows you to map any flat table that you have in your database into a form.

Specifying Flat Storage

To specify that the form \$form has a flat table storage mechanism set by setting

```
modules/forms/forms/$form/storage
```

to have value **flat**.

Form Storage Options

The flat storage mechanism is defined so that, by default, it can read in the cached "hippo_" tables of form data. If your situation, is not exactly this, then you can take advantage of the options as described in this section.

The options specifying a flat table storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/flat
```

It has the following structure:

- **table:** Optional scalar node. The table to use. E.g. my_table, `my weird\_table`, `some\_other\_database`.`table`. You are responsible for back-ticks if required. If it is not set, it determines the table name from the table_prefix set in the global options.
- **id:** Optional parent node. The data defining how to associate an id per row of this table. If it is not set, the data is populated from the column 'id.'
 - **col:** Optional scalar node. Specifies a column of the table to be used as the id. You are responsible for back-ticks.
 - **function:** Optional scalar node. Specifies a SQL function whose result will be the id for the form. 'col' takes precedence.
 - **form_prepend:** Optional scalar node. Defaults to true. If true, it means the form name has been prepended to the id. Otherwise, it assumes that the column is just the id. If true, this form is not writable.
- **fields:** Optional parent node. Specifies how the data of your form is associated to a row of your table. Each child of this node is the name of a field \$field of your form. By default, all fields of a form are populated, and are all assumed to come from the column with that field name.
 - **\$field:** Parent node with the following child nodes.
 - **col:** Optional scalar node. Specifies a column of the table to be used as the id. You are responsible for back-ticks.
 - **function:** Optional scalar node. Specifies a SQL function whose result will be the value for the field. 'col' takes precedence.
 - **enabled:** Optional scalar node. If present and evaluates to false, it means we should not populate this field.
- **parent:** Optional parent node. If not present, we assume the parent is populated from the column 'parent'. It has the following child nodes:
 - **enabled:** Optional scalar node. If present and evaluates to false, it means getParent() should return the trivial parent id, '0'.
 - **col:** Optional scalar node. Specifies a "column" of the table to be used as the id for the parent. You are responsible for back-ticks.

- **function:** Optional scalar node. Optional scalar node. Optional scalar node. Specifies a SQL function whose result will as the value for the parent form's id. 'col' takes precedence.
- **writable:** Optional scalar node. Defines the write access to the table. If not present or its value cast to false, then the table is not consider to be writable. If its value casts to true, then it is considered writable and the save() method will actually do something.
- **last_modified:** Optional parent node. If not present, we assume the last modified time is populated from the column 'last_modified'. It has the following child nodes:
 - **enabled:** Optional scalar node. If present and evaluates to false, it means the modified time is always taken to be NULL
 - **col:** Optional scalar node. Specifies a "column" of the table to be used as the modified time. Column should have type datetime. You are responsible for back-tics.
 - **function:** Optional scalar node. Optional scalar node. Optional scalar node. Specifies a SQL function whose result (of type datetime) will as the value for the modified time. 'col' takes precedence.

Global Options

There are global options for specifying a the mapping between components and databases

```
/modules/forms/storage_options/flat
```

This has the structure:

- **table_prefix:** Optional scalar node. The value pre-pended to a form name to give the table name where the data is stored. If not set it is 'hippo_', the prefix used for the caching of form data to flat tables. For example the person form would use the table 'hippo_person'.

Example

To read in the cached *hippo_person* tables for the person forms from a cached table we would set:

```
/modules/forms/forms/person/storage => 'flat'
```

Writing

Only fields which are columns are writable. If the data specifying the id is not writable, then the form is not writable.

Warning: It is assumed that the columns associated to each field (besides the id) is either allowed to be null or has a default value, otherwise the column is not writable. Basically we need to allow that for a new form, each column can be saved in an independent.

Warning: The id column cannot have 'form_prepend' set to true for the field to be writable

Form Storage -- Magic Data

Features

Storing form data in magic data is intended to be used in the following situations:

- centrally maintained data that does not change frequently
- data that you want translations/localizations for
- data that you do not care to track the history of changes
- data that you want to load in easily for a module

Storage

All the data for form \$form is stored in the magic data instance at the path

```
/I2CE/formsData/forms/$form
```

with each node underneath corresponding to an instance of the form. For example, under

```
/I2CE/formsData/forms/gender
```

we have

```
'F' => Array [
  'last_modified' => '2009-04-27 1:23:45'
  'fields' => Array [
    'name' => 'Female'
  ]
]
'M' => Array [
  'last_modified' => '2009-04-27 1:23:45'
  'fields' => Array [
    'name' => 'Male'
  ]
]
```

If there is a parent form for the form, it is saved under 'parent' node for form instance.

Form Storage -- Multi-Flat Table

Slated for release in version 4.0.1.

The *Multi-Flat* form storage mechanism is similar to the flat form storage mechanism excepting that the data used to populate the form can come from multiple databases and tables. The *Multi-Flat* storage mechanism is intended for data aggregation purposes. It does so by considering each database/table to contain the data from one component. By a component, we mean a self-contained running instance of iHRIS Manage.

For example, you may have several regions each running an instance of iHRIS Manage. You may wish to aggregate data maintained within each of the regions (e.g. people and positions, but not jobs or geographic locations) into a central instance of iHRIS Manage so that you can run reports on the entire country. When setting up the central instance of iHRIS Manage, you could choose to use the *Multi-Flat* storage mechanism for people and positions. Then on the central server, you could create a database for each region, (Region1, Region2, etc.) which would simply contain the cached tables for people and position for each of the respective regions.

For the data such as jobs or geographic locations, which should be centrally maintained, we encourage you to use the magic data form storage mechanisms.

Specifying Multi-Flat Storage

To specify that the form \$form has a Multi-Flat table storage mechanism set by setting

```
/modules/forms/forms/$form/storage
```

to have value '*multi_flat*'.

Form Options

The multi-flat storage mechanism is defined so that, by default, it can read in the cached "hippo_" tables of form data across several databases, with each database corresponding to one component (e.g. a region, district or facility). If your situation, is not exactly this, then you can take advantage of the options as described in this section.

The options specifying a *Multi-Flat* table storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/multi_flat
```

It has the following structure (which is identical to those for flat storage):

- **table:** Optional scalar node. The table to use, e.g. *hippo_person*. You are responsible for back-tics if required. The same table name will be used across the multiple databases, with each database representing an individual component). If it is not set, it determines the table name from the `table_prefix` set in the global options.
- **id:** Optional parent node. The data defining how to associate an id per row of this table. If it is not set, we use simply the column 'id'.
 - **col:** Optional scalar node. Specifies a column of the table to be used as the id. You are responsible for back-tics.
 - **function:** Optional scalar node. Specifies a SQL function whose result will be the id for the form. 'col' takes precedence.
 - **form_prepend:** Optional scalar node. Defaults to true. If true it means the form name has been prepended to the id. Otherwise, it assumes that the column is just the id.
- **fields:** Optional parent node. Specifies how the data of your form is associated to a row of your table. Each child of this node is the name of a field \$field of your form. By default, all fields of a form are populated, and are all assumed to come from the column with that field name.

- \$field: Parent node with the following child nodes.
 - col: Optional scalar node. Specifies a column of the table to be used as the id. You are responsible for back-tics.
 - function: Optional scalar node. Optional scalar node. Specifies a SQL function whose result will as the value for the field. 'col' takes precedence.
 - enabled: Optional scalar node. If present and evaluates to false, it means we should not populate this field.
- parent: Optional parent node. If not present, we assume the parent is populated from the column 'parent'. It has the following child nodes:
 - enabled: Optional scalar node. If present and evaluates to false, it means getParent() should return the trivial parent id, '0'.
 - col: Optional scalar node. Specifies a "column" of the table to be used as the id for the parent. You are responsible for back-tics.
 - function: Optional scalar node. Optional scalar node. Optional scalar node. Specifies a SQL function whose result will as the value for the parent form's id. 'col' takes precedence.
- writable: Optional scalar node. Defines the write access to the table. If not present or its value cast to false, then the table is not consider to be writable. If its value casts to true, then it is considered writable and the save() method will actually do something. At the moment, the save() method is not implemented.
- last_modified: Optional parent node. If not present, we assume the last modified time is populated from the column 'last_modified'. It has the following child nodes:
 - enabled: Optional scalar node. If present and evaluates to false, it means the modified time is always taken to be NULL
 - col: Optional scalar node. Specifies a "column" of the table to be used as the modified time. Column should have type datetime. You are responsible for back-tics.
 - function: Optional scalar node. Optional scalar node. Optional scalar node. Specifies a SQL function whose result (of type datetime) will as the value for the modified time. 'col' takes precedence.

Form Options Example

To read in the cached *hippo_person* tables for the person forms from the four different regions in the example below we would set:

```
/modules/forms/forms/person/storage => 'multi_flat'
```

This can be done in a configuration.xml file by:

```
<configuration name='person_multi_flat' path='/modules/forms/forms/person/storage'>
  <value>multi_flat</value>
</configuration>
```

In this case, if a person form had the id "person12" and was in the Northern region, the id would become "person12@north"

Global Options

There are global options for specifying a the mapping between components and databases

```
/modules/forms/storage_options/multi_flat
```

This has the structure:

- **table_prefix**: Optional scalar node. The value pre-pended to a form name to give the table name where the data is stored. If not set it is 'hippo_', the prefix used for the caching of form data to flat tables.
- **components**: Required parent node. It's child nodes are the names of each of the components (e.g. Regions) you will be reading from.
 - **\$component**: Parent node.
 - **database**: Required scalar node. It's value is the database where the tables for the \$component are stored.
 - **table_prefix**: Optional scalar node. It's value is the prefix pre-pended to the form name to get the table. If it is not set, it uses the value stored at /modules/forms/storage_options/multi_flat/table_prefix (which defaults to 'hippo_')

Global Options Example

For example you might have the following:

- **components**
 - **north =>**
 - **database =>** 'NorthernRegionDatabase'
 - **south =>**
 - **database =>** 'SouthernRegionDatabase'
 - **east =>**
 - **database =>** 'EasternRegionDatabase'
 - **west**
 - **database =>** 'WesternRegionDatabase'

You can set this in a configuration.xml file by:

```
<configurationGroup name='multi_flat_components' path='/modules/forms/storage_options/multi_flat/components'>
  <configuration name='north' values='many' type='delimited'>
    <value>database:NorhternRegionDatabase</value>
  </configuration>
  <configuration name='south' values='many' type='delimited'>
    <value>database:SouthernRegionDatabase</value>
  </configuration>
  <configuration name='east' values='many' type='delimited'>
    <value>database:EasternRegionDatabase</value>
  </configuration>
  <configuration name='west' values='many' type='delimited'>
    <value>database:WesternRegionDatabase</value>
  </configuration>
</configurationGroup>
```

Form Storage Mechanisms

A storage mechanism is defined by subclass `I2CE_FormStorage_Mechanism` which provides the methods to read, and possibly write, the data for any form with the given mechanism. If the data is stored in a database, it can sub-class `I2CE_FormStorage_DB` and provide read access to the data as a form by only defining one method, `getRequiredFieldsQuery()`. To make a storage mechanism writable, you only need to write a method which defines how to store a data field.

Once a storage mechanism is written, the data for that form can be queried via searches with limits.

The currently (or soon-to-be) available storage mechanisms are:

- entry: A vertical database storage mechanism which keeps a history of when and by who individual fields (data elements) were changed. This is the default storage mechanism, and the storage mechanism that was used in version prior to 3.2.
- flat: A horizontal database storage mechanism, where a row of a table corresponds to an instance of a form. The columns, or any SQL function, of the table are used to define the fields.
- multi_flat: A horizontal database storage mechanism similar to the flat storage mechanism but combining several identically structured tables. It is primarily intended for data collation.
- magicdata: A locale aware storage mechanism primarily intended for centrally maintained lists of data.
- CSV: A storage mechanism to read data from a CSV file
- Eval: A storage mechanism to populate and get records based on php function calls
- XML: A storage mechanism to populate and get records based on an XML file.
- SDMX-HD: A storage mechanism to populate and get records based on SDMX-HD code lists.
- SDMX Cross Sectional: A storage mechanism to populate and get records based on SDMX Cross Sectional Data.

Aggregating Storage Mechanisms

You may be in a situation in which you need to aggregate from several different instances of iHRIS Manage (or Qualify). You can mark a specific a storage mechanism, `$storage_mechanism`, as being aggregating by setting:

```
/modules/forms/storage_options/$storage_mechanism/componentized
```

to **1**. Then each form `$form` that uses that storage mechanism, will be componentized.

At the moment, only the Multi-Flat storage mechanism is an aggregating storage mechanism.

Once the *form-storage* module is enabled, an instance of `I2CE_Form` has the method `isComponentized()` to check if a form is componentized. You can also check via `I2CE_FormStorage::isComponentized($form)`

Forms and Form Classes

Records are stored in the Intrahealth Informatics Core Engine (I2CE) in forms which consist of a collection fields. You may roughly think of a form as table in a database and a field as a column of that table.

The logic of a form is handled by a *Form Class* which extends **I2CE_Form**. The logic of a field is handled by a class extending *I2CE_FormField*.

Referencing in Templates

The templating system allows easy reference to data stored in a form in an html template. For example to reference a person's firstname you can use:

```
<p id='my_person'>You are looking at <span type='form' name='person:firstname' /> <span type='form' name='person:surname' />!</p>
```

Would be turned into

```
<p id='my_person'>You are looking at Joe Smith!</p>
```

if there was a 'person' form set at or above the node with id 'my_person'. The html is modified by the templating system. In version 3.1, this is done by the 'processForms()' method of the *forms* module class, *I2CE_Module_Forms*, by hooking into the hook 'process_templatedata_FORM' defined in *I2CE_Module_TemplateData*.

It is the responsibility of the page to make sure the appropriate form is assigned to the appropriate node in the template.

Forms and Their Classes

A form \$form is linked to a form classes by specifying the data at */modules/forms/forms/\$form/class* to be the name of the form class. For example:

```
I2CE::getConfig()->modules->forms->person->class = 'I2CE_ManagePerson';
```

The classes may or may not exist as files. If there is logic that a form needs to perform, for instance on its *validate()* and *save()* methods it will exist. Otherwise, they exist virtually. Starting in version 3.2 such a virtual class is generated 'on-the-fly' by making use of the *__autoload()* method.

Fields and Their Classes

All fields of a form have a name and a type. The name of the fields is how the field is referenced by the form as a public variable by using the *__get()* and *__set()* methods. For example:

```
if ($person instanceof I2CE_Person) {
    echo "$person->firstname . "\n";
}
```

The types effect how the data is stored in the database and how the data is displayed and entered in the system. The following are a list of common types:

- **BOOL** A boolean True/False value
- **CURRENCY** A currency value
- **DATE_HMS** A hour, minute, second time
- **DATE_MD** A month and date
- **DATE_TIME** A time

- DATE_Y A year
- DATE_YMD A year, month and date
- INT An integer value
- INT_LIST A list of integers
- INT_GENERATE An integer which automatically increments
- STRING_LINE A line of text
- STRING_MLINE Several lines of text
- STRING_PASS A password
- STRING_TEXT A lot of text
- YESNO A Yes/No value

A \$type is handled by the class I2CE_FormField_\$type

Forms and Their Fields

The structure of forms, their classes and fields and where they are defined in can be easily browsed at:

- Form and Field Browser ^[1] Applies to development version 3.2

How the Data is Stored

Although you may loosely think of a form as being a table in the database, it is not quite so.

Version 3.1

In version 3.1 all data stored in forms is stored in the 'entry' and 'last_entry' tables. These tables keep a history of the changes made to the data based on the user that changed the data, the type of the change, and the time of the change. The 'entry' table has all of the history, while the 'last_entry' table only contains the most recent changes to a field.

Version 3.2

Starting in this version we are enabling multiple storage mechanisms for a form. The default storage mechanism will still be through the 'entry' and 'last_entry' table.

In addition we will enable storage to specified database tables to allow the administrator to easily incorporate outside data sources into the Custom Reporting utility. This will be either read-only or read-write as the user specified.

We also allow storage in Magic Data. This is primarily intended for list data that a administrator wishes to maintain centrally in a module and then ship out to regional offices. In addition, the lists stored in Magic Data will be localizable.

References

[1] http://open.intrahealth.org/ihris-docs/form_documentor/

HowTo: Install Memcached

With version 4.0.4 of iHRIS you can use memcached to improve performance.

Install Memcached

First install memcached by opening a terminal and typing:

```
sudo apt-get install memcached
```

Then make sure that memcached is enabled. Look at `/etc/default/memcached` and make sure that it is set to be enabled. You can edit it by typing:

```
sudo gedit /etc/default/memcached
```

Then make sure the content is:

```
ENABLE_MEMCACHED=yes
```

If memcached wasn't enabled then after editing that file you'll need to restart it by typing:

```
sudo /etc/init.d/memcached restart
```

Install PHP Module

If you are using Ubuntu Lucid, you can simply do

```
sudo apt-get install php5-memcached
```

Otherwise, we need to link memcached with PHP using the memcached PECL library. First make sure the development packages are installed so PECL can compile memcached. Type the following in a terminal:

```
sudo apt-get install libmemcached2 libmemcached-dev apache2-prefork-dev  
php5-dev
```

Now install memcached by typing:

```
sudo pecl install memcached
```

Now enable the module by creating and editing a config file for PHP.

```
sudo gedit /etc/php5/conf.d/memcached.ini
```

Save the following for that file:

```
extension=memcached.so
```

Restart Apache

Now restart apache to enable the PHP memcached library by typing the following in a terminal:

```
sudo /etc/init.d/apache2 restart
```

I2CE Module List (4.0.6)

This is a list of all modules available in version 4.0.6-release of the package I2CE ^[1]

BackgroundProcess

This describes version 4.0.0 of the module Background Processes (BackgroundProcess)

- Source: i2ce/modules/BackgroundProcess ^[2]
- Module Class: The module class is implemented by I2CE_BackgroundProcess
- Fuzzy Methods:
 - Implements the method I2CE_Page->launchBackgroundProcess() via launchBackgroundProcess()
 - Implements the method I2CE_Module->launchBackgroundProcess() via launchBackgroundProcess()
 - Implements the method I2CE_Template->launchBackgroundProcess() via launchBackgroundProcess()
 - Implements the method I2CE_Page->launchBackgroundPHPScript() via launchBackgroundPHPScript()
 - Implements the method I2CE_Module->launchBackgroundPHPScript() via launchBackgroundPHPScript()
 - Implements the method I2CE_Template->launchBackgroundPHPScript() via launchBackgroundPHPScript()
 - Implements the method I2CE_Page->launchBackgroundPage() via launchBackgroundPage()
 - Implements the method I2CE_Module->launchBackgroundPage() via launchBackgroundPage()
 - Implements the method I2CE_Template->launchBackgroundPage() via launchBackgroundPage()
- Description: A convenience module to allow the running of process in the background
- Requirements:
 - pages at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/BackgroundProcess/configs ^[3]
 - Templates: modules/BackgroundProcess/templates ^[4]
background_process_menu.html
 - Css: modules/BackgroundProcess/css ^[5]
 - Classes: modules/BackgroundProcess/ ^[6]
I2CE_BackgroundProcess, I2CE_Page_BackgroundProcess, I2CE_Page_Run_SQL

BinField

This describes version 4.0.6.0 of the module Binary Fields (BinField)

- Source: i2ce/modules/Forms/modules/Binary_Files ^[7]
- Module Class: The module class is implemented by I2CE_Module_BinaryFiles
- Description: A module that allows binary files for form fields
- Requirements:
 - forms at least 4.0 and less than 4.1
 - pages at least 4.0 and less than 4.1
 - MimeTypes at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/Binary_Files/lib ^[8]
I2CE_FormField_BINARY_FILE, I2CE_FormField_DB_BLOB, I2CE_FormField_DOCUMENT,
I2CE_FormField_IMAGE, I2CE_Module_BinaryFiles, I2CE_Page_BinaryField
 - Sql: modules/Forms/modules/Binary_Files/sql ^[9]

CachedForms

This describes version 4.0.6.1 of the module Cached Forms (CachedForms)

- Source: i2ce/modules/Forms/modules/CachedForms ^[10]
- Module Class: The module class is implemented by I2CE_Module_CachedForms
- Fuzzy Methods:
 - Implements the method I2CE_FormField->cachedTableReference() via cachedTableReference()
- Command Line Interpreter (CLI) Fuzzy Methods:
 - Implements the CLI method I2CE_FormField->cachedTableReference() via cachedTableReference()
- Description: A module that allow the creation of a cached table corresponding to a form
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
 - BackgroundProcess at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Forms/modules/CachedForms/configs ^[11]
 - Classes: modules/Forms/modules/CachedForms/lib ^[12]
I2CE_CachedForm, I2CE_Module_CachedForms, I2CE_Page_CachedForm
 - Templates: modules/Forms/modules/CachedForms/templates ^[13]
cachedforms_menu_each.html, cachedforms_menu.html, cachedforms_menu_exportProfile.html,
cachedforms_menu_exportProfile_each.html

ColorPicker

This describes version 4.0.0 of the module Color Picker (ColorPicker)

- Source: i2ce/modules/MooTools/modules/ColorPicker^[14]
- Module Class: The module class is implemented by I2CE_Module_ColorPicker
- Fuzzy Methods:
 - Implements the method I2CE_MagicDataTemplate->processValues_color_triple_hex_single() via processValues_color_triple_hex_single()
 - Implements the method I2CE_MagicDataTemplate->processValues_color_triple_hex_many() via processValues_color_triple_hex_many()
 - Implements the method I2CE_MagicDataTemplate->processValues_color_triple_rgb_single() via processValues_color_triple_rgb_single()
 - Implements the method I2CE_MagicDataTemplate->processValues_color_triple_rgb_many() via processValues_color_triple_rgb_many()
 - Implements the method I2CE_MagicDataTemplate->processValues_color_hex_single() via processValues_color_hex_single()
 - Implements the method I2CE_MagicDataTemplate->processValues_color_hex_many() via processValues_color_hex_many()
 - Implements the method I2CE_Page->addColorPickerTriple() via addColorPickerTriple()
 - Implements the method I2CE_Template->addColorPickerTriple() via addColorPickerTriple()
- Description: Uses the MooTools Color Picker written by Kelly Anderson at <http://www.sweetvision.com/projects/javascript-color-picker/>. Enable some additional functionality for configuration as well
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MooTools/modules/ColorPicker/scripts^[15]
 - Templates: modules/MooTools/modules/ColorPicker/templates^[16]
configuration_color_triple_hex_single.html, configuration_color_triple_single.html,
configuration_color_triple_rgb_single.html
 - Css: modules/MooTools/modules/ColorPicker/css^[17]
 - Classes: modules/MooTools/modules/ColorPicker/^[18]
I2CE_Module_ColorPicker

CustomReports

This describes version 4.0.5 of the module Custom Reports (CustomReports)

- Source: i2ce/modules/CustomReports^[19]
- Module Class: The module class is implemented by I2CE_Module_CustomReports
- Fuzzy Methods:
 - Implements the method I2CE_Form->isNumeric() via isNumeric()
 - Implements the method I2CE_FormField->isNumeric() via isNumericField()
- Description: Custom Reports
- Requirements:
 - pages at least 4.0 and less than 4.1
 - formRelationships at least 4.0 and less than 4.1

- magicDataExport at least 4.0 and less than 4.1
- CachedForms at least 4.0 and less than 4.1
- jumper at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/CustomReports/configs ^[20]
 - Classes: modules/CustomReports/lib ^[21]
 - I2CE_CustomReport, I2CE_CustomReport_Display, I2CE_CustomReport_Display_Default,
 - I2CE_CustomReport_Template, I2CE_Module_CustomReports, I2CE_Page_CustomReports,
 - I2CE_Page_Report_MagicDataExport, I2CE_Swiss_CustomReports_Base,
 - I2CE_Swiss_CustomReports_Report, I2CE_Swiss_CustomReports_ReportView,
 - I2CE_Swiss_CustomReports_ReportView_Base, I2CE_Swiss_CustomReports_ReportView_Displays,
 - I2CE_Swiss_CustomReports_ReportView_Field, I2CE_Swiss_CustomReports_ReportView_Fields,
 - I2CE_Swiss_CustomReports_ReportViews, I2CE_Swiss_CustomReports_Report_Base,
 - I2CE_Swiss_CustomReports_Report_Meta, I2CE_Swiss_CustomReports_Report_ReportingForm,
 - I2CE_Swiss_CustomReports_Report_ReportingForm_Field,
 - I2CE_Swiss_CustomReports_Report_ReportingForm_Field_Limit,
 - I2CE_Swiss_CustomReports_Report_ReportingForm_Field_Limits,
 - I2CE_Swiss_CustomReports_Report_ReportingForm_Fields,
 - I2CE_Swiss_CustomReports_Report_ReportingForms,
 - I2CE_Swiss_CustomReports_Report_ReportingFunction,
 - I2CE_Swiss_CustomReports_Report_ReportingFunction_Limits,
 - I2CE_Swiss_CustomReports_Report_ReportingFunctions, I2CE_Swiss_CustomReports_Reports
 - Css: modules/CustomReports/css ^[22]
 - Images: modules/CustomReports/images ^[23]
 - Templates: modules/CustomReports/templates ^[24]
 - customReports_reportViews_existing_reportview.html, customReports_report_limits_each.html,
 - customReports_report_form_field.html, customReports_reportViews_edit.html, customReports_menu.html,
 - customReports_report_form_field_limit.html, customReports_report_forms_each.html,
 - customReports_table_data_cell.html, customReports_reportViews_reports_view.html,
 - customReports_report_form.html, customReports_display_Default_base.html,
 - customReports_reportView_displays_each.html, customReports_reportView_field_numeric.html,
 - customReports_reportView_displays.html, customReports_reports_no_new.html,
 - customReports_table_data_row.html, customReports_table.html, customReports_reportView_edit.html,
 - customReports_reports_category.html, customReports_table_link_cell.html,
 - customReports_report_form_fields.html, customReports_reportView_fields.html,
 - customReports_report_functions_each.html, customReports_reportViews_views_each_view.html,
 - customReports_reportView_view.html, customReports_report_forms_form.html,
 - customReports_report_meta.html, customReports_table_head_cell.html, customReports_report_limits.html,
 - customReports_options.html, customReports_report_function.html,
 - customReports_reportViews_reports_edit.html, customReports_nav_menu.html,
 - customReports_report_functions.html, customReports_reportViews_views_each_edit.html,
 - customReports_notfound.html, customReports_reportView_field.html, customReports_reports_new.html,
 - customReports_reportView_fields_each.html, customReports_report_forms.html,
 - customReports_reportViews_views_view.html, customReports_report_form_fields_each.html,
 - customReports_reports_categories.html, customReports_reports_category_report.html,
 - customReports_report.html, customReports_reportViews_views_edit.html, customReports_reports.html,
 - customReports_reportViews_view.html, customReports_display_control_Default.html

- Xml: modules/CustomReports/xml ^[25]
- Modules: modules/CustomReports/modules ^[26]
CustomReports_Export, CustomReports_PDF, CustomReports_PieChart, ReportArchiver

CustomReports_Export

This describes version 4.0.6.1 of the module Export Reports (CustomReports_Export)

- Source: i2ce/modules/CustomReports/modules/Export ^[27]
- Description: Configuration options for exported reports
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Templates: modules/CustomReports/modules/Export/templates ^[28]
swiss_xslt.html, swiss_xslts.html, swiss_xslts_each.html, customReports_display_control_Export.html, swiss_exporteditor.html
 - Classes: modules/CustomReports/modules/Export/lib ^[29]
I2CE_CustomReport_Display_Export, I2CE_Swiss_CustomReport_ReportView_ExportEditor, I2CE_Swiss_XSLT, I2CE_Swiss_XSLTS

CustomReports_PDF

This describes version 4.0.0 of the module PDF Reports (CustomReports_PDF)

- Source: i2ce/modules/CustomReports/modules/PDF ^[30]
- Description: Configuration options for reports that use PDF
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
 - textlayout at least 4.0 and less than 4.1
 - ColorPicker at least 4.0 and less than 4.1
- Paths:
 - Templates: modules/CustomReports/modules/PDF/templates ^[31]
customReports_display_control_PDF.html
 - Classes: modules/CustomReports/modules/PDF/lib ^[32]
I2CE_CustomReport_Display_PDF

CustomReports_PieChart

This describes version 4.0.5.0 of the module Pie and Chart (CustomReports_PieChart)

- Source: i2ce/modules/CustomReports/modules/PieChart ^[33]
- Description: Configuration options for reports that use Pie and Charts
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
 - ColorPicker at least 4.0 and less than 4.1
 - maani-charts at least 4.7
- Paths:
 - Configs: modules/CustomReports/modules/PieChart/configs ^[34]
 - Templates: modules/CustomReports/modules/PieChart/templates ^[35]
customReports_display_control_PieChart.html, customReports_display_PieChart_base.html

- Classes: modules/CustomReports/modules/PieChart/lib ^[36]
I2CE_CustomReport_Display_PieChart
- Css: modules/CustomReports/modules/PieChart/css ^[37]

DatePicker

This describes version 1.16 of the module Date Picker (DatePicker)

- Source: i2ce/modules/MooTools/modules/DatePicker ^[38]
- Module Class: The module class is implemented by I2CE_Module_DatePicker
- Fuzzy Methods:
 - Implements the method I2CE_Page->addDatePicker() via addDatePicker()
 - Implements the method I2CE_Template->addDatePicker() via addDatePicker()
- Description: Uses the MooTools Color Date <http://www.monkeyphysics.com/mootools/script/2/datepicker>
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MooTools/modules/DatePicker/scripts ^[39]
 - Css: modules/MooTools/modules/DatePicker/css ^[40]
 - Classes: modules/MooTools/modules/DatePicker/ ^[41]
I2CE_Module_DatePicker

DisplayData

This describes version 4.0.0 of the module I2CE Display Data (DisplayData)

- Source: i2ce/modules/TemplateData/modules/DisplayData ^[42]
- Module Class: The module class is implemented by I2CE_DisplayData
- Fuzzy Methods:
 - Implements the method I2CE_Template->setDisplayData() via setDisplayData()
 - Implements the method I2CE_Template->setDisplayDataImmediate() via setDisplayDataImmediate()
 - Implements the method I2CE_Template->selectOptionsImmediate() via selectOptionsImmediate()
 - Implements the method I2CE_Page->selectOptionsImmediate() via selectOptionsImmediate()
 - Implements the method I2CE_Page->setDisplayData() via setDisplayData()
 - Implements the method I2CE_Page->setDisplayDataImmediate() via setDisplayDataImmediate()
- Description: Adds display data to the template
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - template-data at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/TemplateData/modules/DisplayData/ ^[43]
I2CE_DisplayData

Fields

This describes version 4.0.6 of the module I2CE Fields (Fields)

- Source: `i2ce/modules/Forms/modules/Fields` ^[44]
- Module Class: The module class is implemented by `I2CE_Module_Fields`
- Description: Adds a few basic forms to the system as well as some form functionality to the template
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - `template-data` at least 4.0 and less than 4.1
 - `DisplayData` at least 4.0 and less than 4.1
- Optionally Enables: `DatePicker`
- Paths:
 - Configs: `modules/Forms/modules/Fields/configs` ^[45]
 - Classes: `modules/Forms/modules/Fields/lib` ^[46], `modules/Forms/modules/Fields/lib/fields` ^[47]
`I2CE_Entry`, `I2CE_FieldContainer`, `I2CE_FieldContainer_Factory`, `I2CE_FormField`,
`I2CE_FormField_BOOL`, `I2CE_FormField_DATE_HMS`, `I2CE_FormField_DATE_MD`,
`I2CE_FormField_DATE_TIME`, `I2CE_FormField_DATE_Y`, `I2CE_FormField_DATE_YMD`,
`I2CE_FormField_DB_DATE`, `I2CE_FormField_DB_INT`, `I2CE_FormField_DB_STRING`,
`I2CE_FormField_DB_TEXT`, `I2CE_FormField_INT`, `I2CE_FormField_INT_GENERATE`,
`I2CE_FormField_INT_LIST`, `I2CE_FormField_STRING_LINE`, `I2CE_FormField_STRING_MLINE`,
`I2CE_FormField_STRING_PASS`, `I2CE_FormField_STRING_TEXT`, `I2CE_FormField_YESNO`,
`I2CE_Module_Fields`
 - Templates: `modules/Forms/modules/Fields/templates` ^[48]
`form_field.html`, `display_field.html`, `simple_display_field.html`
 - Scripts: `modules/Forms/modules/Fields/scripts` ^[49]
 - Modules: `modules/Forms/modules/Fields/modules` ^[50]

FileDump

This describes version 4.0.0 of the module File Dump (FileDump)

- Source: `i2ce/modules/Pages/modules/FileDump` ^[51]
- Description: File Download Utility
- Requirements:
 - `MimeTypes` at least 4.0 and less than 4.1
 - `pages` at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/Pages/modules/FileDump/configs` ^[52]
 - Classes: `modules/Pages/modules/FileDump/` ^[53]
`I2CE_FileDump`

Float

This describes version 4.0.0 of the module Float (Float)

- Source: i2ce/modules/Forms/modules/Float ^[54]
- Module Class: The module class is implemented by I2CE_Module_Float
- Description: A module that allows the float formfield
- Requirements:
 - forms at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/Float/lib ^[55]
I2CE_FormField_DB_FLOAT, I2CE_FormField_FLOAT, I2CE_Module_Float

FormWorm

This describes version 4.0.0 of the module Form Worm (FormWorm)

- Source: i2ce/modules/MooTools/modules/FormWorm ^[56]
- Module Class: The module class is implemented by I2CE_Module_FormWorm
- Fuzzy Methods:
 - Implements the method I2CE_Page->addFormWorm() via addFormWorm()
 - Implements the method I2CE_Template->addFormWorm() via addFormWorm()
- Description: A collection of javascript utilities to handle form verification and submission of forms with multiple actions
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools-I2CE at least 4.0 and less than 4.1
- Paths:
 - Scripts: modules/MooTools/modules/FormWorm/scripts ^[57]
 - Css: modules/MooTools/modules/FormWorm/css ^[58]
 - Classes: modules/MooTools/modules/FormWorm/ ^[59]
I2CE_Module_FormWorm

I2CE

This describes version 4.0.6.0 of the module I2CE Basic System (I2CE) It is the top module of this package

- Source: i2ce/ ^[60]
- Module Class: The module class is implemented by I2CE_Module_Core
- Description: The I2CE Core System Configuration
- Paths:
 - Misc: /I2CE_config.inc.php ^[61], /I2CE_structure.sql ^[62]
 - Classes: /lib ^[63]
I2CE, I2CE_Configurator, I2CE_Date, I2CE_Dumper, I2CE_FileSearch, I2CE_FileSearch_Caching,
I2CE_Fuzzy, I2CE_Locales, I2CE_MagicData, I2CE_MagicDataNode, I2CE_MagicDataStorage,
I2CE_MagicDataStorageAPC, I2CE_MagicDataStorageDB, I2CE_MagicDataStorageDBAlt,
I2CE_MagicDataStorageMem, I2CE_MagicDataStorageMemcached, I2CE_MagicDataStorageMongoDB,
I2CE_MagicDataTemplate, I2CE_Module, I2CE_ModuleFactory, I2CE_Module_Core, I2CE_Process,
I2CE_TemplateMeister, I2CE_Updater, I2CE_UserAccess_Mechanism, I2CE_Util, I2CE_Validate,
I2CE_Error, I2CE_Error

- Modules: /modules ^[64]
BackgroundProcess, CustomReports, ImportExport, MimeTypes, MooTools, Timer, YAML_spyc, forms, jumper, maani-charts, magicDataExport, messageHandler, pages, swissfactory, template-data, user
- Scripts: /scripts ^[65]
- Sql: /sql ^[66]

ImportExport

This describes version 0.9 of the module Import Export Support (ImportExport)

- Source: i2ce/modules/ImportExport ^[67]
- Module Class: The module class is implemented by I2CE_Import_Export
- Description: Enables an XML Import and Export tool which allows offline access.
- Paths:
 - Sql: modules/ImportExport/sql ^[68]
 - Classes: modules/ImportExport/lib ^[69]
I2CE_Import_Export

Lists

This describes version 4.0.6.1 of the module Form Lists (Lists)

- Source: i2ce/modules/Forms/modules/Lists ^[70]
- Module Class: The module class is implemented by I2CE_Module_Lists
- Description: Database Lists
- Requirements:
 - forms at least 4.0 and less than 4.1
 - forms-storage-magicdata at least 4.0 and less than 4.1
 - TreeSelect at least 4.0 and less than 4.1
 - jumper at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Forms/modules/Lists/configs ^[71]
 - Classes: modules/Forms/modules/Lists/lib ^[72]
I2CE_FormField_MAP, I2CE_FormField_MAPPED, I2CE_FormField_MAP_MULT, I2CE_List, I2CE_Module_Lists, I2CE_PageFormLists, I2CE_PageViewList, I2CE_SimpleList
 - Templates: modules/Forms/modules/Lists/templates ^[73]
lists_type_header.html, lists_form_simple.html, button_confirm_admin.html, lists_type_list.html, lists_type_select.html, lists_type_dual_row.html, lists_type_row.html, view_list.html, lists_type_mapped.html, menu_view.html, lists_type_dual.html, lists_type_mapped_default.html, lists_form_base.html, view_list_simple.html
 - Sql: modules/Forms/modules/Lists/sql ^[74]
 - Modules: modules/Forms/modules/Lists/modules ^[75]
Lists-LinkTo

Lists-LinkTo

This describes version 4.0.5.0 of the module List Link to Data (Lists-LinkTo)

- Source: `i2ce/modules/Forms/modules/Lists/modules/ListLink` ^[76]
- Description: Lists that are linked to other data. This module is meant to be extended to defined what type of data this list links to. You can extend the `I2CE_ListLink` class to add new fields to link to. Alone this class doesn't do much.
- Requirements:
 - Lists at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/Forms/modules/Lists/modules/ListLink/configs` ^[77]
 - Modules: `modules/Forms/modules/Lists/modules/ListLink/modules` ^[78]
Lists-LinkTo-List, Lists-LinkTo-String
 - Classes: `modules/Forms/modules/Lists/modules/ListLink/` ^[79]

Lists-LinkTo-List

This describes version 4.0.5.0 of the module List Link to List (Lists-LinkTo-List)

- Source: `i2ce/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList` ^[80]
- Description: Lists that are linked to another list form. Multiple forms are defined here that can be used to link lists to other lists for different storage mechanisms. You must enable the required form storage module yourself to avoid extra modules being loaded. You should use the same form storage that is used for the List form you're linking. Certain storage mechanisms may need extra storage options defined.
- Requirements:
 - forms-storage-CSV at least 4.0 and less than 4.1
 - forms-storage-flat at least 4.0 and less than 4.1
 - forms-storage-magicdata at least 4.0 and less than 4.1
 - Lists-LinkTo at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList/configs` ^[81]
 - Classes: `modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList/` ^[82]

Lists-LinkTo-String

This describes version 4.0.5.0 of the module List Link to String (Lists-LinkTo-String)

- Source: `i2ce/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString` ^[83]
- Description: Lists that are linked to a string (id). Multiple forms are defined here that can be used to link lists to strings for different storage mechanisms. You must enable the required form storage module yourself to avoid extra modules being loaded. You should use the same form storage that is used for the List form you're linking. Certain storage mechanisms may need extra storage options defined.
- Requirements:
 - Lists-LinkTo at least 4.0 and less than 4.1
 - forms-storage-CSV at least 4.0 and less than 4.1
 - forms-storage-flat at least 4.0 and less than 4.1
 - forms-storage-magicdata at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString/configs` ^[84]

- Classes: modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString/ ^[85]

LocaleForm

This describes version 4.0.3.7 of the module Locale Form (LocaleForm)

- Source: i2ce/modules/Forms/modules/LocaleForm ^[86]
- Description:
- Requirements:
 - forms at least 4.0 and less than 4.1
 - forms-storage-eval at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Forms/modules/LocaleForm/configs ^[87]
 - Classes: modules/Forms/modules/LocaleForm/ ^[88]

LoginPage

This describes version 4.0.0 of the module Login Page (LoginPage)

- Source: i2ce/modules/Pages/modules/Login ^[89]
- Module Class: The module class is implemented by I2CE_Module_Login
- Fuzzy Methods:
 - Implements the method I2CE_Wrangler->manipulateWrangler_I2CE_logout() via manipulateWrangler()
- Description: The login Page
- Requirements:
 - pages at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Pages/modules/Login/configs ^[90]
 - Css: modules/Pages/modules/Login/css ^[91]
 - Classes: modules/Pages/modules/Login/lib ^[92]
I2CE_Module_Login, I2CE_PageFeedback, I2CE_PageForgot, I2CE_PageLogin, I2CE_PageLogout, I2CE_PagePassword
 - Templates: modules/Pages/modules/Login/templates ^[93]
password_wrong.html, login.html, password_cant_change.html, password.html, forgot.html, feedback.html, password_none.html, password_form.html, feedback_thanks.html, password_no_match.html, feedback_form.html, password_success.html

MimeTypes

This describes version 4.0.0.1 of the module Mime Types (MimeTypes)

- Source: i2ce/modules/MimeTypes ^[94]
- Description: Adds a in mime type capabilities
- Requirements:
 - I2CE at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/MimeTypes/configs ^[95]
 - Classes: modules/MimeTypes/lib ^[96]
I2CE_MimeTypes
 - Mime: modules/MimeTypes/mime ^[97]

MooTools

This describes version 1.2.4 of the module MooTools (MooTools)

- Source: i2ce/modules/MooTools^[98]
- Description: MooTools javascript library
- Requirements:
 - I2CE at least 4.0 and less than 4.1
- Paths:
 - Scripts: modules/MooTools/scripts^[99]
 - Modules: modules/MooTools/modules^[100]
ColorPicker, DatePicker, FormWorm, MooTools-I2CE, StretchPage, TreeSelect, fancyDebug, menu_select
 - Classes: modules/MooTools/^[101]
I2CE_MootoolsCore, I2CE_Module_Debugging, I2CE_Module_MenuSelect, I2CE_Module_StretchPage, I2CE_Module_TreeSelect

MooTools-I2CE

This describes version 4.0.0 of the module I2CE Library (MooTools-I2CE)

- Source: i2ce/modules/MooTools/modules/Core^[102]
- Module Class: The module class is implemented by I2CE_MootoolsCore
- Fuzzy Methods:
 - Implements the method I2CE_Page->getClassValue() via getClassValue()
 - Implements the method I2CE_Template->getClassValue() via getClassValue()
 - Implements the method I2CE_Page->loadClassValues() via loadClassValues()
 - Implements the method I2CE_Template->loadClassValues() via loadClassValues()
 - Implements the method I2CE_Page->setClassValue() via setClassValue()
 - Implements the method I2CE_Template->setClassValue() via setClassValue()
 - Implements the method I2CE_Page->setClassValues() via setClassValues()
 - Implements the method I2CE_Template->setClassValues() via setClassValues()
- Description: I2CE MooTools core library
- Requirements:
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MooTools/modules/Core/scripts^[103]
 - Css: modules/MooTools/modules/Core/css^[104]
 - Classes: modules/MooTools/modules/Core/^[105]

Options

This describes version 4.0.0 of the module I2CE Options Data (Options)

- Source: `i2ce/modules/TemplateData/modules/Options` ^[106]
- Module Class: The module class is implemented by `I2CE_Template_Options`
- Fuzzy Methods:
 - Implements the method `I2CE_Page->addOption()` via `addOption()`
 - Implements the method `I2CE_Template->addOption()` via `addOption()`
 - Implements the method `I2CE_Page->addOptions()` via `addOptions()`
 - Implements the method `I2CE_Template->addOptions()` via `addOptions()`
- Description: Adds options data to the template
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - `template-data` at least 4.0 and less than 4.1
- Paths:
 - Classes: `modules/TemplateData/modules/Options/` ^[107]
`I2CE_Template_Options`

PrintedForms

This describes version 4.0.5.6 of the module Printed Forms (PrintedForms)

- Source: `i2ce/modules/Forms/modules/PrintedForms` ^[108]
- Module Class: The module class is implemented by `I2CE_Module_PrintedForms`
- Description: Engine used to generated standard printed forms from a form relationship
- Requirements:
 - `pages` at least 4.0 and less than 4.1
 - `formRelationships` at least 4.0 and less than 4.1
 - `textlayout` at least 4.0 and less than 4.1
- Optionally Enables: `BinField`
- Paths:
 - Configs: `modules/Forms/modules/PrintedForms/configs` ^[109]
 - Classes: `modules/Forms/modules/PrintedForms/lib` ^[110]
`I2CE_Module_PrintedForms`, `I2CE_Page_PrintedForms`, `I2CE_PrintedForm_Render`,
`I2CE_PrintedForm_Render_PDF`
 - Images: `modules/Forms/modules/PrintedForms/images` ^[111]
 - Templates: `modules/Forms/modules/PrintedForms/templates` ^[112]
`printed_forms_menu_archive_each.html`, `printed_forms_menu_each.html`, `printed_forms_menu.html`

ReportArchiver

This describes version 4.0.6.5 of the module Custom Reports Archiver (ReportArchiver)

- Source: i2ce/modules/CustomReports/modules/ReportArchiver ^[113]
- Module Class: The module class is implemented by I2CE_Module_ReportArchiver
- Description: Custom Reports
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
 - CustomReports_Export at least 4.0 and less than 4.1
 - BinField at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/CustomReports/modules/ReportArchiver/configs ^[114]
 - Classes: modules/CustomReports/modules/ReportArchiver/lib ^[115]
I2CE_Module_ReportArchiver, I2CE_Page_ArchiveReport, I2CE_Page_CustomReport_ArchiveMenu
 - Templates: modules/CustomReports/modules/ReportArchiver/templates ^[116]
reportArchive_menu.html, archiveReports_menu.html

StretchPage

This describes version 4.0.0 of the module Page Stretcher (StretchPage)

- Source: i2ce/modules/MooTools/modules/StretchPage ^[117]
- Module Class: The module class is implemented by I2CE_Module_StretchPage
- Description: Makes sure that the page is at least as high as the browser window. Use bad adding a div with id='StretchPage' to the containing element that you want stretched.
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Classes: modules/MooTools/modules/StretchPage/lib ^[118]
 - Scripts: modules/MooTools/modules/StretchPage/scripts ^[119]
 - Css: modules/MooTools/modules/StretchPage/css ^[120]

Tags

This describes version 4.0.0 of the module Tags (Tags)

- Source: i2ce/modules/TemplateData/modules/Tags ^[121]
- Module Class: The module class is implemented by I2CE_Module_Tags
- Description: Adds module and script tag processing to the template
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - template-data at least 4.0 and less than 4.1
 - DisplayData at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/TemplateData/modules/Tags/ ^[122]
I2CE_Module_Tags, I2CE_PluralForms

Timer

This describes version 4.0.0 of the module I2CE Timer (Timer)

- Source: i2ce/modules/Timer^[123]
- Module Class: The module class is implemented by I2CE_Timer
- Description: Adds a timer class
- Requirements:
 - I2CE at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Timer/configs^[124]
 - Classes: modules/Timer/^[125]
I2CE_Timer

TreeSelect

This describes version 4.0.0 of the module Tree Select (TreeSelect)

- Source: i2ce/modules/MooTools/modules/TreeSelect^[126]
- Module Class: The module class is implemented by I2CE_Module_TreeSelect
- Fuzzy Methods:
 - Implements the method I2CE_Page->addAutoCompleteInputTreeById() via addAutoCompleteInputTreeById()
 - Implements the method I2CE_Template->addAutoCompleteInputTreeById() via addAutoCompleteInputTreeById()
 - Implements the method I2CE_Page->addAutoCompleteInputTree() via addAutoCompleteInputTree()
 - Implements the method I2CE_Template->addAutoCompleteInputTree() via addAutoCompleteInputTree()
- Description: Tree Select
- Requirements:
 - MooTools-I2CE at least 4.0 and less than 4.1
- Paths:
 - Scripts: modules/MooTools/modules/TreeSelect/scripts^[127]
 - Css: modules/MooTools/modules/TreeSelect/css^[128]
 - Classes: modules/MooTools/modules/TreeSelect/^[129]

UserAccess

This describes version 4.0.0 of the module User (UserAccess)

- Source: i2ce/modules/User/modules/UserAccess^[130]
- Module Class: The module class is implemented by I2CE_Module_UserAccess
- Description: Provides Deafult User Access Mechansim
- Requirements:
 - user at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/User/modules/UserAccess/lib^[131]
I2CE_Module_UserAccess, I2CE_UserAccess
 - Sql: modules/User/modules/UserAccess/sql^[132]
 - Templates: modules/User/modules/UserAccess/templates^[133]
user_form.html, user_form_edit.html

UserAccess_DHIS

This describes version 4.0.0 of the module User (UserAccess_DHIS)

- Source: i2ce/modules/User/modules/UserAccess_DHIS ^[134]
- Module Class: The module class is implemented by I2CE_Module_UserAccess_DHIS
- Description: Provides DHIS User Access Mechansim
- Paths:
 - Classes: modules/User/modules/UserAccess_DHIS/lib ^[135]
I2CE_Module_UserAccess_DHIS, I2CE_UserAccess_DHIS
 - Sql: modules/User/modules/UserAccess_DHIS/sql ^[136]
 - Templates: modules/User/modules/UserAccess_DHIS/templates ^[137]
user_form_DHIS.html, user_form_edit_DHIS.html

UserAccess_LDAP

This describes version 4.0.0 of the module User (UserAccess_LDAP)

- Source: i2ce/modules/User/modules/UserAccess_LDAP ^[138]
- Module Class: The module class is implemented by I2CE_Module_UserAccess_LDAP
- Description: Provides LDAP User Access Mechansim
- Paths:
 - Classes: modules/User/modules/UserAccess_LDAP/lib ^[139]
I2CE_Module_UserAccess_LDAP, I2CE_UserAccess_LDAP
 - Templates: modules/User/modules/UserAccess_LDAP/templates ^[140]
user_form_LDAP.html, user_form_edit_LDAP.html

UserAccess_LDAP_Hybrid

This describes version 4.0.0 of the module User (UserAccess_LDAP_Hybrid)

- Source: i2ce/modules/User/modules/UserAccess_LDAP_Hybrid ^[141]
- Module Class: The module class is implemented by I2CE_Module_UserAccess_LDAP_Hybrid
- Description: Provides a hybrid database and LDAP User Access Mechansim
- Paths:
 - Classes: modules/User/modules/UserAccess_LDAP_Hybrid/lib ^[142]
I2CE_Module_UserAccess_LDAP_Hybrid, I2CE_UserAccess_LDAP_DB
 - Templates: modules/User/modules/UserAccess_LDAP_Hybrid/templates ^[143]
user_form_LDAP_DB.html, user_form_edit_LDAP_DB.html

UserForm

This describes version 4.0.7 of the module User Form (UserForm)

- Source: i2ce/modules/Forms/modules/UserForm ^[144]
- Description:
- Requirements:
 - forms at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
 - LocaleForm at least 4.0 and less than 4.1
- Paths:

- Configs: modules/Forms/modules/UserForm/configs ^[145]
- Classes: modules/Forms/modules/UserForm/lib ^[146]
I2CE_FormStorage_userform, I2CE_PageFormUser, I2CE_User_Form
- Templates: modules/Forms/modules/UserForm/templates ^[147]
button_confirm_user.html, user_list.html

YAML_spyc

This describes version 0.3.0 of the module YAML (YAML_spyc)

- Source: i2ce/modules/YAML ^[148]
- Module Class: The module class is implemented by I2CE_Module_YAML
- Fuzzy Methods:
 - Implements the method I2CE_Configurator->loadConfigFile_YAML() via loadConfigFile_YAML()
- Description: YAML parser provided by spyc. Also enabled processing of .YAML config files
- Paths:
 - Classes: modules/YAML/lib ^[149]
I2CE_MagicDataTemplate_YAML, I2CE_Module_YAML, Spyc
 - Xml: modules/YAML/xml ^[150]

admin

This describes version 4.0.0 of the module Modules Administration (admin)

- Source: i2ce/modules/Pages/modules/Admin ^[151]
- Description: The I2CE module administration system
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
 - FormWorm at least 4.0 and less than 4.1
- Optionally Enables: swissConfig
- Paths:
 - Configs: modules/Pages/modules/Admin/configs ^[152]
 - Classes: modules/Pages/modules/Admin/lib ^[153]
I2CE_PageAdmin
 - Templates: modules/Pages/modules/Admin/templates ^[154]
module_module.html, module_menu.html, module_sub_module.html, module_category.html,
no_configuration.html
 - Modules: modules/Pages/modules/Admin/modules ^[155]
modulePrompter
 - Css: modules/Pages/modules/Admin/css ^[156]
 - Scripts: modules/Pages/modules/Admin/scripts ^[157]
 - Images: modules/Pages/modules/Admin/images ^[158]

fancyDebug

This describes version 4.0.0 of the module Fancy Debugger (fancyDebug)

- Source: i2ce/modules/MooTools/modules/Debugger^[159]
- Module Class: The module class is implemented by I2CE_Module_Debugging
- Description: A fancy error displaying system
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MooTools/modules/Debugger/scripts^[160]
 - Images: modules/MooTools/modules/Debugger/images^[161]
 - Css: modules/MooTools/modules/Debugger/css^[162]
 - Classes: modules/MooTools/modules/Debugger/^[163]

field-limits

This describes version 4.0.5 of the module Form Limits (field-limits)

- Source: i2ce/modules/Forms/modules/FieldLimits^[164]
- Module Class: The module class is implemented by I2CE_Module_FieldLimits
- Fuzzy Methods:
 - Implements the method I2CE_FormField->getLimitStyles() via getFieldLimitStyles()
 - Implements the method I2CE_FormField->generateLimit() via generateFieldLimit()
 - Implements the method I2CE_FormField->generateLimit_null() via generateLimit_null()
 - Implements the method I2CE_FormField->generateLimit_not_null() via generateLimit_not_null()
 - Implements the method I2CE_FormField->generateLimit_null_not_null() via generateLimit_not_null()
 - Implements the method I2CE_FormField->checkLimit_null() via checkLimit_null()
 - Implements the method I2CE_FormField->checkLimit_not_null() via checkLimit_not_null()
 - Implements the method I2CE_FormField->checkLimit_null_not_null() via checkLimit_not_null()
 - Implements the method I2CE_FormField->checkLimitString_null() via checkLimitString_null()
 - Implements the method I2CE_FormField->checkLimitString_not_null() via checkLimitString_not_null()
 - Implements the method I2CE_FormField->checkLimitString_null_not_null() via checkLimitString_null_not_null()
 - Implements the method I2CE_FormField->getLimitMenu_null() via I2CE_FormField_DISPLAYFIELDSTYLE_null()
 - Implements the method I2CE_FormField->getLimitMenu_not_null() via I2CE_FormField_DISPLAYFIELDSTYLE_not_null()
 - Implements the method I2CE_FormField->getLimitMenu_null_not_null() via I2CE_FormField_DISPLAYFIELDSTYLE_null_not_null()
 - Implements the method I2CE_FormField->processLimitMenu_null() via I2CE_FormField_PROCESSFIELDSTYLE_null()
 - Implements the method I2CE_FormField->processLimitMenu_not_null() via I2CE_FormField_PROCESSFIELDSTYLE_not_null()
 - Implements the method I2CE_FormField->processLimitMenu_null_not_null() via I2CE_FormField_PROCESSFIELDSTYLE_null_not_null()
 - Implements the method I2CE_FormField_DB_DATE->generateLimit_null() via generateLimit_DB_DATE_null()

- Implements the method I2CE_FormField_DB_DATE->generateLimit_not_null() via generateLimit_DB_DATE_not_null()
 - Implements the method I2CE_FormField_DB_DATE->generateLimit_null_not_null() via generateLimit_DB_DATE_null_not_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_null() via checkLimit_DB_DATE_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_not_null() via checkLimit_DB_DATE_not_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_null_not_null() via checkLimit_DB_DATE_null_not_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_null() via checkLimitString_DB_DATE_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_not_null() via checkLimitString_DB_DATE_not_null()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_null_not_null() via checkLimitString_DB_DATE_null_not_null()
 - Implements the method I2CE_FormField->generateLimit_max_parent() via generateLimit_max_parent()
 - Implements the method I2CE_FormField->generateLimit_min_parent() via generateLimit_min_parent()
 - Implements the method I2CE_FormField->generateLimit_max_parent_form() via generateLimit_max_parent_form()
 - Implements the method I2CE_FormField->generateLimit_min_parent_form() via generateLimit_min_parent_form()
 - Implements the method I2CE_FormField->getLimitMenu_max_parent() via I2CE_FormField_DISPLAYFIELDSTYLE_max_parent()
 - Implements the method I2CE_FormField->getLimitMenu_min_parent() via I2CE_FormField_DISPLAYFIELDSTYLE_min_parent()
 - Implements the method I2CE_FormField->getLimitMenu_max_parent_form() via I2CE_FormField_DISPLAYFIELDSTYLE_max_parent_form()
 - Implements the method I2CE_FormField->getLimitMenu_min_parent_form() via I2CE_FormField_DISPLAYFIELDSTYLE_min_parent_form()
 - Implements the method I2CE_FormField->processLimitMenu_max_parent() via I2CE_FormField_PROCESSFIELDSTYLE_max_parent()
 - Implements the method I2CE_FormField->processLimitMenu_min_parent() via I2CE_FormField_PROCESSFIELDSTYLE_min_parent()
 - Implements the method I2CE_FormField->processLimitMenu_max_parent_form() via I2CE_FormField_PROCESSFIELDSTYLE_max_parent_form()
 - Implements the method I2CE_FormField->processLimitMenu_min_parent_form() via I2CE_FormField_PROCESSFIELDSTYLE_min_parent_form()
 - Implements the method I2CE_FormField_BOOL->generateLimit_truefalse() via generateLimit_BOOL_truefalse()
 - Implements the method I2CE_FormField_BOOL->generateLimit_true() via generateLimit_BOOL_true()
 - Implements the method I2CE_FormField_BOOL->generateLimit_false() via generateLimit_BOOL_false()
 - Implements the method I2CE_FormField_YESNO->generateLimit_yesno() via generateLimit_YESNO_yesno()
 - Implements the method I2CE_FormField_YESNO->generateLimit_yes() via generateLimit_YESNO_yes()
 - Implements the method I2CE_FormField_YESNO->generateLimit_no() via generateLimit_YESNO_no()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_in() via generateLimit_DB_INT_in()
-

- Implements the method I2CE_FormField_DB_STRING->generateLimit_in() via generateLimit_DB_STRING_in()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_in() via generateLimit_DB_TEXT_in()
 - Implements the method I2CE_FormField_DB_DATE->generateLimit_in() via generateLimit_DB_DATE_in()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_equals() via generateLimit_DB_INT_equals()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_equals() via generateLimit_DB_STRING_equals()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_equals() via generateLimit_DB_TEXT_equals()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_greaterthan() via generateLimit_DB_INT_greaterthan()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_greaterthan() via generateLimit_DB_STRING_greaterthan()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_greaterthan() via generateLimit_DB_TEXT_greaterthan()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_lessthan() via generateLimit_DB_INT_lessthan()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_lessthan() via generateLimit_DB_STRING_lessthan()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_lessthan() via generateLimit_DB_TEXT_lessthan()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_greaterthan_equals() via generateLimit_DB_INT_greaterthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_greaterthan_equals() via generateLimit_DB_STRING_greaterthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_greaterthan_equals() via generateLimit_DB_TEXT_greaterthan_equals()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_lessthan_equals() via generateLimit_DB_INT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_lessthan_equals() via generateLimit_DB_STRING_lessthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_lessthan_equals() via generateLimit_DB_TEXT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_INT->generateLimit_between() via generateLimit_DB_INT_between()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_between() via generateLimit_DB_STRING_between()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_between() via generateLimit_DB_TEXT_between()
 - Implements the method I2CE_FormField_DB_DATE->generateLimit_greaterthan_now() via generateLimit_greaterthan_now()
 - Implements the method I2CE_FormField_DB_DATE->generateLimit_lessthan_now() via generateLimit_lessthan_now()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_like() via generateLimit_DB_STRING_like()
-

- Implements the method I2CE_FormField_DB_TEXT->generateLimit_like() via generateLimit_DB_TEXT_like()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_lowerlike() via generateLimit_DB_STRING_lowerlike()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_lowerlike() via generateLimit_DB_TEXT_lowerlike()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_lowerequals() via generateLimit_DB_STRING_lowerequals()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_lowerequals() via generateLimit_DB_TEXT_lowerequals()
 - Implements the method I2CE_FormField_DB_STRING->generateLimit_contains() via generateLimit_DB_STRING_contains()
 - Implements the method I2CE_FormField_DB_TEXT->generateLimit_contains() via generateLimit_DB_TEXT_contains()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_null() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_null()
 - Implements the method I2CE_FormField_DB_DATE->processLimitMenu_null() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_null()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_not_null() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_not_null()
 - Implements the method I2CE_FormField_DB_DATE->processLimitMenu_not_null() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_not_null()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_null_not_null() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_null_not_null()
 - Implements the method I2CE_FormField_DB_DATE->processLimitMenu_null_not_null() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_null_not_null()
 - Implements the method I2CE_FormField_BOOL->checkLimit_truefalse() via checkLimit_BOOL_truefalse()
 - Implements the method I2CE_FormField_BOOL->checkLimitString_truefalse() via checkLimitString_BOOL_truefalse()
 - Implements the method I2CE_FormField_BOOL->getLimitMenu_truefalse() via I2CE_FormField_BOOL_DISPLAYFIELDSTYLE_truefalse()
 - Implements the method I2CE_FormField_BOOL->processLimitMenu_truefalse() via I2CE_FormField_BOOL_PROCESSFIELDSTYLE_truefalse()
 - Implements the method I2CE_FormField_BOOL->checkLimit_true() via checkLimit_BOOL_true()
 - Implements the method I2CE_FormField_BOOL->checkLimitString_true() via checkLimitString_BOOL_true()
 - Implements the method I2CE_FormField_BOOL->getLimitMenu_true() via I2CE_FormField_BOOL_DISPLAYFIELDSTYLE_true()
 - Implements the method I2CE_FormField_BOOL->processLimitMenu_true() via I2CE_FormField_BOOL_PROCESSFIELDSTYLE_true()
 - Implements the method I2CE_FormField_BOOL->checkLimit_false() via checkLimit_BOOL_false()
 - Implements the method I2CE_FormField_BOOL->checkLimitString_false() via checkLimitString_BOOL_false()
 - Implements the method I2CE_FormField_BOOL->getLimitMenu_false() via I2CE_FormField_BOOL_DISPLAYFIELDSTYLE_false()
 - Implements the method I2CE_FormField_BOOL->processLimitMenu_false() via I2CE_FormField_BOOL_PROCESSFIELDSTYLE_false()
-

- Implements the method I2CE_FormField_YESNO->checkLimit_yesno() via checkLimit_YESNO_yesno()
 - Implements the method I2CE_FormField_YESNO->checkLimitString_yesno() via checkLimitString_YESNO_yesno()
 - Implements the method I2CE_FormField_YESNO->getLimitMenu_yesno() via I2CE_FormField_YESNO_DISPLAYFIELDSTYLE_yesno()
 - Implements the method I2CE_FormField_YESNO->processLimitMenu_yesno() via I2CE_FormField_YESNO_PROCESSFIELDSTYLE_yesno()
 - Implements the method I2CE_FormField_YESNO->checkLimit_yes() via checkLimit_YESNO_yes()
 - Implements the method I2CE_FormField_YESNO->checkLimitString_yes() via checkLimitString_YESNO_yes()
 - Implements the method I2CE_FormField_YESNO->getLimitMenu_yes() via I2CE_FormField_YESNO_DISPLAYFIELDSTYLE_yes()
 - Implements the method I2CE_FormField_YESNO->processLimitMenu_yes() via I2CE_FormField_YESNO_PROCESSFIELDSTYLE_yes()
 - Implements the method I2CE_FormField_YESNO->checkLimit_no() via checkLimit_YESNO_no()
 - Implements the method I2CE_FormField_YESNO->checkLimitString_no() via checkLimitString_YESNO_no()
 - Implements the method I2CE_FormField_YESNO->getLimitMenu_no() via I2CE_FormField_YESNO_DISPLAYFIELDSTYLE_no()
 - Implements the method I2CE_FormField_YESNO->processLimitMenu_no() via I2CE_FormField_YESNO_PROCESSFIELDSTYLE_no()
 - Implements the method I2CE_FormField_DB_INT->checkLimit_in() via checkLimit_DB_INT_in()
 - Implements the method I2CE_FormField_DB_INT->checkLimitString_in() via checkLimitString_DB_INT_in()
 - Implements the method I2CE_FormField_DB_INT->getLimitMenu_in() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_INT->processLimitMenu_in() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_in() via checkLimit_DB_STRING_in()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_in() via checkLimitString_DB_STRING_in()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_in() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_in() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_in() via checkLimit_DB_TEXT_in()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_in() via checkLimitString_DB_TEXT_in()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_in() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_in() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_in() via checkLimit_DB_DATE_in()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_in() via checkLimitString_DB_DATE_in()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_in() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_in()
-

- Implements the method I2CE_FormField_DB_DATE->processLimitMenu_in() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_in()
 - Implements the method I2CE_FormField_DB_INT->checkLimit_equals() via checkLimit_DB_INT_equals()
 - Implements the method I2CE_FormField_DB_INT->checkLimitString_equals() via checkLimitString_DB_INT_equals()
 - Implements the method I2CE_FormField_DB_INT->getLimitMenu_equals() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_INT->processLimitMenu_equals() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_equals() via checkLimit_DB_STRING_equals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_equals() via checkLimitString_DB_STRING_equals()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_equals() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_equals() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_equals() via checkLimit_DB_TEXT_equals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_equals() via checkLimitString_DB_TEXT_equals()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_equals() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_equals() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_equals()
 - Implements the method I2CE_FormField_DB_INT->checkLimit_greaterthan() via checkLimit_DB_INT_greaterthan()
 - Implements the method I2CE_FormField_DB_INT->checkLimitString_greaterthan() via checkLimitString_DB_INT_greaterthan()
 - Implements the method I2CE_FormField_DB_INT->getLimitMenu_greaterthan() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_greaterthan()
 - Implements the method I2CE_FormField_DB_INT->processLimitMenu_greaterthan() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_greaterthan()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_greaterthan() via checkLimit_DB_STRING_greaterthan()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_greaterthan() via checkLimitString_DB_STRING_greaterthan()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_greaterthan() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_greaterthan()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_greaterthan() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_greaterthan()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_greaterthan() via checkLimit_DB_TEXT_greaterthan()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_greaterthan() via checkLimitString_DB_TEXT_greaterthan()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_greaterthan() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_greaterthan()
-

- Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_greaterthan() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_greaterthan()
- Implements the method I2CE_FormField_DB_INT->checkLimit_lessthan() via checkLimit_DB_INT_lessthan()
- Implements the method I2CE_FormField_DB_INT->checkLimitString_lessthan() via checkLimitString_DB_INT_lessthan()
- Implements the method I2CE_FormField_DB_INT->getLimitMenu_lessthan() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_INT->processLimitMenu_lessthan() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_STRING->checkLimit_lessthan() via checkLimit_DB_STRING_lessthan()
- Implements the method I2CE_FormField_DB_STRING->checkLimitString_lessthan() via checkLimitString_DB_STRING_lessthan()
- Implements the method I2CE_FormField_DB_STRING->getLimitMenu_lessthan() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_STRING->processLimitMenu_lessthan() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_TEXT->checkLimit_lessthan() via checkLimit_DB_TEXT_lessthan()
- Implements the method I2CE_FormField_DB_TEXT->checkLimitString_lessthan() via checkLimitString_DB_TEXT_lessthan()
- Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_lessthan() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_lessthan() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_lessthan()
- Implements the method I2CE_FormField_DB_INT->checkLimit_greaterthan_equals() via checkLimit_DB_INT_greaterthan_equals()
- Implements the method I2CE_FormField_DB_INT->checkLimitString_greaterthan_equals() via checkLimitString_DB_INT_greaterthan_equals()
- Implements the method I2CE_FormField_DB_INT->getLimitMenu_greaterthan_equals() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_greaterthan_equals()
- Implements the method I2CE_FormField_DB_INT->processLimitMenu_greaterthan_equals() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_greaterthan_equals()
- Implements the method I2CE_FormField_DB_STRING->checkLimit_greaterthan_equals() via checkLimit_DB_STRING_greaterthan_equals()
- Implements the method I2CE_FormField_DB_STRING->checkLimitString_greaterthan_equals() via checkLimitString_DB_STRING_greaterthan_equals()
- Implements the method I2CE_FormField_DB_STRING->getLimitMenu_greaterthan_equals() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_greaterthan_equals()
- Implements the method I2CE_FormField_DB_STRING->processLimitMenu_greaterthan_equals() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_greaterthan_equals()
- Implements the method I2CE_FormField_DB_TEXT->checkLimit_greaterthan_equals() via checkLimit_DB_TEXT_greaterthan_equals()
- Implements the method I2CE_FormField_DB_TEXT->checkLimitString_greaterthan_equals() via checkLimitString_DB_TEXT_greaterthan_equals()

- Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_greaterthan_equals() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_greaterthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_greaterthan_equals() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_greaterthan_equals()
 - Implements the method I2CE_FormField_DB_INT->checkLimit_lessthan_equals() via checkLimit_DB_INT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_INT->checkLimitString_lessthan_equals() via checkLimitString_DB_INT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_INT->getLimitMenu_lessthan_equals() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_INT->processLimitMenu_lessthan_equals() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_lessthan_equals() via checkLimit_DB_STRING_lessthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_lessthan_equals() via checkLimitString_DB_STRING_lessthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_lessthan_equals() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_lessthan_equals() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_lessthan_equals() via checkLimit_DB_TEXT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_lessthan_equals() via checkLimitString_DB_TEXT_lessthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_lessthan_equals() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_lessthan_equals() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_lessthan_equals()
 - Implements the method I2CE_FormField_DB_INT->checkLimit_between() via checkLimit_DB_INT_between()
 - Implements the method I2CE_FormField_DB_INT->checkLimitString_between() via checkLimitString_DB_INT_between()
 - Implements the method I2CE_FormField_DB_INT->getLimitMenu_between() via I2CE_FormField_DB_INT_DISPLAYFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_INT->processLimitMenu_between() via I2CE_FormField_DB_INT_PROCESSFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_between() via checkLimit_DB_STRING_between()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_between() via checkLimitString_DB_STRING_between()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_between() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_between() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_between() via checkLimit_DB_TEXT_between()
-

- Implements the method I2CE_FormField_DB_TEXT->checkLimitString_between() via checkLimitString_DB_TEXT_between()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_between() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_between() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_between()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_greaterthan_now() via checkLimit_DB_DATE_greaterthan_now()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_greaterthan_now() via checkLimitString_DB_DATE_greaterthan_now()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_greaterthan_now() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_greaterthan_now()
 - Implements the method I2CE_FormField_DB_DATE->processLimitMenu_greaterthan_now() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_greaterthan_now()
 - Implements the method I2CE_FormField_DB_DATE->checkLimit_lessthan_now() via checkLimit_DB_DATE_lessthan_now()
 - Implements the method I2CE_FormField_DB_DATE->checkLimitString_lessthan_now() via checkLimitString_DB_DATE_lessthan_now()
 - Implements the method I2CE_FormField_DB_DATE->getLimitMenu_lessthan_now() via I2CE_FormField_DB_DATE_DISPLAYFIELDSTYLE_lessthan_now()
 - Implements the method I2CE_FormField_DB_DATE->processLimitMenu_lessthan_now() via I2CE_FormField_DB_DATE_PROCESSFIELDSTYLE_lessthan_now()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_like() via checkLimit_DB_STRING_like()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_like() via checkLimitString_DB_STRING_like()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_like() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_like()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_like() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_like()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_like() via checkLimit_DB_TEXT_like()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_like() via checkLimitString_DB_TEXT_like()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_like() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_like()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_like() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_like()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_lowerlike() via checkLimit_DB_STRING_lowerlike()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_lowerlike() via checkLimitString_DB_STRING_lowerlike()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_lowerlike() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_lowerlike()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_lowerlike() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_lowerlike()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_lowerlike() via checkLimit_DB_TEXT_lowerlike()
-

- Implements the method I2CE_FormField_DB_TEXT->checkLimitString_lowerlike() via checkLimitString_DB_TEXT_lowerlike()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_lowerlike() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_lowerlike()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_lowerlike() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_lowerlike()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_lowerequals() via checkLimit_DB_STRING_lowerequals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_lowerequals() via checkLimitString_DB_STRING_lowerequals()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_lowerequals() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_lowerequals()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_lowerequals() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_lowerequals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_lowerequals() via checkLimit_DB_TEXT_lowerequals()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_lowerequals() via checkLimitString_DB_TEXT_lowerequals()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_lowerequals() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_lowerequals()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_lowerequals() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_lowerequals()
 - Implements the method I2CE_FormField_DB_STRING->checkLimit_contains() via checkLimit_DB_STRING_contains()
 - Implements the method I2CE_FormField_DB_STRING->checkLimitString_contains() via checkLimitString_DB_STRING_contains()
 - Implements the method I2CE_FormField_DB_STRING->getLimitMenu_contains() via I2CE_FormField_DB_STRING_DISPLAYFIELDSTYLE_contains()
 - Implements the method I2CE_FormField_DB_STRING->processLimitMenu_contains() via I2CE_FormField_DB_STRING_PROCESSFIELDSTYLE_contains()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimit_contains() via checkLimit_DB_TEXT_contains()
 - Implements the method I2CE_FormField_DB_TEXT->checkLimitString_contains() via checkLimitString_DB_TEXT_contains()
 - Implements the method I2CE_FormField_DB_TEXT->getLimitMenu_contains() via I2CE_FormField_DB_TEXT_DISPLAYFIELDSTYLE_contains()
 - Implements the method I2CE_FormField_DB_TEXT->processLimitMenu_contains() via I2CE_FormField_DB_TEXT_PROCESSFIELDSTYLE_contains()
 - Implements the method I2CE_FormField_DATE_YMD->generateLimit_equals() via DATE_generateLimit_DATE_YMD_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_equals() via DATE_checkLimit_DATE_YMD_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimitString_equals() via DATE_checkLimit_DATE_YMD_equals()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_equals() via DATE_getLimitMenu_DATE_YMD_equals()
-

- Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_equals() via DATE_processLimitMenu_DATE_YMD_equals()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_equals() via DATE_generateLimit_DATE_MD_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_equals() via DATE_checkLimit_DATE_MD_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_equals() via DATE_checkLimit_DATE_MD_equals()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_equals() via DATE_getLimitMenu_DATE_MD_equals()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_equals() via DATE_processLimitMenu_DATE_MD_equals()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_equals() via DATE_generateLimit_DATE_Y_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_equals() via DATE_checkLimit_DATE_Y_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_equals() via DATE_checkLimit_DATE_Y_equals()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_equals() via DATE_getLimitMenu_DATE_Y_equals()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_equals() via DATE_processLimitMenu_DATE_Y_equals()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_equals() via DATE_generateLimit_DATE_HMS_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimit_equals() via DATE_checkLimit_DATE_HMS_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimitString_equals() via DATE_checkLimit_DATE_HMS_equals()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_equals() via DATE_getLimitMenu_DATE_HMS_equals()
 - Implements the method I2CE_FormField_DATE_HMS->processLimitMenu_equals() via DATE_processLimitMenu_DATE_HMS_equals()
 - Implements the method I2CE_FormField_DATE_TIME->generateLimit_equals() via DATE_generateLimit_DATE_TIME_equals()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimit_equals() via DATE_checkLimit_DATE_TIME_equals()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimitString_equals() via DATE_checkLimit_DATE_TIME_equals()
 - Implements the method I2CE_FormField_DATE_TIME->getLimitMenu_equals() via DATE_getLimitMenu_DATE_TIME_equals()
 - Implements the method I2CE_FormField_DATE_TIME->processLimitMenu_equals() via DATE_processLimitMenu_DATE_TIME_equals()
 - Implements the method I2CE_FormField_DATE_YMD->generateLimit_greaterthan() via DATE_generateLimit_DATE_YMD_greaterthan()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_greaterthan() via DATE_checkLimit_DATE_YMD_greaterthan()
-

- Implements the method I2CE_FormField_DATE_YMD->checkLimitString_greaterthan() via DATE_checkLimit_DATE_YMD_greaterthan()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_greaterthan() via DATE_getLimitMenu_DATE_YMD_greaterthan()
 - Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_greaterthan() via DATE_processLimitMenu_DATE_YMD_greaterthan()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_greaterthan() via DATE_generateLimit_DATE_MD_greaterthan()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_greaterthan() via DATE_checkLimit_DATE_MD_greaterthan()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_greaterthan() via DATE_checkLimit_DATE_MD_greaterthan()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_greaterthan() via DATE_getLimitMenu_DATE_MD_greaterthan()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_greaterthan() via DATE_processLimitMenu_DATE_MD_greaterthan()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_greaterthan() via DATE_generateLimit_DATE_Y_greaterthan()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_greaterthan() via DATE_checkLimit_DATE_Y_greaterthan()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_greaterthan() via DATE_checkLimit_DATE_Y_greaterthan()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_greaterthan() via DATE_getLimitMenu_DATE_Y_greaterthan()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_greaterthan() via DATE_processLimitMenu_DATE_Y_greaterthan()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_greaterthan() via DATE_generateLimit_DATE_HMS_greaterthan()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimit_greaterthan() via DATE_checkLimit_DATE_HMS_greaterthan()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimitString_greaterthan() via DATE_checkLimit_DATE_HMS_greaterthan()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_greaterthan() via DATE_getLimitMenu_DATE_HMS_greaterthan()
 - Implements the method I2CE_FormField_DATE_HMS->processLimitMenu_greaterthan() via DATE_processLimitMenu_DATE_HMS_greaterthan()
 - Implements the method I2CE_FormField_DATE_TIME->generateLimit_greaterthan() via DATE_generateLimit_DATE_TIME_greaterthan()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimit_greaterthan() via DATE_checkLimit_DATE_TIME_greaterthan()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimitString_greaterthan() via DATE_checkLimit_DATE_TIME_greaterthan()
 - Implements the method I2CE_FormField_DATE_TIME->getLimitMenu_greaterthan() via DATE_getLimitMenu_DATE_TIME_greaterthan()
 - Implements the method I2CE_FormField_DATE_TIME->processLimitMenu_greaterthan() via DATE_processLimitMenu_DATE_TIME_greaterthan()
-

- Implements the method I2CE_FormField_DATE_YMD->generateLimit_less-than() via DATE_generateLimit_DATE_YMD_less-than()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_less-than() via DATE_checkLimit_DATE_YMD_less-than()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimitString_less-than() via DATE_checkLimit_DATE_YMD_less-than()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_less-than() via DATE_getLimitMenu_DATE_YMD_less-than()
 - Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_less-than() via DATE_processLimitMenu_DATE_YMD_less-than()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_less-than() via DATE_generateLimit_DATE_MD_less-than()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_less-than() via DATE_checkLimit_DATE_MD_less-than()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_less-than() via DATE_checkLimit_DATE_MD_less-than()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_less-than() via DATE_getLimitMenu_DATE_MD_less-than()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_less-than() via DATE_processLimitMenu_DATE_MD_less-than()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_less-than() via DATE_generateLimit_DATE_Y_less-than()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_less-than() via DATE_checkLimit_DATE_Y_less-than()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_less-than() via DATE_checkLimit_DATE_Y_less-than()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_less-than() via DATE_getLimitMenu_DATE_Y_less-than()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_less-than() via DATE_processLimitMenu_DATE_Y_less-than()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_less-than() via DATE_generateLimit_DATE_HMS_less-than()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimit_less-than() via DATE_checkLimit_DATE_HMS_less-than()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimitString_less-than() via DATE_checkLimit_DATE_HMS_less-than()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_less-than() via DATE_getLimitMenu_DATE_HMS_less-than()
 - Implements the method I2CE_FormField_DATE_HMS->processLimitMenu_less-than() via DATE_processLimitMenu_DATE_HMS_less-than()
 - Implements the method I2CE_FormField_DATE_TIME->generateLimit_less-than() via DATE_generateLimit_DATE_TIME_less-than()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimit_less-than() via DATE_checkLimit_DATE_TIME_less-than()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimitString_less-than() via DATE_checkLimit_DATE_TIME_less-than()
-

- Implements the method I2CE_FormField_DATE_TIME->getLimitMenu_less-than() via DATE_getLimitMenu_DATE_TIME_less-than()
 - Implements the method I2CE_FormField_DATE_TIME->processLimitMenu_less-than() via DATE_processLimitMenu_DATE_TIME_less-than()
 - Implements the method I2CE_FormField_DATE_YMD->generateLimit_greater-than_equals() via DATE_generateLimit_DATE_YMD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_greater-than_equals() via DATE_checkLimit_DATE_YMD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimitString_greater-than_equals() via DATE_checkLimit_DATE_YMD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_greater-than_equals() via DATE_getLimitMenu_DATE_YMD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_greater-than_equals() via DATE_processLimitMenu_DATE_YMD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_greater-than_equals() via DATE_generateLimit_DATE_MD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_greater-than_equals() via DATE_checkLimit_DATE_MD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_greater-than_equals() via DATE_checkLimit_DATE_MD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_greater-than_equals() via DATE_getLimitMenu_DATE_MD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_greater-than_equals() via DATE_processLimitMenu_DATE_MD_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_greater-than_equals() via DATE_generateLimit_DATE_Y_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_greater-than_equals() via DATE_checkLimit_DATE_Y_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_greater-than_equals() via DATE_checkLimit_DATE_Y_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_greater-than_equals() via DATE_getLimitMenu_DATE_Y_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_greater-than_equals() via DATE_processLimitMenu_DATE_Y_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_greater-than_equals() via DATE_generateLimit_DATE_HMS_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimit_greater-than_equals() via DATE_checkLimit_DATE_HMS_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimitString_greater-than_equals() via DATE_checkLimit_DATE_HMS_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_greater-than_equals() via DATE_getLimitMenu_DATE_HMS_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_HMS->processLimitMenu_greater-than_equals() via DATE_processLimitMenu_DATE_HMS_greater-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->generateLimit_greater-than_equals() via DATE_generateLimit_DATE_TIME_greater-than_equals()
-

- Implements the method I2CE_FormField_DATE_TIME->checkLimit_greaterthan_equals() via DATE_checkLimit_DATE_TIME_greaterthan_equals()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimitString_greaterthan_equals() via DATE_checkLimit_DATE_TIME_greaterthan_equals()
 - Implements the method I2CE_FormField_DATE_TIME->getLimitMenu_greaterthan_equals() via DATE_getLimitMenu_DATE_TIME_greaterthan_equals()
 - Implements the method I2CE_FormField_DATE_TIME->processLimitMenu_greaterthan_equals() via DATE_processLimitMenu_DATE_TIME_greaterthan_equals()
 - Implements the method I2CE_FormField_DATE_YMD->generateLimit_lessthan_equals() via DATE_generateLimit_DATE_YMD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_lessthan_equals() via DATE_checkLimit_DATE_YMD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimitString_lessthan_equals() via DATE_checkLimit_DATE_YMD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_lessthan_equals() via DATE_getLimitMenu_DATE_YMD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_lessthan_equals() via DATE_processLimitMenu_DATE_YMD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_lessthan_equals() via DATE_generateLimit_DATE_MD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_lessthan_equals() via DATE_checkLimit_DATE_MD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_lessthan_equals() via DATE_checkLimit_DATE_MD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_lessthan_equals() via DATE_getLimitMenu_DATE_MD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_lessthan_equals() via DATE_processLimitMenu_DATE_MD_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_lessthan_equals() via DATE_generateLimit_DATE_Y_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_lessthan_equals() via DATE_checkLimit_DATE_Y_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_lessthan_equals() via DATE_checkLimit_DATE_Y_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_lessthan_equals() via DATE_getLimitMenu_DATE_Y_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_lessthan_equals() via DATE_processLimitMenu_DATE_Y_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_lessthan_equals() via DATE_generateLimit_DATE_HMS_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimit_lessthan_equals() via DATE_checkLimit_DATE_HMS_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_HMS->checkLimitString_lessthan_equals() via DATE_checkLimit_DATE_HMS_lessthan_equals()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_lessthan_equals() via DATE_getLimitMenu_DATE_HMS_lessthan_equals()
-

- Implements the method I2CE_FormField_DATE_HMS->processLimitMenu_less-than_equals() via DATE_processLimitMenu_DATE_HMS_less-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->generateLimit_less-than_equals() via DATE_generateLimit_DATE_TIME_less-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimit_less-than_equals() via DATE_checkLimit_DATE_TIME_less-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->checkLimitString_less-than_equals() via DATE_checkLimit_DATE_TIME_less-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->getLimitMenu_less-than_equals() via DATE_getLimitMenu_DATE_TIME_less-than_equals()
 - Implements the method I2CE_FormField_DATE_TIME->processLimitMenu_less-than_equals() via DATE_processLimitMenu_DATE_TIME_less-than_equals()
 - Implements the method I2CE_FormField_DATE_YMD->getLimitMenu_between() via DATE_getLimitMenu_DATE_YMD_between()
 - Implements the method I2CE_FormField_DATE_YMD->generateLimit_between() via DATE_generateLimit_DATE_YMD_between()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimit_between() via DATE_checkLimit_DATE_YMD_between()
 - Implements the method I2CE_FormField_DATE_YMD->checkLimitString_between() via DATE_checkLimitString_DATE_YMD_between()
 - Implements the method I2CE_FormField_DATE_YMD->processLimitMenu_between() via DATE_processLimitMenu_DATE_YMD_between()
 - Implements the method I2CE_FormField_DATE_MD->getLimitMenu_between() via DATE_getLimitMenu_DATE_MD_between()
 - Implements the method I2CE_FormField_DATE_MD->generateLimit_between() via DATE_generateLimit_DATE_MD_between()
 - Implements the method I2CE_FormField_DATE_MD->checkLimit_between() via DATE_checkLimit_DATE_MD_between()
 - Implements the method I2CE_FormField_DATE_MD->checkLimitString_between() via DATE_checkLimitString_DATE_MD_between()
 - Implements the method I2CE_FormField_DATE_MD->processLimitMenu_between() via DATE_processLimitMenu_DATE_MD_between()
 - Implements the method I2CE_FormField_DATE_Y->getLimitMenu_between() via DATE_getLimitMenu_DATE_Y_between()
 - Implements the method I2CE_FormField_DATE_Y->generateLimit_between() via DATE_generateLimit_DATE_Y_between()
 - Implements the method I2CE_FormField_DATE_Y->checkLimit_between() via DATE_checkLimit_DATE_Y_between()
 - Implements the method I2CE_FormField_DATE_Y->checkLimitString_between() via DATE_checkLimitString_DATE_Y_between()
 - Implements the method I2CE_FormField_DATE_Y->processLimitMenu_between() via DATE_processLimitMenu_DATE_Y_between()
 - Implements the method I2CE_FormField_DATE_HMS->getLimitMenu_between() via DATE_getLimitMenu_DATE_HMS_between()
 - Implements the method I2CE_FormField_DATE_HMS->generateLimit_between() via DATE_generateLimit_DATE_HMS_between()
-

- Implements the method `I2CE_FormField_DATE_HMS->checkLimit_between()` via `DATE_checkLimit_DATE_HMS_between()`
- Implements the method `I2CE_FormField_DATE_HMS->checkLimitString_between()` via `DATE_checkLimitString_DATE_HMS_between()`
- Implements the method `I2CE_FormField_DATE_HMS->processLimitMenu_between()` via `DATE_processLimitMenu_DATE_HMS_between()`
- Implements the method `I2CE_FormField_DATE_TIME->getLimitMenu_between()` via `DATE_getLimitMenu_DATE_TIME_between()`
- Implements the method `I2CE_FormField_DATE_TIME->generateLimit_between()` via `DATE_generateLimit_DATE_TIME_between()`
- Implements the method `I2CE_FormField_DATE_TIME->checkLimit_between()` via `DATE_checkLimit_DATE_TIME_between()`
- Implements the method `I2CE_FormField_DATE_TIME->checkLimitString_between()` via `DATE_checkLimitString_DATE_TIME_between()`
- Implements the method `I2CE_FormField_DATE_TIME->processLimitMenu_between()` via `DATE_processLimitMenu_DATE_TIME_between()`
- Description: A module that enables limits for fields.
- Requirements:
 - Fields at least 4.0 and less than 4.1
- Paths:
 - Classes: `modules/Forms/modules/FieldLimits/lib` ^[165]
`I2CE_Module_FieldLimits`
 - Templates: `modules/Forms/modules/FieldLimits/templates` ^[166]
`limit_mapped_choice_between.html`, `limit_choice_contains.html`, `limit_choice_yesno.html`,
`limit_choice_greaterthan_now.html`, `limit_date_choice_between.html`, `limit_choice_not_null.html`,
`limit_mapped_choice_lessthan_equals.html`, `limit_choice_lowerlike.html`, `limit_choice_truefalse.html`,
`limit_mapped_choice_equals.html`, `limit_choice_min_parent.html`, `limit_choice_like.html`,
`limit_choice_between.html`, `limit_date_choice.html`, `limit_choice_null_not_null.html`, `limit_choice_no.html`,
`limit_choice_min_parent_form.html`, `limit_choice_greaterthan_equals.html`, `limit_choice_true.html`,
`limit_choice_lowerequals.html`, `limit_mapped_choice_greaterthan_equals.html`,
`limit_choice_max_parent.html`, `limit_choice_greaterthan.html`, `limit_choice_in.html`,
`limit_mapped_choice_greaterthan.html`, `limit_choice_lessthan_now.html`,
`limit_choice_max_parent_form.html`, `limit_choice_lessthan_equals.html`, `limit_choice_lessthan.html`,
`limit_mapped_choice_in.html`, `limit_choice_yes.html`, `limit_choice_false.html`, `limit_choice_null.html`,
`limit_mapped_choice_lessthan.html`, `limit_choice_equals.html`

form-limits

This describes version 4.0.6 of the module Form Limits (form-limits)

- Source: `i2ce/modules/Forms/modules/FormLimits` ^[167]
- Module Class: The module class is implemented by `I2CE_Module_FormLimits`
- Fuzzy Methods:
 - Implements the method `I2CE_Form->getLimitStyles()` via `getLimitStyles()`
 - Implements the method `I2CE_Form->checkLimit()` via `checkLimit()`
 - Implements the method `I2CE_Form->checkWhereClause()` via `checkWhereClause()`
 - Implements the method `I2CE_Form->createCheckFunction()` via `createCheckFunction()`
 - Implements the method `I2CE_Form->createCheckLimitString()` via `createCheckLimitString()`

- Implements the method I2CE_Form->generateLimit() via generateLimit()
- Implements the method I2CE_Form->generateWhereClause() via generateWhereClause()
- Description: A module that enables limits for forms.
- Requirements:
 - forms at least 4.0 and less than 4.1
 - field-limits at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormLimits/lib ^[168]
I2CE_Module_FormLimits
 - Templates: modules/Forms/modules/FormLimits/templates ^[169]

formBrowser

This describes version 4.0.0 of the module Form Browser (formBrowser)

- Source: i2ce/modules/Forms/modules/FormBrowser ^[170]
- Description: Enables Browsing of Forms
- Requirements:
 - forms at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Forms/modules/FormBrowser/configs ^[171]
 - Classes: modules/Forms/modules/FormBrowser/lib ^[172]
I2CE_FormBrowser, I2CE_PageFormBrowser
 - Templates: modules/Forms/modules/FormBrowser/templates ^[173]
formBrowser_form_details_edit.html, formBrowser_form_details_record_edit.html,
formBrowser_form_details_record_edit_link.html, formBrowser_form_details.html, formBrowser.html,
formBrowser_form_details_no_record.html, formBrowse_menu.html, formBrowser_menu.html,
formBrowser_menu_form.html, formBrowser_form_details_record.html,
formBrowser_form_details_record_link.html
 - Css: modules/Forms/modules/FormBrowser/css ^[174]

formDocumentor

This describes version 4.0.3 of the module Form Documentor (formDocumentor)

- Source: i2ce/modules/Forms/modules/FormDocumentor ^[175]
- Description: Enables Documenting of existing forms and their relationship from the command line
- Requirements:
 - forms at least 4.0 and less than 4.1
 - pages at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormDocumentor/lib ^[176]
I2Ce_Page_FormDocumentor
 - Images: modules/Forms/modules/FormDocumentor/images ^[177]

formRelationships

This describes version 4.0.0 of the module Form Relationships (formRelationships)

- Source: i2ce/modules/Forms/modules/FormRelationship ^[178]
- Description: Provides Form Relationships for use by a Swiss Factory
- Requirements:
 - forms at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
 - swissfactory at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormRelationship/lib ^[179]
 I2CE_FormRelationship, I2CE_FormRelationship_Template, I2CE_Swiss_FormRelationship,
 I2CE_Swiss_FormRelationship_AncestralCondition, I2CE_Swiss_FormRelationship_AncestralConditions,
 I2CE_Swiss_FormRelationship_Base, I2CE_Swiss_FormRelationship_Join,
 I2CE_Swiss_FormRelationship_Joins, I2CE_Swiss_FormRelationship_ReportingFunctions,
 I2CE_Swiss_FormRelationship_Where, I2CE_Swiss_FormRelationship_Where_Operands,
 I2CE_Swiss_FormRelationships, I2CE_Swiss_SQLFunction
 - Templates: modules/Forms/modules/FormRelationship/templates ^[180]
 swiss_sqlfunction_edit.html, formRelationship_existing_limit.html, formRelationship_join_container.html,
 formRelationship_new_limits.html, formRelationship_existing_operand_list_member_view.html,
 formRelationship_existing_function_view.html, formRelationship_join_drop_empty_view.html,
 formRelationship_existing_operand_list_member_edit.html, swiss_sqlfunction_view.html,
 formRelationship_condition.html, formrelationships_options.html,
 formRelationship_join_drop_empty_edit.html, formRelationship_view_relation.html,
 formRelationship_new_limit_style.html, formRelationship_reporting_functions_view.html,
 formRelationship_view.html, formRelationship_existing_function_edit.html,
 formRelationship_existing_condition.html, formRelationship_existing_conditions.html,
 formRelationship_menu_relation_copy.html, formRelationship_new_operand.html,
 formRelationship_relationship_each.html, formRelationship_join.html,
 formRelationship_conditions_container.html, formRelationship_new_limit_choice.html,
 formRelationship_edit.html, formRelationship_relationship.html, formRelationship_meta_edit.html,
 formRelationship_new_limit_styles.html, formRelationship_existing_operand.html,
 formRelationship_existing_joins.html, formRelationship_reporting_functions_edit.html,
 formRelationship_join_meta.html, formRelationship_where_container.html,
 formRelationship_menu_form.html, formRelationship_meta_view.html,
 formRelationship_new_condition.html, formRelationship_existing_operand_list.html,
 formRelationship_existing_join.html
 - Css: modules/Forms/modules/FormRelationship/css ^[181]

forms

This describes version 4.0.6 of the module I2CE Forms (forms)

- Source: `i2ce/modules/Forms` ^[182]
- Module Class: The module class is implemented by `I2CE_Module_Forms`
- Fuzzy Methods:
 - Implements the method `I2CE_PermissionParser->hasPermission_form()` via `hasPermission_form()`
 - Implements the method `I2CE_Template->setForm()` via `setForm()`
 - Implements the method `I2CE_Template->getField()` via `getField()`
 - Implements the method `I2CE_Template->setReview()` via `setReview()`
 - Implements the method `I2CE_Template->isReview()` via `isReview()`
 - Implements the method `I2CE_Template->setShowForm()` via `setShowForm()`
 - Implements the method `I2CE_Template->showForm()` via `showForm()`
 - Implements the method `I2CE_Page->setForm()` via `setForm()`
 - Implements the method `I2CE_Page->getField()` via `getField()`
 - Implements the method `I2CE_Page->setReview()` via `setReview()`
 - Implements the method `I2CE_Page->isReview()` via `isReview()`
 - Implements the method `I2CE_Page->setShowForm()` via `setShowForm()`
 - Implements the method `I2CE_Page->showForm()` via `showForm()`
- Description: Adds a few basic forms to the system as well as some form functionality to the template
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - Fields at least 4.0 and less than 4.1
 - template-data at least 4.0 and less than 4.1
 - DisplayData at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/Forms/configs` ^[183]
 - Classes: `modules/Forms/lib` ^[184]
`I2CE_Form`, `I2CE_FormFactory`, `I2CE_Module_Forms`, `I2CE_PageForm`
 - Templates: `modules/Forms/templates` ^[185]
`button_save_only.html`, `button_confirm.html`, `form_error.html`, `button_save_return.html`, `button_save.html`,
`button_confirm_notchild.html`
 - Scripts: `modules/Forms/scripts` ^[186]
 - Modules: `modules/Forms/modules` ^[187]
`BinField`, `CachedForms`, `Fields`, `Float`, `Lists`, `LocaleForm`, `PrintedForms`, `UserForm`, `field-limits`, `form-limits`,
`formBrowser`, `formDocumentor`, `formRelationships`, `forms-storage`

forms-storage

This describes version 4.0.6 of the module Form Storage (forms-storage)

- Source: i2ce/modules/Forms/modules/FormStorage^[188]
- Module Class: The module class is implemented by I2CE_FormStorage
- Fuzzy Methods:
 - Implements the method I2CE_Form->isComponentized() via isComponentizedForm()
 - Implements the method I2CE_Form->addChild() via addChild()
 - Implements the method I2CE_Form->getChildIds() via getChildIds()
 - Implements the method I2CE_Form->getStorage() via getStorage()
 - Implements the method I2CE_Form->isWritable() via isWritable()
 - Implements the method I2CE_Form->populate() via populate()
 - Implements the method I2CE_Form->populateChild() via populateChild()
 - Implements the method I2CE_Form->populateChildren() via populateChildren()
 - Implements the method I2CE_Form->populateFirst() via populateFirst()
 - Implements the method I2CE_Form->populateHistory() via populateHistory()
 - Implements the method I2CE_Form->populateLast() via populateLast()
 - Implements the method I2CE_Form->delete() via delete()
 - Implements the method I2CE_Form->save() via save()
 - Implements the method I2CE_Form->setChangeType() via setChangeType()
 - Implements the method I2CE_FormField->save() via FF_save()
 - Implements the method I2CE_FormField_INT_GENERATE->save() via FF_IG_save()
 - Implements the method I2CE_FormField_STRING_PASS->save() via FF_SP_save()
 - Implements the method I2CE_FormField->populateHistory() via FF_populateHistory()
 - Implements the method I2CE_FormField_INT_GENERATE->setSequence() via FF_IG_setSequence()
 - Implements the method I2CE_FormFactory->getRecords() via getRecords()
- Description: A module that enables storage of Forms. Sub modules will enable the specific storage and retrieval options.
- Requirements:
 - forms at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/lib^[189]
I2CE_FormStorage, I2CE_FormStorage_DB, I2CE_FormStorage_Mechanism
 - Modules: modules/Forms/modules/FormStorage/modules^[190]
forms-storage-CSV, forms-storage-SDMXHD, forms-storage-entry, forms-storage-eval, forms-storage-file, forms-storage-flat, forms-storage-magicdata, forms-storage-multiflat, forms-storage-xml

forms-storage-CSV

This describes version 4.0.0 of the module Form Storage - CSV (forms-storage-CSV)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageCSV ^[191]
- Description: A module that enables reading storage of Forms from a CSV file
- Requirements:
 - forms-storage-file at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageCSV/lib ^[192]
I2CE_FormStorage_CSV

forms-storage-SDMXHD

This describes version 4.0.5 of the module Form Storage - SDMX-HD (forms-storage-SDMXHD)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageSDMXHD ^[193]
- Description: A module that enables reading storage of Forms from a SDMX CodeList or CrossSectionalData
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
 - forms-storage-xml at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageSDMXHD/lib ^[194]
I2CE_FormStorage_SDMXHD, I2CE_FormStorage_SDMX_CrossSectional

forms-storage-entry

This describes version 4.0.6 of the module Form Storage - Entry (forms-storage-entry)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageEntry ^[195]
- Module Class: The module class is implemented by I2CE_Module_FormStorageEntry
- Description: A module that enables storage of Forms to a entry database structure that enables historical tracking and automatic extension for new fields.
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageEntry/lib ^[196]
I2CE_FormStorage_entry, I2CE_Module_FormStorageEntry
 - Sql: modules/Forms/modules/FormStorage/modules/FormStorageEntry/sql ^[197]

forms-storage-eval

This describes version 4.0.0 of the module Form Storage - Eval (forms-storage-eval)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageEval^[198]
- Description: A module that enables storage of Forms based on evaluation of php functions
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageEval/lib^[199]
I2CE_FormStorage_eval

forms-storage-file

This describes version 4.0.6 of the module Form Storage - File (forms-storage-file)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageFile^[200]
- Description: A module that for file based access form storage mechanisms
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageFile/lib^[201]
I2CE_FormStorage_File_Base

forms-storage-flat

This describes version 4.0.6 of the module Form Storage - Flat (forms-storage-flat)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageFlat^[202]
- Description: A module that enables storage of Forms to a flat fixed database structure.
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageFlat/lib^[203]
I2CE_FormStorage_Flat

forms-storage-magicdata

This describes version 4.0.6 of the module Form Storage - Magic Data (forms-storage-magicdata)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageMagicData^[204]
- Description: A module that enables storage of Forms to MagicData Storage.
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageMagicData/lib^[205]
I2CE_FormStorage_magicdata, I2CE_FormStorage_magicdata, I2CE_FormStorage_magicdata

forms-storage-multiflat

This describes version 4.0.6 of the module Form Storage - Multi Flat (forms-storage-multiflat)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageMultiFlat ^[206]
- Description: A module that enables aggregated storage of Forms from a flat fixed database structure.
- Requirements:
 - forms-storage at least 4.0 and less than 4.1
 - Lists at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageMultiFlat/lib ^[207]
I2CE_FormStorage_multi_flat

forms-storage-xml

This describes version 4.0.6 of the module Form Storage - XML (forms-storage-xml)

- Source: i2ce/modules/Forms/modules/FormStorage/modules/FormStorageXML ^[208]
- Description: A module that enables reading storage of Forms from a XML file
- Requirements:
 - forms-storage-file at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Forms/modules/FormStorage/modules/FormStorageXML/lib ^[209]
I2CE_FormStorage_XML, I2CE_FormStorage_XML_BASE

jumper

This describes version 4.0.0 of the module Page Jumper (jumper)

- Source: i2ce/modules/Jumper ^[210]
- Module Class: The module class is implemented by I2CE_Module_Jumper
- Fuzzy Methods:
 - Implements the method I2CE_Page->makeJumper() via makeJumper()
 - Implements the method I2CE_Template->makeJumper() via makeJumper()
- Description: Creates a page jumper for elements of a page.
- Requirements:
 - pages at least 4.0 and less than 4.1
- Optionally Enables: stub
- Paths:
 - Images: modules/Jumper/images ^[211]
 - Css: modules/Jumper/css ^[212]
 - Classes: modules/Jumper/ ^[213]
I2CE_Module_Jumper

localeSelector

This describes version 4.0.3.3 of the module Locale Selector (localeSelector)

- Source: i2ce/modules/Pages/modules/LocaleSelector ^[214]
- Module Class: The module class is implemented by I2CE_Module_LocaleSelector
- Description: Provides Locale Selector for a page as well information for locales
- Requirements:
 - pages at least 4.0 and less than 4.1
 - swissfactory at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Pages/modules/LocaleSelector/lib ^[215]
I2CE_Module_LocaleSelector, I2CE_Page_LocaleAdmin, I2CE_Swiss_Locale, I2CE_Swiss_Locales
 - Images: modules/Pages/modules/LocaleSelector/images ^[216]
 - Misc: modules/Pages/modules/LocaleSelector/Flags.xml ^[217]
 - Configs: modules/Pages/modules/LocaleSelector/configs ^[218]
 - Templates: modules/Pages/modules/LocaleSelector/templates ^[219]
language_choice_icon.html, site_locale_add.html, language_choice.html, site_locale_base_edit.html, site_locale_each.html, site_locale_base.html, locale_view.html, locale_edit.html

maani-charts

This describes version 4.7 of the module Charted Reports (maani-charts)

- Source: i2ce/modules/FlashCharts ^[220]
- Description: Configuration options for the Maani chart reporting software <http://www.maani.us/charts>
- Requirements:
 - FileDump at least 4.0 and less than 4.1
- Paths:
 - Maani_chart_files: modules/FlashCharts/maani_charts ^[221]
 - Swf: modules/FlashCharts/maani_charts ^[221]
 - Scripts: modules/FlashCharts/scripts ^[222]
 - Classes: modules/FlashCharts/ ^[223]

magicDataBrowser

This describes version 4.0.0 of the module Magic Data Browser (magicDataBrowser)

- Source: i2ce/modules/Pages/modules/MagicDataBrowser ^[224]
- Description: Browse Magic Data
- Requirements:
 - pages at least 4.0 and less than 4.1
 - FormWorm at least 4.0 and less than 4.1
- Optionally Enables: magicDataExport
- Paths:
 - Configs: modules/Pages/modules/MagicDataBrowser/configs ^[225]
 - Scripts: modules/Pages/modules/MagicDataBrowser/scripts ^[226]

- Templates: modules/Pages/modules/MagicDataBrowser/templates ^[227]
browser_value_node_notset_mini.html, browser_value_node_mini.html, browser_node.html,
browser_value_node_notset.html, magicdata_export_controls.html, browser_value_node.html, browser.html,
browser_node_mini.html, browser_add_node.html
- Css: modules/Pages/modules/MagicDataBrowser/css ^[228]
- Classes: modules/Pages/modules/MagicDataBrowser/ ^[229]
I2CE_Page_MagicDataBrowser

magicDataExport

This describes version 4.0.0 of the module Magic Data Export (magicDataExport)

- Source: i2ce/modules/MagicDataExport ^[230]
- Description: Export Magic Data
- Requirements:
 - pages at least 4.0 and less than 4.1
- Paths:
 - Xml: modules/MagicDataExport/xml ^[231]
 - Classes: modules/MagicDataExport/ ^[232]
I2CE_MagicDataExport_Template, I2CE_Page_MagicDataExport

menu_select

This describes version 4.0.0 of the module Menu Select (menu_select)

- Source: i2ce/modules/MooTools/modules/MenuSelect ^[233]
- Module Class: The module class is implemented by I2CE_Module_MenuSelect
- Fuzzy Methods:
 - Implements the method I2CE_Page->menuSelect() via menuSelect()
 - Implements the method I2CE_Template->menuSelect() via menuSelect()
 - Implements the method I2CE_Page->addUpdateSelect() via addUpdateSelect()
 - Implements the method I2CE_Template->addUpdateSelect() via addUpdateSelect()
- Description: Handles Nested Select Options
- Requirements:
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MooTools/modules/MenuSelect/scripts ^[234]
 - Classes: modules/MooTools/modules/MenuSelect/ ^[235]

messageBox

This describes version 4.0.0 of the module Message Box (messageBox)

- Source: i2ce/modules/MessageHandler/modules/MessageBox ^[236]
- Module Class: The module class is implemented by I2CE_MessageBox
- Description: Displays the default message in a box
- Requirements:
 - messageHandler at least 4.0 and less than 4.1
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Scripts: modules/MessageHandler/modules/MessageBox/scripts ^[237]
 - Css: modules/MessageHandler/modules/MessageBox/css ^[238]
 - Classes: modules/MessageHandler/modules/MessageBox/ ^[239]
I2CE_MessageBox

messageHandler

This describes version 4.0.0 of the module Message Handler (messageHandler)

- Source: i2ce/modules/MessageHandler ^[240]
- Module Class: The module class is implemented by I2CE_MessageHandler
- Fuzzy Methods:
 - Implements the method I2CE_Fuzzy->userMessage() via addUserMessage()
- Description: A handler for user messages
- Requirements:
 - I2CE at least 4.0 and less than 4.1
- Paths:
 - Modules: modules/MessageHandler/modules ^[241]
messageBox, messageNotice
 - Classes: modules/MessageHandler/ ^[242]
I2CE_MessageHandler, I2CE_MessageNotice

messageNotice

This describes version 4.0.0 of the module Message Notices (messageNotice)

- Source: i2ce/modules/MessageHandler/modules/MessageNotice ^[243]
 - Module Class: The module class is implemented by I2CE_MessageNotice
 - Description: Displays any messages tagged with 'notice' in a notice box box
 - Requirements:
 - pages at least 4.0 and less than 4.1
 - messageHandler at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
 - Paths:
 - Scripts: modules/MessageHandler/modules/MessageNotice/scripts ^[244]
 - Css: modules/MessageHandler/modules/MessageNotice/css ^[245]
 - Images: modules/MessageHandler/modules/MessageNotice/images ^[246]
 - Classes: modules/MessageHandler/modules/MessageNotice/ ^[247]
-

modDocumentor

This describes version 4.0.3 of the module Mod Documentor (modDocumentor)

- Source: i2ce/modules/Pages/modules/ModDocumentor ^[248]
- Description: Enables Documenting of existing mods and their relationship from the command line
- Requirements:
 - pages at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Pages/modules/ModDocumentor/lib ^[249]
I2Ce_Page_ModDocumentor

modulePrompter

This describes version 4.0.0 of the module Module Prompter (modulePrompter)

- Source: i2ce/modules/Pages/modules/Admin/modules/ModulePrompter ^[250]
- Module Class: The module class is implemented by I2CE_Module_ModulePrompter
- Fuzzy Methods:
 - Implements the method I2CE_Wrangler->manipulateWrangler_I2CE_home() via changeHomePage()
- Description: Module to prompt the enable/disable of specific modules upon login
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - admin at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Pages/modules/Admin/modules/ModulePrompter/lib ^[251]
I2CE_Module_ModulePrompter

pages

This describes version 4.0.0 of the module Pages (pages)

- Source: i2ce/modules/Pages ^[252]
- Description: Provides pages, Users, Permissions and Templates
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - user at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Pages/configs ^[253]
 - Modules: modules/Pages/modules ^[254]
FileDump, LoginPage, admin, localeSelector, magicDataBrowser, modDocumentor, stub, tasks-roles
 - Templates: modules/Pages/templates ^[255]
noaccess.html, main.html
 - Classes: modules/Pages/lib ^[256]
I2CE_Page, I2CE_PermissionParser, I2CE_Template, I2CE_Wrangler

stub

This describes version 4.0.0 of the module Page Stubs (stub)

- Source: `i2ce/modules/Pages/modules/Stub` ^[257]
- Module Class: The module class is implemented by `I2CE_Stub`
- Fuzzy Methods:
 - Implements the method `I2CE_Page->addAjaxUpdate()` via `addAjaxUpdate()`
 - Implements the method `I2CE_Template->addAjaxUpdate()` via `addAjaxUpdate()`
 - Implements the method `I2CE_Page->addAjaxToggle()` via `addAjaxToggle()`
 - Implements the method `I2CE_Template->addAjaxToggle()` via `addAjaxToggle()`
 - Implements the method `I2CE_Page->addAjaxRequestFunction()` via `addAjaxRequestFunction()`
 - Implements the method `I2CE_Template->addAjaxRequestFunction()` via `addAjaxRequestFunction()`
 - Implements the method `I2CE_Page->addAjaxCompleteFunction()` via `addAjaxCompleteFunction()`
 - Implements the method `I2CE_Template->addAjaxCompleteFunction()` via `addAjaxCompleteFunction()`
 - Implements the method `I2CE_Page->addAjaxToggleOnFunction()` via `addAjaxToggleOnFunction()`
 - Implements the method `I2CE_Template->addAjaxToggleOnFunction()` via `addAjaxToggleOnFunction()`
 - Implements the method `I2CE_Page->addAjaxToggleOffFunction()` via `addAjaxToggleOffFunction()`
 - Implements the method `I2CE_Template->addAjaxToggleOffFunction()` via `addAjaxToggleOffFunction()`
 - Implements the method `I2CE_Page->hasAjax()` via `hasAjaxFuzzy()`
 - Implements the method `I2CE_Template->hasAjax()` via `hasAjaxFuzzy()`
- Description: Request only the stub of a page -- intended for ajax use.
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - pages at least 4.0 and less than 4.1
 - MooTools at least 1.2 and less than 1.3
- Paths:
 - Configs: `modules/Pages/modules/Stub/configs` ^[258]
 - Scripts: `modules/Pages/modules/Stub/scripts` ^[259]
 - Images: `modules/Pages/modules/Stub/images` ^[260]
 - Css: `modules/Pages/modules/Stub/css` ^[261]
 - Classes: `modules/Pages/modules/Stub/` ^[262]
`I2CE_Page_Stub`, `I2CE_Page_Stub_Ajax_Test`, `I2CE_Stub`

swissConfig

This describes version 4.0.0 of the module Swiss Config (swissConfig)

- Source: `i2ce/modules/SwissFactory/modules/SwissConfig` ^[263]
- Description: The Swiss Factory Module to display configuration files
- Requirements:
 - swissfactory at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/SwissFactory/modules/SwissConfig/configs` ^[264]
 - Classes: `modules/SwissFactory/modules/SwissConfig/lib` ^[265]
`I2CE_Page_SwissConfig`, `I2CE_SwissConfigFactory`

swissMagic

This describes version 4.0.0 of the module Swiss Magic (swissMagic)

- Source: i2ce/modules/SwissFactory/modules/SwissMagic ^[266]
 - Description: The Swiss Factory Module to display magic data directly
 - Requirements:
 - swissfactory at least 4.0 and less than 4.1
 - Paths:
 - Configs: modules/SwissFactory/modules/SwissMagic/configs ^[267]
 - Classes: modules/SwissFactory/modules/SwissMagic/lib ^[268]
- I2CE_Page_SwissMagic

swissfactory

This describes version 4.0.0 of the module Swiss Factory (swissfactory)

- Source: i2ce/modules/SwissFactory ^[269]
- Module Class: The module class is implemented by I2CE_Module_SwissFactory
- Fuzzy Methods:
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_string_single() via editValue_string_single()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_string_many() via editValue_string_many()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_delimited_single() via editValue_delimited_single()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_delimited_many() via editValue_delimited_many()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_boolean_single() via editValue_boolean_single()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_boolean_many() via editValue_boolean_many()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_list_single() via editValue_list_single()
 - Implements the method I2CE_Swiss_Default_Leaf->editValue_list_many() via editValue_list_many()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_string_single() via viewValue_string_single()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_string_many() via viewValue_string_many()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_delimited_single() via viewValue_delimited_single()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_delimited_many() via viewValue_delimited_many()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_boolean_single() via viewValue_boolean_single()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_boolean_many() via viewValue_boolean_many()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_list_single() via viewValue_list_single()
 - Implements the method I2CE_Swiss_Default_Leaf->viewValue_list_many() via viewValue_list_many()
- Description: The Swiss Factory Magic Data Editing System
- Requirements:
 - pages at least 4.0 and less than 4.1
 - FormWorm at least 4.0 and less than 4.1
 - menu_select at least 4.0 and less than 4.1

- Paths:
 - Classes: modules/SwissFactory/lib ^[270]
I2CE_Module_SwissFactory, I2CE_Swiss, I2CE_SwissFactory, I2CE_SwissMagicFactory, I2CE_Swiss_Default, I2CE_Swiss_Default_Base, I2CE_Swiss_Default_Leaf
 - Templates: modules/SwissFactory/templates ^[271]
configuration_list_single.html, configuration_list_many.html, configurations.html, configuration_string_single.html, configuration_string_many.html, configuration_delimited_individual_view.html, configuration_list_single_view.html, configuration_delimited_single_individual.html, configuration_delimited_single.html, configuration_delimited_many.html, configuration_delimited_individual.html, swiss_factory_view.html, configuration_string_many_individual.html, configuration_string_many_individual_view.html, configuration_string_single_view.html, configuration_list_many_view.html, configuration_noindex_string_many_individual.html, configuration_noindex_string_many_individual_view.html, configurationGroup_default.html, configuration_options.html, swiss_factory_edit.html, configuration_noindex_string_many.html, configurationGroups.html, configuration_boolean_single_view.html, configuration_boolean_single.html, configuration_main.html
 - Modules: modules/SwissFactory/modules ^[272]
swissConfig, swissMagic
 - Css: modules/SwissFactory/css ^[273]

tasks-roles

This describes version 4.0.0 of the module Tasks and Roles (tasks-roles)

- Source: i2ce/modules/Pages/modules/TasksAndRoles ^[274]
- Description: Provides administrator interface to define tasks and role
- Requirements:
 - pages at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Pages/modules/TasksAndRoles/configs ^[275]
 - Templates: modules/Pages/modules/TasksAndRoles/templates ^[276]
roles_and_tasks_view_all_roles.html, roles_and_tasks_edit_role.html, roles_and_tasks_view_all_tasks.html, roles_and_tasks_view_all_tasks_each.html, roles_and_tasks_view_all_roles_no_edit.html, roles_and_tasks_menu.html, roles_and_tasks_view_all_roles_each.html, roles_and_tasks_view_all.html, roles_and_tasks_edit_task.html
 - Classes: modules/Pages/modules/TasksAndRoles/lib ^[277]
I2CE_Page_TasksAndRoles

template-data

This describes version 4.0.0 of the module Template Data (template-data)

- Source: i2ce/modules/TemplateData ^[278]
- Module Class: The module class is implemented by I2CE_Module_TemplateData
- Fuzzy Methods:
 - Implements the method I2CE_Page->setDataTypePriority() via setDataTypePriority()
 - Implements the method I2CE_Template->setDataTypePriority() via setDataTypePriority()
 - Implements the method I2CE_Page->setData() via setData()
 - Implements the method I2CE_Template->setData() via setData()
 - Implements the method I2CE_Page->getData() via getData()
 - Implements the method I2CE_Template->getData() via getData()
 - Implements the method I2CE_Page->getDefaultData() via getDefaultData()
 - Implements the method I2CE_Template->getDefaultData() via getDefaultData()
 - Implements the method I2CE_Page->removeData() via removeData()
 - Implements the method I2CE_Template->removeData() via removeData()
 - Implements the method I2CE_Page->getDataNames() via getDataNames()
 - Implements the method I2CE_Template->getDataNames() via getDataNames()
 - Implements the method I2CE_Page->ensureNode() via ensureNode()
 - Implements the method I2CE_Template->ensureNode() via ensureNode()
- Description: A module that allows you to associate arbitray types of data to any node of the template DOM
- Requirements:
 - I2CE at least 4.0 and less than 4.1
- Paths:
 - Modules: modules/TemplateData/modules ^[279]
DisplayData, Options, Tags
 - Classes: modules/TemplateData/ ^[280]
I2CE_Module_TemplateData

user

This describes version 4.0.0 of the module User (user)

- Source: i2ce/modules/User ^[281]
- Description: Provides Users
- Requirements:
 - I2CE at least 4.0.3 and less than 4.1
- Paths:
 - Classes: modules/User/lib ^[282]
I2CE_User
 - Modules: modules/User/modules ^[283]
UserAccess, UserAccess_DHIS, UserAccess_LDAP, UserAccess_LDAP_Hybrid

References

- [1] <https://launchpad.net/i2ce>
- [2] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/BackgroundProcess>
- [3] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/BackgroundProcess/configs>
- [4] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/BackgroundProcess/templates>
- [5] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/BackgroundProcess/css>
- [6] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/BackgroundProcess/>
- [7] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Binary_Files
- [8] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Binary_Files/lib
- [9] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Binary_Files/sql
- [10] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/CachedForms>
- [11] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/CachedForms/configs>
- [12] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/CachedForms/lib>
- [13] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/CachedForms/templates>
- [14] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/ColorPicker>
- [15] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/ColorPicker/scripts>
- [16] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/ColorPicker/templates>
- [17] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/ColorPicker/css>
- [18] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/ColorPicker/>
- [19] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports>
- [20] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/configs>
- [21] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/lib>
- [22] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/css>
- [23] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/images>
- [24] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/templates>
- [25] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/xml>
- [26] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules>
- [27] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/Export>
- [28] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/Export/templates>
- [29] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/Export/lib>
- [30] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PDF>
- [31] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PDF/templates>
- [32] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PDF/lib>
- [33] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PieChart>
- [34] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PieChart/configs>
- [35] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PieChart/templates>
- [36] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PieChart/lib>
- [37] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/PieChart/css>
- [38] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/DatePicker>
- [39] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/DatePicker/scripts>
- [40] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/DatePicker/css>
- [41] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/DatePicker/>
- [42] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/DisplayData>
- [43] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/DisplayData/>
- [44] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields>
- [45] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/configs>
- [46] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/lib>
- [47] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/lib/fields>
- [48] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/templates>
- [49] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/scripts>
- [50] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Fields/modules>

- [51] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/FileDump>
- [52] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/FileDump/configs>
- [53] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/FileDump/>
- [54] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Float>
- [55] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Float/lib>
- [56] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/FormWorm>
- [57] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/FormWorm/scripts>
- [58] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/FormWorm/css>
- [59] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/FormWorm/>
- [60] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/>
- [61] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://I2CE_config.inc.php
- [62] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://I2CE_structure.sql
- [63] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://lib>
- [64] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://modules>
- [65] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://scripts>
- [66] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head://sql>
- [67] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/ImportExport>
- [68] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/ImportExport/sql>
- [69] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/ImportExport/lib>
- [70] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists>
- [71] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/configs>
- [72] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/lib>
- [73] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/templates>
- [74] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/sql>
- [75] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules>
- [76] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink>
- [77] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/configs>
- [78] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules>
- [79] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/>
- [80] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList>
- [81] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList/configs>
- [82] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToList/>
- [83] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString>
- [84] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString/configs>
- [85] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/Lists/modules/ListLink/modules/ListLinkToString/>
- [86] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/LocaleForm>
- [87] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/LocaleForm/configs>
- [88] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/LocaleForm/>
- [89] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Login>
- [90] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Login/configs>
- [91] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Login/css>
- [92] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Login/lib>
- [93] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Login/templates>
- [94] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MimeTypes>
- [95] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MimeTypes/configs>
- [96] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MimeTypes/lib>
- [97] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MimeTypes/mime>
- [98] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools>

- [99] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/scripts>
 - [100] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules>
 - [101] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/>
 - [102] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Core>
 - [103] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Core/scripts>
 - [104] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Core/css>
 - [105] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Core/>
 - [106] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/Options>
 - [107] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/Options/>
 - [108] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/PrintedForms>
 - [109] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/PrintedForms/configs>
 - [110] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/PrintedForms/lib>
 - [111] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/PrintedForms/images>
 - [112] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/PrintedForms/templates>
 - [113] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/ReportArchiver>
 - [114] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/ReportArchiver/configs>
 - [115] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/ReportArchiver/lib>
 - [116] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/CustomReports/modules/ReportArchiver/templates>
 - [117] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/StretchPage>
 - [118] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/StretchPage/lib>
 - [119] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/StretchPage/scripts>
 - [120] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/StretchPage/css>
 - [121] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/Tags>
 - [122] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules/Tags/>
 - [123] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Timer>
 - [124] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Timer/configs>
 - [125] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Timer/>
 - [126] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/TreeSelect>
 - [127] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/TreeSelect/scripts>
 - [128] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/TreeSelect/css>
 - [129] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/TreeSelect/>
 - [130] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess>
 - [131] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess/lib>
 - [132] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess/sql>
 - [133] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess/templates>
 - [134] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_DHIS
 - [135] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_DHIS/lib
 - [136] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_DHIS/sql
 - [137] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_DHIS/templates
 - [138] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP
 - [139] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP/lib
 - [140] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP/templates
 - [141] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP_Hybrid
 - [142] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP_Hybrid/lib
-

- [143] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules/UserAccess_LDAP_Hybrid/templates
- [144] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/UserForm>
- [145] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/UserForm/configs>
- [146] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/UserForm/lib>
- [147] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/UserForm/templates>
- [148] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/YAML>
- [149] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/YAML/lib>
- [150] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/YAML/xml>
- [151] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin>
- [152] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/configs>
- [153] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/lib>
- [154] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/templates>
- [155] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/modules>
- [156] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/css>
- [157] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/scripts>
- [158] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/images>
- [159] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Debugger>
- [160] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Debugger/scripts>
- [161] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Debugger/images>
- [162] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Debugger/css>
- [163] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/Debugger/>
- [164] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FieldLimits>
- [165] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FieldLimits/lib>
- [166] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FieldLimits/templates>
- [167] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormLimits>
- [168] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormLimits/lib>
- [169] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormLimits/templates>
- [170] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormBrowser>
- [171] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormBrowser/configs>
- [172] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormBrowser/lib>
- [173] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormBrowser/templates>
- [174] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormBrowser/css>
- [175] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormDocumentor>
- [176] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormDocumentor/lib>
- [177] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormDocumentor/images>
- [178] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormRelationship>
- [179] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormRelationship/lib>
- [180] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormRelationship/templates>
- [181] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormRelationship/css>
- [182] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms>
- [183] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/configs>
- [184] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/lib>
- [185] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/templates>
- [186] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/scripts>
- [187] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules>
- [188] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage>
- [189] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/lib>

- [190] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules>
 - [191] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageCSV>
 - [192] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageCSV/lib>
 - [193] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageSDMXHD>
 - [194] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageSDMXHD/lib>
 - [195] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageEntry>
 - [196] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageEntry/lib>
 - [197] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageEntry/sql>
 - [198] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageEval>
 - [199] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageEval/lib>
 - [200] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageFile>
 - [201] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageFile/lib>
 - [202] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageFlat>
 - [203] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageFlat/lib>
 - [204] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageMagicData>
 - [205] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageMagicData/lib>
 - [206] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageMultiFlat>
 - [207] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageMultiFlat/lib>
 - [208] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageXML>
 - [209] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Forms/modules/FormStorage/modules/FormStorageXML/lib>
 - [210] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Jumper>
 - [211] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Jumper/images>
 - [212] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Jumper/css>
 - [213] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Jumper/>
 - [214] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector>
 - [215] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector/lib>
 - [216] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector/images>
 - [217] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector/Flags.xml>
 - [218] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector/configs>
 - [219] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/LocaleSelector/templates>
 - [220] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/FlashCharts>
 - [221] http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/FlashCharts/maani_charts
 - [222] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/FlashCharts/scripts>
 - [223] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/FlashCharts/>
 - [224] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser>
-

- [225] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser/configs>
- [226] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser/scripts>
- [227] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser/templates>
- [228] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser/css>
- [229] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/MagicDataBrowser/>
- [230] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MagicDataExport>
- [231] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MagicDataExport/xml>
- [232] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MagicDataExport/>
- [233] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/MenuSelect>
- [234] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/MenuSelect/scripts>
- [235] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MooTools/modules/MenuSelect/>
- [236] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageBox>
- [237] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageBox/scripts>
- [238] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageBox/css>
- [239] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageBox/>
- [240] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler>
- [241] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules>
- [242] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/>
- [243] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageNotice>
- [244] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageNotice/scripts>
- [245] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageNotice/css>
- [246] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageNotice/images>
- [247] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/MessageHandler/modules/MessageNotice/>
- [248] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/ModDocumentor>
- [249] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/ModDocumentor/lib>
- [250] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/modules/ModulePrompter>
- [251] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Admin/modules/ModulePrompter/lib>
- [252] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages>
- [253] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/configs>
- [254] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules>
- [255] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/templates>
- [256] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/lib>
- [257] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub>
- [258] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub/configs>
- [259] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub/scripts>
- [260] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub/images>
- [261] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub/css>
- [262] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/Stub/>
- [263] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissConfig>
- [264] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissConfig/configs>
- [265] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissConfig/lib>

- [266] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissMagic>
- [267] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissMagic/configs>
- [268] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules/SwissMagic/lib>
- [269] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory>
- [270] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/lib>
- [271] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/templates>
- [272] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/modules>
- [273] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/SwissFactory/css>
- [274] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/TasksAndRoles>
- [275] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/TasksAndRoles/configs>
- [276] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/TasksAndRoles/templates>
- [277] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/Pages/modules/TasksAndRoles/lib>
- [278] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData>
- [279] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/modules>
- [280] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/TemplateData/>
- [281] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User>
- [282] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/lib>
- [283] <http://bazaar.launchpad.net/~intrahealth+informatics/i2ce/4.0.6-release/files/head:/modules/User/modules>

IHRIS Common Module List (4.0.6)

This is a list of all modules available in version 4.0.6-release of the package iHRIS Common ^[1]

CEUs

This describes version 4.0.1.1 of the module CEUs (CEUs)

- Source: `common/modules/CEUs` ^[2]
- Module Class: The module class is implemented by `iHRIS_Module_CEU`s
- Description: Makes Continuing Education Unit (CEU) information available to the system
- Requirements:
 - `ihris-common` at least 4.0 and less than 4.1
 - `forms-storage-magicdata` at least 4.0 and less than 4.1
- Paths:
 - Configs: `modules/CEUs/configs` ^[3]
 - Classes: `modules/CEUs/lib` ^[4]
`iHRIS_Module_CEU`s
 - Templates: `modules/CEUs/templates` ^[5]
`view_list_continuing_education_course.html`, `lists_form_continuing_education_course.html`

Contact

This describes version 4.0.6.1 of the module Contact (Contact)

- Source: common/modules/Contact ^[6]
- Module Class: The module class is implemented by iHRIS_Module_Contact
- Description: Makes Contact information available to the system
- Requirements:
 - Geography at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Contact/configs ^[7]
 - Classes: modules/Contact/lib ^[8]
iHRIS_Contact, iHRIS_Module_Contact
 - Templates: modules/Contact/templates ^[9]
lists_form_contact.html, form_contact.html

Currency

This describes version 4.0.6.2 of the module Currency (Currency)

- Source: common/modules/Currency ^[10]
- Module Class: The module class is implemented by iHRIS_Module_Currency
- Description: Makes Currency information available to the system
- Requirements:
 - Geography at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Currency/configs ^[11]
 - Classes: modules/Currency/lib ^[12]
iHRIS_FormField_CURRENCY, iHRIS_Module_Currency
 - Templates: modules/Currency/templates ^[13]
view_list_currency.html, lists_form_currency.html

Document

This describes version 4.0.0 of the module Document (Document)

- Source: common/modules/Document ^[14]
- Description: Makes Document information available to the system
- Requirements:
 - BinField at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Document/configs ^[15]
 - Classes: modules/Document/lib ^[16]

Facility

This describes version 4.0.0 of the module Facility (Facility)

- Source: common/modules/Facility^[17]
- Module Class: The module class is implemented by iHRIS_Module_Facility
- Description: Makes Facility information available to the system
- Requirements:
 - Geography at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Facility/configs^[18]
 - Classes: modules/Facility/lib^[19]
iHRIS_Module_Facility
 - Modules: modules/Facility/modules^[20]
FacilityContact
 - Templates: modules/Facility/templates^[21]
lists_form_facility.html, view_list_facility.html, view_list_facility_type.html

FacilityContact

This describes version 4.0.0 of the module Facility Contact (FacilityContact)

- Source: common/modules/Facility/modules/FacilityContact^[22]
- Module Class: The module class is implemented by iHRIS_Module_FacilityContact
- Description: Adds contact information to a facility
- Requirements:
 - Facility at least 4.0 and less than 4.1
 - Contact at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Facility/modules/FacilityContact/configs^[23]
 - Templates: modules/Facility/modules/FacilityContact/templates^[24]
view_list_facility_contact.html, lists_form_facility_contact.html
 - Classes: modules/Facility/modules/FacilityContact/lib^[25]
iHRIS_Module_FacilityContact

Geography

This describes version 4.0.6.1 of the module Geography (Geography)

- Source: common/modules/Geography^[26]
- Module Class: The module class is implemented by iHRIS_Module_Geography
- Description: Makes Geography information available to the system
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - forms-storage-magicdata at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Geography/configs^[27]
 - Classes: modules/Geography/lib^[28]
iHRIS_Country, iHRIS_Module_Geography

- Templates: modules/Geography/templates ^[29]
view_list_district.html, view_list_county.html, lists_form_district.html, lists_form_country.html,
lists_form_county.html, view_list_country.html, lists_form_region.html, view_list_region.html

Person

This describes version 4.0.0 of the module Person (Person)

- Source: common/modules/Person ^[30]
- Module Class: The module class is implemented by iHRIS_Module_Person
- Description: Makes Person information available to the system
- Requirements:
 - Geography at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Person/configs ^[31]
 - Classes: modules/Person/lib ^[32]
iHRIS_Module_Person, iHRIS_PageFormParentPerson, iHRIS_PageFormPerson, iHRIS_PageView,
iHRIS_Person
 - Modules: modules/Person/modules ^[33]
PersonArchivedScan, PersonContact, PersonDemographic, PersonEducation, PersonEmployment, PersonID,
PersonLanguage, PersonNotes, PersonPassportPhoto, PersonResume, dependents, nextOfKin,
person-simple-competency
 - Templates: modules/Person/templates ^[34]
view.html, menu_view_link.html, form_person_base.html, menu_view_person.html, form_person.html

PersonArchivedScan

This describes version 4.0.6.2 of the module Archived Paper Records (PersonArchivedScan)

- Source: common/modules/Person/modules/ArchivalScans ^[35]
- Module Class: The module class is implemented by iHRIS_Module_ArchivedScan
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_archive_scan() via action_person_archive_scan()
- Description: Provides place to archive scans of paper records
- Requirements:
 - Person at least 4.0
 - Photo at least 4.0
- Paths:
 - Configs: modules/Person/modules/ArchivalScans/configs ^[36]
 - Classes: modules/Person/modules/ArchivalScans/lib ^[37]
iHRIS_Module_ArchivedScan
 - Templates: modules/Person/modules/ArchivalScans/templates ^[38]
view_person_archive_scan.html, form_person_archive_scan.html

PersonContact

This describes version 4.0.0 of the module iHRIS Person Contact (PersonContact)

- Source: common/modules/Person/modules/Contact ^[39]
- Module Class: The module class is implemented by iHRIS_Module_PersonContact
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_contact_work() via action_person_contact_work()
 - Implements the method iHRIS_PageView->action_person_contact_personal() via action_person_contact_personal()
 - Implements the method iHRIS_PageView->action_person_contact_other() via action_person_contact_other()
 - Implements the method iHRIS_PageView->action_person_contact_emergency() via action_person_contact_emergency()
- Description: A Person's Contact
- Requirements:
 - Person at least 4.0
 - Contact at least 4.0
- Paths:
 - Configs: modules/Person/modules/Contact/configs ^[40]
 - Templates: modules/Person/modules/Contact/templates ^[41]
 add_person_contact_emergency.html, view_person_contact_personal.html,
 add_person_contact_personal.html, view_person_contact_work.html, form_person_contact_other.html,
 form_person_contact_emergency.html, view_person_contact_other.html,
 view_person_contact_emergency.html, add_person_contact_work.html, form_person_contact_personal.html,
 form_person_contact_work.html, add_person_contact_other.html
 - Classes: modules/Person/modules/Contact/lib ^[42]
 iHRIS_Module_PersonContact, iHRIS_PageFormContact

PersonDemographic

This describes version 4.0.0 of the module iHRIS Person Demographic (PersonDemographic)

- Source: common/modules/Person/modules/Demographic ^[43]
- Module Class: The module class is implemented by iHRIS_Module_PersonDemographic
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_demographic() via action_demographic()
- Description: A Person's Demographic
- Requirements:
 - Person at least 4.0
- Paths:
 - Configs: modules/Person/modules/Demographic/configs ^[44]
 - Classes: modules/Person/modules/Demographic/lib ^[45]
 iHRIS_Module_PersonDemographic
 - Templates: modules/Person/modules/Demographic/templates ^[46]
 view_list_marital_status.html, form_demographic.html, view_demographic.html

PersonEducation

This describes version 4.0.0 of the module iHRIS Person Education (PersonEducation)

- Source: common/modules/Person/modules/Education^[47]
- Module Class: The module class is implemented by iHRIS_Module_PersonEducation
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_education() via action_education()
- Description: A Person's Education and Degree Details
- Requirements:
 - Person at least 4.0
- Paths:
 - Configs: modules/Person/modules/Education/configs^[48]
 - Templates: modules/Person/modules/Education/templates^[49]
view_list_edu_type.html, form_education.html, view_education.html, lists_form_degree.html, view_list_degree.html
 - Classes: modules/Person/modules/Education/lib^[50]
iHRIS_Module_PersonEducation

PersonEmployment

This describes version 4.0.0 of the module iHRIS Person Employment (PersonEmployment)

- Source: common/modules/Person/modules/Employment^[51]
- Module Class: The module class is implemented by iHRIS_Module_PersonEmployment
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_employment() via action_employment()
- Description: A Person's Employment History Details
- Requirements:
 - Person at least 4.0
 - Currency at least 4.0
- Paths:
 - Configs: modules/Person/modules/Employment/configs^[52]
 - Classes: modules/Person/modules/Employment/lib^[53]
iHRIS_Module_PersonEmployment
 - Templates: modules/Person/modules/Employment/templates^[54]
view_employment.html, form_employment.html

PersonID

This describes version 4.0.0 of the module iHRIS Person ID (PersonID)

- Source: common/modules/Person/modules/ID^[55]
- Module Class: The module class is implemented by iHRIS_Module_PersonID
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_id() via action_person_id()
- Description: A Person's ID
- Requirements:
 - Person at least 4.0
- Paths:

- Configs: modules/Person/modules/ID/configs ^[56]
- Classes: modules/Person/modules/ID/lib ^[57]
iHRIS_Module_PersonID
- Templates: modules/Person/modules/ID/templates ^[58]
view_person_id.html, view_list_id_type.html, form_person_id.html

PersonLanguage

This describes version 4.0.0 of the module iHRIS Person Language (PersonLanguage)

- Source: common/modules/Person/modules/Language ^[59]
- Module Class: The module class is implemented by iHRIS_Module_PersonLanguage
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_language() via action_person_language()
- Description: Track a Person's Language Qualifications
- Requirements:
 - Person at least 4.0
- Paths:
 - Configs: modules/Person/modules/Language/configs ^[60]
 - Classes: modules/Person/modules/Language/lib ^[61]
iHRIS_Module_PersonLanguage
 - Templates: modules/Person/modules/Language/templates ^[62]
view_list_language.html, view_person_language.html, form_person_language.html

PersonNotes

This describes version 4.0.0 of the module Notes (PersonNotes)

- Source: common/modules/Person/modules/Notes ^[63]
- Module Class: The module class is implemented by iHRIS_Module_PersonNotes
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_notes() via action_notes()
- Description: Makes Notes information available to the system
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - Person at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Person/modules/Notes/configs ^[64]
 - Classes: modules/Person/modules/Notes/lib ^[65]
iHRIS_Module_PersonNotes
 - Templates: modules/Person/modules/Notes/templates ^[66]
view_notes.html, form_notes.html

PersonPassportPhoto

This describes version 4.0.6 of the module iHRIS Person Passport Photo (PersonPassportPhoto)

- Source: common/modules/Person/modules/PersonPhoto^[67]
- Module Class: The module class is implemented by iHRIS_Module_PersonPassport
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_photo_passport() via action_person_photo_passport()
- Description: A Person's Photo
- Requirements:
 - Person at least 4.0
 - Photo at least 4.0
- Paths:
 - Configs: modules/Person/modules/PersonPhoto/configs^[68]
 - Classes: modules/Person/modules/PersonPhoto/lib^[69]
iHRIS_Module_PersonPassport
 - Templates: modules/Person/modules/PersonPhoto/templates^[70]
form_person_photo_passport.html, view_person_photo_passport.html

PersonResume

This describes version 4.0.6.0 of the module iHRIS Person Resume (PersonResume)

- Source: common/modules/Person/modules/Resume^[71]
- Module Class: The module class is implemented by iHRIS_Module_Resume
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_resume() via action_person_resume()
- Description: A Person's Resume
- Requirements:
 - Person at least 4.0
 - Document at least 4.0
- Paths:
 - Configs: modules/Person/modules/Resume/configs^[72]
 - Classes: modules/Person/modules/Resume/lib^[73]
iHRIS_Module_Resume
 - Templates: modules/Person/modules/Resume/templates^[74]
form_person_resume.html, view_person_resume.html

Photo

This describes version 4.0.0 of the module Photo (Photo)

- Source: common/modules/Photo ^[75]
- Description: Makes Photo information available to the system
- Requirements:
 - BinField at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Photo/configs ^[76]
 - Classes: modules/Photo/lib ^[77]

SDMX-HD-CodeLists

This describes version 4.0.5.2 of the module SDMX-HD Code Lists (SDMX-HD-CodeLists)

- Source: common/modules/SDMX-HD-CodeLists ^[78]
- Description: Information to load SDMX-HD Code Lists.
- Requirements:
 - ihris-common at least 4.0
 - forms-storage-SDMXHD at least 4.0
- Paths:
 - Configs: modules/SDMX-HD-CodeLists/configs ^[79]
 - Sdmxhd: modules/SDMX-HD-CodeLists/SDMX-HD ^[80]
 - Classes: modules/SDMX-HD-CodeLists/ ^[81]

SampleData-Common

This describes version 4.0.0 of the module iHRIS Common Sample Data (SampleData-Common)

- Source: common/modules/CommonSampleData ^[82]
- Description: Sample Data for iHRIS Common forms.
- Requirements:
 - ihris-common at least 4.0
- Optionally Enables: SampleData-Geography SampleData-currency SampleData-degree
- Paths:
 - Modules: modules/CommonSampleData/modules ^[83]
SampleData-Geography, SampleData-currency, SampleData-degree, SampleData-edu_type
 - Classes: modules/CommonSampleData/ ^[84]

SampleData-Geography

This describes version 4.0.0 of the module Geography Sample Data (SampleData-Geography)

- Source: common/modules/CommonSampleData/modules/SampleData-Geography ^[85]
- Description: Sample Data for Geography forms.
- Requirements:
 - Geography at least 4.0
- Optionally Enables: SampleData-country SampleData-region SampleData-district SampleData-county
- Paths:
 - Modules: modules/CommonSampleData/modules/SampleData-Geography/modules ^[86]
SampleData-country, SampleData-county, SampleData-district, SampleData-region
 - Classes: modules/CommonSampleData/modules/SampleData-Geography/ ^[87]

SampleData-country

This describes version 4.0.0 of the module Country (SampleData-country)

- Source: common/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country ^[88]
- Description: Sample Data for form: country
- Requirements:
 - Geography at least 4.0
- Paths:
 - Configs:
modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country/configs ^[89]
 - Classes: modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country/ ^[90]

SampleData-county

This describes version 4.0.0 of the module County (SampleData-county)

- Source: common/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-county ^[91]
- Description: Sample Data for form: county
- Requirements:
 - SampleData-district at least 4.0
- Paths:
 - Classes: modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-county/ ^[92]

SampleData-currency

This describes version 4.0.0 of the module Currency (SampleData-currency)

- Source: common/modules/CommonSampleData/modules/SampleData-currency ^[93]
- Description: Sample Data for form: currency
- Requirements:
 - Currency at least 4.0
- Paths:
 - Configs: modules/CommonSampleData/modules/SampleData-currency/configs ^[94]
 - Classes: modules/CommonSampleData/modules/SampleData-currency/ ^[95]

SampleData-degree

This describes version 4.0.0 of the module Degree (SampleData-degree)

- Source: common/modules/CommonSampleData/modules/SampleData-degree ^[96]
- Description: Sample Data for form: degree
- Requirements:
 - SampleData-edu_type at least 4.0
- Paths:
 - Configs: modules/CommonSampleData/modules/SampleData-degree/configs ^[97]
 - Classes: modules/CommonSampleData/modules/SampleData-degree/ ^[98]

SampleData-district

This describes version 4.0.0 of the module District (SampleData-district)

- Source: common/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-district ^[99]
- Description: Sample Data for form: district
- Requirements:
 - SampleData-region at least 4.0
- Paths:
 - Classes: modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-district/ ^[100]

SampleData-edu_type

This describes version 4.0.0 of the module Education Type (SampleData-edu_type)

- Source: common/modules/CommonSampleData/modules/SampleData-edu_type ^[101]
 - Description: Sample Data for form: edu_type
 - Requirements:
 - PersonEducation at least 4.0
 - Paths:
 - Configs: modules/CommonSampleData/modules/SampleData-edu_type/configs ^[102]
 - Classes: modules/CommonSampleData/modules/SampleData-edu_type/ ^[103]
-

SampleData-region

This describes version 4.0.0 of the module Region (SampleData-region)

- Source: common/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-region [104]
- Description: Sample Data for form: region
- Requirements:
 - SampleData-country at least 4.0
- Paths:
 - Classes: modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-region/ [105]

UUID_map

This describes version 4.0.6.1 of the module UUID Map (UUID_map)

- Source: common/modules/UUID [106]
- Module Class: The module class is implemented by iHRIS_Module_UUID_Map
- Description: Allows administrator to associate a UUID with any form id
- Requirements:
 - forms-storage-flat at least 4.0 and less than 4.1
 - Lists at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/UUID/configs [107]
 - Classes: modules/UUID/lib [108]
iHRIS_UUID_Map, iHRIS_UUID_Map, iHRIS_Module_UUID_Map
 - Sql: modules/UUID/sql [109]

dependents

This describes version 4.0.6.1 of the module Person's Dependents (dependents)

- Source: common/modules/Person/modules/Dependents [110]
- Module Class: The module class is implemented by iHRIS_Module_Dependents
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_dependent() via show_dependents()
- Description: Adds Dependent Information to a Person
- Requirements:
 - Person at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Person/modules/Dependents/configs [111]
 - Templates: modules/Person/modules/Dependents/templates [112]
form_dependent.html, view_dependent.html
 - Classes: modules/Person/modules/Dependents/lib [113]
iHRIS_Module_Dependents

establishment

This describes version 4.0.6.20 of the module iHRIS Manage Establishment (establishment)

- Source: common/modules/Establishment ^[114]
- Description: The iHRIS Manage Establishment provides establishment information by cadre
- Requirements:
 - ihris-common-Job at least 4.0
 - Facility at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Establishment/configs ^[115]
 - Classes: modules/Establishment/lib ^[116]
 - Templates: modules/Establishment/templates ^[117]
 establishment_menu.html, lists_form_establishment_period.html, view_list_establishment.html,
 view_list_establishment_period.html, lists_form_establishment.html

ihris-common

This describes version 4.0.6 of the module iHRIS Common (ihris-common) It is the top module of this package

- Source: common/ ^[118]
- Module Class: The module class is implemented by iHRIS_Module
- Description: Common elements used by the iHRIS Suite
- Requirements:
 - I2CE at least 4.0 and less than 4.1
 - pages at least 4.0 and less than 4.1
 - forms at least 4.0 and less than 4.1
 - forms-storage-entry at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - UserForm at least 4.0 and less than 4.1
 - Lists at least 4.0 and less than 4.1
 - Tags at least 4.0 and less than 4.1
 - Options at least 4.0 and less than 4.1
 - template-data at least 4.0 and less than 4.1
 - DisplayData at least 4.0 and less than 4.1
 - admin at least 4.0 and less than 4.1
 - FileDump at least 4.0 and less than 4.1
 - LoginPage at least 4.0 and less than 4.1
- Optionally Enables: UserAccess
- Paths:
 - Configs: /configs ^[119]
 - Classes: /lib ^[120]
 iHRIS_Module, iHRIS_PageConfigure, iHRIS_PageFieldHistory, iHRIS_PageFormLists,
 iHRIS_PageFormUser, iHRIS_PageHistory, iHRIS_PageIndex, iHRIS_PageViewList
 - Templates: /templates ^[121]
 history.html, field_history_fullname.html, button_confirm_only.html, hr.html, lists.html, intro.html,
 display_field_mline.html, shell.html, search_row.html, field_history_row_fullname.html, configure.html,
 menu_configure.html, user_names.html, field_history.html
 - Css: /css ^[122]

- Scripts: /scripts ^[123]
- Images: /images ^[124]
- Modules: /modules ^[125]
CEUs, Contact, Currency, Document, Facility, Geography, Person, Photo, SDMX-HD-CodeLists, SampleData-Common, UUID_map, establishment, ihris-common-Cadre, ihris-common-Job, ihris-common-RecentForm, ihris-common-Search, simple-competency, training-course, training-institution

ihris-common-Cadre

This describes version 4.0.6.0 of the module iHRIS Commone Cadre (ihris-common-Cadre)

- Source: common/modules/Cadre ^[126]
- Description: The iHRIS Manage Job
- Requirements:
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Cadre/configs ^[127]
 - Classes: modules/Cadre/lib ^[128]
 - Templates: modules/Cadre/templates ^[129]
view_list_cadre.html
 - Modules: modules/Cadre/modules ^[130]

ihris-common-Job

This describes version 4.0.6.7 of the module iHRIS Common Job (ihris-common-Job)

- Source: common/modules/Job ^[131]
- Description: The iHRIS Common Job
- Requirements:
 - ihris-common-Cadre at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Job/configs ^[132]
 - Classes: modules/Job/lib ^[133]
 - Templates: modules/Job/templates ^[134]
view_list_classification.html, view_list_job.html, lists_form_classification.html, lists_form_job.html
 - Modules: modules/Job/modules ^[135]
isco-08, isco-88

ihris-common-RecentForm

This describes version 4.0.3.0 of the module Recent Form Page (ihris-common-RecentForm)

- Source: common/modules/RecentForm ^[136]
- Description: The iHRIS Recent Form page.
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/RecentForm/configs ^[137]
 - Classes: modules/RecentForm/lib ^[138]
iHRIS_PageRecentForm
 - Templates: modules/RecentForm/templates ^[139]
search_recent.html, recent_form.html, recent_desc.html, menu_search_recent.html, recent_display_form.html, recent.html, recent_display.html, menu_recent.html

ihris-common-Search

This describes version 4.0.3.0 of the module Search Page (ihris-common-Search)

- Source: common/modules/Search ^[140]
- Description: The iHRIS Search page.
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Search/configs ^[141]
 - Classes: modules/Search/lib ^[142]
iHRIS_PageSearch
 - Templates: modules/Search/templates ^[143]
search.html, menu_search.html, search_report.html, menu_search_report.html

isco-08

This describes version 4.0.6 of the module ISCO 08 Job Codes (isco-08)

- Source: common/modules/Job/modules/isco_08 ^[144]
- Description: The ISCO 08 Job Codes
- Paths:
 - Modules: modules/Job/modules/isco_08/modules ^[145]
isco-08-major-00, isco-08-major-01, isco-08-major-02, isco-08-major-03, isco-08-major-04, isco-08-major-05, isco-08-major-06, isco-08-major-07, isco-08-major-08, isco-08-major-09
 - Classes: modules/Job/modules/isco_08/ ^[146]

isco-08-major-00

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-00)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_0 ^[147]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_0/ ^[148]

isco-08-major-01

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-01)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_1 ^[149]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_1/ ^[150]

isco-08-major-02

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-02)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_2 ^[151]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_2/ ^[152]

isco-08-major-03

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-03)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_3 ^[153]
 - Description: The ISCO 08 Job Codes
 - Requirements:
 - isco-08 at least 4.0 and less than 4.1
 - Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_3/ ^[154]
-

isco-08-major-04

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-04)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_4 ^[155]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_4/ ^[156]

isco-08-major-05

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-05)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_5 ^[157]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_5/ ^[158]

isco-08-major-06

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-06)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_6 ^[159]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_6/ ^[160]

isco-08-major-07

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-07)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_7 ^[161]
 - Description: The ISCO 08 Job Codes
 - Requirements:
 - isco-08 at least 4.0 and less than 4.1
 - Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_7/ ^[162]
-

isco-08-major-08

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-08)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_8 ^[163]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_8/ ^[164]

isco-08-major-09

This describes version 4.0.1 of the module ISCO 08 Job Codes (isco-08-major-09)

- Source: common/modules/Job/modules/isco_08/modules/isco_08_major_9 ^[165]
- Description: The ISCO 08 Job Codes
- Requirements:
 - isco-08 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_08/modules/isco_08_major_9/ ^[166]

isco-88

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88)

- Source: common/modules/Job/modules/isco_88 ^[167]
- Description: The ISCO 88 Job Codes
- Paths:
 - Modules: modules/Job/modules/isco_88/modules ^[168]
isco-88-major-00, isco-88-major-01, isco-88-major-02, isco-88-major-03, isco-88-major-04, isco-88-major-05,
isco-88-major-06, isco-88-major-07, isco-88-major-08, isco-88-major-09
 - Classes: modules/Job/modules/isco_88/ ^[169]

isco-88-major-00

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-00)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_0 ^[170]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_0/ ^[171]

isco-88-major-01

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-01)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_1 ^[172]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_1/ ^[173]

isco-88-major-02

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-02)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_2 ^[174]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_2/ ^[175]

isco-88-major-03

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-03)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_3 ^[176]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_3/ ^[177]

isco-88-major-04

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-04)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_4 ^[178]
 - Description: The ISCO 88 Job Codes
 - Requirements:
 - isco-88 at least 4.0 and less than 4.1
 - Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_4/ ^[179]
-

isco-88-major-05

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-05)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_5^[180]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_5/^[181]

isco-88-major-06

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-06)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_6^[182]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_6/^[183]

isco-88-major-07

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-07)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_7^[184]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_7/^[185]

isco-88-major-08

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-08)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_8^[186]
 - Description: The ISCO 88 Job Codes
 - Requirements:
 - isco-88 at least 4.0 and less than 4.1
 - Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_8/^[187]
-

isco-88-major-09

This describes version 4.0.1 of the module ISCO 88 Job Codes (isco-88-major-09)

- Source: common/modules/Job/modules/isco_88/modules/isco_88_major_9^[188]
- Description: The ISCO 88 Job Codes
- Requirements:
 - isco-88 at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/Job/modules/isco_88/modules/isco_88_major_9/^[189]

nextOfKin

This describes version 4.0.6.1 of the module Person's Next of Kin (nextOfKin)

- Source: common/modules/Person/modules/NextOfKin^[190]
- Module Class: The module class is implemented by iHRIS_Module_NextOfKin
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_nextofkin() via show_nextofkin()
- Description: Adds Next of Kin Information to a Person
- Requirements:
 - Person at least 4.0 and less than 4.1
 - Contact at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Person/modules/NextOfKin/configs^[191]
 - Templates: modules/Person/modules/NextOfKin/templates^[192]
form_nextofkin.html, view_nextofkin.html
 - Classes: modules/Person/modules/NextOfKin/lib^[193]
iHRIS_Module_NextOfKin

person-simple-competency

This describes version 4.0.6 of the module Simple Competency (person-simple-competency)

- Source: common/modules/Person/modules/SimpleCompetency^[194]
- Module Class: The module class is implemented by iHRIS_Module_PersonSimpleCompetency
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_competency() via action_person_competency()
- Description: A simple two-tiered competency module enabled for a person
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - Person at least 4.0 and less than 4.1
 - simple-competency at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Person/modules/SimpleCompetency/configs^[195]
 - Classes: modules/Person/modules/SimpleCompetency/lib^[196]
iHRIS_Module_PersonSimpleCompetency, iHRIS_Page_Person_Competency_Evaluation_History
 - Templates: modules/Person/modules/SimpleCompetency/templates^[197]
personal_competency_evaluation_history.html, form_person_competency.html,
view_person_competency.html, personal_competency_evaluation_history_comp_each.html,

personal_competency_evaluation_history_each.html

simple-competency

This describes version 4.0.0 of the module Simple Competency (simple-competency)

- Source: common/modules/SimpleComptency ^[198]
- Module Class: The module class is implemented by iHRIS_Module_SimpleCompetency
- Description: A simple two-tiered competency module
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage-magicdata at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/SimpleComptency/configs ^[199]
 - Classes: modules/SimpleComptency/lib ^[200]
iHRIS_Module_SimpleCompetency
 - Templates: modules/SimpleComptency/templates ^[201]
view_list_competency.html, view_list_competency_type.html, lists_form_competency.html,
view_list_competency_evaluation.html

training-course

This describes version 4.0.46.2 of the module Training Course (training-course)

- Source: common/modules/TrainingCourse ^[202]
- Module Class: The module class is implemented by iHRIS_Module_Training_Course
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_scheduled_training_course() via
action_person_scheduled_training_course()
- Description: Adds functionality to add training courses to the system
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
 - CEUs at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/TrainingCourse/configs ^[203]
 - Classes: modules/TrainingCourse/lib ^[204]
iHRIS_Module_Training_Course, iHRIS_PageForm_Person_Scheduled_Training_Course,
iHRIS_Scheduled_Training_Course, iHRIS_Training_Course
 - Templates: modules/TrainingCourse/templates ^[205]
enrolled_students.html, lists_form_training_course_evaluation.html,
form_person_schedule_training_course.html, view_list_training_course_evaluation.html,
lists_form_scheduled_training_course.html, view_person_scheduled_training_course.html,
view_list_training_course_category.html, lists_form_training_course.html,
view_list_scheduled_training_course.html, scheduled_course_list_person.html,
view_list_training_course_status.html, form_schedule_training_course.html, view_list_training_course.html,
view_list_training_course_requestor.html

- Modules: modules/TrainingCourse/modules^[206]
training-simple-competency

training-institution

This describes version 4.0.0 of the module Training Institution (training-institution)

- Source: common/modules/TrainingInstitution^[207]
- Module Class: The module class is implemented by iHRIS_Module_TrainingInstitution
- Description: Adds basic training institution and funder functionality
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - Geography at least 4.0 and less than 4.1
 - Contact at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/TrainingInstitution/configs^[208]
 - Classes: modules/TrainingInstitution/lib^[209]
iHRIS_Module_TrainingInstitution, iHRIS_PageFormParentTrainingInstitution
 - Templates: modules/TrainingInstitution/templates^[210]
lists_form_training_funder_contact.html, view_list_training_funder_contact.html,
view_list_training_institution.html, view_list_training_funder.html, lists_form_training_funder.html,
button_confirm_ti.html, lists_form_ti_base.html, lists_form_training_institution.html, menu_view_ti.html,
lists_form_training_institution_contact.html, view_list_training_institution_contact.html

training-simple-competency

This describes version 4.0.12 of the module Training Competency (Simple) (training-simple-competency)

- Source: common/modules/TrainingCourse/modules/TrainingSimpleCompetency^[211]
- Module Class: The module class is implemented by iHRIS_Module_TrainingSimpleCompetency
- Description: Makes the Simple Competency module available to training course module
- Requirements:
 - training-course at least 4.0 and less than 4.1
 - person-simple-competency at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/TrainingCourse/modules/TrainingSimpleCompetency/configs^[212]
 - Classes: modules/TrainingCourse/modules/TrainingSimpleCompetency/lib^[213]
iHRIS_Module_TrainingSimpleCompetency, iHRIS_PageForm_Evaluate_Course_Competencies
 - Templates: modules/TrainingCourse/modules/TrainingSimpleCompetency/templates^[214]
training_course_evaluation_no_competency.html, form_training_course_competencies.html,
training_course_evaluation_form.html

References

- [1] <https://launchpad.net/ihris-common>
 - [2] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CEUs>
 - [3] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CEUs/configs>
 - [4] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CEUs/lib>
 - [5] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CEUs/templates>
 - [6] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Contact>
 - [7] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Contact/configs>
 - [8] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Contact/lib>
 - [9] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Contact/templates>
 - [10] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Currency>
 - [11] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Currency/configs>
 - [12] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Currency/lib>
 - [13] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Currency/templates>
 - [14] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Document>
 - [15] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Document/configs>
 - [16] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Document/lib>
 - [17] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility>
 - [18] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/configs>
 - [19] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/lib>
 - [20] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/modules>
 - [21] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/templates>
 - [22] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/modules/FacilityContact>
 - [23] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/modules/FacilityContact/configs>
 - [24] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/modules/FacilityContact/templates>
 - [25] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Facility/modules/FacilityContact/lib>
 - [26] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Geography>
 - [27] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Geography/configs>
 - [28] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Geography/lib>
 - [29] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Geography/templates>
 - [30] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person>
 - [31] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/configs>
 - [32] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/lib>
 - [33] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules>
 - [34] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/templates>
 - [35] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ArchivalScans>
 - [36] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ArchivalScans/configs>
 - [37] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ArchivalScans/lib>
 - [38] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ArchivalScans/templates>
 - [39] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Contact>
 - [40] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Contact/configs>
 - [41] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Contact/templates>
 - [42] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Contact/lib>
 - [43] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Demographic>
 - [44] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Demographic/configs>
-

- [45] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Demographic/lib>
 - [46] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Demographic/templates>
 - [47] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Education>
 - [48] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Education/configs>
 - [49] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Education/templates>
 - [50] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Education/lib>
 - [51] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Employment>
 - [52] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Employment/configs>
 - [53] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Employment/lib>
 - [54] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Employment/templates>
 - [55] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ID>
 - [56] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ID/configs>
 - [57] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ID/lib>
 - [58] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/ID/templates>
 - [59] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Language>
 - [60] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Language/configs>
 - [61] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Language/lib>
 - [62] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Language/templates>
 - [63] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Notes>
 - [64] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Notes/configs>
 - [65] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Notes/lib>
 - [66] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Notes/templates>
 - [67] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/PersonPhoto>
 - [68] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/PersonPhoto/configs>
 - [69] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/PersonPhoto/lib>
 - [70] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/PersonPhoto/templates>
 - [71] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Resume>
 - [72] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Resume/configs>
 - [73] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Resume/lib>
 - [74] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Resume/templates>
 - [75] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Photo>
 - [76] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Photo/configs>
 - [77] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Photo/lib>
 - [78] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SDMX-HD-CodeLists>
 - [79] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SDMX-HD-CodeLists/configs>
 - [80] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SDMX-HD-CodeLists/SDMX-HD>
 - [81] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SDMX-HD-CodeLists/>
-

- [82] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/>
- [83] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules>
- [84] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/>
- [85] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography>
- [86] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules>
- [87] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/>
- [88] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country>
- [89] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country/configs>
- [90] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-country/>
- [91] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-county>
- [92] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-county/>
- [93] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-currency>
- [94] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-currency/configs>
- [95] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-currency/>
- [96] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-degree>
- [97] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-degree/configs>
- [98] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-degree/>
- [99] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-district>
- [100] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-district/>
- [101] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-edu_type
- [102] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-edu_type/configs
- [103] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-edu_type/
- [104] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-region>
- [105] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/CommonSampleData/modules/SampleData-Geography/modules/SampleData-region/>
- [106] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/UUID>
- [107] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/UUID/configs>
- [108] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/UUID/lib>
- [109] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/UUID/sql>
- [110] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Dependents>
- [111] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Dependents/configs>
- [112] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Dependents/templates>
- [113] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/Dependents/lib>
- [114] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Establishment>

- [illegible]

- [illegible]

- [191] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/NextOfKin/configs>
 - [192] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/NextOfKin/templates>
 - [193] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/NextOfKin/lib>
 - [194] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/SimpleCompetency>
 - [195] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/SimpleCompetency/configs>
 - [196] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/SimpleCompetency/lib>
 - [197] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/Person/modules/SimpleCompetency/templates>
 - [198] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SimpleComptency>
 - [199] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SimpleComptency/configs>
 - [200] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SimpleComptency/lib>
 - [201] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/SimpleComptency/templates>
 - [202] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse>
 - [203] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/configs>
 - [204] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/lib>
 - [205] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/templates>
 - [206] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/modules>
 - [207] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingInstitution>
 - [208] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingInstitution/configs>
 - [209] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingInstitution/lib>
 - [210] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingInstitution/templates>
 - [211] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/modules/TrainingSimpleCompetency>
 - [212] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/modules/TrainingSimpleCompetency/configs>
 - [213] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/modules/TrainingSimpleCompetency/lib>
 - [214] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-common/4.0.6-release/files/head:/modules/TrainingCourse/modules/TrainingSimpleCompetency/templates>
-

IHRIS Ideas List

If you wish to work on any of these projects, you can contact us at our [Project Communication](#) page.

iHRIS Core System Improvements

Self Service

Difficulty: High

Mentor: TBD

This would be an expansion of the current role/task system that would allow person records in the system to login and have access to certain information about themselves or the people they supervise. The current access system is handled by tasks and roles. Certain pages and template content can only be seen by users who can do the associated tasks. With Self Service, the permission parser needs to be modified to allow checking for tasks based on the record that is being seen or modified. In some cases there may be multiple levels of checking such as a supervisor being able to modify records of all supervised employees or a facility manager being able to view all employees working in that facility.

SDMX-HD

Difficulty: Medium

Mentor: TBD

SDMX-HD ^[1] is a data exchange standard for indicator definitions and data. iHRIS would like to support exporting aggregate (reporting) data to SDMX-HD for import into aggregate systems.

Mobile Updates

Difficulty: High

Mentor: TBD

Build an interface that can work on various levels of mobile phones to interface with iHRIS. Perhaps using OpenRosa ^[2]. This would allow remote users to look up or make small data updates through SMS or over the Internet. This work would involve building the SMS gateway as well as creating an easy way for administrators to define pages that will be viewed and updated from the mobile application.

Convert Configuration Data (MagicData) to MongoDB (or others?)

Difficulty: Low

Mentor: TBD

Build a faster interface for MagicData to save using MongoDB instead of MySQL to try to improve speed to this information since it is accessed so frequently. Will possibly need to retain mysql as a write storage mechanism so that magic data form storage remains fast.

Form and Page Editors

Difficulty: High

Mentor: TBD

Build an administrative interface to allow customization of forms through the application instead of using module configuration files. Building on that, create an interface to define display and edit pages based on the existing forms so more customization work can be done through the application instead of manually editing XML configuration files. More information: Custom Forms and Custom Pages.

Context Sensitive Help

Difficulty: Medium

Mentor: TBD

Set up more help links within the application so users can get direct access to help instead of having to find the relevant section in the manual. Perhaps even rewrite how the manual is used in the application.

Web Services

Difficulty: High

Mentor: TBD

Build a web services interface so other applications can access and update allowed data without having to export/import at regular intervals.

Write MagicData Objects as C

Difficulty: High

Mentor: TBD

Rewrite the MagicData PHP classes in C to speed up usage.

Upgrade to PHP 5.3

Difficulty: Medium

Mentor: TBD

Take advantage of the new features available in PHP version 5.3 to iHRIS PHP 5.3 Clean Up clean up the code.

iHRIS Modules

Leave Tracking Module

Difficulty: Medium

Mentor: TBD

Add a module to iHRIS Manage to track an employees leave. If done in concert with Self Service this could allow employees to request and view leave details directly. This would involve working with users in other countries to make sure the specifications fit their needs as well as being able to generalize it for the core system.

Mobile Roll-Call

Difficulty: Medium

Mentor: TBD

The Roll-Call module is an extension of mobile updates to allow supervisors or workers (i.e. community health workers) to log their activity.

Organizational Chart

Difficulty: Medium

Mentor: TBD

Produce a org chart for iHRIS Manage that show employees and their supervisors. Could make use of the position report that has an employee and their supervisors Two main possibilities. Make it ajaxy and put everything on the client (maybe use canvas?), or produce org-charts on the server via graphviz.

Job Application Questions

Difficulty: Low

Mentor: TBD

A module to ask applicants a series of standard questions ^[3]

Reporting

Replace Flash Charts with Images

Difficulty: Medium

Mentor: TBD

We would like to remove the Flash charts and replace it with images. This can be done using pChart ^[4] or anything similar.

JavaScript Charts

Difficulty: Medium

Mentor: TBD

A second step would be to add the option for using Canvas ^[5] for the charts as well. We'd like to add some additional features to the reporting to allow more complex charts to view the data.

General Reporting Improvements

Difficulty: Low

Mentor: TBD

There are also some smaller additions like displaying all the limits chosen for a particular report so it's clear what is being displayed and improving the interface for end users to work with reports. Interface improvements can also be made for the form relationship and report builder pages.

Geographic / OpenLayers Reporting

Difficulty: High

Mentor: TBD

Incorporate OpenLayers ^[6] into the reporting system: Reports which are tagged with geo-data (e.g. Lat and Long coordinates for a facility) will have numeric and aggregate data for the report plotted on a map.

Country Implementations

Difficulty: Varied

Mentor: TBD

Countries where iHRIS is installed may have additional needs for assistance on customizations and modules. Capacity Project's iHRIS Suite page has more information on countries where we work. Please contact us ^[7] if you're interested in this type of work.

Non iHRIS Ideas

Use Cases Wiki

Difficulty: High

Mentor: TBD

The iHRIS Project was built using use cases ^[8], but we would like a more open model to work on updates and customizations to our systems. This would be a module for a wiki (whichever seems best) that will allow easier editing of use cases so this work can be shared. It will make it easier for people making customizations to modify use cases for their purposes.

References

- [1] <http://sdmx-hd.org/>
 - [2] <http://www.openrosa.org/>
 - [3] <http://www.capacityproject.org/hris/suite/UseCaseReport-iHRISManage.htm#REQ-50251c96-e13a-463c-bb24-ec1b885949dfREQ-PT10>
 - [4] <http://pchart.sourceforge.net/>
 - [5] http://en.wikipedia.org/wiki/Canvas_element
 - [6] <http://openlayers.org/>
 - [7] <http://www.capacityproject.org/hris/contact/>
 - [8] http://en.wikipedia.org/wiki/Use_case
-

IHRIS Manage Form Fields - 4.0

These are the forms and fields in iHRIS Manage version 4.0.1

There is also a graphical visualization ^[1] of this data. **Warning:** this is a very large file and you may wish to save it to your desktop instead of viewing it in your browser.

Here is a description of the Field types.

application

The form *application* is implemented by the class: iHRIS_Applicant It has the following fields:

- position:
 - Header: Position(s)
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: position
- felony:
 - Header: Have you ever been convicted of a felony?
 - Type: YESNO
- felony_circumstance:
 - Header: If yes, give the circumstances.
 - Type: STRING_MLINE
- other_info:
 - Header: In addition to your work history, are there other skills, qualifications or experience we should consider?
 - Type: STRING_MLINE
- hear:
 - Header: How did you hear of this opening?
 - Type: STRING_MLINE
- start_date:
 - Header: When can you start?
 - Type: DATE_YMD
- desired_wage:
 - Header: Desired Wage
 - Type: CURRENCY
 - Maps To Forms: currency
- full_time:
 - Header: Are you looking for full-time employment?
 - Type: YESNO
- hours:
 - Header: If no, what hours are you available?
 - Type: STRING_MLINE

benefit

The form *benefit* is implemented by the class: iHRIS_Benefit It has the following fields:

- type:
 - Header: Benefit Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: benefit_type
- source:
 - Header: Source
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: salary_source
- recurrence:
 - Header: Recurrence Frequency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: benefit_recurrence
- amount:
 - Header: Amount
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD

benefit_recurrence

The form *benefit_recurrence* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

benefit_type

The form *benefit_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cadre

The form *cadre* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

classification

The form *classification* is implemented by the class: iHRIS_Classification It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- description:
 - Header: Description
 - Type: STRING_LINE
- code:
 - Header: Code
 - Type: STRING_LINE

competency

The form *competency* is implemented by the class: iHRIS_Competency It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {competency_type}
- competency_type:
 - Header: Competency Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency_type
- notes:
 - Header: Notes
 - Type: STRING_MLINE

competency_evaluation

The form *competency_evaluation* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

competency_type

The form *competency_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

contact

The form *contact* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

continuing_education

The form *continuing_education* is implemented by the class: iHRIS_ContinuingEducation It has the following fields:

- continuing_education_course:
 - Header: Continuing Education Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: continuing_education_course
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required

continuing_education_course

The form *continuing_education_course* is implemented by the class: iHRIS_ContinuingEducationCourse It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required

council

The form *council* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

country

The form *country* is implemented by the class: iHRIS_Country It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- alpha_two:
 - Header: 2 Character Alpha Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- code:
 - Header: ISO Numeric Code
 - Type: INT
- primary:
 - Header: Primary Country
 - Type: YESNO
- location:
 - Header: Use for Location Selection
 - Type: YESNO

county

The form *county* is implemented by the class: iHRIS_County It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {district}
- district:
 - Header: District
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: district

currency

The form *currency* is implemented by the class: iHRIS_Currency It has the following fields:

- code:
 - Header: Currency Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- name:
 - Header: Name
 - Type: STRING_LINE
- country:
 - Header: Country

- Type: MAP
- Maps To Forms: country
- symbol:
 - Header: Symbol
 - Type: STRING_LINE

degree

The form *degree* is implemented by the class: iHRIS_Degree It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {edu_type}
- edu_type:
 - Header: Education Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: edu_type

demographic

The form *demographic* is implemented by the class: iHRIS_ManageDemographic It has the following fields:

- birth_date:
 - Header: Date of Birth
 - Type: DATE_YMD
- gender:
 - Header: Gender
 - Type: MAP
 - Maps To Forms: gender
- marital_status:
 - Header: Marital Status
 - Type: MAP
 - Maps To Forms: marital_status
- dependents:
 - Header: Number of Dependents
 - Type: INT

department

The form *department* is implemented by the class: iHRIS_Department It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

district

The form *district* is implemented by the class: iHRIS_District It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {region:country}
- region:
 - Header: Region
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: region
- code:
 - Header: Code
 - Type: STRING_LINE

edu_type

The form *edu_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

education

The form *education* is implemented by the class: iHRIS_Education It has the following fields:

- degree:
 - Header: Degree
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: degree
 - institution:
 - Header: Institution Name
 - Type: STRING_LINE
 - Restrictions: Required
 - location:
 - Header: Institution Location
 - Type: STRING_LINE
-

- year:
 - Header: Year of Graduation (leave blank if In Progress)
 - Type: DATE_Y
- major:
 - Header: Major
 - Type: STRING_LINE

employee_status

The form *employee_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

employment

The form *employment* is implemented by the class: iHRIS_Employment It has the following fields:

- company_name:
 - Header: Company Name
 - Type: STRING_LINE
 - Restrictions: Required
- company_address:
 - Header: Company Address
 - Type: STRING_MLINE
- company_phone:
 - Header: Company Telephone
 - Type: STRING_LINE
- start_date:
 - Header: Date Started
 - Type: DATE_YMD
 - Restrictions: Required
- start_wage:
 - Header: Starting Wage
 - Type: CURRENCY
 - Maps To Forms: currency
- start_position:
 - Header: Starting Position
 - Type: STRING_LINE
- end_date:
 - Header: Date Ended (leave blank if still employed)
 - Type: DATE_YMD
- end_wage:
 - Header: Ending Wage
 - Type: CURRENCY
 - Maps To Forms: currency

- end_position:
 - Header: Ending Position
 - Type: STRING_LINE
- supervisor:
 - Header: Supervisor
 - Type: STRING_LINE
- contact_ok:
 - Header: Ok to Contact?
 - Type: YESNO
- responsibilities:
 - Header: Job Responsibilities
 - Type: STRING_MLINE
- reason_for_leaving:
 - Header: Reason for Leaving
 - Type: STRING_MLINE

facility

The form *facility* is implemented by the class: iHRIS_Facility

This form is used to describe basic information about a facility

It has the child forms:

- facility_contact

It has the following fields:

- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type

facility_contact

The form *facility_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

facility_type

The form *facility_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

gender

The form *gender* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
-

id_type

The form *id_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

isco_88_major

The form *isco_88_major* is implemented by the class: iHRIS_ISCO_88_Major It has the following fields:

- name:
 - Header: Major Group
 - Type: STRING_LINE
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_MLINE

isco_88_minor

The form *isco_88_minor* is implemented by the class: iHRIS_ISCO_88_Minor It has the following fields:

- name:
 - Header: Minor Group
 - Type: STRING_LINE
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_MLINE
- isco_88_sub_major:
 - Header: Sub-Major Group
 - Type: MAP
 - Maps To Forms: isco_88_sub_major

isco_88_sub_major

The form *isco_88_sub_major* is implemented by the class: iHRIS_ISCO_88_Sub_Major It has the following fields:

- name:
 - Header: Sub-Major Group
 - Type: STRING_LINE
 - Restrictions: Required
 - description:
 - Header: Description
 - Type: STRING_MLINE
 - isco_88_major:
 - Header: Major Group
 - Type: MAP
-

- Maps To Forms: isco_88_major

isco_88_unit

The form *isco_88_unit* is implemented by the class: iHRIS_ISCO_88_Unit It has the following fields:

- name:
 - Header: Unit
 - Type: STRING_LINE
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- isco_88_minor:
 - Header: Minor Group
 - Type: MAP
 - Maps To Forms: isco_88_minor

job

The form *job* is implemented by the class: iHRIS_Job It has the following fields:

- title:
 - Header: Title
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- code:
 - Header: Code
 - Type: STRING_LINE
- description:
 - Header: Description
 - Type: STRING_MLINE
- salary_grade:
 - Header: Salary Grade
 - Type: MAP
 - Maps To Forms: salary_grade
- cadre:
 - Header: Cadre (Health Professionals Only)
 - Type: MAP
 - Maps To Forms: cadre
- classification:
 - Header: Classification
 - Type: MAP
 - Maps To Forms: classification
- isco_88_unit:
 - Header: ISCO 88 Code
 - Type: MAP
 - Maps To Forms: isco_88_unit

language

The form *language* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

language_proficiency

The form *language_proficiency* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

marital_status

The form *marital_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

notes

The form *notes* is implemented by the class: iHRIS_Notes It has the following fields:

- note:
 - Header: Note
 - Type: STRING_MLINE
 - Restrictions: Required
- date_added:
 - Header: Date Added
 - Type: DATE_YMD
 - Restrictions: Required

person

The form *person* is implemented by the class: iHRIS_ManagePerson

This form holds basic information about a person such as their names and residence

It has the child forms:

- application
 - benefit
 - demographic
 - education
 - employment
 - notes
-

- person_competency
- person_contact_emergency
- person_contact_other
- person_contact_personal
- person_contact_work
- person_id
- person_language
- person_photo_passport
- person_position
- person_resume
- person_scheduled_training_course
- position_decision
- position_interview
- registration

It has the following fields:

- nationality:
 - Header: Nationality
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- residence:
 - Header: Residence
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: county,district
- surname:
 - Header: Surname
 - Type: STRING_LINE
 - Restrictions: Required
- firstname:
 - Header: First Name
 - Type: STRING_LINE
 - Restrictions: Required
- othername:
 - Header: Other Names
 - Type: STRING_LINE

person_competency

The form *person_competency* is implemented by the class: iHRIS_PersonCompetency It has the following fields:

- evaluation_date:
 - Header: Last Evaluated
 - Type: DATE_YMD
- competency_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Maps To Forms: competency_evaluation
- competency:
 - Header: Competency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency

person_contact_emergency

The form *person_contact_emergency* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

person_contact_other

The form *person_contact_other* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

person_contact_personal

The form *person_contact_personal* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

person_contact_work

The form *person_contact_work* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

person_id

The form *person_id* is implemented by the class: iHRIS_PersonID

This form holds basic information about an identification for a person

It has the following fields:

- id_type:
 - Header: Identification Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: id_type
- id_num:
 - Header: Identification Number
 - Type: STRING_LINE
 - Restrictions: Required

person_language

The form *person_language* is implemented by the class: iHRIS_PersonLanguage It has the following fields:

- speaking:
 - Header: Speaking Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency
- reading:
 - Header: Reading Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency
- writing:
 - Header: Writing Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency
- language:
 - Header: Language
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language

person_photo_passport

The form *person_photo_passport* is implemented by the class: iHRIS_Photo It has the following fields:

- image:
 - Header: Image
 - Type: IMAGE
- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE

person_position

The form *person_position* is implemented by the class: iHRIS_PersonPosition

This form is used to link a person to a particular position residence

It has the child forms:

- salary

It has the following fields:

- reason:
 - Header: Reason for Departure
 - Type: MAP
 - Maps To Forms: pos_change_reason
- position:
 - Header: Position
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: position
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD

person_resume

The form *person_resume* is implemented by the class: iHRIS_Document It has the following fields:

- document:
 - Header: Document
 - Type: DOCUMENT
- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE

person_scheduled_training_course

The form *person_scheduled_training_course* is implemented by the class: iHRIS_Person_Scheduled_Training_Course It has the child forms:

- training_course_competency_evaluation

It has the following fields:

- is_retraining:
 - Header: Retraining
 - Type: YESNO
- completed:
 - Header: Completed
 - Type: YESNO
- request_date:
 - Header: Request Date
 - Type: DATE_YMD
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- training_course_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_course_evaluation
- training_course_requestor:
 - Header: Requested By
 - Type: MAP
 - Maps To Forms: training_course_requestor
- scheduled_training_course:
 - Header: Instance
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: scheduled_training_course

pos_change_reason

The form *pos_change_reason* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

position

The form *position* is implemented by the class: iHRIS_Position It has the following fields:

- source:
 - Header: Source
 - Type: MAP_MULT
 - Maps To Forms: salary_source
 - supervisor:
 - Header: Supervisor
 - Type: MAP
 - Maps To Forms: position
 - pos_type:
 - Header: Position Type
 - Type: MAP
 - Maps To Forms: position_type
 - status:
 - Header: Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: position_status
 - code:
 - Header: Position Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
 - job:
 - Header: Job
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: job
 - title:
 - Header: Position Title
 - Type: STRING_LINE
 - Restrictions: Required
 - description:
 - Header: Position Description
 - Type: STRING_MLINE
 - proposed_salary:
 - Header: Proposed Salary
 - Type: CURRENCY
 - Maps To Forms: currency
 - facility:
 - Header: Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility
 - department:
-

- Header: Department
- Type: MAP
- Maps To Forms: department
- proposed_end_date:
 - Header: Proposed End Date
 - Type: DATE_YMD
- proposed_hiring_date:
 - Header: Proposed Hiring Date
 - Type: DATE_YMD
- posted_date:
 - Header: Date Posted
 - Type: DATE_YMD
- comments:
 - Header: Position Comments
 - Type: STRING_TEXT
- interview_comments:
 - Header: Interview Comments
 - Type: STRING_TEXT

position_decision

The form *position_decision* is implemented by the class: iHRIS_PositionDecision It has the following fields:

- date:
 - Header: Date of Decision
 - Type: DATE_YMD
 - Restrictions: Required
- offer:
 - Header: Make a Job Offer?
 - Type: YESNO
- comments:
 - Header: Comments
 - Type: STRING_MLINE

position_interview

The form *position_interview* is implemented by the class: iHRIS_PositionInterview It has the following fields:

- date:
 - Header: Date of Interview
 - Type: DATE_YMD
 - Restrictions: Required
- person:
 - Header: People Attending
 - Type: STRING_LINE
 - Restrictions: Required
- comments:
 - Header: Comments

- Type: STRING_MLINE

position_status

The form *position_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

position_type

The form *position_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

region

The form *region* is implemented by the class: iHRIS_Region It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {country}
- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- code:
 - Header: Code
 - Type: STRING_LINE

registration

The form *registration* is implemented by the class: iHRIS_Registration It has the following fields:

- council:
 - Header: Registration Council
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: council
- registration_number:
 - Header: Registration Number
 - Type: STRING_LINE
- license_number:
 - Header: License Number

- Type: STRING_LINE
- registration_date:
 - Header: Registration Date
 - Type: DATE_YMD
- license_expiration:
 - Header: License Expiration Date
 - Type: DATE_YMD

role

The form *role* is implemented by the class: I2CE_Role It has the following fields:

- trickle_up:
 - Header: Trickle Up
 - Type: MAP_MULT
 - Maps To Forms: role
- name:
 - Header: Role
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- assignable:
 - Header: Can Assign To User
 - Type: YESNO
 - Restrictions: Required

salary

The form *salary* is implemented by the class: iHRIS_Salary It has the following fields:

- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- salary:
 - Header: Salary
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- end_date:
 - Header: End Date
 - Type: DATE_YMD
- notes:
 - Header: Notes
 - Type: STRING_MLINE

salary_grade

The form *salary_grade* is implemented by the class: iHRIS_SalaryGrade It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- start:
 - Header: Start
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- end:
 - Header: End
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- midpoint:
 - Header: MidPoint
 - Type: CURRENCY
 - Maps To Forms: currency
- notes:
 - Header: Notes
 - Type: STRING_MLINE

salary_source

The form *salary_source* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

scheduled_training_course

The form *scheduled_training_course* is implemented by the class: iHRIS_Scheduled_Training_Course It has the following fields:

- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- training_course:
 - Header: Training Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_course
- name:

- Header: Site
- Type: STRING_LINE
- Restrictions: Required, Unique
- num_students:
 - Header: Maximum Number of Students
 - Type: INT
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- instructors:
 - Header: Instructors
 - Type: STRING_MLINE
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required

training_course

The form *training_course* is implemented by the class: iHRIS_Training_Course

This form holds basic information about a training course

It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- topic:
 - Header: Topic
 - Type: STRING_LINE
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Maps To Forms: training_institution
- training_funder:
 - Header: Training Funders
 - Type: MAP_MULT

- Maps To Forms: training_funder
- continuing_education_course:
 - Header: CEUs Provided
 - Type: MAP_MULT
 - Maps To Forms: continuing_education_course
- training_course_status:
 - Header: Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_course_status
- training_course_category:
 - Header: Category
 - Type: MAP
 - Maps To Forms: training_course_category
- competency:
 - Header: Competencies Provided
 - Type: MAP_MULT
 - Maps To Forms: competency

training_course_category

The form *training_course_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_course_competency_evaluation

The form *training_course_competency_evaluation* is implemented by the class: iHRIS_Training_Course_Competency_Evaluation It has the following fields:

- notes:
 - Header: Notes
 - Type: STRING_MLINE
- evaluation_date:
 - Header: Evaluation Date
 - Type: DATE_YMD
 - Restrictions: Required
- competency_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency_evaluation
- competency:
 - Header: Competency
 - Type: MAP

- Restrictions: Required
- Maps To Forms: competency

training_course_evaluation

The form *training_course_evaluation* is implemented by the class: iHRIS_Training_Course_Evaluation It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- competency_evaluation:
 - Header: Competency Evaluation
 - Type: MAP
 - Maps To Forms: competency_evaluation

training_course_requestor

The form *training_course_requestor* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_course_status

The form *training_course_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder

The form *training_funder* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_funder_contact

It has the following fields:

- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder_contact

The form *training_funder_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

training_institution

The form *training_institution* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_institution_contact

It has the following fields:

- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_institution_contact

The form *training_institution_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

user

The form *user* is implemented by the class: I2CE_User_Form It has the following fields:

- username:
 - Header: Username
 - Type: STRING_LINE
 - Restrictions: Required
 - password:
 - Header: Password (leave blank to keep the same password)
 - Type: STRING_PASS
 - firstname:
 - Header: First Name
 - Type: STRING_LINE
 - Restrictions: Required
 - lastname:
 - Header: Surname
 - Type: STRING_LINE
 - Restrictions: Required
 - email:
 - Header: Email
 - Type: STRING_LINE
 - role:
 - Header: Role
-

- Type: MAP
- Maps To Forms: role
- creator:
 - Header:
 - Type: INT

References

[1] http://open.intrahealth.org/visualizations/forms-ihris-manage-site-demo_4_0_1.gif

IHRIS Manage Form Fields - 4.0.7

These are the forms and fields in iHRIS Manage version 4.0.7

There is also a graphical visualization ^[1] of this data. **Warning:** this is a very large file and you may wish to save it to your desktop instead of viewing it in your browser.

Here is a description of the Field types.

accident

The form *accident* is implemented by the class: iHRIS_Accident It has the following fields:

- accident_type:
 - Header: Accident Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: accident_type
- end_date:
 - Header: End of Applicability
 - Type: DATE_YMD
- followup:
 - Header: Follow-up Required
 - Type: STRING_MLINE
- occurrence_date:
 - Header: Date of Occurrence
 - Type: DATE_YMD
- persons_involved:
 - Header: People Involved
 - Type: STRING_MLINE
- start_date:
 - Header: Start of Applicability
 - Type: DATE_YMD
 - Restrictions: Required

accident_type

The form *accident_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

application

The form *application* is implemented by the class: iHRIS_Applicant It has the following fields:

- desired_wage:
 - Header: Desired Wage
 - Type: CURRENCY
 - Maps To Forms: currency
- felony:
 - Header: Have you ever been convicted of a felony?
 - Type: YESNO
- felony_circumstance:
 - Header: If yes, give the circumstances.
 - Type: STRING_MLINE
- full_time:
 - Header: Are you looking for full-time employment?
 - Type: YESNO
- hear:
 - Header: How did you hear of this opening?
 - Type: STRING_MLINE
- hours:
 - Header: If no, what hours are you available?
 - Type: STRING_MLINE
- other_info:
 - Header: In addition to your work history, are there other skills, qualifications or experience we should consider?
 - Type: STRING_MLINE
- position:
 - Header: Position(s)
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: position
- start_date:
 - Header: When can you start?
 - Type: DATE_YMD

archived_report

The form *archived_report* is implemented by the class: I2CE_ArchivedReport It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- date:
 - Header: Generation Date
 - Type: DATE_YMD
 - Restrictions: Required
- name:
 - Header: Title
 - Type: STRING_LINE
 - Restrictions: Required
- report:
 - Header: Report
 - Type: DOCUMENT
- report_view:
 - Header: Report View
 - Type: STRING_LINE
 - Restrictions: Unique in {date}

benefit

The form *benefit* is implemented by the class: iHRIS_Benefit It has the following fields:

- amount:
 - Header: Amount
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- end_date:
 - Header: End Date
 - Type: DATE_YMD
- recurrence:
 - Header: Recurrence Frequency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: benefit_recurrence
- source:
 - Header: Source
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: salary_source
- start_date:
 - Header: Start Date
 - Type: DATE_YMD

- Restrictions: Required
- type:
 - Header: Benefit Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: benefit_type

benefit_recurrence

The form *benefit_recurrence* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

benefit_type

The form *benefit_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cadre

The form *cadre* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_asource

The form *cl_asource* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_cstype

The form *cl_cstype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_currency

The form *cl_currency* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_day

The form *cl_day* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_disagg

The form *cl_disagg* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_disease

The form *cl_disease* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_disstat

The form *cl_disstat* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_dsource

The form *cl_dsource* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_dstype

The form *cl_dstype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_dtype

The form *cl_dtype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_fperiod

The form *cl_fperiod* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_gboundary_type

The form *cl_gboundary_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_gcode_country

The form *cl_gcode_country* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_gender

The form *cl_gender* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_glevel

The form *cl_glevel* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_glocation

The form *cl_glocation* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_hif1

The form *cl_hif1* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_hif2

The form *cl_hif2* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_income

The form *cl_income* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_logical

The form *cl_logical* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_metype

The form *cl_metype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_month

The form *cl_month* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_mult

The form *cl_mult* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_operand

The form *cl_operand* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_orphan

The form *cl_orphan* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_otype

The form *cl_otype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_periodicity

The form *cl_periodicity* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_preg

The form *cl_preg* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_pstatus

The form *cl_pstatus* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_ptype

The form *cl_ptype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_quarter

The form *cl_quarter* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_race

The form *cl_race* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_sector

The form *cl_sector* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_sex

The form *cl_sex* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_special_value

The form *cl_special_value* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_stype

The form *cl_stype* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_tpop

The form *cl_tpop* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_unit

The form *cl_unit* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_value_type

The form *cl_value_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_vstatus

The form *cl_vstatus* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_vulnstat

The form *cl_vulnstat* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_week

The form *cl_week* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

cl_year

The form *cl_year* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

classification

The form *classification* is implemented by the class: iHRIS_Classification It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- description:
 - Header: Description
 - Type: STRING_LINE
- name:

- Header: Name
- Type: STRING_LINE
- Restrictions: Required, Unique

competency

The form *competency* is implemented by the class: iHRIS_Competency It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- competency_type:
 - Header: Competency Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency_type
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {competency_type}
- notes:
 - Header: Notes
 - Type: STRING_MLINE

competency_evaluation

The form *competency_evaluation* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

competency_type

The form *competency_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

confirmation

The form *confirmation* is implemented by the class: iHRIS_Confirmation It has the following fields:

- confirmation_type:
 - Header: Confirmation Type
 - Type: MAP
 - Restrictions: Required, Unique in {parent}
 - Maps To Forms: confirmation_type
- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- record:
 - Header: Record
 - Type: DOCUMENT
- valid:
 - Header: Valid
 - Type: YESNO
 - Restrictions: Required

confirmation_type

The form *confirmation_type* is implemented by the class: iHRIS_ConfirmationType It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- job:
 - Header: Associated Job
 - Type: MAP
 - Maps To Forms: job
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {job}
- probation_period:
 - Header: Probationary Period (Months)
 - Type: INT
 - Restrictions: Required

continuing_education

The form *continuing_education* is implemented by the class: iHRIS_ContinuingEducation It has the following fields:

- continuing_education_course:
 - Header: Continuing Education Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: continuing_education_course
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

continuing_education_course

The form *continuing_education_course* is implemented by the class: iHRIS_ContinuingEducationCourse It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required

council

The form *council* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

country

The form *country* is implemented by the class: iHRIS_Country It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- alpha_two:
 - Header: 2 Character Alpha Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- code:
 - Header: ISO Numeric Code
 - Type: INT
- location:
 - Header: Use for Location Selection
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- primary:
 - Header: Primary Country
 - Type: YESNO

county

The form *county* is implemented by the class: iHRIS_County It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- district:
 - Header: District
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: district

- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {district}

currency

The form *currency* is implemented by the class: iHRIS_Currency It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Currency Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- country:
 - Header: Country
 - Type: MAP
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
- symbol:
 - Header: Symbol
 - Type: STRING_LINE

degree

The form *degree* is implemented by the class: iHRIS_Degree It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- edu_type:
 - Header: Education Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: edu_type
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {edu_type}

demographic

The form *demographic* is implemented by the class: iHRIS_ManageDemographic It has the following fields:

- birth_date:
 - Header: Date of Birth
 - Type: DATE_YMD
- gender:
 - Header: Gender
 - Type: MAP
 - Maps To Forms: gender
- marital_status:
 - Header: Marital Status
 - Type: MAP
 - Maps To Forms: marital_status
- dependents:
 - Header: Number of Dependents
 - Type: INT

department

The form *department* is implemented by the class: iHRIS_Department It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

dependent

The form *dependent* is implemented by the class: iHRIS_Dependent It has the following fields:

- date_of_birth:
 - Header: Date of Birth
 - Type: DATE_YMD
- gender:
 - Header: Gender
 - Type: MAP
 - Maps To Forms: gender
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required

disciplinary_action

The form *disciplinary_action* is implemented by the class: iHRIS_DisciplinaryAction It has the following fields:

- action_date:
 - Header: Date of Discussion
 - Type: DATE_YMD
- disciplinary_action_type:
 - Header: Action Taken
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: disciplinary_action_type
- end_date:
 - Header: End of Applicability
 - Type: DATE_YMD
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- persons_present:
 - Header: People Present
 - Type: STRING_MLINE
- start_date:
 - Header: Start of Applicability
 - Type: DATE_YMD
 - Restrictions: Required

disciplinary_action_type

The form *disciplinary_action_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

district

The form *district* is implemented by the class: iHRIS_District It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- name:

- Header: Name
- Type: STRING_LINE
- Restrictions: Required, Unique in {region:country}
- region:
 - Header: Region
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: region

edu_type

The form *edu_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

education

The form *education* is implemented by the class: iHRIS_Education It has the following fields:

- degree:
 - Header: Degree
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: degree
- institution:
 - Header: Institution Name
 - Type: STRING_LINE
 - Restrictions: Required
- location:
 - Header: Institution Location
 - Type: STRING_LINE
- major:
 - Header: Major
 - Type: STRING_LINE
- year:
 - Header: Year of Graduation (leave blank if In Progress)
 - Type: DATE_Y

employment

The form *employment* is implemented by the class: iHRIS_Employment It has the following fields:

- company_address:
 - Header: Company Address
 - Type: STRING_MLINE
 - company_name:
 - Header: Company Name
 - Type: STRING_LINE
 - Restrictions: Required
 - company_phone:
 - Header: Company Telephone
 - Type: STRING_LINE
 - contact_ok:
 - Header: Ok to Contact?
 - Type: YESNO
 - end_date:
 - Header: Date Ended (leave blank if still employed)
 - Type: DATE_YMD
 - end_position:
 - Header: Ending Position
 - Type: STRING_LINE
 - end_wage:
 - Header: Ending Wage
 - Type: CURRENCY
 - Maps To Forms: currency
 - reason_for_leaving:
 - Header: Reason for Leaving
 - Type: STRING_MLINE
 - responsibilities:
 - Header: Job Responsibilities
 - Type: STRING_MLINE
 - start_date:
 - Header: Date Started
 - Type: DATE_YMD
 - Restrictions: Required
 - start_position:
 - Header: Starting Position
 - Type: STRING_LINE
 - start_wage:
 - Header: Starting Wage
 - Type: CURRENCY
 - Maps To Forms: currency
 - supervisor:
 - Header: Supervisor
-

- Type: STRING_LINE

establishment

The form *establishment* is implemented by the class: iHRIS_Establishment It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- amount:
 - Header: Number of Health Workers
 - Type: INT
 - Restrictions: Required
- establishment_period:
 - Header: Establishment Period
 - Type: MAP
 - Restrictions: Required, Unique in {job_cadre,location}
 - Maps To Forms: establishment_period
- job_cadre:
 - Header: Job or Cadre
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: cadre,job
- location:
 - Header: Facility or Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility,facility_type

establishment_period

The form *establishment_period* is implemented by the class: iHRIS_EstablishmentPeriod It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- establishment_type:
 - Header: Establishment Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: establishment_type
- year:
 - Header: Year of Applicability
 - Type: DATE_Y
 - Restrictions: Required, Unique in {establishment_type}

establishment_type

The form *establishment_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility

The form *facility* is implemented by the class: iHRIS_Facility

This form is used to describe basic information about a facility

It has the child forms:

- facility_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type

facility_contact

The form *facility_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number

- Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

facility_type

The form *facility_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

gender

The form *gender* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

generated_doc

The form *generated_doc* is implemented by the class: I2CE_GeneratedDoc It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- document:
 - Header: Document
 - Type: DOCUMENT
- primary_form:
 - Header: Primary Form ID
 - Type: STRING_LINE

id_type

The form *id_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

isco_88_major

The form *isco_88_major* is implemented by the class: iHRIS_ISCO_88_Major It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- description:
 - Header: Description
 - Type: STRING_MLINE
- name:
 - Header: Major Group
 - Type: STRING_LINE
 - Restrictions: Required

isco_88_minor

The form *isco_88_minor* is implemented by the class: iHRIS_ISCO_88_Minor It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- description:
 - Header: Description
 - Type: STRING_MLINE
- isco_88_sub_major:
 - Header: Sub-Major Group
 - Type: MAP
 - Maps To Forms: isco_88_sub_major
- name:
 - Header: Minor Group
 - Type: STRING_LINE
 - Restrictions: Required

isco_88_sub_major

The form *isco_88_sub_major* is implemented by the class: iHRIS_ISCO_88_Sub_Major It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- description:
 - Header: Description
 - Type: STRING_MLINE
- isco_88_major:
 - Header: Major Group
 - Type: MAP
 - Maps To Forms: isco_88_major
- name:
 - Header: Sub-Major Group
 - Type: STRING_LINE
 - Restrictions: Required

isco_88_unit

The form *isco_88_unit* is implemented by the class: iHRIS_ISCO_88_Unit It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- description:
 - Header: Description
 - Type: STRING_LINE
- isco_88_minor:

- Header: Minor Group
- Type: MAP
- Maps To Forms: isco_88_minor
- name:
 - Header: Unit
 - Type: STRING_LINE
 - Restrictions: Required

job

The form *job* is implemented by the class: iHRIS_ManageJob It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- cadre:
 - Header: Cadre (Health Professionals Only)
 - Type: MAP
 - Maps To Forms: cadre
- classification:
 - Header: Classification
 - Type: MAP
 - Maps To Forms: classification
- code:
 - Header: Code
 - Type: STRING_LINE
- description:
 - Header: Description
 - Type: STRING_MLINE
- isco_88_unit:
 - Header: ISCO 88 Code
 - Type: MAP
 - Maps To Forms: isco_88_unit
- title:
 - Header: Title
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- salary_grade:
 - Header: Salary Grade
 - Type: MAP
 - Maps To Forms: salary_grade

language

The form *language* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

language_proficiency

The form *language_proficiency* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

marital_status

The form *marital_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

nextofkin

The form *nextofkin* is implemented by the class: iHRIS_NextOfKin It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:

- Header: Email Address
- Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required
- relationship:
 - Header: Relationship
 - Type: STRING_LINE
 - Restrictions: Required

notes

The form *notes* is implemented by the class: iHRIS_Notes It has the following fields:

- date_added:
 - Header: Date Added
 - Type: DATE_YMD
 - Restrictions: Required
- note:
 - Header: Note
 - Type: STRING_MLINE
 - Restrictions: Required

person

The form *person* is implemented by the class: iHRIS_ManagePerson

This form holds basic information about a person such as their names and residence

It has the child forms:

- accident
- application
- benefit
- confirmation
- demographic
- dependent
- disciplinary_action
- education
- employment

- nextofkin
- notes
- person_archive_scan
- person_competency
- person_contact_emergency
- person_contact_other
- person_contact_personal
- person_contact_work
- person_id
- person_language
- person_photo_passport
- person_position
- person_resume
- person_scheduled_training_course
- position_decision
- position_interview
- registration

It has the following fields:

- firstname:
 - Header: First Name
 - Type: STRING_LINE
 - Restrictions: Required
 - nationality:
 - Header: Nationality
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
 - othername:
 - Header: Other Names
 - Type: STRING_LINE
 - residence:
 - Header: Residence
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: county,district
 - surname:
 - Header: Surname
 - Type: STRING_LINE
 - Restrictions: Required
-

person_archive_scan

The form *person_archive_scan* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

person_competency

The form *person_competency* is implemented by the class: iHRIS_PersonCompetency It has the following fields:

- competency:
 - Header: Competency
 - Type: MAP
 - Restrictions: Required, Unique in {parent}
 - Maps To Forms: competency
- competency_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Maps To Forms: competency_evaluation
- evaluation_date:
 - Header: Last Evaluated
 - Type: DATE_YMD

person_contact_emergency

The form *person_contact_emergency* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:

- Header: Fax Number
- Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_other

The form *person_contact_other* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_personal

The form *person_contact_personal* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number

- Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_work

The form *person_contact_work* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_id

The form *person_id* is implemented by the class: iHRIS_PersonID

This form holds basic information about an identification for a person

It has the following fields:

- id_num:
 - Header: Identification Number
 - Type: STRING_LINE
 - Restrictions: Required
- id_type:
 - Header: Identification Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: id_type

person_language

The form *person_language* is implemented by the class: iHRIS_PersonLanguage It has the following fields:

- language:
 - Header: Language
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language
- reading:
 - Header: Reading Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency
- speaking:
 - Header: Speaking Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency
- writing:
 - Header: Writing Proficiency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: language_proficiency

person_photo_passport

The form *person_photo_passport* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

person_position

The form *person_position* is implemented by the class: iHRIS_PersonPosition

This form is used to link a person to a particular position residence

It has the child forms:

- salary

It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
- position:
 - Header: Position
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: position
- reason:
 - Header: Reason for Departure
 - Type: MAP
 - Maps To Forms: pos_change_reason
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

person_resume

The form *person_resume* is implemented by the class: iHRIS_Document It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- document:
 - Header: Document
 - Type: DOCUMENT

person_scheduled_training_course

The form *person_scheduled_training_course* is implemented by the class: iHRIS_Person_Scheduled_Training_Course It has the child forms:

- training_course_competency_evaluation

It has the following fields:

- completed:
 - Header: Completed
 - Type: YESNO
- is_retraining:
 - Header: Retraining
 - Type: YESNO
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- request_date:
 - Header: Request Date
 - Type: DATE_YMD
 - Restrictions: Required
- scheduled_training_course:
 - Header: Instance
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: scheduled_training_course
- training_course_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_course_evaluation
- training_course_requestor:
 - Header: Requested By

- Type: MAP
- Maps To Forms: training_course_requestor

pos_change_reason

The form *pos_change_reason* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

position

The form *position* is implemented by the class: iHRIS_Position It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Position Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- comments:
 - Header: Position Comments
 - Type: STRING_TEXT
- department:
 - Header: Department
 - Type: MAP
 - Maps To Forms: department
- description:
 - Header: Position Description
 - Type: STRING_MLINE
- facility:
 - Header: Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility
- interview_comments:
 - Header: Interview Comments
 - Type: STRING_TEXT
- job:
 - Header: Job
 - Type: MAP
 - Restrictions: Required

- Maps To Forms: job
 - posted_date:
 - Header: Date Posted
 - Type: DATE_YMD
 - pos_type:
 - Header: Position Type
 - Type: MAP
 - Maps To Forms: position_type
 - proposed_end_date:
 - Header: Proposed End Date
 - Type: DATE_YMD
 - proposed_hiring_date:
 - Header: Proposed Hiring Date
 - Type: DATE_YMD
 - proposed_salary:
 - Header: Proposed Salary
 - Type: CURRENCY
 - Maps To Forms: currency
 - source:
 - Header: Source
 - Type: MAP_MULT
 - Maps To Forms: salary_source
 - status:
 - Header: Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: position_status
 - supervisor:
 - Header: Supervisor
 - Type: MAP
 - Maps To Forms: position
 - title:
 - Header: Position Title
 - Type: STRING_LINE
 - Restrictions: Required
-

position_decision

The form *position_decision* is implemented by the class: iHRIS_PositionDecision It has the following fields:

- comments:
 - Header: Comments
 - Type: STRING_MLINE
- date:
 - Header: Date of Decision
 - Type: DATE_YMD
 - Restrictions: Required
- offer:
 - Header: Make a Job Offer?
 - Type: YESNO
- record:
 - Header: Record of Decision
 - Type: DOCUMENT

position_interview

The form *position_interview* is implemented by the class: iHRIS_PositionInterview It has the following fields:

- comments:
 - Header: Comments
 - Type: STRING_MLINE
- date:
 - Header: Date of Interview
 - Type: DATE_YMD
 - Restrictions: Required
- person:
 - Header: People Attending
 - Type: STRING_LINE
 - Restrictions: Required
- record:
 - Header: Interview Record
 - Type: DOCUMENT

position_status

The form *position_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

position_type

The form *position_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

region

The form *region* is implemented by the class: iHRIS_Region It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {country}

registration

The form *registration* is implemented by the class: iHRIS_Registration It has the following fields:

- council:
 - Header: Registration Council
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: council
- license_expiration:
 - Header: License Expiration Date
 - Type: DATE_YMD
- license_number:
 - Header: License Number
 - Type: STRING_LINE
- registration_date:
 - Header: Registration Date

- Type: DATE_YMD
- registration_number:
 - Header: Registration Number
 - Type: STRING_LINE

salary

The form *salary* is implemented by the class: iHRIS_Salary It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- salary:
 - Header: Salary
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

salary_grade

The form *salary_grade* is implemented by the class: iHRIS_SalaryGrade It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- end:
 - Header: End
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency
- midpoint:
 - Header: MidPoint
 - Type: CURRENCY
 - Maps To Forms: currency
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- notes:
 - Header: Notes
 - Type: STRING_MLINE

- start:
 - Header: Start
 - Type: CURRENCY
 - Restrictions: Required
 - Maps To Forms: currency

salary_source

The form *salary_source* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

scheduled_training_course

The form *scheduled_training_course* is implemented by the class: iHRIS_Scheduled_Training_Course It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- instructors:
 - Header: Instructors
 - Type: STRING_MLINE
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Site
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- num_students:
 - Header: Maximum Number of Students
 - Type: INT
 - Restrictions: Required

- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- training_course:
 - Header: Training Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_course

training_course

The form *training_course* is implemented by the class: iHRIS_Training_Course

This form holds basic information about a training course

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- competency:
 - Header: Competencies Provided
 - Type: MAP_MULT
 - Maps To Forms: competency
- continuing_education_course:
 - Header: CEUs Provided
 - Type: MAP_MULT
 - Maps To Forms: continuing_education_course
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- topic:
 - Header: Topic
 - Type: STRING_LINE
 - Restrictions: Required
- training_course_category:
 - Header: Category
 - Type: MAP
 - Maps To Forms: training_course_category
- training_course_status:
 - Header: Status
 - Type: MAP
 - Restrictions: Required

- Maps To Forms: training_course_status
- training_funder:
 - Header: Training Funders
 - Type: MAP_MULT
 - Maps To Forms: training_funder
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Maps To Forms: training_institution

training_course_category

The form *training_course_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_course_competency_evaluation

The form *training_course_competency_evaluation* is implemented by the class: iHRIS_Training_Course_Competency_Evaluation It has the following fields:

- competency:
 - Header: Competency
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency
- competency_evaluation:
 - Header: Evaluation
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: competency_evaluation
- evaluation_date:
 - Header: Evaluation Date
 - Type: DATE_YMD
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_MLINE

training_course_evaluation

The form *training_course_evaluation* is implemented by the class: iHRIS_Training_Course_Evaluation It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- competency_evaluation:
 - Header: Competency Evaluation
 - Type: MAP
 - Maps To Forms: competency_evaluation
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_course_requestor

The form *training_course_requestor* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_course_status

The form *training_course_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder

The form *training_funder* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_funder_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder_contact

The form *training_funder_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

training_institution

The form *training_institution* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_institution_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_institution_contact

The form *training_institution_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

References

[1] http://open.intrahealth.org/visualizations/forms-ihris-manage-site-demo_4_0_7.gif

IHRIS Manage Module List (4.0.6)

This is a list of all modules available in version 4.0.6-release of the package iHRIS Manage ^[1]

ManageRegistration

This describes version 4.0.0 of the module iHRIS Manage Registration (ManageRegistration)

- Source: manage/modules/ManageRegistration ^[2]
- Module Class: The module class is implemented by iHRIS_Module_ManageRegistration
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_registration() via action_registration()
- Description: A Person's Registration Details
- Requirements:
 - ihris-manage-Person at least 4.0
- Paths:
 - Configs: modules/ManageRegistration/configs ^[3]
 - Templates: modules/ManageRegistration/templates ^[4]
view_list_council.html, view_registration.html, form_registration.html
 - Classes: modules/ManageRegistration/lib ^[5]
iHRIS_Module_ManageRegistration

SampleData-accident_type

This describes version 4.0.4.2 of the module Accident Type (SampleData-accident_type)

- Source: manage/modules/BaseData/modules/SampleData-accident_type ^[6]
- Description: Sample Data for form: accidentid_type
- Requirements:
 - accident at least 4.0
- Paths:
 - Classes: modules/BaseData/modules/SampleData-accident_type/ ^[7]

SampleData-benefit_type

This describes version 4.0.0 of the module Benefit Type (SampleData-benefit_type)

- Source: manage/modules/BaseData/modules/SampleData-benefit_type ^[8]
 - Description: Sample Data for form: benefit_type
 - Requirements:
 - ihris-manage-Benefit at least 4.0
 - Paths:
 - Classes: modules/BaseData/modules/SampleData-benefit_type/ ^[9]
-

SampleData-cadre

This describes version 4.0.0 of the module Cadre (SampleData-cadre)

- Source: manage/modules/MedicalData/modules/SampleData-cadre ^[10]
- Description: Sample Data for form: cadre
- Requirements:
 - ihris-manage-Job at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-cadre/ ^[11]

SampleData-classification

This describes version 4.0.0 of the module Classification (SampleData-classification)

- Source: manage/modules/MedicalData/modules/SampleData-classification ^[12]
- Description: Sample Data for form: classification
- Requirements:
 - ihris-manage-Job at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-classification/ ^[13]

SampleData-competency

This describes version 4.0.0 of the module Competency (SampleData-competency)

- Source: manage/modules/MedicalData/modules/SampleData-competency ^[14]
- Description: Sample Data for form: competency
- Requirements:
 - SampleData-competency_type at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-competency/ ^[15]

SampleData-competency_type

This describes version 4.0.0 of the module Competency Type (SampleData-competency_type)

- Source: manage/modules/MedicalData/modules/SampleData-competency_type ^[16]
- Description: Sample Data for form: competency_type
- Requirements:
 - simple-competency at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-competency_type/ ^[17]

SampleData-confirmation_type

This describes version 4.0.6 of the module Sample Data Confirmation Type (SampleData-confirmation_type)

- Source: manage/modules/SampleData/modules/SampleData-confirmation_type ^[18]
- Description: Sample data for confirmation types.
- Paths:
 - Classes: modules/SampleData/modules/SampleData-confirmation_type/ ^[19]

SampleData-council

This describes version 4.0.0 of the module Registration Councils (SampleData-council)

- Source: manage/modules/MedicalData/modules/SampleData-council ^[20]
- Description: Sample Data for form: council
- Requirements:
 - ManageRegistration at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-council/ ^[21]

SampleData-department

This describes version 4.0.0 of the module Department (SampleData-department)

- Source: manage/modules/MedicalData/modules/SampleData-department ^[22]
- Description: Sample Data for form: department
- Requirements:
 - ihris-manage-PersonPosition at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-department/ ^[23]

SampleData-disciplinary_action_type

This describes version 4.0.4.1 of the module Disciplinary Action Type (SampleData-disciplinary_action_type)

- Source: manage/modules/MedicalData/modules/SampleData-disciplinary_action_type ^[24]
- Description: Sample Data for form: disciplinary_action_type
- Requirements:
 - disciplinary_action at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-disciplinary_action_type/ ^[25]

SampleData-establishment

This describes version 4.0.6.2010.08.03.01 of the module Establishment Sample Data (SampleData-establishment)

- Source: manage/modules/SampleData/modules/SampleData-Establishment ^[26]
- Requirements:
 - ihris-manage-sample-data at least 4.0 and less than 4.1
 - establishment at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/SampleData/modules/SampleData-Establishment/configs ^[27]
 - Classes: modules/SampleData/modules/SampleData-Establishment/ ^[28]

SampleData-facility

This describes version 4.0.0 of the module Office/Facility (SampleData-facility)

- Source: manage/modules/SampleData/modules/SampleData-facility ^[29]
- Description: Sample Data for form: facility
- Requirements:
 - Facility at least 4.0
- Paths:
 - Classes: modules/SampleData/modules/SampleData-facility/ ^[30]

SampleData-facility_type

This describes version 4.0.0 of the module Facility Type (SampleData-facility_type)

- Source: manage/modules/MedicalData/modules/SampleData-facility_type ^[31]
- Description: Sample Data for form: facility_type
- Requirements:
 - Facility at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-facility_type/ ^[32]

SampleData-id_type

This describes version 4.0.0 of the module Identification Type (SampleData-id_type)

- Source: manage/modules/BaseData/modules/SampleData-id_type ^[33]
- Description: Sample Data for form: id_type
- Requirements:
 - PersonID at least 4.0
- Paths:
 - Classes: modules/BaseData/modules/SampleData-id_type/ ^[34]

SampleData-job

This describes version 4.0.0 of the module Job (SampleData-job)

- Source: manage/modules/MedicalData/modules/SampleData-job ^[35]
- Description: Sample Data for form: job
- Requirements:
 - SampleData-cadre at least 4.0
 - SampleData-classification at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-job/ ^[36]

SampleData-language

This describes version 4.0.0 of the module Language (SampleData-language)

- Source: manage/modules/BaseData/modules/SampleData-language ^[37]
- Description: Sample Data for form: language
- Requirements:
 - PersonLanguage at least 4.0
- Paths:
 - Classes: modules/BaseData/modules/SampleData-language/ ^[38]

SampleData-marital_status

This describes version 4.0.0 of the module Marital Status (SampleData-marital_status)

- Source: manage/modules/BaseData/modules/SampleData-marital_status ^[39]
- Description: Sample Data for form: marital_status
- Requirements:
 - PersonDemographic at least 4.0
- Paths:
 - Classes: modules/BaseData/modules/SampleData-marital_status/ ^[40]

SampleData-pos_change_reason

This describes version 4.0.0 of the module Reasons for Departure (SampleData-pos_change_reason)

- Source: manage/modules/BaseData/modules/SampleData-pos_change_reason ^[41]
- Description: Sample Data for form: pos_change_reason
- Requirements:
 - ihris-manage-PersonPosition at least 4.0
- Paths:
 - Classes: modules/BaseData/modules/SampleData-pos_change_reason/ ^[42]

SampleData-position_type

This describes version 4.0.0 of the module Position Type (SampleData-position_type)

- Source: manage/modules/MedicalData/modules/SampleData-position_type^[43]
- Description: Sample Data for form: position_type
- Requirements:
 - ihris-manage-PersonPosition at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-position_type/^[44]

SampleData-salary_grade

This describes version 4.0.0 of the module Salary Grade (SampleData-salary_grade)

- Source: manage/modules/MedicalData/modules/SampleData-salary_grade^[45]
- Description: Sample Data for form: salary_grade
- Requirements:
 - ihris-manage-Job at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-salary_grade/^[46]

SampleData-salary_source

This describes version 4.0.0 of the module Salary Source (SampleData-salary_source)

- Source: manage/modules/MedicalData/modules/SampleData-salary_source^[47]
- Description: Sample Data for form: salary_source
- Requirements:
 - ihris-manage-Salary at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-salary_source/^[48]

SampleData-training_course_category

This describes version 4.0.0 of the module Training Course Category (SampleData-training_course_category)

- Source: manage/modules/MedicalData/modules/SampleData-training_course_category^[49]
- Description: Sample Data for form: training_course_category
- Requirements:
 - training-course at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-training_course_category/^[50]

SampleData-training_course_requestor

This describes version 4.0.0 of the module Training Requestor (SampleData-training_course_requestor)

- Source: manage/modules/MedicalData/modules/SampleData-training_course_requestor^[51]
- Description: Sample Data for form: training_course_requestor
- Requirements:
 - training-course at least 4.0
- Paths:
 - Classes: modules/MedicalData/modules/SampleData-training_course_requestor/^[52]

accident

This describes version 4.0.6.0 of the module Workplace Accident (accident)

- Source: manage/modules/Accident^[53]
- Module Class: The module class is implemented by iHRIS_Module_Accident
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_accident() via action_accident()
- Description: A Workplace Accident Tracking Module
- Requirements:
 - Person at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Accident/configs^[54]
 - Classes: modules/Accident/lib^[55]
iHRIS_Module_Accident
 - Templates: modules/Accident/templates^[56]
view_list_accident_type.html, form_accident.html, view_accident.html

disciplinary_action

This describes version 4.0.6.1 of the module Disciplinary Action (disciplinary_action)

- Source: manage/modules/Disciplinary^[57]
- Module Class: The module class is implemented by iHRIS_Module_DisciplinaryAction
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_disciplinary_action() via action_disciplinary_action()
- Description: A Disciplinary Action Tracking Module
- Requirements:
 - Person at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Disciplinary/configs^[58]
 - Classes: modules/Disciplinary/lib^[59]
iHRIS_Module_DisciplinaryAction
 - Templates: modules/Disciplinary/templates^[60]
form_disciplinary_action.html, view_list_disciplinary_action_type.html, view_disciplinary_action.html

ihris-manage

This describes version 4.0.6.0 of the module iHRIS Manage (ihris-manage) It is the top module of this package

- Source: manage/ ^[61]
- Module Class: The module class is implemented by iHRIS_Module_Manage
- Description: The iHRIS Manage system.
- Requirements:
 - ihris-common at least 4.0 and less than 4.1
 - ihris-manage-Person at least 4.0 and less than 4.1
 - ihris-manage-PersonPosition at least 4.0 and less than 4.1
 - ihris-manage-Benefit at least 4.0 and less than 4.1
 - Currency at least 4.0 and less than 4.1
 - simple-competency at least 4.0 and less than 4.1
 - ihris-common-Search at least 4.0 and less than 4.1
 - ihris-common-RecentForm at least 4.0 and less than 4.1
- Conflicts:
 - ihris-qualify at least 2 and less than 5
 - ihris-plan at least 1 and less than 2
- Optionally Enables: ihris-manage-CustomReports ihris-manage-Application ihris-manage-help FacilityContact ManageRegistration
- Paths:
 - Configs: /configs ^[62]
 - Classes: /lib ^[63]
iHRIS_Module_Manage, iHRIS_PageManage
 - Templates: /templates ^[64]
view.html, lists.html, menu_manage.html, shell.html, manage.html, index.html, menu_view_person.html
 - Css: /css ^[65]
 - Scripts: /scripts ^[66]
 - Images: /images ^[67]
 - Modules: /modules ^[68]
ManageRegistration, accident, disciplinary_action, ihris-manage-Application, ihris-manage-Benefit, ihris-manage-CustomReports, ihris-manage-Job, ihris-manage-Person, ihris-manage-PersonDemographic, ihris-manage-PersonPosition, ihris-manage-Salary, ihris-manage-base-data, ihris-manage-confirmation, ihris-manage-help, ihris-manage-medical-data, ihris-manage-sample-data, manage-training-course

ihris-manage-Application

This describes version 4.0.0 of the module iHRIS Manage Application (ihris-manage-Application)

- Source: manage/modules/ManageApplication ^[69]
- Module Class: The module class is implemented by iHRIS_Module_Application
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_application() via action_application()
 - Implements the method iHRIS_PageView->action_position_decision() via action_position_decision()
 - Implements the method iHRIS_PageView->action_position_interview() via action_position_interview()
- Description: The iHRIS Manage Application Module.
- Requirements:
 - ihris-manage-PersonPosition at least 4.0 and less than 4.1

- Person at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageApplication/configs ^[70]
 - Classes: modules/ManageApplication/lib ^[71]
iHRIS_Applicant, iHRIS_Module_Application
 - Modules: modules/ManageApplication/modules ^[72]
ihris-manage-ApplicationAttachment
 - Templates: modules/ManageApplication/templates ^[73]
form_position_decision.html, form_position_interview.html, view_position_interview.html,
applicant_review_results.html, applicant_review_row.html, applicant_review_list_entry.html,
applicant_review_list.html, form_application.html, applicant_review_no_results.html,
view_position_decision.html, applicant_review.html, view_application.html

ihris-manage-ApplicationAttachment

This describes version 4.0.7.2 of the module iHRIS Manage Application Attachments (ihris-manage-ApplicationAttachment)

- Source: manage/modules/ManageApplication/modules/ApplicationAttachments ^[74]
- Description: Allows attachments to Position Decisions and Position Interview forms
- Requirements:
 - ihris-manage-Application at least 4.0 and less than 4.1
 - BinField at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageApplication/modules/ApplicationAttachments/configs ^[75]
 - Classes: modules/ManageApplication/modules/ApplicationAttachments/ ^[76]

ihris-manage-Benefit

This describes version 4.0.4 of the module iHRIS Manage Benefit (ihris-manage-Benefit)

- Source: manage/modules/Benefit ^[77]
- Module Class: The module class is implemented by iHRIS_Module_Benefit
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_benefit() via action_benefit()
- Description: The iHRIS Manage Benefit module provides basic benefit related information
- Requirements:
 - Person at least 4.0
 - ihris-manage-Salary at least 4.0
- Paths:
 - Configs: modules/Benefit/configs ^[78]
 - Classes: modules/Benefit/lib ^[79]
iHRIS_Benefit, iHRIS_Module_Benefit
 - Templates: modules/Benefit/templates ^[80]
form_benefit.html, view_benefit.html, view_list_benefit_type.html

ihris-manage-ConfirmationAttachment

This describes version 4.0.6.0 of the module iHRIS Manage Confirmation Attachments (ihris-manage-ConfirmationAttachment)

- Source: manage/modules/Confirmation/modules/ConfirmationAttachments ^[81]
- Description: Allows attachments to Confirmation forms
- Requirements:
 - ihris-manage-confirmation at least 4.0 and less than 4.1
 - BinField at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Confirmation/modules/ConfirmationAttachments/configs ^[82]
 - Classes: modules/Confirmation/modules/ConfirmationAttachments/ ^[83]

ihris-manage-CustomReports

This describes version 4.0.0 of the module iHRIS Manage Custom Reports (ihris-manage-CustomReports)

- Source: manage/modules/ManageCustomReports ^[84]
- Description: The Manage Reporting System
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Optionally Enables: CustomReports_PieChart CustomReports_Export CustomReports_PDF
ihris-manage-CustomReports-position-reports ihris-manage-CustomReports-staff-reports
ihris-manage-CustomReports-facility-reports ihris-manage-CustomReports-search-people
- Paths:
 - Configs: modules/ManageCustomReports/configs ^[85]
 - Pdf_images: modules/ManageCustomReports/pdf_images ^[86]
 - Modules: modules/ManageCustomReports/Reports ^[87]
ihris-manage-CustomReports-FilledPositions, ihris-manage-CustomReports-facility-reports,
ihris-manage-CustomReports-position-reports, ihris-manage-CustomReports-search-people,
ihris-manage-CustomReports-staff-reports
 - Classes: modules/ManageCustomReports/ ^[88]

ihris-manage-CustomReports-FilledPositions

This describes version 4.0.0 of the module iHRIS Manage Filled Positions Reports (ihris-manage-CustomReports-FilledPositions)

- Source: manage/modules/ManageCustomReports/Reports/FilledPositions ^[89]
- Description: The Manage Report for Filled Positions
- Requirements:
 - ihris-manage-CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageCustomReports/Reports/FilledPositions/configs ^[90]
 - Classes: modules/ManageCustomReports/Reports/FilledPositions/ ^[91]

ihris-manage-CustomReports-facility-reports

This describes version 4.0.0 of the module iHRIS Manage Facility Reports (ihris-manage-CustomReports-facility-reports)

- Source: manage/modules/ManageCustomReports/Reports/FacilityReports ^[92]
- Description: The Manage Reports based on the Facility relationship.
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageCustomReports/Reports/FacilityReports/configs ^[93]
 - Classes: modules/ManageCustomReports/Reports/FacilityReports/ ^[94]

ihris-manage-CustomReports-position-reports

This describes version 4.0.0.2 of the module iHRIS Manage Position Reports (ihris-manage-CustomReports-position-reports)

- Source: manage/modules/ManageCustomReports/Reports/PositionReports ^[95]
- Description: The Manage Reports based on the Position relationship
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageCustomReports/Reports/PositionReports/configs ^[96]
 - Classes: modules/ManageCustomReports/Reports/PositionReports/ ^[97]

ihris-manage-CustomReports-search-people

This describes version 4.0.0 of the module Custom Reports - Search People (ihris-manage-CustomReports-search-people)

- Source: manage/modules/ManageCustomReports/Reports/SearchPeople ^[98]
- Description: The definition of the search people report for Manage.
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageCustomReports/Reports/SearchPeople/configs ^[99]
 - Classes: modules/ManageCustomReports/Reports/SearchPeople/ ^[100]

ihris-manage-CustomReports-staff-reports

This describes version 4.0.8.1 of the module iHRIS Manage Custom Staff Reports (ihris-manage-CustomReports-staff-reports)

- Source: manage/modules/ManageCustomReports/Reports/StaffReports ^[101]
- Description: The Manage Staff Reports
- Requirements:
 - CustomReports at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageCustomReports/Reports/StaffReports/configs ^[102]
 - Classes: modules/ManageCustomReports/Reports/StaffReports/ ^[103]

ihris-manage-Job

This describes version 4.0.6.3 of the module iHRIS Manage Job (ihris-manage-Job)

- Source: manage/modules/ManageJob^[104]
- Module Class: The module class is implemented by iHRIS_Module_ManageJob
- Description: The iHRIS Manage Job
- Requirements:
 - ihris-common-Job at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManageJob/configs^[105]
 - Classes: modules/ManageJob/lib^[106]
iHRIS_ManageJob, iHRIS_Module_ManageJob, iHRIS_PageViewJob
 - Templates: modules/ManageJob/templates^[107]
view_list_job.html, lists_form_salary_grade.html, view_job.html, lists_form_job.html,
view_list_salary_grade.html
 - Modules: modules/ManageJob/modules^[108]

ihris-manage-Person

This describes version 4.0.3 of the module iHRIS Manage Person (ihris-manage-Person)

- Source: manage/modules/ManagePerson^[109]
- Description: The iHRIS Manage Person
- Requirements:
 - Person at least 4.0
- Paths:
 - Classes: modules/ManagePerson/lib^[110]
iHRIS_PageFormPersonManage

ihris-manage-PersonDemographic

This describes version 4.0.0 of the module iHRIS Manage Person Demographic (ihris-manage-PersonDemographic)

- Source: manage/modules/ManagePersonDemographic^[111]
- Description: The iHRIS Manage Person Demographic
- Requirements:
 - Person at least 4.0
 - PersonDemographic at least 4.0
- Paths:
 - Configs: modules/ManagePersonDemographic/configs^[112]
 - Templates: modules/ManagePersonDemographic/templates^[113]
form_demographic.html, view_demographic.html
 - Classes: modules/ManagePersonDemographic/^[114]

ihris-manage-PersonPosition

This describes version 4.0.6.2 of the module iHRIS Manage Person Position (ihris-manage-PersonPosition)

- Source: manage/modules/ManagePersonPosition ^[115]
- Module Class: The module class is implemented by iHRIS_Module_PersonPosition
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_person_position() via action_person_position()
 - Implements the method iHRIS_Person->getLastPosition() via getLastPosition()
 - Implements the method iHRIS_Person->isActive() via isActive_Person()
 - Implements the method iHRIS_PersonPosition->isActive() via isActive_PersonPosotion()
- Description: The iHRIS Manage Position. Adds a position which is linked to a person and is defined by a job,
- Requirements:
 - ihris-manage-Job at least 4.0 and less than 4.1
 - Person at least 4.0 and less than 4.1
 - Facility at least 4.0 and less than 4.1
 - form-limits at least 4.0 and less than 4.1
 - forms-storage at least 4.0 and less than 4.1
 - ihris-manage-Benefit at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/ManagePersonPosition/configs ^[116]
 - Classes: modules/ManagePersonPosition/lib ^[117]
iHRIS_Module_PersonPosition, iHRIS_PageFormDeparture, iHRIS_PageFormMakeOffer, iHRIS_PageFormSalary, iHRIS_PageViewPosition, iHRIS_PersonPosition, iHRIS_Position, iHRIS_SalaryHistoryPage
 - Templates: modules/ManagePersonPosition/templates ^[118]
salary_history.html, view_position_open_link.html, view_list_position_type.html, view_salary.html, lists_form_department.html, lists_type_mapped_position_status.html, salary_history_position.html, view_job_positions.html, button_confirm_position.html, view_position_discontinued_link.html, form_person_position.html, form_departure.html, form_salary.html, view_position_row.html, salary_history_add.html, salary_history_salary.html, lists_form_position.html, view_person_position.html, view_list_pos_change_reason.html, form_salary_change.html, form_make_offer.html, view_position_supervised.html, form_make_promotion.html, view_position.html, view_list_department.html, view_position_person.html

ihris-manage-Salary

This describes version 4.0.0 of the module iHRIS Manage Salary (ihris-manage-Salary)

- Source: manage/modules/Salary ^[119]
- Module Class: The module class is implemented by iHRIS_Module_ManageSalary
- Description: The iHRIS Manage Salary module provides salary and salary source forms
- Requirements:
 - ihris-manage-Person at least 4.0
 - Currency at least 4.0
- Paths:
 - Configs: modules/Salary/configs ^[120]
 - Classes: modules/Salary/lib ^[121]
iHRIS_Module_ManageSalary

- Templates: modules/Salary/templates^[122]
view_list_salary_source.html

ihris-manage-base-data

This describes version 4.0.4 of the module iHRIS Manage Base Data (ihris-manage-base-data)

- Source: manage/modules/BaseData^[123]
- Description: iHRIS Manage Base Data
- Requirements:
 - BackgroundProcess at least 4.0 and less than 4.1
 - ihris-manage at least 4.0 and less than 4.1
 - SampleData-Common at least 4.0
- Optionally Enables: SampleData-benefit_type SampleData-language SampleData-marital_status SampleData-pos_change_reason SampleData-id_type SampleData-accident_type
- Paths:
 - Modules: modules/BaseData/modules^[124]
SampleData-accident_type, SampleData-benefit_type, SampleData-id_type, SampleData-language, SampleData-marital_status, SampleData-pos_change_reason
 - Classes: modules/BaseData/^[125]

ihris-manage-confirmation

This describes version 4.0.6.2 of the module iHRIS Manage Confirmation (ihris-manage-confirmation)

- Source: manage/modules/Confirmation^[126]
- Module Class: The module class is implemented by iHRIS_Module_Confirmation
- Fuzzy Methods:
 - Implements the method iHRIS_PageView->action_confirmation() via action_confirmation()
- Description: The iHRIS Manage Confirmation module provides confirmation tracking
- Requirements:
 - Person at least 4.0 and less than 4.1
 - ihris-manage-PersonPosition at least 4.0 and less than 4.1
 - ihris-common-Job at least 4.0 and less than 4.1
- Paths:
 - Configs: modules/Confirmation/configs^[127]
 - Classes: modules/Confirmation/lib^[128]
iHRIS_Module_Confirmation
 - Modules: modules/Confirmation/modules^[129]
ihris-manage-ConfirmationAttachment
 - Templates: modules/Confirmation/templates^[130]
form_confirmation.html, view_list_confirmation_type.html, add_confirmation.html, view_confirmation.html, lists_form_confirmation_type.html

ihris-manage-help

This describes version 4.0.0 of the module iHRIS Manage Help (ihris-manage-help)

- Source: manage/modules/manage-help ^[131]
- Description: The iHRIS Manage Help system.
- Requirements:
 - ihris-manage at least 4.0 and less than 4.1
- Paths:
 - Static: modules/manage-help/static ^[132]
 - Images: modules/manage-help/images ^[133]
 - Scripts: modules/manage-help/scripts ^[134]
 - Css: modules/manage-help/css ^[135]
 - Classes: modules/manage-help/ ^[136]

ihris-manage-medical-data

This describes version 4.0.0 of the module iHRIS Manage Medical Base Data (ihris-manage-medical-data)

- Source: manage/modules/MedicalData ^[137]
- Description: iHRIS Manage Medical Base Data
- Requirements:
 - ihris-manage-base-data at least 4.0 and less than 4.1
- Optionally Enables: SampleData-cadre SampleData-department SampleData-salary_grade
SampleData-classification SampleData-facility_type SampleData-salary_source SampleData-competency
SampleData-job SampleData-training_course_category SampleData-competency_type SampleData-position_type
SampleData-training_course_requestor SampleData-council SampleData-disciplinary_action_type
- Paths:
 - Modules: modules/MedicalData/modules ^[138]
SampleData-cadre, SampleData-classification, SampleData-competency, SampleData-competency_type,
SampleData-council, SampleData-department, SampleData-disciplinary_action_type,
SampleData-facility_type, SampleData-job, SampleData-position_type, SampleData-salary_grade,
SampleData-salary_source, SampleData-training_course_category, SampleData-training_course_requestor
 - Classes: modules/MedicalData/ ^[139]

ihris-manage-sample-data

This describes version 4.0.0 of the module iHRIS Manage Sample Data (ihris-manage-sample-data)

- Source: manage/modules/SampleData ^[140]
- Module Class: The module class is implemented by iHRIS_Module_Manage_SampleData
- Description: iHRIS Manage Sample Data
- Requirements:
 - ihris-manage-medical-data at least 4.0 and less than 4.1
- Optionally Enables: SampleData-facility SampleData-establishment SampleData-confirmation_type
- Paths:
 - Sql: modules/SampleData/sql ^[141]
 - Modules: modules/SampleData/modules ^[142]
SampleData-confirmation_type, SampleData-establishment, SampleData-facility

- Classes: modules/SampleData/ ^[143]
iHRIS_Module_Manage_SampleData

manage-training-course

This describes version 4.0.0 of the module Manage Training Course (manage-training-course)

- Source: manage/modules/ManageTrainingCourse ^[144]
- Description: Makes the training course module available to iHRIS Manage
- Requirements:
 - ihris-manage at least 4.0 and less than 4.1
 - training-course at least 4.0 and less than 4.1
- Optionally Enables: manage-training-institution manage-training-simple-competency
- Paths:
 - Modules: modules/ManageTrainingCourse/modules ^[145]
manage-training-institution, manage-training-simple-competency
 - Classes: modules/ManageTrainingCourse/ ^[146]

manage-training-institution

This describes version 4.0.0 of the module Manage Training Institutions (manage-training-institution)

- Source: manage/modules/ManageTrainingCourse/modules/ManageTrainingInstitutions ^[147]
- Description: Makes training institution and funder information available to iHRIS Manage training course module
- Requirements:
 - manage-training-course at least 4.0 and less than 4.1
 - training-institution at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/ManageTrainingCourse/modules/ManageTrainingInstitutions/ ^[148]

manage-training-simple-competency

This describes version 4.0.0 of the module Manage Training Competency (Simple) (manage-training-simple-competency)

- Source: manage/modules/ManageTrainingCourse/modules/ManageTrainingSimpleCompetency ^[149]
- Description: Makes the Simple Competency module available to iHRIS Manage training course module
- Requirements:
 - manage-training-course at least 4.0 and less than 4.1
 - training-simple-competency at least 4.0 and less than 4.1
- Paths:
 - Classes: modules/ManageTrainingCourse/modules/ManageTrainingSimpleCompetency/ ^[150]

References

- [1] <https://launchpad.net/ihris-manage>
 - [2] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageRegistration>
 - [3] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageRegistration/configs>
 - [4] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageRegistration/templates>
 - [5] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageRegistration/lib>
 - [6] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-accident_type
 - [7] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-accident_type/
 - [8] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-benefit_type
 - [9] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-benefit_type/
 - [10] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-cadre>
 - [11] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-cadre/>
 - [12] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-classification>
 - [13] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-classification/>
 - [14] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-competency>
 - [15] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-competency/>
 - [16] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-competency_type
 - [17] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-competency_type/
 - [18] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-confirmation_type
 - [19] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-confirmation_type/
 - [20] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-council>
 - [21] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-council/>
 - [22] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-department>
 - [23] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-department/>
 - [24] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-disciplinary_action_type
 - [25] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-disciplinary_action_type/
 - [26] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-Establishment>
 - [27] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-Establishment/configs>
 - [28] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-Establishment/>
 - [29] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-facility>
 - [30] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules/SampleData-facility/>
 - [31] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-facility_type
-

- [32] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-facility_type/
- [33] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-id_type
- [34] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-id_type/
- [35] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-job>
- [36] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-job/>
- [37] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-language>
- [38] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-language/>
- [39] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-marital_status
- [40] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-marital_status/
- [41] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-pos_change_reason
- [42] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules/SampleData-pos_change_reason/
- [43] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-position_type
- [44] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-position_type/
- [45] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-salary_grade
- [46] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-salary_grade/
- [47] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-salary_source
- [48] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-salary_source/
- [49] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-training_course_category
- [50] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-training_course_category/
- [51] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-training_course_requestor
- [52] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules/SampleData-training_course_requestor/
- [53] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Accident>
- [54] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Accident/configs>
- [55] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Accident/lib>
- [56] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Accident/templates>
- [57] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Disciplinary>
- [58] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Disciplinary/configs>
- [59] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Disciplinary/lib>
- [60] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Disciplinary/templates>
- [61] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/>
- [62] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://configs>
- [63] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://lib>
- [64] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://templates>
- [65] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://css>
- [66] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://scripts>
- [67] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://images>
- [68] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head://modules>
- [69] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication>

- [70] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/configs>
 - [71] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/lib>
 - [72] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/modules>
 - [73] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/templates>
 - [74] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/modules/ApplicationAttachments>
 - [75] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/modules/ApplicationAttachments/configs>
 - [76] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageApplication/modules/ApplicationAttachments/>
 - [77] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Benefit>
 - [78] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Benefit/configs>
 - [79] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Benefit/lib>
 - [80] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Benefit/templates>
 - [81] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/modules/ConfirmationAttachments>
 - [82] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/modules/ConfirmationAttachments/configs>
 - [83] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/modules/ConfirmationAttachments/>
 - [84] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports>
 - [85] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/configs>
 - [86] http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/pdf_images
 - [87] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports>
 - [88] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/>
 - [89] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FilledPositions>
 - [90] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FilledPositions/configs>
 - [91] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FilledPositions/>
 - [92] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FacilityReports>
 - [93] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FacilityReports/configs>
 - [94] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/FacilityReports/>
 - [95] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/PositionReports>
 - [96] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/PositionReports/configs>
 - [97] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/PositionReports/>
 - [98] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/SearchPeople>
 - [99] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/SearchPeople/configs>
 - [100] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/SearchPeople/>
 - [101] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/StaffReports>
 - [102] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/StaffReports/configs>
 - [103] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageCustomReports/Reports/StaffReports/>
 - [104] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageJob>
-

- [105] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageJob/configs>
- [106] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageJob/lib>
- [107] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageJob/templates>
- [108] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageJob/modules>
- [109] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePerson>
- [110] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePerson/lib>
- [111] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonDemographic>
- [112] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonDemographic/configs>
- [113] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonDemographic/templates>
- [114] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonDemographic/>
- [115] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonPosition>
- [116] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonPosition/configs>
- [117] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonPosition/lib>
- [118] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManagePersonPosition/templates>
- [119] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Salary>
- [120] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Salary/configs>
- [121] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Salary/lib>
- [122] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Salary/templates>
- [123] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData>
- [124] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/modules>
- [125] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/BaseData/>
- [126] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation>
- [127] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/configs>
- [128] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/lib>
- [129] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/modules>
- [130] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/Confirmation/templates>
- [131] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help>
- [132] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help/static>
- [133] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help/images>
- [134] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help/scripts>
- [135] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help/css>
- [136] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/manage-help/>
- [137] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData>
- [138] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/modules>
- [139] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/MedicalData/>
- [140] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData>
- [141] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/sql>
- [142] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/modules>
- [143] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/SampleData/>
- [144] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse>
- [145] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/modules>
- [146] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/>
- [147] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/modules/ManageTrainingInstitutions>
- [148] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/modules/ManageTrainingInstitutions/>
- [149] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/modules/ManageTrainingSimpleCompetency>
- [150] <http://bazaar.launchpad.net/~intrahealth+informatics/ihris-manage/4.0.6-release/files/head:/modules/ManageTrainingCourse/modules/ManageTrainingSimpleCompetency/>

IHRIS Module List (4.0.6)

This is a list of all the modules available in the iHRIS Suite

- BackgroundProcess is a part of **I2CE** version 4.0.6-release
 - BinField is a part of **I2CE** version 4.0.6-release
 - CEUs is a part of **iHRIS Common** version 4.0.6-release
 - CachedForms is a part of **I2CE** version 4.0.6-release
 - ColorPicker is a part of **I2CE** version 4.0.6-release
 - Contact is a part of **iHRIS Common** version 4.0.6-release
 - Currency is a part of **iHRIS Common** version 4.0.6-release
 - CustomReports is a part of **I2CE** version 4.0.6-release
 - CustomReports_Export is a part of **I2CE** version 4.0.6-release
 - CustomReports_PDF is a part of **I2CE** version 4.0.6-release
 - CustomReports_PieChart is a part of **I2CE** version 4.0.6-release
 - DatePicker is a part of **I2CE** version 4.0.6-release
 - DisplayData is a part of **I2CE** version 4.0.6-release
 - Document is a part of **iHRIS Common** version 4.0.6-release
 - Facility is a part of **iHRIS Common** version 4.0.6-release
 - FacilityContact is a part of **iHRIS Common** version 4.0.6-release
 - Fields is a part of **I2CE** version 4.0.6-release
 - FileDump is a part of **I2CE** version 4.0.6-release
 - Float is a part of **I2CE** version 4.0.6-release
 - FormWorm is a part of **I2CE** version 4.0.6-release
 - Geography is a part of **iHRIS Common** version 4.0.6-release
 - I2CE is a part of **I2CE** version 4.0.6-release
 - ImportExport is a part of **I2CE** version 4.0.6-release
 - Lists is a part of **I2CE** version 4.0.6-release
 - Lists-LinkTo is a part of **I2CE** version 4.0.6-release
 - Lists-LinkTo-List is a part of **I2CE** version 4.0.6-release
 - Lists-LinkTo-String is a part of **I2CE** version 4.0.6-release
 - LocaleForm is a part of **I2CE** version 4.0.6-release
 - LoginPage is a part of **I2CE** version 4.0.6-release
 - ManageRegistration is a part of **iHRIS Manage** version 4.0.6-release
 - MimeTypes is a part of **I2CE** version 4.0.6-release
 - MooTools is a part of **I2CE** version 4.0.6-release
 - MooTools-I2CE is a part of **I2CE** version 4.0.6-release
 - Options is a part of **I2CE** version 4.0.6-release
 - Person is a part of **iHRIS Common** version 4.0.6-release
 - PersonArchivedScan is a part of **iHRIS Common** version 4.0.6-release
 - PersonContact is a part of **iHRIS Common** version 4.0.6-release
 - PersonDemographic is a part of **iHRIS Common** version 4.0.6-release
 - PersonEducation is a part of **iHRIS Common** version 4.0.6-release
 - PersonEmployment is a part of **iHRIS Common** version 4.0.6-release
 - PersonID is a part of **iHRIS Common** version 4.0.6-release
 - PersonLanguage is a part of **iHRIS Common** version 4.0.6-release
 - PersonNotes is a part of **iHRIS Common** version 4.0.6-release
-

- PersonPassportPhoto is a part of **iHRIS Common** version 4.0.6-release
- PersonResume is a part of **iHRIS Common** version 4.0.6-release
- Photo is a part of **iHRIS Common** version 4.0.6-release
- PrintedForms is a part of **I2CE** version 4.0.6-release
- ReportArchiver is a part of **I2CE** version 4.0.6-release
- SDMX-HD-CodeLists is a part of **iHRIS Common** version 4.0.6-release
- SampleData-Common is a part of **iHRIS Common** version 4.0.6-release
- SampleData-Geography is a part of **iHRIS Common** version 4.0.6-release
- SampleData-accident_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-benefit_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-cadre is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-classification is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-competency is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-competency_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-confirmation_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-council is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-country is a part of **iHRIS Common** version 4.0.6-release
- SampleData-county is a part of **iHRIS Common** version 4.0.6-release
- SampleData-currency is a part of **iHRIS Common** version 4.0.6-release
- SampleData-degree is a part of **iHRIS Common** version 4.0.6-release
- SampleData-department is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-disciplinary_action_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-district is a part of **iHRIS Common** version 4.0.6-release
- SampleData-edu_type is a part of **iHRIS Common** version 4.0.6-release
- SampleData-establishment is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-facility is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-facility_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-id_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-job is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-language is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-marital_status is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-pos_change_reason is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-position_type is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-region is a part of **iHRIS Common** version 4.0.6-release
- SampleData-salary_grade is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-salary_source is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-training_course_category is a part of **iHRIS Manage** version 4.0.6-release
- SampleData-training_course_requestor is a part of **iHRIS Manage** version 4.0.6-release
- StretchPage is a part of **I2CE** version 4.0.6-release
- Tags is a part of **I2CE** version 4.0.6-release
- Timer is a part of **I2CE** version 4.0.6-release
- TreeSelect is a part of **I2CE** version 4.0.6-release
- UUID_map is a part of **iHRIS Common** version 4.0.6-release
- UserAccess is a part of **I2CE** version 4.0.6-release
- UserAccess_DHIS is a part of **I2CE** version 4.0.6-release
- UserAccess_LDAP is a part of **I2CE** version 4.0.6-release
- UserAccess_LDAP_Hybrid is a part of **I2CE** version 4.0.6-release

- UserForm is a part of **I2CE** version 4.0.6-release
- YAML_spyc is a part of **I2CE** version 4.0.6-release
- accident is a part of **iHRIS Manage** version 4.0.6-release
- admin is a part of **I2CE** version 4.0.6-release
- dependents is a part of **iHRIS Common** version 4.0.6-release
- disciplinary_action is a part of **iHRIS Manage** version 4.0.6-release
- establishment is a part of **iHRIS Common** version 4.0.6-release
- fancyDebug is a part of **I2CE** version 4.0.6-release
- field-limits is a part of **I2CE** version 4.0.6-release
- form-limits is a part of **I2CE** version 4.0.6-release
- formBrowser is a part of **I2CE** version 4.0.6-release
- formDocumentor is a part of **I2CE** version 4.0.6-release
- formRelationships is a part of **I2CE** version 4.0.6-release
- forms is a part of **I2CE** version 4.0.6-release
- forms-storage is a part of **I2CE** version 4.0.6-release
- forms-storage-CSV is a part of **I2CE** version 4.0.6-release
- forms-storage-SDMXHD is a part of **I2CE** version 4.0.6-release
- forms-storage-entry is a part of **I2CE** version 4.0.6-release
- forms-storage-eval is a part of **I2CE** version 4.0.6-release
- forms-storage-file is a part of **I2CE** version 4.0.6-release
- forms-storage-flat is a part of **I2CE** version 4.0.6-release
- forms-storage-magicdata is a part of **I2CE** version 4.0.6-release
- forms-storage-multiflat is a part of **I2CE** version 4.0.6-release
- forms-storage-xml is a part of **I2CE** version 4.0.6-release
- ihris-common is a part of **iHRIS Common** version 4.0.6-release
- ihris-common-Cadre is a part of **iHRIS Common** version 4.0.6-release
- ihris-common-Job is a part of **iHRIS Common** version 4.0.6-release
- ihris-common-RecentForm is a part of **iHRIS Common** version 4.0.6-release
- ihris-common-Search is a part of **iHRIS Common** version 4.0.6-release
- ihris-manage is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-Application is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-ApplicationAttachment is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-Benefit is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-ConfirmationAttachment is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports-FilledPositions is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports-facility-reports is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports-position-reports is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports-search-people is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-CustomReports-staff-reports is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-Job is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-Person is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-PersonDemographic is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-PersonPosition is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-Salary is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-base-data is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-confirmation is a part of **iHRIS Manage** version 4.0.6-release

- ihris-manage-help is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-medical-data is a part of **iHRIS Manage** version 4.0.6-release
- ihris-manage-sample-data is a part of **iHRIS Manage** version 4.0.6-release
- isco-08 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-00 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-01 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-02 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-03 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-04 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-05 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-06 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-07 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-08 is a part of **iHRIS Common** version 4.0.6-release
- isco-08-major-09 is a part of **iHRIS Common** version 4.0.6-release
- isco-88 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-00 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-01 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-02 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-03 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-04 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-05 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-06 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-07 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-08 is a part of **iHRIS Common** version 4.0.6-release
- isco-88-major-09 is a part of **iHRIS Common** version 4.0.6-release
- jumper is a part of **I2CE** version 4.0.6-release
- localeSelector is a part of **I2CE** version 4.0.6-release
- maani-charts is a part of **I2CE** version 4.0.6-release
- magicDataBrowser is a part of **I2CE** version 4.0.6-release
- magicDataExport is a part of **I2CE** version 4.0.6-release
- manage-training-course is a part of **iHRIS Manage** version 4.0.6-release
- manage-training-institution is a part of **iHRIS Manage** version 4.0.6-release
- manage-training-simple-competency is a part of **iHRIS Manage** version 4.0.6-release
- menu_select is a part of **I2CE** version 4.0.6-release
- messageBox is a part of **I2CE** version 4.0.6-release
- messageHandler is a part of **I2CE** version 4.0.6-release
- messageNotice is a part of **I2CE** version 4.0.6-release
- modDocumentor is a part of **I2CE** version 4.0.6-release
- modulePrompter is a part of **I2CE** version 4.0.6-release
- nextOfKin is a part of **iHRIS Common** version 4.0.6-release
- pages is a part of **I2CE** version 4.0.6-release
- person-simple-competency is a part of **iHRIS Common** version 4.0.6-release
- simple-competency is a part of **iHRIS Common** version 4.0.6-release
- stub is a part of **I2CE** version 4.0.6-release
- swissConfig is a part of **I2CE** version 4.0.6-release
- swissMagic is a part of **I2CE** version 4.0.6-release
- swissfactory is a part of **I2CE** version 4.0.6-release

- tasks-roles is a part of **I2CE** version 4.0.6-release
- tcpdf is a part of **TextLayout Tools** version 4.0.6-release
- template-data is a part of **I2CE** version 4.0.6-release
- textlayout is a part of **TextLayout Tools** version 4.0.6-release
- training-course is a part of **iHRIS Common** version 4.0.6-release
- training-institution is a part of **iHRIS Common** version 4.0.6-release
- training-simple-competency is a part of **iHRIS Common** version 4.0.6-release
- user is a part of **I2CE** version 4.0.6-release

IHRIS Qualify Form Fields

These are the forms and fields in iHRIS Qualify version 4.0.7

There is also a graphical visualization ^[1] of this data. **Warning:** this is a very large file and you may wish to save it to your desktop instead of viewing it in your browser.

Here is a description of the Field types.

academic_level

The form *academic_level* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

archived_report

The form *archived_report* is implemented by the class: I2CE_ArchivedReport It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
 - date:
 - Header: Generation Date
 - Type: DATE_YMD
 - Restrictions: Required
 - name:
 - Header: Title
 - Type: STRING_LINE
 - Restrictions: Required
 - report:
 - Header: Report
 - Type: DOCUMENT
 - report_view:
-

- Header: Report View
- Type: STRING_LINE
- Restrictions: Unique in {date}

cadre

The form *cadre* is implemented by the class: iHRIS_Cadre It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- isco:
 - Header: ISCO Classification Code
 - Type: STRING_LINE
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- qualification:
 - Header: Minimum Qualification Required
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: qualification

certificate

The form *certificate* is implemented by the class: iHRIS_Certificate It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- academic_level:
 - Header: Academic Level
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: academic_level
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {academic_level}

continuing_education

The form *continuing_education* is implemented by the class: iHRIS_ContinuingEducation It has the following fields:

- continuing_education_course:
 - Header: Continuing Education Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: continuing_education_course
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

continuing_education_course

The form *continuing_education_course* is implemented by the class: iHRIS_ContinuingEducationCourse It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required

country

The form *country* is implemented by the class: iHRIS_Country It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- alpha_two:
 - Header: 2 Character Alpha Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- code:
 - Header: ISO Numeric Code
 - Type: INT
- location:
 - Header: Use for Location Selection
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- primary:
 - Header: Primary Country
 - Type: YESNO

county

The form *county* is implemented by the class: iHRIS_County It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- district:
 - Header: District
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {district}

currency

The form *currency* is implemented by the class: iHRIS_Currency It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Currency Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- country:
 - Header: Country
 - Type: MAP
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
- symbol:
 - Header: Symbol
 - Type: STRING_LINE

degree

The form *degree* is implemented by the class: iHRIS_Degree It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- edu_type:
 - Header: Education Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: edu_type
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {edu_type}

demographic

The form *demographic* is implemented by the class: iHRIS_QualifyDemographic It has the following fields:

- birth_date:
 - Header: Date of Birth
 - Type: DATE_YMD
- gender:
 - Header: Gender
 - Type: MAP
 - Maps To Forms: gender
- marital_status:
 - Header: Marital Status
 - Type: MAP
 - Maps To Forms: marital_status
- birth_location:
 - Header: Birth Location
 - Type: MAP
 - Maps To Forms: county,district

deployment

The form *deployment* is implemented by the class: iHRIS_Deployment It has the following fields:

- deployment_date:
 - Header: Deployment Date
 - Type: DATE_YMD
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: health_facility
- job_code:
 - Header: Job/Post Code
 - Type: STRING_LINE
- job_title:
 - Header: Job/Post Title
 - Type: STRING_LINE

disciplinary_action

The form *disciplinary_action* is implemented by the class: iHRIS_DisciplinaryAction It has the following fields:

- action_date:
 - Header: Date Disciplinary Action Occurred
 - Type: DATE_YMD
 - Restrictions: Required
- disciplinary_action_reason:
 - Header: Disciplinary Action Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: disciplinary_action_reason
- notes:
 - Header: Notes
 - Type: STRING_TEXT
- reinstate_date:
 - Header: Reinstatement Date
 - Type: DATE_YMD
- suspend:
 - Header: Suspend License?
 - Type: YESNO

disciplinary_action_category

The form *disciplinary_action_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

disciplinary_action_reason

The form *disciplinary_action_reason* is implemented by the class: iHRIS_DisciplinaryActionReason It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- disciplinary_action_category:
 - Header: Disciplinary Action Category
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: disciplinary_action_category
- name:

- Header: Name
- Type: STRING_LINE
- Restrictions: Required, Unique

district

The form *district* is implemented by the class: iHRIS_District It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {region:country}
- region:
 - Header: Region
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: region

edu_type

The form *edu_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

education

The form *education* is implemented by the class: iHRIS_SecondaryEducation It has the following fields:

- certificate:
 - Header: Certificate
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: certificate
- certificate_number:
 - Header: Certificate Number
 - Type: STRING_LINE
- grade:

- Header: Grade Obtained
- Type: STRING_LINE
- sec_school:
 - Header: Secondary School Name
 - Type: STRING_LINE
 - Restrictions: Required

exam

The form *exam* is implemented by the class: iHRIS_Exam It has the following fields:

- application_date:
 - Header: Application Date
 - Type: DATE_YMD
 - Restrictions: Required
- endorser_date:
 - Header: Endorser Date
 - Type: DATE_YMD
- endorser_name:
 - Header: Endorser Name
 - Type: STRING_LINE
- endorser_qualifications:
 - Header: Endorser Qualifications
 - Type: STRING_MLINE
- exam_date:
 - Header: Exam Date
 - Type: DATE_YMD
- exam_number:
 - Header: Exam Number
 - Type: STRING_LINE
- materials_approved:
 - Header: Materials Approved?
 - Type: YESNO
- materials_received:
 - Header: Materials Received?
 - Type: YESNO
- results:
 - Header: Exam Results
 - Type: MAP
 - Maps To Forms: exam_result
- try:
 - Header: Exam Try
 - Type: MAP
 - Maps To Forms: exam_try

exam_result

The form *exam_result* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

exam_try

The form *exam_try* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility

The form *facility* is implemented by the class: iHRIS_Facility

This form is used to descibe basic information about a facility

It has the child forms:

- facility_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type

facility_agent

The form *facility_agent* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility_contact

The form *facility_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

facility_institution

The form *facility_institution* is implemented by the class: iHRIS_FacilityInstitution It has the following fields:

- active:
 - Header: Active?
 - Type: BOOL
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required, Unique in {training_institution}
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required, Unique in {health_facility}
 - Maps To Forms: training_institution

facility_institution_edit_fac

The form *facility_institution_edit_fac* is implemented by the class: iHRIS_FacilityInstitutionEditFacility It has the following fields:

- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: training_institution

facility_institution_edit_inst

The form *facility_institution_edit_inst* is implemented by the class: iHRIS_FacilityInstitutionEditInstitution It has the following fields:

- health_facility:
 - Header: Health Facility
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_institution

facility_status

The form *facility_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility_type

The form *facility_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

gender

The form *gender* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

generated_doc

The form *generated_doc* is implemented by the class: I2CE_GeneratedDoc It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- document:
 - Header: Document
 - Type: DOCUMENT
- primary_form:

- Header: Primary Form ID
- Type: STRING_LINE

health_facility

The form *health_facility* is implemented by the class: iHRIS_HealthFacility It has the child forms:

- facility_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type
- facility_agent:
 - Header: Facility Agent
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_agent
- facility_status:
 - Header: Facility Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_status
- id_code:
 - Header: Identification Code
 - Type: STRING_LINE

id_type

The form *id_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

institution_inspection

The form *institution_inspection* is implemented by the class: iHRIS_InstitutionInspection It has the following fields:

- date:
 - Header: Inspection Date
 - Type: DATE_YMD
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_TEXT
- pass:
 - Header: Passed?
 - Type: YESNO

license

The form *license* is implemented by the class: iHRIS_License It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- license_number:
 - Header: License Number
 - Type: INT_GENERATE
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- suspend:
 - Header: Suspended?
 - Type: YESNO

marital_status

The form *marital_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

notes

The form *notes* is implemented by the class: iHRIS_Notes It has the following fields:

- date_added:
 - Header: Date Added
 - Type: DATE_YMD
 - Restrictions: Required
- note:
 - Header: Note
 - Type: STRING_MLINE
 - Restrictions: Required

out_migration

The form *out_migration* is implemented by the class: iHRIS_OutMigration It has the following fields:

- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- new_address:
 - Header: Address in new Country
 - Type: STRING_MLINE
- organization:
 - Header: Organization Requesting Verification
 - Type: STRING_LINE
- out_migration_reason:
 - Header: Out Migration Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: out_migration_reason
- request_date:
 - Header: Request Date
 - Type: DATE_YMD

out_migration_reason

The form *out_migration_reason* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

person

The form *person* is implemented by the class: iHRIS_QualifyPerson

This form holds basic information about a person such as their names and residence

It has the child forms:

- demographic
- deployment
- education
- notes
- out_migration
- person_archive_scan
- person_contact_emergency
- person_contact_other
- person_contact_personal
- person_contact_work
- person_id
- person_photo_passport
- record_verify
- training

It has the following fields:

- firstname:
 - Header: First Name
 - Type: STRING_LINE
 - Restrictions: Required
- nationality:
 - Header: Nationality
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- othername:
 - Header: Other Names
 - Type: STRING_LINE
- residence:
 - Header: Residence
 - Type: MAP

- Restrictions: Required
- Maps To Forms: county,district
- surname:
 - Header: Surname
 - Type: STRING_LINE
 - Restrictions: Required
- home:
 - Header: Home
 - Type: MAP
 - Maps To Forms: county,district

person_archive_scan

The form *person_archive_scan* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

person_contact_emergency

The form *person_contact_emergency* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_other

The form *person_contact_other* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_personal

The form *person_contact_personal* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
 - address:
 - Header: Mailing Address
 - Type: STRING_MLINE
 - alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
 - email:
 - Header: Email Address
 - Type: STRING_LINE
 - fax:
-

- Header: Fax Number
- Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_work

The form *person_contact_work* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_id

The form *person_id* is implemented by the class: iHRIS_PersonID

This form holds basic information about an identification for a person

It has the following fields:

- id_num:
 - Header: Identification Number
 - Type: STRING_LINE
 - Restrictions: Required
- id_type:
 - Header: Identification Type

- Type: MAP
- Restrictions: Required
- Maps To Forms: id_type

person_photo_passport

The form *person_photo_passport* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

private_practice

The form *private_practice* is implemented by the class: iHRIS_PrivatePractice It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: health_facility
- inspection_date:
 - Header: Inspection Date
 - Type: DATE_YMD
- inspection_results:
 - Header: Inspection Results
 - Type: STRING_MLINE
- license_number:
 - Header: License Number
 - Type: INT_GENERATE
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

qualification

The form *qualification* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

record_verify

The form *record_verify* is implemented by the class: iHRIS_RecordVerify It has the following fields:

- verify_change:
 - Header: Changes Made
 - Type: MAP_MULT
 - Maps To Forms: verify_change
- verify_date:
 - Header: Verification Date
 - Type: DATE_YMD

region

The form *region* is implemented by the class: iHRIS_Region It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {country}

registration

The form *registration* is implemented by the class: iHRIS_Registration It has the following fields:

- application_date:
 - Header: Application Date
 - Type: DATE_YMD
 - Restrictions: Required
- practice_type:
 - Header: Practice Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: registration_type
- registration_date:
 - Header: Registration Date
 - Type: DATE_YMD
 - Restrictions: Required
- registration_number:
 - Header: Registration Number
 - Type: INT_GENERATE
 - Restrictions: Required, Unique

registration_type

The form *registration_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training

The form *training* is implemented by the class: iHRIS_Training It has the child forms:

- continuing_education
- disciplinary_action
- exam
- license
- private_practice
- registration
- training_disrupt

It has the following fields:

- cadre:
 - Header: Cadre
 - Type: MAP

- Maps To Forms: cadre
- graduation:
 - Header: Graduation Date
 - Type: DATE_YMD
- index_num:
 - Header: Index Number
 - Type: INT_GENERATE
 - Restrictions: Required
- intake_date:
 - Header: Intake Date
 - Type: DATE_YMD
 - Restrictions: Required
- out_country:
 - Header: Country Trained in
 - Type: MAP
 - Maps To Forms: country
- out_institution:
 - Header: Training Institution
 - Type: STRING_LINE
- trained_outside:
 - Header: Trained Outside this Country
 - Type: BOOL
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Maps To Forms: training_institution

training_disrupt

The form *training_disrupt* is implemented by the class: iHRIS_TrainingDisrupt It has the following fields:

- disruption_date:
 - Header: Disruption Date
 - Type: DATE_YMD
 - Restrictions: Required
- disruption_reason:
 - Header: Disruption Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_disruption_reason
- resumption_date:
 - Header: Resumption Date
 - Type: DATE_YMD

training_disruption_category

The form *training_disruption_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_disruption_reason

The form *training_disruption_reason* is implemented by the class: iHRIS_TrainingDisruptionReason It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {training_disruption_category}
- training_disruption_category:
 - Header: Training Disruption Category
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_disruption_category

training_funder

The form *training_funder* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_funder_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder_contact

The form *training_funder_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

training_institution

The form *training_institution* is implemented by the class: iHRIS_QualifyTrainingInstitution It has the child forms:

- facility_contact
- institution_inspection

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_agent:
 - Header: Facility Agent
 - Type: MAP

- Restrictions: Required
- Maps To Forms: facility_agent
- facility_status:
 - Header: Facility Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_status
- id_code:
 - Header: Identification Code
 - Type: STRING_LINE

training_institution_contact

The form *training_institution_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

training_program

The form *training_program* is implemented by the class: iHRIS_TrainingProgram It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- cadre:
 - Header: Cadre
 - Type: MAP
 - Restrictions: Required, Unique in {training_institution}
 - Maps To Forms: cadre
- end_date:
 - Header: End Date
 - Type: DATE_YMD
- num_students:
 - Header: Number of Students
 - Type: INT
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_institution

verify_change

The form *verify_change* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

References

- [1] http://open.intrahealth.org/visualizations/forms-ihris-qualify-site-demo_4_0_7.gif

IHRIS Qualify Form Fields - 4.0.7

These are the forms and fields in iHRIS Qualify version 4.0.7

There is also a graphical visualization ^[1] of this data. **Warning:** this is a very large file and you may wish to save it to your desktop instead of viewing it in your browser.

Here is a description of the Field types.

academic_level

The form *academic_level* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

archived_report

The form *archived_report* is implemented by the class: I2CE_ArchivedReport It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- date:
 - Header: Generation Date
 - Type: DATE_YMD
 - Restrictions: Required
- name:
 - Header: Title
 - Type: STRING_LINE
 - Restrictions: Required
- report:
 - Header: Report
 - Type: DOCUMENT
- report_view:
 - Header: Report View
 - Type: STRING_LINE
 - Restrictions: Unique in {date}

cadre

The form *cadre* is implemented by the class: iHRIS_Cadre It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- isco:
 - Header: ISCO Classification Code
 - Type: STRING_LINE
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- qualification:
 - Header: Minimum Qualification Required
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: qualification

certificate

The form *certificate* is implemented by the class: iHRIS_Certificate It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- academic_level:
 - Header: Academic Level
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: academic_level
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {academic_level}

continuing_education

The form *continuing_education* is implemented by the class: iHRIS_ContinuingEducation It has the following fields:

- continuing_education_course:
 - Header: Continuing Education Course
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: continuing_education_course
- credit_hours:
 - Header: Credit Hours
 - Type: INT

- Restrictions: Required
- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

continuing_education_course

The form *continuing_education_course* is implemented by the class: iHRIS_ContinuingEducationCourse It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- credit_hours:
 - Header: Credit Hours
 - Type: INT
 - Restrictions: Required
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required

country

The form *country* is implemented by the class: iHRIS_Country It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- alpha_two:
 - Header: 2 Character Alpha Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- code:
 - Header: ISO Numeric Code
 - Type: INT
- location:
 - Header: Use for Location Selection
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

- primary:
 - Header: Primary Country
 - Type: YESNO

county

The form *county* is implemented by the class: iHRIS_County It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- district:
 - Header: District
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {district}

currency

The form *currency* is implemented by the class: iHRIS_Currency It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Currency Code
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- country:
 - Header: Country
 - Type: MAP
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
- symbol:
 - Header: Symbol
 - Type: STRING_LINE

degree

The form *degree* is implemented by the class: iHRIS_Degree It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- edu_type:
 - Header: Education Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: edu_type
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {edu_type}

demographic

The form *demographic* is implemented by the class: iHRIS_QualifyDemographic It has the following fields:

- birth_date:
 - Header: Date of Birth
 - Type: DATE_YMD
- gender:
 - Header: Gender
 - Type: MAP
 - Maps To Forms: gender
- marital_status:
 - Header: Marital Status
 - Type: MAP
 - Maps To Forms: marital_status
- birth_location:
 - Header: Birth Location
 - Type: MAP
 - Maps To Forms: county,district

deployment

The form *deployment* is implemented by the class: iHRIS_Deployment It has the following fields:

- deployment_date:
 - Header: Deployment Date
 - Type: DATE_YMD
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required

- Maps To Forms: health_facility
- job_code:
 - Header: Job/Post Code
 - Type: STRING_LINE
- job_title:
 - Header: Job/Post Title
 - Type: STRING_LINE

disciplinary_action

The form *disciplinary_action* is implemented by the class: iHRIS_DisciplinaryAction It has the following fields:

- action_date:
 - Header: Date Disciplinary Action Occurred
 - Type: DATE_YMD
 - Restrictions: Required
- disciplinary_action_reason:
 - Header: Disciplinary Action Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: disciplinary_action_reason
- notes:
 - Header: Notes
 - Type: STRING_TEXT
- reinstate_date:
 - Header: Reinstatement Date
 - Type: DATE_YMD
- suspend:
 - Header: Suspend License?
 - Type: YESNO

disciplinary_action_category

The form *disciplinary_action_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

disciplinary_action_reason

The form *disciplinary_action_reason* is implemented by the class: iHRIS_DisciplinaryActionReason It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- disciplinary_action_category:
 - Header: Disciplinary Action Category
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: disciplinary_action_category
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

district

The form *district* is implemented by the class: iHRIS_District It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {region:country}
- region:
 - Header: Region
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: region

edu_type

The form *edu_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

education

The form *education* is implemented by the class: iHRIS_SecondaryEducation It has the following fields:

- certificate:
 - Header: Certificate
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: certificate
- certificate_number:
 - Header: Certificate Number
 - Type: STRING_LINE
- grade:
 - Header: Grade Obtained
 - Type: STRING_LINE
- sec_school:
 - Header: Secondary School Name
 - Type: STRING_LINE
 - Restrictions: Required

exam

The form *exam* is implemented by the class: iHRIS_Exam It has the following fields:

- application_date:
 - Header: Application Date
 - Type: DATE_YMD
 - Restrictions: Required
- endorser_date:
 - Header: Endorser Date
 - Type: DATE_YMD
- endorser_name:
 - Header: Endorser Name
 - Type: STRING_LINE
- endorser_qualifications:
 - Header: Endorser Qualifications
 - Type: STRING_MLINE
- exam_date:
 - Header: Exam Date
 - Type: DATE_YMD
- exam_number:
 - Header: Exam Number
 - Type: STRING_LINE
- materials_approved:
 - Header: Materials Approved?
 - Type: YESNO
- materials_received:

- Header: Materials Received?
- Type: YESNO
- results:
 - Header: Exam Results
 - Type: MAP
 - Maps To Forms: exam_result
- try:
 - Header: Exam Try
 - Type: MAP
 - Maps To Forms: exam_try

exam_result

The form *exam_result* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

exam_try

The form *exam_try* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility

The form *facility* is implemented by the class: iHRIS_Facility

This form is used to describe basic information about a facility

It has the child forms:

- facility_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP

- Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type

facility_agent

The form *facility_agent* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility_contact

The form *facility_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

facility_institution

The form *facility_institution* is implemented by the class: iHRIS_FacilityInstitution It has the following fields:

- active:
 - Header: Active?
 - Type: BOOL
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required, Unique in {training_institution}
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required, Unique in {health_facility}
 - Maps To Forms: training_institution

facility_institution_edit_fac

The form *facility_institution_edit_fac* is implemented by the class: iHRIS_FacilityInstitutionEditFacility It has the following fields:

- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: training_institution

facility_institution_edit_inst

The form *facility_institution_edit_inst* is implemented by the class: iHRIS_FacilityInstitutionEditInstitution It has the following fields:

- health_facility:
 - Header: Health Facility
 - Type: MAP_MULT
 - Restrictions: Required
 - Maps To Forms: health_facility
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_institution

facility_status

The form *facility_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

facility_type

The form *facility_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

gender

The form *gender* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

generated_doc

The form *generated_doc* is implemented by the class: I2CE_GeneratedDoc It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- document:
 - Header: Document
 - Type: DOCUMENT
- primary_form:

- Header: Primary Form ID
- Type: STRING_LINE

health_facility

The form *health_facility* is implemented by the class: iHRIS_HealthFacility It has the child forms:

- facility_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_type:
 - Header: Facility Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_type
- facility_agent:
 - Header: Facility Agent
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_agent
- facility_status:
 - Header: Facility Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_status
- id_code:
 - Header: Identification Code
 - Type: STRING_LINE

id_type

The form *id_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

institution_inspection

The form *institution_inspection* is implemented by the class: iHRIS_InstitutionInspection It has the following fields:

- date:
 - Header: Inspection Date
 - Type: DATE_YMD
 - Restrictions: Required
- notes:
 - Header: Notes
 - Type: STRING_TEXT
- pass:
 - Header: Passed?
 - Type: YESNO

license

The form *license* is implemented by the class: iHRIS_License It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- license_number:
 - Header: License Number
 - Type: INT_GENERATE
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- suspend:
 - Header: Suspended?
 - Type: YESNO

marital_status

The form *marital_status* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

notes

The form *notes* is implemented by the class: iHRIS_Notes It has the following fields:

- date_added:
 - Header: Date Added
 - Type: DATE_YMD
 - Restrictions: Required
- note:
 - Header: Note
 - Type: STRING_MLINE
 - Restrictions: Required

out_migration

The form *out_migration* is implemented by the class: iHRIS_OutMigration It has the following fields:

- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- new_address:
 - Header: Address in new Country
 - Type: STRING_MLINE
- organization:
 - Header: Organization Requesting Verification
 - Type: STRING_LINE
- out_migration_reason:
 - Header: Out Migration Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: out_migration_reason
- request_date:
 - Header: Request Date
 - Type: DATE_YMD

out_migration_reason

The form *out_migration_reason* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

person

The form *person* is implemented by the class: iHRIS_QualifyPerson

This form holds basic information about a person such as their names and residence

It has the child forms:

- demographic
- deployment
- education
- notes
- out_migration
- person_archive_scan
- person_contact_emergency
- person_contact_other
- person_contact_personal
- person_contact_work
- person_id
- person_photo_passport
- record_verify
- training

It has the following fields:

- firstname:
 - Header: First Name
 - Type: STRING_LINE
 - Restrictions: Required
- nationality:
 - Header: Nationality
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- othername:
 - Header: Other Names
 - Type: STRING_LINE
- residence:
 - Header: Residence
 - Type: MAP

- Restrictions: Required
- Maps To Forms: county,district
- surname:
 - Header: Surname
 - Type: STRING_LINE
 - Restrictions: Required
- home:
 - Header: Home
 - Type: MAP
 - Maps To Forms: county,district

person_archive_scan

The form *person_archive_scan* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

person_contact_emergency

The form *person_contact_emergency* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE

- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_other

The form *person_contact_other* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_personal

The form *person_contact_personal* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
 - address:
 - Header: Mailing Address
 - Type: STRING_MLINE
 - alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
 - email:
 - Header: Email Address
 - Type: STRING_LINE
 - fax:
-

- Header: Fax Number
- Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_contact_work

The form *person_contact_work* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

person_id

The form *person_id* is implemented by the class: iHRIS_PersonID

This form holds basic information about an identification for a person

It has the following fields:

- id_num:
 - Header: Identification Number
 - Type: STRING_LINE
 - Restrictions: Required
- id_type:
 - Header: Identification Type

- Type: MAP
- Restrictions: Required
- Maps To Forms: id_type

person_photo_passport

The form *person_photo_passport* is implemented by the class: iHRIS_Photo It has the following fields:

- date:
 - Header: Date
 - Type: DATE_YMD
 - Restrictions: Required
- description:
 - Header: Description
 - Type: STRING_LINE
- image:
 - Header: Image
 - Type: IMAGE

private_practice

The form *private_practice* is implemented by the class: iHRIS_PrivatePractice It has the following fields:

- end_date:
 - Header: End Date
 - Type: DATE_YMD
 - Restrictions: Required
- health_facility:
 - Header: Health Facility
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: health_facility
- inspection_date:
 - Header: Inspection Date
 - Type: DATE_YMD
- inspection_results:
 - Header: Inspection Results
 - Type: STRING_MLINE
- license_number:
 - Header: License Number
 - Type: INT_GENERATE
 - Restrictions: Required
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required

qualification

The form *qualification* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

record_verify

The form *record_verify* is implemented by the class: iHRIS_RecordVerify It has the following fields:

- verify_change:
 - Header: Changes Made
 - Type: MAP_MULT
 - Maps To Forms: verify_change
- verify_date:
 - Header: Verification Date
 - Type: DATE_YMD

region

The form *region* is implemented by the class: iHRIS_Region It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- code:
 - Header: Code
 - Type: STRING_LINE
- country:
 - Header: Country
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: country
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {country}

registration

The form *registration* is implemented by the class: iHRIS_Registration It has the following fields:

- application_date:
 - Header: Application Date
 - Type: DATE_YMD
 - Restrictions: Required
- practice_type:
 - Header: Practice Type
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: registration_type
- registration_date:
 - Header: Registration Date
 - Type: DATE_YMD
 - Restrictions: Required
- registration_number:
 - Header: Registration Number
 - Type: INT_GENERATE
 - Restrictions: Required, Unique

registration_type

The form *registration_type* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training

The form *training* is implemented by the class: iHRIS_Training It has the child forms:

- continuing_education
- disciplinary_action
- exam
- license
- private_practice
- registration
- training_disrupt

It has the following fields:

- cadre:
 - Header: Cadre
 - Type: MAP

- Maps To Forms: cadre
- graduation:
 - Header: Graduation Date
 - Type: DATE_YMD
- index_num:
 - Header: Index Number
 - Type: INT_GENERATE
 - Restrictions: Required
- intake_date:
 - Header: Intake Date
 - Type: DATE_YMD
 - Restrictions: Required
- out_country:
 - Header: Country Trained in
 - Type: MAP
 - Maps To Forms: country
- out_institution:
 - Header: Training Institution
 - Type: STRING_LINE
- trained_outside:
 - Header: Trained Outside this Country
 - Type: BOOL
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Maps To Forms: training_institution

training_disrupt

The form *training_disrupt* is implemented by the class: iHRIS_TrainingDisrupt It has the following fields:

- disruption_date:
 - Header: Disruption Date
 - Type: DATE_YMD
 - Restrictions: Required
- disruption_reason:
 - Header: Disruption Reason
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_disruption_reason
- resumption_date:
 - Header: Resumption Date
 - Type: DATE_YMD

training_disruption_category

The form *training_disruption_category* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_disruption_reason

The form *training_disruption_reason* is implemented by the class: iHRIS_TrainingDisruptionReason It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique in {training_disruption_category}
- training_disruption_category:
 - Header: Training Disruption Category
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_disruption_category

training_funder

The form *training_funder* is implemented by the class: iHRIS_ListByCountry It has the child forms:

- training_funder_contact

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

training_funder_contact

The form *training_funder_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

training_institution

The form *training_institution* is implemented by the class: iHRIS_QualifyTrainingInstitution It has the child forms:

- facility_contact
- institution_inspection

It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- location:
 - Header: Location
 - Type: MAP
 - Maps To Forms: county,district
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique
- facility_agent:
 - Header: Facility Agent
 - Type: MAP

- Restrictions: Required
- Maps To Forms: facility_agent
- facility_status:
 - Header: Facility Status
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: facility_status
- id_code:
 - Header: Identification Code
 - Type: STRING_LINE

training_institution_contact

The form *training_institution_contact* is implemented by the class: iHRIS_Contact It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- address:
 - Header: Mailing Address
 - Type: STRING_MLINE
- alt_telephone:
 - Header: Alternate Telephone Number
 - Type: STRING_LINE
- email:
 - Header: Email Address
 - Type: STRING_LINE
- fax:
 - Header: Fax Number
 - Type: STRING_LINE
- notes:
 - Header: Notes
 - Type: STRING_MLINE
- telephone:
 - Header: Telephone Number
 - Type: STRING_LINE

training_program

The form *training_program* is implemented by the class: iHRIS_TrainingProgram It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- cadre:
 - Header: Cadre
 - Type: MAP
 - Restrictions: Required, Unique in {training_institution}
 - Maps To Forms: cadre
- end_date:
 - Header: End Date
 - Type: DATE_YMD
- num_students:
 - Header: Number of Students
 - Type: INT
- start_date:
 - Header: Start Date
 - Type: DATE_YMD
 - Restrictions: Required
- training_institution:
 - Header: Training Institution
 - Type: MAP
 - Restrictions: Required
 - Maps To Forms: training_institution

verify_change

The form *verify_change* is implemented by the class: I2CE_SimpleList It has the following fields:

- i2ce_hidden:
 - Header: Hide
 - Type: YESNO
- name:
 - Header: Name
 - Type: STRING_LINE
 - Restrictions: Required, Unique

IHRIS Qualify Module List (4.0.6)

This is a list of all modules available in version 4.0.6-release of the package iHRIS Qualify ^[1]

References

[1] <https://launchpad.net/qualify>

IHRIS Regional Rollout

Developing a Policy for iHRIS Manage Rollout

Many countries are interested in decentralizing their HR management system. Several of the countries where we work are currently rolling out their system. Namibia is rolling out their HR information management system to the regions; 3 regions are now connected and all 13 will be online by the end of 2010. In Tanzania, the country's largest FBO, Christian Social Services Commission, is installing iHRIS Manage in its 5 zonal offices. Uganda is currently implementing their iHRIS Manage system in nine districts and plans to eventually roll the system out to all of the 83 districts. Expanding an information system requires careful planning and preparation and there are many details to consider. This article will highlight what we've learned thus far. As you read this article, please note the following:

- Each country is governed differently and health care administration division varies greatly. Countries may be divided into zones, regions, districts, states, etc. For simplicity in this document, we will refer to all of these as regions.
- Each country also has a group of people making decisions about HRIS strengthening and software deployment. For simplicity in this document, we will refer to the decision makers as the 'stakeholder leadership group' or 'SLG' for short.
- Although this article is written for iHRIS Manage expansion, it may be applicable to other HR management systems as well.

Designating permission to Edit Data

The iHRIS Manage data model for regional deployment requires the SLG to develop a policy designating whether data will be edited at the regional offices or at the central head office. Data cannot be edited at both:

- A. Data edited at the regional offices are aggregated at the central office and are read-only at the central office.
- B. Data edited at the central office are sent to the regional offices and are read-only at the regional offices.

It is important to note that by choosing option B, a regional office will not be able to add a new employee, etc. to the list and will have to wait for the central office to do so.

Standardizing Lists

One advantage of data model B is it helps ensure consistency of database lists, which create dropdown menus, across the regional offices, which is crucial to aggregating data and producing meaningful reports. For example, if the SLG chooses to edit the list of cadres at the central office, a *Maternity Nurse* in the Northern region, for instance, will be the same as a *Maternity Nurse* in the Western and other regions. If, on the other hand, the SLG chooses data model A and regional offices edit the cadre list, there would be no assurance that the *Maternity Nurse* cadre in the Western region and Northern region are the same. In fact, there may be no *Maternity Nurse* in the Northern region's cadre list at all. There may instead be a *Maternity and Infant Care Nurse* in the Northern region. These cadres may or may not

be the same, and there would be no way for the software to know that. This can cause many problems when trying to produce and analyze reports on, say, how many 'Maternity Nurses' are employed nationally and in each district. Enforcing standardization of database lists is also important for job codes and job classifications.

In general, if a database list contains choices which apply to more than one regional office, it would ideally be set to be edited at the central office and not at the regional office. Thus, as much as possible, the SLG should create standards for all of the dropdown lists which apply to more than one region.

On the other hand, data/forms such as the personnel data, should be edited at the regional office. For instance, personnel data includes contact, demographic, and education information. This is because the regional offices will be more likely to have accurate data and to be involved in the day to day management of the personnel. Also, any lists that you will not likely be concerned about comparing data on at the central level should be safe to be edited at the regional level.

Step Solution

Although creating standardized lists for all drop-down lists is ideal, the SLG may not be able to do so before rollout begins. Based on zonal deployment in Tanzania, the iHRIS developers and stakeholders suggested the following lists to be edited at the zonal office:

- diocese
- position_type (full time, part time, temporary)
- department

As indicated in the example of cadres above, if you choose to edit a database list at the regional office rather than at the central office, it will make direct comparison of the data at the central office more difficult. However, you may have not had a chance to standardize all the lists with input from each of the regional offices.

The **Step Solution** is to allow the above lists (and a few others) to be edited at the regional offices. Then, after some time has passed and the regional offices have each created their own lists of diocese, etc., the central office should review these lists and decide upon a standardized list that all the regional offices will use. For example if the Northern region entered a department 'Maternity Ward' and the Western region entered a department 'Maternity and Infant Ward,' then the central office might decide that these are the same and choose to standardize it as "Maternity Ward."

Once a list has been standardized, each of the regional offices' databases will need to be updated to use these lists, and to update any records pointing to "Maternity and Infant Ward" in the Western region now to "Maternity Ward" as defined by the head office.

Using this sort of Step Solution will be a bit time consuming, so the more lists that can be defined and standardized before the regional deployment, the better.

IHRIS Role List (4.0.6)

This is a list of all the roles available in the iHRIS System

admin

The role *Administrator* is defined in the module pages of the package I2CE.

- Can perform the following tasks: cached_forms_can_administer, custom_reports_admin, printed_forms_admin, custom_reports_archiver_admin, tasks_and_roles_admin

exec_manager

The role *Executive Manager* is defined in the module ihris-manage of the package iHRIS Manage.

- Any of the tasks that a Executive Manager can perform can be performed by any the following roles: Administrator
- Can perform the following tasks: custom_reports_can_view_reportViews, can_change_own_password, person_can_view_child_forms, can_view_database_list_position, can_view_database_list_job

hr_manager

The role *HR Manager* is defined in the module ihris-manage of the package iHRIS Manage.

- Any of the tasks that a HR Manager can perform can be performed by any the following roles: Administrator
- Can perform the following tasks: custom_reports_can_access_reports, custom_reports_can_edit_reportViews, custom_reports_can_view_reportViews, can_edit_all_database_lists, person_can_edit, person_can_edit_child_forms, users_can_edit, person_can_change_child_form_salary, person_can_change_child_form_person_position, can_change_own_password, can_edit_all_planning_database_lists, establishment_can_edit

hr_staff

The role *HR Staff* is defined in the module ihris-manage of the package iHRIS Manage.

- Any of the tasks that a HR Staff can perform can be performed by any the following roles: Administrator,HR Manager
 - Can perform the following tasks: can_view_all_database_lists, custom_reports_can_view_reportViews, person_can_edit_child_form_person_scheduled_training_course, person_can_view_child_form_person_scheduled_training_course, competency_can_view_history, person_can_view_child_forms, person_can_edit_child_form_application, person_can_edit_child_form_benefit, person_can_edit_child_form_dependent, person_can_edit_child_form_employment, person_can_edit_child_form_education, person_can_edit_child_form_person_id, person_can_edit_child_form_nextofkin, person_can_edit_child_form_notes, person_can_edit_child_form_person_competency, person_can_edit_child_form_person_contact_emergency, person_can_edit_child_form_person_contact_other, person_can_edit_child_form_person_contact_personal, person_can_edit_child_form_person_contact_work, person_can_edit_child_form_person_position, person_can_edit_child_form_position_decision, person_can_edit_child_form_position_interview, person_can_edit_child_form_salary, person_competency_can_view_evaluation_history, can_edit_database_list_department, can_edit_database_list_facility, can_edit_all_manage_positions_database_lists, can_configure_system, can_change_own_password, person_can_edit_child_form_accident, can_edit_database_list_accident_type,
-

person_can_edit_child_form_disciplinary_action, can_edit_database_list_disciplinary_action_type,
can_view_recent_forms

training_manager

The role *Training Manager* is defined in the module ihris-manage of the package iHRIS Manage.

- Any of the tasks that a Training Manager can perform can be performed by any the following roles: Administrator, HR Manager
- Can perform the following tasks: custom_reports_can_view_reportViews, can_edit_database_lists_training, can_edit_scheduled_training_course, person_can_view_child_form_person_scheduled_training_course, person_can_edit_child_form_person_scheduled_training_course, person_can_view_child_forms, person_scheduled_training_course_can_edit_evaluation, can_change_own_password, can_configure_system

IHRIS Suite 4.0 Development

Version 4.0.0

Released week of July 13, 2009.

Version 4.0.2

Released November 13, 2009.

Completed

- Custom reports/Form Limits -- allow you to specify the values that a limit can take in the getLimitMenu() and in the custom reports
 - added fancy updater
 - fixed up fatal errors so it provides a mailto form
 - fixed up fatal errors so it is the same fancy level as the updater
 - fixed bug in finding conflicts when installing optional modules
 - fixes for custom report:
 - charts -- now works w/o url rewriting enabled
 - non-enabled fields are not longer displayed and sort order is preserved in a view
 - fixed aggregation of fields
 - add XML export (to non-standard but hopefully useful) format
 - add command line option --force-restart=1 to force the restart of an install/update (used in conjunction with --update=1)
 - add time stamp to PDF
 - add form documentor as a CLI page
 - Debug training module
 - Ensure all templates are localized (done in 4.0.0)
 - Cleanup ISCO-88 Job Codes (done in development for 4.0.1)
 - Finish Flat Storage mechanism for forms.
 - Add in Multi-Flat Storage mechanism for forms
 - Fix this: http://www.2shared.com/file/6929841/7587e315/bad_css.html
 - Add cache stale times on a per form basis
 - Add cache stale times on a per form storage mechanism basis
-

- Add ability to turn of form caching by background process
- Add cache stale times on a per report basis
- Add ability to turn of report generation by background process
- Change so that caching a report triggers the caching of the forms needed for the report if they are stale
- Change so that forced caching a report triggers forced caching of the forms needed for the report
- Replace I2CE_Form::validate() mapped values check with something from I2CE_List, e.g. monsterMash()
- separate form field validation logic into the appropriate modules
- fix bug in export of custom reports to html
- logout page now really logs out
- added command line option --clear_cache=1 which will clear the magic data cache
- added special URL: \$site_url/clear_cache.php which will clear the magic data cache, the apc cache and destroy the session
- fix limits for dates
- fix bug in setting the order in which fields are displayed in a report view
- fix bug in defining a form relationship when linking from a form.
- added index to string_Value column of last_entry table to speed of cache generation
- added in index on mapped fields in hippo_tables to speed up report generation,
- fixed ie7 javascript errors that were causing problems for custom reports
- upgraded to mootools 1.2.3
- speed display of lists in administer database
- added a db-like version of magic data form storage which is used if the "permanent" magic data storage is in the config table (this causes localization support to be dropped from magic data)
- fixed issue for default display of custom reports where limits were lost when resorting the table
- Add paging for list display pages
- add photo upload
- add resume upload
- Fix bug with report views not displaying fields the first time you try to edit it
- Report limits with dates are being set to the current date by default
- Fix sort order of headers on report views
- Migrate iHRIS Qualify

Version 4.0.3

Release in Friday March 5, 2010.

Completed

- when editing a database list with a select field, not choosing a select field should display everything (e.g. not choosing the location to limit the facilities shows all the facilities)
 - allow list members to be disabled so that they don't appear in the default drop-down menu.
 - add option meta/form_any so that a mapped field can take values in any form
 - make the flat form storage mechanism writable as much as possible
 - add a UUID module so that any form can be assigned a uuid via the form uuid_map
 - fixed up processing of <eval> tag for external module requirements
 - fixed issue when classes were not loaded when a install was restarted
 - added CSV form storage mechanism
 - added eval form storage mechanism
 - created locale form (via eval form storage) for selecting available/selectable locals
-

- Windows: allow relocatable paths so USB-Toolkit ^[1] will work
- added moveData()/exportData()/importData() for form storage mechanisms
- Add in different role/password authentications for users
 - DHIS users
 - LDAP
- there is now an administrative user 'i2ce_admin' whose password is the password used to access the db
- Mysql's unix socket often lives in /var/lib/mysql (or elsewhere), not /var/run/mysqld. (jstrope) -- fixed by adding initializeDSN() to I2CE class which allows you to pass a DSN. we can now handle RHEL setting the dsn if we ever package .rpms for it.
- Cleanup user and user_form.
- Make iHRIS work out of the box on RHEL:
 - Fedora has no /etc/timezone -- that info lives in /etc/sysconfig/clock (but you can't just do a file_get_contents on it -- has comments and additional info and the time zones don't always match the format returned by date_default_timezone_get) (jstrope)
 - relevant Bug report ^[2] and here ^[3] and here ^[4]
 - iHRIS didn't give much of an indication of why the initialization failed. If you had an error handler that said "set your date.timezone setting in php.ini", that would probably suffice. (jstrope)
- upgrade mootools to 1.2.4
- Remove all mootools' \$ references from javascript dollar sage mode ^[5]
- Add workplace accident module to ihris manage
- Add disciplinary action module to ihris manage
- FormCache is smarter: forms are marked dirty when they are saved and clean when they are cached. this way we don't need to even bother trying to re-cache a form if it has not been saved since the last time it was cached.
- Magic Data Browser: the path is now a bunch of links so you can easily skip to the top.
- FormStorageEntry: flattened out the sub-query into a single query so that indices on last_entry can be taken advantage of in a where clause
- modify limit templates to display differently for report view limits and relationship editing.
- function signatures fixed for validate() method of personPosition,application
- function signature fixed for filedump->display() and ajax_text->display()
- function signature fixed for formfield_currency->createdoneditable()
- made collation utf8_bin (instead of utf8_general_ci) across all columns in hippo tables (cuts report generation times by half)
- cleaned up code for setting default values for form fields (now lookup value is handled by MAP)
- added indices to entry table to speed up cached form generation (form_field,string_value) and (formfield,integer_value)
- speed-up for getting max in int_generate so that it uses the (formfield,integer_value) index
- changed magic data to be stored in config_alt table rather than config table to deal with:
 - config table did not allow children with commas in their names
 - performance was slowed as the size of the config table grew
 - increase the speed when doing a join with a parent and child (form storage magic data)
- call page stretch when the page goes through an ajax update
- fix issues with the updater/configurator when moving to a new version of the software library while the old version stayed in the same place
- fixed issues with classes of dependent modules not being loaded on a module update
- added a 'Recent Forms' menu option to the search page so you can see which forms (e.g. person or position) have recently been edited/created. useful if they are not yet in the search report

- moved all of the SearchPages classes from manage and qualify into common with the search reports being displayed by magic data
- fixed error checking/null checking when getting the last modified time for a form stored in magic data
- allow to check the modification time on individual fields of a form or of the record for entry
- fixed pagination issues when view lists in the 'Administer database'
- Removed caching all forms from the generate_complete background process since each form makes sure the required forms are cached. Removed the restriction of passing multiple forms to the generate custom reports command line
- fixed header for CSS that was breaking Chrome and Safari
- various fixes of function signatures
- marked all translatable nodes in configuration .xml files.
- fixed up translation of .html and config .xml files from .mo files

Version 4.0.4

Completed

- Added memcached magic data storage to sit between APC and DB. Reduces load on DB and speeds up start-up time for background processes.
- Fixed issues with magic data storage and initialization not setting everything in DB storage.
- Module Configuration via SwissConifg now works (at least the basic parts)
- fixed prepared statement for config_alt table that was problematic in mysql 5.0
- fixed PageStretch lowest element calculation when there were scrollable elements
- In fatal bugs, the mailto form now looks nicer and includes a full error trace.
- Fixed issue in loading in localized magic data from a delimited type... the loaded language would overwrite en_US string.
- Added a play button for error messages.
- FormField Date_YMD now uses the DatePicker ^[6] mootools script
- On module update load as many modules class paths as possible
- Fixed bug with reports not displaying when the default view displayed multiple columns but the selected view was only one.
- Modified flash charts to better display labels so the chart and labels aren't cut off.
- Added display of error message to raiseError when the error is about running out of memory.
- Added error message to charts and HTML views when the report hasn't been generated or the limits don't return any results.
- Reports: Change the buttons on reports to pull up the options window and remove the options link.
- Form documentor can now localize
- Added in checking to Multi-flat storage to see if desired databases exist
- Date Picker
 - Defaults to decade
 - Allows blank values
 - Report date limits now use data picker
- Removed (Options) links for report buttons. now buttons will pop up the options menu
- fixup width of passport photos
- I2CE_FormField_Binary_File -- filename and modtime are now stored.

Version 4.0.5

Completed

- Reports: When joining in a specific form on a mapped field which can take values in multiple forms, all values of the joined form are populated. E.g. joining district to facility on the location field will populate the district data if either the location maps to a district or a county
- Reports: speed improvements -- the parent form in a relationship is no longer joined in. Rather necessary data are read directly from the reports
- Form Relationships: Added the ability to get all the forms satisfying a relationship given the id of a primary form
- Added in the Printed Forms module with samples:
 - iHRIS Manage: Staff Hire Letter
 - iHRIS Qualify: Registration Form
 - iHRIS Qualify: License
- Added the "Dependents Module" to iHRIS Common which was [coded-in-country ^[7]]
- cleaned up the required strings to translate for exported custom reports
- If you chose the non-default locale on the login page, then that user's locale is set on a successful login
- Cleaned up tasks and their descriptions
- Simple lists can now share a common html template
- Fixed various CSV form storage bugs
- Added some changes to smooth over transition to Ubuntu Lucid:
 - Set default sessions path to /tmp if it has not been set
- die after display non-modified headers
- fixup pagination of html reports --- limit values were not being preserved
- MagicDataNode->setIfIsSet() now sets values based on set locale.
- Magic Data Browser -- shows locale that is being displayed.
- Magic Data Browser -- works better when editing translatable values
- Updated magic number data file
- Added SDMX-HD form storage to view SDMX-HD code lists as iHRIS forms.
- Added default link forms to be used to link lists to other lists as well as to string (for IDs) to map to other data standards if necessary.

Version 4.0.6

Plan for release in August 2010

Completed

- Add in "ancestral form" join condition on form relationships
- modification times are stored (and indexed) in the hippo_XXXX tables (Done to support smaller size updates of databases to remote aggregating database)
- added next of kin module to iHRIS-common
- created a field container/field container factory which form/form factory sub class
- removed I2CE_List class constants, MAIN_FIELD, SEC_FIELD, SORT_FIELD and replaced with extended sprintf functionality stored magic data "/modules/forms/formClasses/\$form/list/display/default/XXX"
- Have the I2CE_List::listOptions() make use of the new sprintf data rather than implode('-', \$vals)
- Add Report Archive module
- workaround MDB2 bug with \0 terminated data in I2CE_FormField_Binary
- Added support to zip report exports

- FormStorage/Lists: allowed multiple fields to be checked against for uniqueness by specifying a comma separated list in the `unique_field`. also made the error message a bit more useful if there is a non-uniqueness problem
- Added ability to upload XSLT to a report view that can be used to transform the .xml export (mostly done to export SDMX-HD)
- form relationships (**SQL ONLY**) allow ability to join on a child field which is mapped such that it traverses the linking data
- added in establishment module to iHRIS Manage
- added in sample data and sample report for establishment module (staffing norms 2010)
- Added module to archive Scanned Paper Records to a person
- Fixed bug w/ selected tree values not being preserved on a submit/confirm page for database lists
- Added ability to specify max document size in KB for a binary form field by setting `/modules/forms/formClasses/$formClass/fields/$field/meta/max_size_kb`
- Fixed issues w/ id field not being set/read from when loading forms from request variables
- added ability to create profiles of forms and to cache or mysqldump the forms based on the profiles
- added ability to delete default display for a custom report view
- added generic XML-based form storage mechanism
- added SDMX CrossSectionalData form storage mechanism
- when a list is read-only, then do not show the 'edit/update' link from the database lists page. instead go to the view list page.
- added gzip compression for report view export
- added bzip2 compression for report view export
- added arbitrary stream support for file based form storage mechanisms -- e.g. now you can read things across `http://` not just the file system. In particular this applies to CSV, XML, and the SDMX-HD form storage mechanisms.
- mapped the user access mechanisms to a user form storage mechanism
- fixed bug with listing fields in the generic form storage mechanism
- split out Job and Cadre modules from Manage into Common. ManageJob remains w/ salary grade
- added Confirmation/Probationary work period module
- allow upload of meeting notes for position changes and interviews

Outstanding

- Form Relationship:
 - Allow for more complicated joins in a form relationship -- e.g. "secondary" conditions on ancestral forms. Done for SQL. Needs to be done for `getFormsSatisfying()`
 - Allow for joining a child form in a relationship multiply (both in a report and in the `getFormsSatisfying()`)
 - handle joining "any" form and make joining forms clearer
- Add easy support for multiple platforms:
 - Add tests to determine platforms, e.g. ie7, firefox, safari, chrome, mobile (which ones?)
 - platform should be saved in a session variable
 - Add support to the file search for platform specific files (e.g. for css). For example:

```
<path name='css'>
  <!-- the default platform-->
  <value>./css/default</value>
</path>
<path name='css' platform='ie7'>
  <value>./css/ie7</value>
```



```
</path>
```

- Add support for "platform resolution." For example search for ie7, then ie then the default
- Field Containers
 - Break up existing limits to separate modules for fields and relationships
 - Add in form limits
- Standardized letters/forms:
 - Add in return/view links for standardized letter menu
 - Search results can be used to generate multiple letters at once
 - add new display "table" which can loop through multiple child forms in a relationship
- Qualify: Use tasks for permission handling instead of roles for everything instead of just a few places.
- Manage: when a person passes a training course which has CEUs, those CEUS are added as a child form to that person.
- in the "Configure System" page, when the user's role is 'admin' provide a link to the 'Project Communication' page and 'Technical Documentation' page on the wiki. People are not finding this when they need to
- when a list is read-only, then do not show the 'edit/update' link from the database lists page. instead go to the view list page.
- allow way to see a list of the forms and their instances that a related to a particular form (parent-child or mapped value to a list)
- form storage entry should allow string id's not just unique integers across all forms stored in entry.
- the `FormStorage::migrateForm()` method should not create the named form in the entry table if it is not already present -- causes an issues with loading of the sample data b/c `facility_contact` could for example be created in the `FacilityContact` module *before* the sample data defining facility contact is loaded.
- add in iso currencies to pre-populate currencies
- Display the limits that a report is currently set to on the report display.
- CSV/Excel report export -- add option to show metadata about what limits were chosen, when report was generated (ask Julie S.)
- Move all string from php to templates
- Add in Simply Joined mechanism for forms to enable reading in data from openMRS style vertical tables.
- Review strings in .pot files to ensure that they translatable as sentences and rework templates/make printf substitutions as appropriate
- Fix-up selection list to be a tree for position+facility rather than a drop down list:
we should be able to set position+facility to have default display fields
'facility+location:county:district:[region]:country'
the problem is that currently, facility+location can take values in either the forms 'county' or 'district' and using the the above display fields string, we would only list the facilities whose location are a county.
- Custom Reports: when a form is componentized, add "easy" option to limit based on the components. e.g. show only the people within "Northern Region"
Optionally define and use the metadata at `/modules/forms/form_storage/options/$storage/component/name`
- Speedup validation of mapfields w/ `unique_field` set to be something like 'country:region'
- Speedup `I2CE_List::monsterMash` and `I2Ce_List::createDataTree`
 - short circuit and return once a match is found instead of getting all the matches
 - If two successive forms have storage mechanisms subclassing `I2CE_FormStorage_DB` try to use a sub-select rather than process through PHP
- replace instances of `foreach($something) { $this->template->appendTemplateFile('some.html',$appendNode);}` with `$add_node = $this->template->loadHTMLFile('some.html'); foreach ($something) { $this->template->appendNode($add_node->clone(true),$append_node);}`

- Add tasks to Qualify
- add in limits for dates where date is(requested form MVC):
 - after a given time period from now (e.g. after 6 months pervious to now)
 - period in months (as int)
 - period in year (as int)
 - before a given time period from now (e.g. after 6 months pervious to now)
 - period in months (as int)
 - period in year (as int)
- Training Sample data should be separated from Medical Sample Data. Currently ManageMedicalData enables SampleData-training_course_category which requires training-course.
- Add in MongoDB Magic Data Storage
- Modify Magic Data Storage to add a canonical/permanent flag so permanent storage will never be cleared. Add initialize option to choose MongoDB or DB to be used as permanent storage.

References

- [1] <http://www.openhealthconsortium.org/wiki/doku.php?id=PHIT>
- [2] https://bugzilla.redhat.com/show_bug.cgi?id=469532
- [3] <http://trac.agavi.org/ticket/1008>
- [4] http://derickrethans.nl/distributions_please_dont_cripple_php_or_red_hat_stop_fucking_around.php
- [5] <http://mootools.net/blog/2009/06/22/the-dollar-safe-mode/>
- [6] <http://www.monkeyphysics.com>
- [7] <http://www.capacityproject.org/hris/blog/index.php/2010/05/tanzania-advances-use-of-hr-management-software-part-1/>

IHRIS Task List (4.0.6)

This is a list of all the tasks available in the iHRIS System

cached_forms_can_administer

The task *cached_forms_can_administer* is defined in the module CachedForms of the package I2CE.

- Description:Allows administering of cached forms

can_change_own_password

The task *can_change_own_password* is defined in the module LoginPage of the package I2CE.

- Description:Can change their own password
-

can_configure_modules

The task *can_configure_modules* is defined in the module admin of the package I2CE.

- Description:Can configure modules

can_configure_system

The task *can_configure_system* is defined in the module ihris-common of the package iHRIS Common.

- Description:Can access the general configure system menu

can_create_or_edit_users

The task *can_create_or_edit_users* is defined in the module UserForm of the package I2CE.

- Description:Can create or edit the users in the system.

can_edit_all_database_lists

The task *can_edit_all_database_lists* is defined in the module Lists of the package I2CE.

- Description:Can edit all the lists stored in the database
- Can perform the following sub-tasks: *can_edit_database_list_continuing_education_course*, *can_edit_all_geographic_database_lists*, *can_edit_database_lists*, *can_view_all_database_lists*, *can_edit_database_list_cadre*, *can_edit_all_job_structure_database_lists*, *can_edit_all_organization_database_lists*, *can_edit_all_employee_database_lists*, *can_edit_position_database_lists*, *can_edit_all_manage_positions_database_lists*, *can_edit_all_training_course_database_lists*

can_edit_all_employee_database_lists

The task *can_edit_all_employee_database_lists* is defined in the module ihris-manage of the package iHRIS Manage.

- Description:Can edit all employee database lists
- Can perform the following sub-tasks: *can_edit_database_list_marital_status*, *can_edit_database_list_edu_type*, *can_edit_database_list_degree*, *can_edit_database_list_id_type*, *can_edit_database_list_language*, *can_edit_database_list_accident_type*, *can_edit_database_list_disciplinary_action_type*, *can_edit_employee_database_lists*, *can_view_all_employee_database_lists*, *can_edit_database_list_benefit_type*, *can_edit_database_list_pos_change_reason*, *can_edit_database_list_confirmation_type*, *can_edit_database_list_competency_evaluation*, *can_edit_database_lists_competency*

can_edit_all_geographic_database_lists

The task *can_edit_all_geographic_database_lists* is defined in the module Geography of the package iHRIS Common.

- Description:Can edit all geography data
 - Can perform the following sub-tasks: *can_edit_database_list_currency*, *can_edit_database_list_country*, *can_edit_database_list_region*, *can_edit_database_list_district*, *can_edit_database_list_county*, *can_edit_geographic_database_lists*, *can_view_all_geographic_database_lists*
-

can_edit_all_job_structure_database_lists

The task *can_edit_all_job_structure_database_lists* is defined in the module *ihris-common-Job* of the package *iHRIS Common*.

- Description: Can edit all job structure database lists
- Can perform the following sub-tasks: *can_view_all_job_structure_database_lists*, *can_edit_database_list_cadre*, *can_edit_database_list_classification*, *can_edit_database_list_job*, *can_edit_database_list_salary_grade*

can_edit_all_manage_positions_database_lists

The task *can_edit_all_manage_positions_database_lists* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description: Can edit all information about positions
- Can perform the following sub-tasks: *can_view_all_manage_positions_database_lists*, *can_edit_database_list_position_type*, *can_edit_database_list_position*, *can_edit_manage_positions_database_lists*, *can_edit_database_list_salary_source*

can_edit_all_organization_database_lists

The task *can_edit_all_organization_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can edit all organizational database lists
- Can perform the following sub-tasks: *can_edit_database_list_facility*, *can_edit_database_list_facility_type*, *can_edit_database_list_council*, *can_edit_organization_database_lists*, *can_view_all_organization_database_lists*, *can_edit_database_list_department*

can_edit_all_planning_database_lists

The task *can_edit_all_planning_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can edit all planning database lists
- Can perform the following sub-tasks: *can_edit_database_list_establishment_type*, *can_edit_database_list_establishment_period*, *can_edit_database_list_establishment*

can_edit_all_training_course_database_lists

The task *can_edit_all_training_course_database_lists* is defined in the module *training-course* of the package *iHRIS Common*.

- Description: Edit all lists associated with the training module
- Can perform the following sub-tasks: *can_edit_database_list_continuing_education_course*, *can_view_all_training_course_database_lists*, *can_edit_database_lists*, *can_view_database_list_continuing_education_course*, *can_edit_database_list_training_course*, *can_edit_database_list_scheduled_training_course*, *can_edit_database_list_training_course_status*, *can_edit_database_list_training_course_requestor*, *can_edit_database_list_training_course_evaluation*, *can_edit_database_list_training_course_category*, *can_edit_database_list_training_institution*, *can_edit_database_list_training_funder*, *person_can_edit_child_form_scheduled_training_course*

can_edit_database_list_accident_type

The task *can_edit_database_list_accident_type* is defined in the module *accident* of the package *iHRIS Manage*.

- Description:Edit the workplace accident type list
- Can perform the following sub-tasks: *can_edit_database_lists*, *can_edit_employee_database_lists*, *can_view_database_list_accident_type*

can_edit_database_list_benefit_type

The task *can_edit_database_list_benefit_type* is defined in the module *ihris-manage-Benefit* of the package *iHRIS Manage*.

- Description:Can edit the benefit type database list
- Can perform the following sub-tasks: *can_edit_employee_database_lists*, *can_view_database_list_benefit_type*

can_edit_database_list_cadre

The task *can_edit_database_list_cadre* is defined in the module *ihris-common-Cadre* of the package *iHRIS Common*.

- Description:Edit the cadre list
- Can perform the following sub-tasks: *can_view_database_list_cadre*

can_edit_database_list_cl_asource

The task *can_edit_database_list_cl_asource* is defined in the module *SDMX-HD-CodeLists* of the package *iHRIS Common*.

- Description:Can edit database code list *cl_asource*

can_edit_database_list_cl_cstype

The task *can_edit_database_list_cl_cstype* is defined in the module *SDMX-HD-CodeLists* of the package *iHRIS Common*.

- Description:Can edit database code list *cl_cstype*

can_edit_database_list_cl_currency

The task *can_edit_database_list_cl_currency* is defined in the module *SDMX-HD-CodeLists* of the package *iHRIS Common*.

- Description:Can edit database code list *cl_currency*
-

can_edit_database_list_cl_day

The task *can_edit_database_list_cl_day* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_day

can_edit_database_list_cl_disagg

The task *can_edit_database_list_cl_disagg* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_disagg

can_edit_database_list_cl_disease

The task *can_edit_database_list_cl_disease* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_disease

can_edit_database_list_cl_disstat

The task *can_edit_database_list_cl_disstat* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_disstat

can_edit_database_list_cl_dsource

The task *can_edit_database_list_cl_dsource* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_dsource

can_edit_database_list_cl_dstype

The task *can_edit_database_list_cl_dstype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_dstype

can_edit_database_list_cl_dtype

The task *can_edit_database_list_cl_dtype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_dtype

can_edit_database_list_cl_fperiod

The task *can_edit_database_list_cl_fperiod* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_fperiod

can_edit_database_list_cl_gboundary_type

The task *can_edit_database_list_cl_gboundary_type* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_gboundary_type

can_edit_database_list_cl_gcode_country

The task *can_edit_database_list_cl_gcode_country* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_gcode_country

can_edit_database_list_cl_gender

The task *can_edit_database_list_cl_gender* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_gender

can_edit_database_list_cl_glevel

The task *can_edit_database_list_cl_glevel* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_glevel

can_edit_database_list_cl_glocation

The task *can_edit_database_list_cl_glocation* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_glocation

can_edit_database_list_cl_hif1

The task *can_edit_database_list_cl_hif1* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_hif1

can_edit_database_list_cl_hif2

The task *can_edit_database_list_cl_hif2* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_hif2

can_edit_database_list_cl_income

The task *can_edit_database_list_cl_income* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_income
-

can_edit_database_list_cl_logical

The task *can_edit_database_list_cl_logical* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_logical

can_edit_database_list_cl_metype

The task *can_edit_database_list_cl_metype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_metype

can_edit_database_list_cl_month

The task *can_edit_database_list_cl_month* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_month

can_edit_database_list_cl_mult

The task *can_edit_database_list_cl_mult* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_mult

can_edit_database_list_cl_operand

The task *can_edit_database_list_cl_operand* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_operand

can_edit_database_list_cl_orphan

The task *can_edit_database_list_cl_orphan* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_orphan

can_edit_database_list_cl_otype

The task *can_edit_database_list_cl_otype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_otype

can_edit_database_list_cl_periodicity

The task *can_edit_database_list_cl_periodicity* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_periodicity
-

can_edit_database_list_cl_preg

The task *can_edit_database_list_cl_preg* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_preg

can_edit_database_list_cl_pstatus

The task *can_edit_database_list_cl_pstatus* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_pstatus

can_edit_database_list_cl_ptype

The task *can_edit_database_list_cl_ptype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_ptype

can_edit_database_list_cl_quarter

The task *can_edit_database_list_cl_quarter* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_quarter

can_edit_database_list_cl_race

The task *can_edit_database_list_cl_race* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_race

can_edit_database_list_cl_sector

The task *can_edit_database_list_cl_sector* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_sector

can_edit_database_list_cl_sex

The task *can_edit_database_list_cl_sex* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_sex

can_edit_database_list_cl_special_value

The task *can_edit_database_list_cl_special_value* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_special_value
-

can_edit_database_list_cl_stype

The task *can_edit_database_list_cl_stype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_stype

can_edit_database_list_cl_tpop

The task *can_edit_database_list_cl_tpop* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_tpop

can_edit_database_list_cl_unit

The task *can_edit_database_list_cl_unit* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_unit

can_edit_database_list_cl_value_type

The task *can_edit_database_list_cl_value_type* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_value_type

can_edit_database_list_cl_vstatus

The task *can_edit_database_list_cl_vstatus* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_vstatus

can_edit_database_list_cl_vulnstat

The task *can_edit_database_list_cl_vulnstat* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_vulnstat

can_edit_database_list_cl_week

The task *can_edit_database_list_cl_week* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_week

can_edit_database_list_cl_year

The task *can_edit_database_list_cl_year* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can edit database code list cl_year
-

can_edit_database_list_classification

The task *can_edit_database_list_classification* is defined in the module *ihris-common-Job* of the package *iHRIS Common*.

- Description:Edit the classification list
- Can perform the following sub-tasks: *can_edit_job_structure_database_lists*,
can_view_database_list_classification

can_edit_database_list_competency

The task *can_edit_database_list_competency* is defined in the module *simple-competency* of the package *iHRIS Common*.

- Description:Edit the competency list
- Can perform the following sub-tasks: *can_edit_employee_database_lists*, *can_view_database_list_competency*

can_edit_database_list_competency_evaluation

The task *can_edit_database_list_competency_evaluation* is defined in the module *person-simple-competency* of the package *iHRIS Common*.

- Description:Edit the competency evaluation list
- Can perform the following sub-tasks: *can_edit_employee_database_lists*,
can_view_database_list_competency_evaluation

can_edit_database_list_competency_type

The task *can_edit_database_list_competency_type* is defined in the module *simple-competency* of the package *iHRIS Common*.

- Description:Edit the competency type list
- Can perform the following sub-tasks: *can_edit_employee_database_lists*,
can_view_database_list_competency_type

can_edit_database_list_confirmation_type

The task *can_edit_database_list_confirmation_type* is defined in the module *ihris-manage-confirmation* of the package *iHRIS Manage*.

- Description:Can edit the confirmation type database list
- Can perform the following sub-tasks: *can_edit_employee_database_lists*,
can_view_database_list_confirmation_type

can_edit_database_list_continuing_education_course

The task *can_edit_database_list_continuing_education_course* is defined in the module *CEUs* of the package *iHRIS Common*.

- Description:Edit the continuing education list
 - Can perform the following sub-tasks: *can_edit_training_course_database_lists*,
can_view_database_list_continuing_education_course
-

can_edit_database_list_council

The task *can_edit_database_list_council* is defined in the module ManageRegistration of the package iHRIS Manage.

- Description:Can edit the council database list
- Can perform the following sub-tasks: can_edit_organization_database_lists, can_view_database_list_council

can_edit_database_list_country

The task *can_edit_database_list_country* is defined in the module Geography of the package iHRIS Common.

- Description:Can edit country list
- Can perform the following sub-tasks: can_edit_geographic_database_lists, can_view_database_list_country

can_edit_database_list_county

The task *can_edit_database_list_county* is defined in the module Geography of the package iHRIS Common.

- Description:Can edit country list
- Can perform the following sub-tasks: can_edit_geographic_database_lists, can_view_database_list_county

can_edit_database_list_currency

The task *can_edit_database_list_currency* is defined in the module Currency of the package iHRIS Common.

- Description:Can edit currency information
- Can perform the following sub-tasks: can_edit_geographic_database_lists, can_view_database_list_currency

can_edit_database_list_degree

The task *can_edit_database_list_degree* is defined in the module PersonEducation of the package iHRIS Common.

- Description:Can edit degree type database lists
- Can perform the following sub-tasks: can_edit_employee_database_lists, can_view_database_lists_degree

can_edit_database_list_department

The task *can_edit_database_list_department* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Edit the department list
- Can perform the following sub-tasks: can_edit_organization_database_lists, can_view_database_list_department

can_edit_database_list_disciplinary_action_type

The task *can_edit_database_list_disciplinary_action_type* is defined in the module disciplinary_action of the package iHRIS Manage.

- Description:Edit the workplace disciplinary_action type list
 - Can perform the following sub-tasks: can_edit_database_lists, can_edit_employee_database_lists, can_view_database_list_disciplinary_action_type
-

can_edit_database_list_district

The task *can_edit_database_list_district* is defined in the module Geography of the package iHRIS Common.

- Description:Can edit district list
- Can perform the following sub-tasks: can_edit_geographic_database_lists, can_view_database_list_country

can_edit_database_list_edu_type

The task *can_edit_database_list_edu_type* is defined in the module PersonEducation of the package iHRIS Common.

- Description:Can edit education type database lists
- Can perform the following sub-tasks: can_edit_employee_database_lists, can_view_database_lists_edu_type

can_edit_database_list_establishment

The task *can_edit_database_list_establishment* is defined in the module establishment of the package iHRIS Common.

- Description:Can edit the establishment database list
- Can perform the following sub-tasks: can_edit_planning_database_lists, can_view_database_list_establishment

can_edit_database_list_establishment_period

The task *can_edit_database_list_establishment_period* is defined in the module establishment of the package iHRIS Common.

- Description:Can edit the establishment period database list
- Can perform the following sub-tasks: can_edit_planning_database_lists, can_view_database_list_establishment_period

can_edit_database_list_establishment_type

The task *can_edit_database_list_establishment_type* is defined in the module establishment of the package iHRIS Common.

- Description:Can edit the establishment type database list
- Can perform the following sub-tasks: can_edit_planning_database_lists, can_view_database_list_establishment_type

can_edit_database_list_facility

The task *can_edit_database_list_facility* is defined in the module Facility of the package iHRIS Common.

- Description:Edit the facility list
 - Can perform the following sub-tasks: can_edit_organization_database_lists, can_view_database_list_facility
-

can_edit_database_list_facility_type

The task *can_edit_database_list_facility_type* is defined in the module Facility of the package iHRIS Common.

- Description:Edit the facility type list
- Can perform the following sub-tasks: can_edit_organization_database_lists, can_view_database_list_facility_type

can_edit_database_list_id_type

The task *can_edit_database_list_id_type* is defined in the module PersonID of the package iHRIS Common.

- Description:Can edit the id_type database list
- Can perform the following sub-tasks: can_edit_employee_database_lists, can_view_database_list_id_type

can_edit_database_list_job

The task *can_edit_database_list_job* is defined in the module ihris-common-Job of the package iHRIS Common.

- Description:Edit the job list
- Can perform the following sub-tasks: can_edit_job_structure_database_lists, can_view_database_list_job

can_edit_database_list_language

The task *can_edit_database_list_language* is defined in the module PersonLanguage of the package iHRIS Common.

- Description:Can edit the language database list
- Can perform the following sub-tasks: can_edit_employee_database_lists, can_view_database_list_language

can_edit_database_list_marital_status

The task *can_edit_database_list_marital_status* is defined in the module PersonDemographic of the package iHRIS Common.

- Description:Can edit the department marital status list.
- Can perform the following sub-tasks: can_view_database_list_marital_status, can_edit_employee_database_lists

can_edit_database_list_pos_change_reason

The task *can_edit_database_list_pos_change_reason* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Edit the pos_change_reason list
 - Can perform the following sub-tasks: can_edit_employee_database_lists, can_view_database_list_pos_change_reason
-

can_edit_database_list_position

The task *can_edit_database_list_position* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description:Edit the position list
- Can perform the following sub-tasks: *can_edit_manage_positions_database_lists*, *can_view_database_list_position*

can_edit_database_list_position_type

The task *can_edit_database_list_position_type* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description:Edit the position_type list
- Can perform the following sub-tasks: *can_edit_manage_positions_database_lists*, *can_view_database_list_position_type*

can_edit_database_list_region

The task *can_edit_database_list_region* is defined in the module *Geography* of the package *iHRIS Common*.

- Description:Can edit region list
- Can perform the following sub-tasks: *can_edit_geographic_database_lists*, *can_view_database_list_country*

can_edit_database_list_salary_grade

The task *can_edit_database_list_salary_grade* is defined in the module *ihris-manage-Job* of the package *iHRIS Manage*.

- Description:Edit the salary_grade list
- Can perform the following sub-tasks: *can_edit_job_structure_database_lists*, *can_view_database_list_salary_grade*

can_edit_database_list_salary_source

The task *can_edit_database_list_salary_source* is defined in the module *ihris-manage-Salary* of the package *iHRIS Manage*.

- Description:Edit the salary_source list
- Can perform the following sub-tasks: *can_edit_manage_positions_database_lists*, *can_view_database_list_salary_source*

can_edit_database_list_scheduled_training_course

The task *can_edit_database_list_scheduled_training_course* is defined in the module *training-course* of the package *iHRIS Common*.

- Description:Edit the scheduled training course category list

can_edit_database_list_training_course

The task *can_edit_database_list_training_course* is defined in the module *training-course* of the package *iHRIS Common*.

- Description:Edit the training course list
-

- Can perform the following sub-tasks: `can_edit_training_course_database_lists`, `can_view_database_list_training_course`

`can_edit_database_list_training_course_category`

The task *can_edit_database_list_training_course_category* is defined in the module training-course of the package iHRIS Common.

- Description:Edit the training course category list
- Can perform the following sub-tasks: `can_edit_training_course_database_lists`, `can_view_database_list_training_course_category`

`can_edit_database_list_training_course_evaluation`

The task *can_edit_database_list_training_course_evaluation* is defined in the module training-course of the package iHRIS Common.

- Description:Edit the training course evaluation list
- Can perform the following sub-tasks: `can_edit_training_course_database_lists`, `can_view_database_list_training_course_evaluation`

`can_edit_database_list_training_course_requestor`

The task *can_edit_database_list_training_course_requestor* is defined in the module training-course of the package iHRIS Common.

- Description:Edit the training course requestor list

`can_edit_database_list_training_course_status`

The task *can_edit_database_list_training_course_status* is defined in the module training-course of the package iHRIS Common.

- Description:Edit the training course status list
- Can perform the following sub-tasks: `can_edit_training_course_database_lists`, `can_view_database_list_training_course_status`

`can_edit_database_list_training_funder`

The task *can_edit_database_list_training_funder* is defined in the module training-institution of the package iHRIS Common.

- Description:Edit the training funder list
 - Can perform the following sub-tasks: `can_edit_training_course_database_lists`, `can_view_database_list_training_funder`
-

can_edit_database_list_training_institution

The task *can_edit_database_list_training_institution* is defined in the module training-institution of the package iHRIS Common.

- Description:Edit the training institutions list

can_edit_database_lists

The task *can_edit_database_lists* is defined in the module Lists of the package I2CE.

- Description:Can edit some of the lists stored in the database
- Can perform the following sub-tasks: can_view_database_lists

can_edit_database_lists_competency

The task *can_edit_database_lists_competency* is defined in the module simple-competency of the package iHRIS Common.

- Description:Edit all list associated with competency
- Can perform the following sub-tasks: can_edit_database_list_competency, can_edit_database_list_competency_type, can_edit_database_list_competency_evaluation, can_edit_employee_database_lists, can_view_database_lists_competency

can_edit_employee_database_lists

The task *can_edit_employee_database_lists* is defined in the module ihris-manage of the package iHRIS Manage.

- Description:Can edit some employee database lists
- Can perform the following sub-tasks: can_edit_database_lists, can_view_employee_database_lists

can_edit_geographic_database_lists

The task *can_edit_geographic_database_lists* is defined in the module Geography of the package iHRIS Common.

- Description:Can edit some geography data
- Can perform the following sub-tasks: can_edit_database_lists, can_view_geographic_database_lists

can_edit_job_structure_database_lists

The task *can_edit_job_structure_database_lists* is defined in the module ihris-common-Job of the package iHRIS Common.

- Description:Can edit some job structure database lists
- Can perform the following sub-tasks: can_edit_position_database_lists, can_view_job_structure_database_lists

can_edit_manage_positions_database_lists

The task *can_edit_manage_positions_database_lists* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Can edit some information about positions
 - Can perform the following sub-tasks: can_view_manage_positions_database_lists, can_edit_position_database_lists
-

can_edit_organization_database_lists

The task *can_edit_organization_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description:Can edit some organizational database lists
- Can perform the following sub-tasks: *can_edit_database_lists*, *can_view_organization_database_lists*

can_edit_planning_database_lists

The task *can_edit_planning_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description:Can edit some planning database lists

can_edit_position_database_lists

The task *can_edit_position_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description:Can edit some position database lists
- Can perform the following sub-tasks: *can_view_position_database_lists*

can_edit_scheduled_training_course

The task *can_edit_scheduled_training_course* is defined in the module *training-course* of the package *iHRIS Common*.

- Description:Edit a scheduled training course

can_edit_training_course_database_lists

The task *can_edit_training_course_database_lists* is defined in the module *training-course* of the package *iHRIS Common*.

- Description:Edit some lists associated with the training module
- Can perform the following sub-tasks: *can_edit_database_lists*

can_evaluate_person_scheduled_training_course

The task *can_evaluate_person_scheduled_training_course* is defined in the module *training-simple-competency* of the package *iHRIS Common*.

- Description:Evaluate a person's scheduled training course

can_hide_list_members

The task *can_hide_list_members* is defined in the module *Lists* of the package *I2CE*.

- Description:Can hide list members

can_view_all_database_lists

The task *can_view_all_database_lists* is defined in the module *Lists* of the package *I2CE*.

- Description:Can view all the lists stored in the database
- Can perform the following sub-tasks: *can_view_database_list_continuing_education_course*, *can_view_database_lists*, *can_view_database_list_cl_asource*, *can_view_database_list_cl_cstype*, *can_view_database_list_cl_currency*, *can_view_database_list_cl_day*, *can_view_database_list_cl_disagg*, *can_view_database_list_cl_disease*, *can_view_database_list_cl_disstat*, *can_view_database_list_cl_dsource*,

can_view_database_list_cl_dstype, can_view_database_list_cl_dtype, can_view_database_list_cl_fperiod,
 can_view_database_list_cl_gboundary_type, can_view_database_list_cl_gcode_country,
 can_view_database_list_cl_gender, can_view_database_list_cl_glevel, can_view_database_list_cl_glocation,
 can_view_database_list_cl_hif1, can_view_database_list_cl_hif2, can_view_database_list_cl_income,
 can_view_database_list_cl_logical, can_view_database_list_cl_metype, can_view_database_list_cl_month,
 can_view_database_list_cl_mult, can_view_database_list_cl_operand, can_view_database_list_cl_orphan,
 can_view_database_list_cl_otype, can_view_database_list_cl_periodicity, can_view_database_list_cl_preg,
 can_view_database_list_cl_pstatus, can_view_database_list_cl_ptype, can_view_database_list_cl_quarter,
 can_view_database_list_cl_race, can_view_database_list_cl_sector, can_view_database_list_cl_sex,
 can_view_database_list_cl_special_value, can_view_database_list_cl_type, can_view_database_list_cl_tpop,
 can_view_database_list_cl_unit, can_view_database_list_cl_value_type, can_view_database_list_cl_vstatus,
 can_view_database_list_cl_vulnstat, can_view_database_list_cl_week, can_view_database_list_cl_year,
 can_view_database_list_cadre, can_view_all_job_structure_database_lists,
 can_view_all_organization_database_lists, can_view_all_employee_database_lists,
 can_view_position_database_lists, can_view_all_manage_positions_database_lists

can_view_all_employee_database_lists

The task *can_view_all_employee_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view all employee database lists
- Can perform the following sub-tasks: can_view_database_list_marital_status, can_view_database_list_edu_type, can_view_database_list_degree, can_view_database_list_id_type, can_view_database_list_language, can_view_database_list_accident_type, can_view_database_list_disciplinary_action_type, can_view_database_list_establishment_type, can_view_database_list_establishment_period, can_view_database_list_establishment, can_view_employee_database_lists, can_view_database_list_benefit_type, can_view_database_list_pos_change_reason, can_view_database_list_confirmation_type, can_view_database_list_competency_evaluation, can_view_database_lists_competency

can_view_all_geographic_database_lists

The task *can_view_all_geographic_database_lists* is defined in the module *Geography* of the package *iHRIS Common*.

- Description: Can view all geography data
- Can perform the following sub-tasks: can_view_database_list_currency, can_view_database_list_country, can_view_database_list_region, can_view_database_list_district, can_view_database_list_county, can_view_geographic_database_lists

can_view_all_job_structure_database_lists

The task *can_view_all_job_structure_database_lists* is defined in the module *ihris-common-Job* of the package *iHRIS Common*.

- Description: Can view all job structure database lists
- Can perform the following sub-tasks: *can_view_database_list_cadre*, *can_view_database_list_classification*, *can_view_database_list_job*, *can_view_database_list_salary_grade*

can_view_all_manage_positions_database_lists

The task *can_view_all_manage_positions_database_lists* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description: Can view all information about positions
- Can perform the following sub-tasks: *can_view_manage_positions_database_lists*, *can_view_database_list_position_type*, *can_view_database_list_position*, *can_view_database_list_salary_source*

can_view_all_organization_database_lists

The task *can_view_all_organization_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view all organizational database lists
- Can perform the following sub-tasks: *can_view_database_list_facility*, *can_view_database_list_facility_type*, *can_view_database_list_council*, *can_view_organization_database_lists*, *can_view_database_list_department*

can_view_all_planning_database_lists

The task *can_view_all_planning_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view all planning database lists

can_view_all_training_course_database_lists

The task *can_view_all_training_course_database_lists* is defined in the module *training-course* of the package *iHRIS Common*.

- Description: View all lists associated with the training module
 - Can perform the following sub-tasks: *can_view_database_list_continuing_education_course*, *can_view_database_lists*, *can_view_database_list_training_course*, *can_view_database_list_scheduled_training_course*, *can_view_database_list_training_course_status*, *can_view_database_list_training_course_requestor*, *can_view_database_list_training_course_evaluation*, *can_view_database_list_training_course_category*, *can_view_database_list_training_institution*, *can_view_database_list_training_funder*, *can_view_training_course_database_lists*
-

can_view_background_processes

The task *can_view_background_processes* is defined in the module BackgroundProcess of the package I2CE.

- Description:Can view background processes

can_view_database_list_accident_type

The task *can_view_database_list_accident_type* is defined in the module accident of the package iHRIS Manage.

- Description:View the workplace accident type list

can_view_database_list_benefit_type

The task *can_view_database_list_benefit_type* is defined in the module ihris-manage-Benefit of the package iHRIS Manage.

- Description:Can view the benefit type database list

can_view_database_list_cadre

The task *can_view_database_list_cadre* is defined in the module ihris-common-Cadre of the package iHRIS Common.

- Description:View the cadre list

can_view_database_list_cl_asource

The task *can_view_database_list_cl_asource* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_asource

can_view_database_list_cl_cstype

The task *can_view_database_list_cl_cstype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_cstype

can_view_database_list_cl_currency

The task *can_view_database_list_cl_currency* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_currency
-

can_view_database_list_cl_day

The task *can_view_database_list_cl_day* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_day

can_view_database_list_cl_disagg

The task *can_view_database_list_cl_disagg* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_disagg

can_view_database_list_cl_disease

The task *can_view_database_list_cl_disease* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_disease

can_view_database_list_cl_disstat

The task *can_view_database_list_cl_disstat* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_disstat

can_view_database_list_cl_dsource

The task *can_view_database_list_cl_dsource* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_dsource

can_view_database_list_cl_dstype

The task *can_view_database_list_cl_dstype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_dstype

can_view_database_list_cl_dtype

The task *can_view_database_list_cl_dtype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_dtype

can_view_database_list_cl_fperiod

The task *can_view_database_list_cl_fperiod* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_fperiod
-

can_view_database_list_cl_gboundary_type

The task *can_view_database_list_cl_gboundary_type* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_gboundary_type

can_view_database_list_cl_gcode_country

The task *can_view_database_list_cl_gcode_country* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_gcode_country

can_view_database_list_cl_gender

The task *can_view_database_list_cl_gender* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_gender

can_view_database_list_cl_glevel

The task *can_view_database_list_cl_glevel* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_glevel

can_view_database_list_cl_glocation

The task *can_view_database_list_cl_glocation* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_glocation

can_view_database_list_cl_hif1

The task *can_view_database_list_cl_hif1* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_hif1

can_view_database_list_cl_hif2

The task *can_view_database_list_cl_hif2* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_hif2

can_view_database_list_cl_income

The task *can_view_database_list_cl_income* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_income
-

can_view_database_list_cl_logical

The task *can_view_database_list_cl_logical* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_logical

can_view_database_list_cl_metype

The task *can_view_database_list_cl_metype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_metype

can_view_database_list_cl_month

The task *can_view_database_list_cl_month* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_month

can_view_database_list_cl_mult

The task *can_view_database_list_cl_mult* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_mult

can_view_database_list_cl_operand

The task *can_view_database_list_cl_operand* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_operand

can_view_database_list_cl_orphan

The task *can_view_database_list_cl_orphan* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_orphan

can_view_database_list_cl_otype

The task *can_view_database_list_cl_otype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_otype

can_view_database_list_cl_periodicity

The task *can_view_database_list_cl_periodicity* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_periodicity
-

can_view_database_list_cl_preg

The task *can_view_database_list_cl_preg* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_preg

can_view_database_list_cl_pstatus

The task *can_view_database_list_cl_pstatus* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_pstatus

can_view_database_list_cl_ptype

The task *can_view_database_list_cl_ptype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_ptype

can_view_database_list_cl_quarter

The task *can_view_database_list_cl_quarter* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_quarter

can_view_database_list_cl_race

The task *can_view_database_list_cl_race* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_race

can_view_database_list_cl_sector

The task *can_view_database_list_cl_sector* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_sector

can_view_database_list_cl_sex

The task *can_view_database_list_cl_sex* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_sex

can_view_database_list_cl_special_value

The task *can_view_database_list_cl_special_value* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_special_value
-

can_view_database_list_cl_stype

The task *can_view_database_list_cl_stype* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_stype

can_view_database_list_cl_tpop

The task *can_view_database_list_cl_tpop* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_tpop

can_view_database_list_cl_unit

The task *can_view_database_list_cl_unit* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_unit

can_view_database_list_cl_value_type

The task *can_view_database_list_cl_value_type* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_value_type

can_view_database_list_cl_vstatus

The task *can_view_database_list_cl_vstatus* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_vstatus

can_view_database_list_cl_vulnstat

The task *can_view_database_list_cl_vulnstat* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_vulnstat

can_view_database_list_cl_week

The task *can_view_database_list_cl_week* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_week

can_view_database_list_cl_year

The task *can_view_database_list_cl_year* is defined in the module SDMX-HD-CodeLists of the package iHRIS Common.

- Description:Can view database code list cl_year
-

can_view_database_list_classification

The task *can_view_database_list_classification* is defined in the module *ihris-common-Job* of the package *iHRIS Common*.

- Description:View the classification list

can_view_database_list_competency

The task *can_view_database_list_competency* is defined in the module *simple-competency* of the package *iHRIS Common*.

- Description:View the competency list
- Can perform the following sub-tasks: *can_view_employee_database_lists*

can_view_database_list_competency_evaluation

The task *can_view_database_list_competency_evaluation* is defined in the module *person-simple-competency* of the package *iHRIS Common*.

- Description:View the competency evaluation list
- Can perform the following sub-tasks: *can_view_employee_database_lists*

can_view_database_list_competency_type

The task *can_view_database_list_competency_type* is defined in the module *simple-competency* of the package *iHRIS Common*.

- Description:View the competency type list
- Can perform the following sub-tasks: *can_view_employee_database_lists*

can_view_database_list_confirmation_type

The task *can_view_database_list_confirmation_type* is defined in the module *ihris-manage-confirmation* of the package *iHRIS Manage*.

- Description:Can view the confirmation type database list

can_view_database_list_continuing_education_course

The task *can_view_database_list_continuing_education_course* is defined in the module *CEUs* of the package *iHRIS Common*.

- Description:View the continuing education list
-

can_view_database_list_council

The task *can_view_database_list_council* is defined in the module ManageRegistration of the package iHRIS Manage.

- Description:Can view the council database list

can_view_database_list_country

The task *can_view_database_list_country* is defined in the module Geography of the package iHRIS Common.

- Description:Can view country list

can_view_database_list_county

The task *can_view_database_list_county* is defined in the module Geography of the package iHRIS Common.

- Description:Can view country list

can_view_database_list_currency

The task *can_view_database_list_currency* is defined in the module Currency of the package iHRIS Common.

- Description:Can view currency information

can_view_database_list_degree

The task *can_view_database_list_degree* is defined in the module PersonEducation of the package iHRIS Common.

- Description:Can view degree type database lists

can_view_database_list_department

The task *can_view_database_list_department* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:View the department list
- Can perform the following sub-tasks: can_view_organization_database_lists

can_view_database_list_disciplinary_action_type

The task *can_view_database_list_disciplinary_action_type* is defined in the module disciplinary_action of the package iHRIS Manage.

- Description:View the workplace disciplinary_action type list

can_view_database_list_district

The task *can_view_database_list_district* is defined in the module Geography of the package iHRIS Common.

- Description:Can view district list
-

can_view_database_list_edu_type

The task *can_view_database_list_edu_type* is defined in the module PersonEducation of the package iHRIS Common.

- Description:Can view education type database lists

can_view_database_list_establishment

The task *can_view_database_list_establishment* is defined in the module establishment of the package iHRIS Common.

- Description:Can view the establishment database list

can_view_database_list_establishment_period

The task *can_view_database_list_establishment_period* is defined in the module establishment of the package iHRIS Common.

- Description:Can view the establishment period database list

can_view_database_list_establishment_type

The task *can_view_database_list_establishment_type* is defined in the module establishment of the package iHRIS Common.

- Description:Can view the establishment type database list

can_view_database_list_facility

The task *can_view_database_list_facility* is defined in the module Facility of the package iHRIS Common.

- Description:View the facility list

can_view_database_list_facility_type

The task *can_view_database_list_facility_type* is defined in the module Facility of the package iHRIS Common.

- Description:View the facility type list

can_view_database_list_id_type

The task *can_view_database_list_id_type* is defined in the module PersonID of the package iHRIS Common.

- Description:Can view the id_type database list

can_view_database_list_job

The task *can_view_database_list_job* is defined in the module ihris-common-Job of the package iHRIS Common.

- Description:View the job list
-

can_view_database_list_language

The task *can_view_database_list_language* is defined in the module PersonLanguage of the package iHRIS Common.

- Description:Can view the language database list

can_view_database_list_marital_status

The task *can_view_database_list_marital_status* is defined in the module PersonDemographic of the package iHRIS Common.

- Description:Can view the department marital status list.

can_view_database_list_pos_change_reason

The task *can_view_database_list_pos_change_reason* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:View the pos_change_reason list
- Can perform the following sub-tasks: can_view_employee_database_lists

can_view_database_list_position

The task *can_view_database_list_position* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:View the position list
- Can perform the following sub-tasks: can_view_manage_positions_database_lists

can_view_database_list_position_type

The task *can_view_database_list_position_type* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:View the position_type list
- Can perform the following sub-tasks: can_view_manage_positions_database_lists

can_view_database_list_region

The task *can_view_database_list_region* is defined in the module Geography of the package iHRIS Common.

- Description:Can view region list

can_view_database_list_salary_grade

The task *can_view_database_list_salary_grade* is defined in the module ihris-manage-Job of the package iHRIS Manage.

- Description:View the salary_grade list

can_view_database_list_salary_source

The task *can_view_database_list_salary_source* is defined in the module ihris-manage-Salary of the package iHRIS Manage.

- Description:View the salary_source list
-

can_view_database_list_scheduled_training_course

The task *can_view_database_list_scheduled_training_course* is defined in the module training-course of the package iHRIS Common.

- Description:View the scheduled training course category list

can_view_database_list_training_course

The task *can_view_database_list_training_course* is defined in the module training-course of the package iHRIS Common.

- Description:View the training course list
- Can perform the following sub-tasks: *can_view_training_course_database_lists*

can_view_database_list_training_course_category

The task *can_view_database_list_training_course_category* is defined in the module training-course of the package iHRIS Common.

- Description:view the training course category list

can_view_database_list_training_course_evaluation

The task *can_view_database_list_training_course_evaluation* is defined in the module training-course of the package iHRIS Common.

- Description:View the training course evaluation list

can_view_database_list_training_course_requestor

The task *can_view_database_list_training_course_requestor* is defined in the module training-course of the package iHRIS Common.

- Description:Edit the training course requestor list

can_view_database_list_training_course_status

The task *can_view_database_list_training_course_status* is defined in the module training-course of the package iHRIS Common.

- Description:View the training course status list

can_view_database_list_training_funder

The task *can_view_database_list_training_funder* is defined in the module training-institution of the package iHRIS Common.

- Description:View the training funder list

can_view_database_list_training_institution

The task *can_view_database_list_training_institution* is defined in the module training-institution of the package iHRIS Common.

- Description:View the training institutions list
-

can_view_database_lists

The task *can_view_database_lists* is defined in the module Lists of the package I2CE.

- Description: Can view some of the lists stored in the database

can_view_database_lists_competency

The task *can_view_database_lists_competency* is defined in the module simple-competency of the package iHRIS Common.

- Description: View all list associated with competency

can_view_employee_database_lists

The task *can_view_employee_database_lists* is defined in the module ihris-manage of the package iHRIS Manage.

- Description: Can view some employee database lists

can_view_form_browser

The task *can_view_form_browser* is defined in the module formBrowser of the package I2CE.

- Description: Can view form browser

can_view_geographic_database_lists

The task *can_view_geographic_database_lists* is defined in the module Geography of the package iHRIS Common.

- Description: Can view some geography data

can_view_job_structure_database_lists

The task *can_view_job_structure_database_lists* is defined in the module ihris-common-Job of the package iHRIS Common.

- Description: Can view some job structure database lists
- Can perform the following sub-tasks: *can_view_position_database_lists*

can_view_magic_data_browser

The task *can_view_magic_data_browser* is defined in the module magicDataBrowser of the package I2CE.

- Description: Can browse magic data
-

can_view_manage_positions_database_lists

The task *can_view_manage_positions_database_lists* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description: Can view some information about positions
- Can perform the following sub-tasks: *can_view_position_database_lists*

can_view_organization_database_lists

The task *can_view_organization_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view some organizational database lists

can_view_person_scheduled_training_course_evaluation

The task *can_view_person_scheduled_training_course_evaluation* is defined in the module *training-simple-competency* of the package *iHRIS Common*.

- Description: View a person's scheduled training course evaluation

can_view_planning_database_lists

The task *can_view_planning_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view some planning database lists

can_view_position_database_lists

The task *can_view_position_database_lists* is defined in the module *ihris-manage* of the package *iHRIS Manage*.

- Description: Can view some position database lists

can_view_recent_forms

The task *can_view_recent_forms* is defined in the module *ihris-common-RecentForm* of the package *iHRIS Common*.

- Description: Can view the list of recent forms that have been edited/added.

can_view_training_course_database_lists

The task *can_view_training_course_database_lists* is defined in the module *training-course* of the package *iHRIS Common*.

- Description: View some lists associated with the training module
 - Can perform the following sub-tasks: *can_view_database_lists*
-

custom_reports_admin

The task *custom_reports_admin* is defined in the module CustomReports of the package I2CE.

- Description:Administrator for custom reports. Can perform all tasks associated with custom reports
- Can perform the following sub-tasks: custom_reports_can_access, custom_reports_delete_reports, custom_reports_can_access_relationships, custom_reports_can_access_reports, custom_reports_can_edit_reportViews, custom_reports_can_view_reportViews

custom_reports_archiver_admin

The task *custom_reports_archiver_admin* is defined in the module ReportArchiver of the package I2CE.

- Description:Allows full access to custom reports archiving system
- Can perform the following sub-tasks: custom_reports_archiver_can_delete, custom_reports_archiver_can_view, custom_reports_archiver_can_archive

custom_reports_archiver_can_archive

The task *custom_reports_archiver_can_archive* is defined in the module ReportArchiver of the package I2CE.

- Description:Allows archiving of custom reports
- Can perform the following sub-tasks: custom_reports_archiver_can_view

custom_reports_archiver_can_delete

The task *custom_reports_archiver_can_delete* is defined in the module ReportArchiver of the package I2CE.

- Description:Allows deleting of archived custom reports
- Can perform the following sub-tasks: custom_reports_archiver_can_archive, custom_reports_archiver_can_view

custom_reports_archiver_can_view

The task *custom_reports_archiver_can_view* is defined in the module ReportArchiver of the package I2CE.

- Description:Allows viewing of archived Custom Reports

custom_reports_can_access

The task *custom_reports_can_access* is defined in the module CustomReports of the package I2CE.

- Description:Allows minimal access to the Custom Reporting System System

custom_reports_can_access_relationships

The task *custom_reports_can_access_relationships* is defined in the module CustomReports of the package I2CE.

- Description:Allows access to the Custom Report Relationships
 - Can perform the following sub-tasks: custom_reports_can_access, custom_reports_can_access_reports, custom_reports_can_edit_reportViews
-

custom_reports_can_access_reports

The task *custom_reports_can_access_reports* is defined in the module CustomReports of the package I2CE.

- Description: Allows access to the Custom Reports
- Can perform the following sub-tasks: custom_reports_can_access, custom_reports_can_edit_reportViews

custom_reports_can_edit_relationships

The task *custom_reports_can_edit_relationships* is defined in the module CustomReports of the package I2CE.

- Description: Allows editing of the Custom Report Relationships

custom_reports_can_edit_reportViews

The task *custom_reports_can_edit_reportViews* is defined in the module CustomReports of the package I2CE.

- Description: Allows editing of the Custom Report Views
- Can perform the following sub-tasks: custom_reports_can_view_reportViews

custom_reports_can_edit_reports

The task *custom_reports_can_edit_reports* is defined in the module CustomReports of the package I2CE.

- Description: Allows editing of the Custom Report Reports

custom_reports_can_view_reportViews

The task *custom_reports_can_view_reportViews* is defined in the module CustomReports of the package I2CE.

- Description: Allows view of the Custom Report Views
- Can perform the following sub-tasks: custom_reports_can_access

custom_reports_delete

The task *custom_reports_delete* is defined in the module CustomReports of the package I2CE.

- Description: Allows deletion of data about custom reports

establishment_can_access

The task *establishment_can_access* is defined in the module establishment of the package iHRIS Common.

- Description: Can access the establishment information
- Can perform the following sub-tasks: can_view_view_database_list_establishment_type, can_view_view_database_list_establishment_period, can_view_view_database_list_establishment

establishment_can_edit

The task *establishment_can_edit* is defined in the module establishment of the package iHRIS Common.

- Description: Can edit the establishment information
 - Can perform the following sub-tasks: can_edit_database_list_establishment_type, can_edit_database_list_establishment_period, can_edit_database_list_establishment, establishment_can_view
-

locales_can_edit_site_locale

The task *locales_can_edit_site_locale* is defined in the module localeSelector of the package I2CE.

- Description: Allows the selection and editing of the locales available to the system for translation

person_can_change_child_form_person_position

The task *person_can_change_child_form_person_position* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description: Can change the existing position of a person
- Can perform the following sub-tasks: *person_can_edit_child_form_person_position*, *person_can_view_child_form_person_position*

person_can_change_child_form_salary

The task *person_can_change_child_form_salary* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description: Can change an existing salary of a person
- Can perform the following sub-tasks: *person_can_edit_child_form_salary*, *person_can_view_child_form_salary*

person_can_delete_child_form_salary

The task *person_can_delete_child_form_salary* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description: Can delete the salary of a person
- Can perform the following sub-tasks: *person_can_edit_child_form_salary*, *person_can_view_child_form_salary*, *person_can_change_child_form_salary*

person_can_edit

The task *person_can_edit* is defined in the module Person of the package iHRIS Common.

- Description: Can edit the person page
- Can perform the following sub-tasks: *person_can_view*

person_can_edit_child_form_accident

The task *person_can_edit_child_form_accident* is defined in the module accident of the package iHRIS Manage.

- Description: Can edit the workplace injuries and accidents assigned to a person
-

person_can_edit_child_form_application

The task *person_can_edit_child_form_application* is defined in the module *ihris-manage-Application* of the package *iHRIS Manage*.

- Description: Can edit application child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_application*, *person_can_view*

person_can_edit_child_form_benefit

The task *person_can_edit_child_form_benefit* is defined in the module *ihris-manage-Benefit* of the package *iHRIS Manage*.

- Description: Can edit benefit child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_benefit*, *person_can_view*

person_can_edit_child_form_confirmation

The task *person_can_edit_child_form_confirmation* is defined in the module *ihris-manage-confirmation* of the package *iHRIS Manage*.

- Description: Can edit confirmation child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_confirmation*, *person_can_view*

person_can_edit_child_form_demographic

The task *person_can_edit_child_form_demographic* is defined in the module *PersonDemographic* of the package *iHRIS Common*.

- Description: Can edit demographic child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_demographic*, *person_can_view*

person_can_edit_child_form_dependent

The task *person_can_edit_child_form_dependent* is defined in the module *dependents* of the package *iHRIS Common*.

- Description: Can edit a person's dependents

person_can_edit_child_form_disciplinary_action

The task *person_can_edit_child_form_disciplinary_action* is defined in the module *disciplinary_action* of the package *iHRIS Manage*.

- Description: Can edit the workplace injuries and disciplinary actions assigned to a person
 - Can perform the following sub-tasks: *person_can_view_child_form_disciplinary_action*, *person_can_view*
-

person_can_edit_child_form_education

The task *person_can_edit_child_form_education* is defined in the module PersonEducation of the package iHRIS Common.

- Description:Can edit education child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_education, person_can_view

person_can_edit_child_form_employment

The task *person_can_edit_child_form_employment* is defined in the module PersonEmployment of the package iHRIS Common.

- Description:Can edit employment child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_employment, person_can_view

person_can_edit_child_form_nextofkin

The task *person_can_edit_child_form_nextofkin* is defined in the module nextOfKin of the package iHRIS Common.

- Description:Can edit a person's nextofkin

person_can_edit_child_form_notes

The task *person_can_edit_child_form_notes* is defined in the module PersonNotes of the package iHRIS Common.

- Description:Can edit notes child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_notes, person_can_view

person_can_edit_child_form_person_archive_scan

The task *person_can_edit_child_form_person_archive_scan* is defined in the module PersonArchivedScan of the package iHRIS Common.

- Description:Can edit archive scan of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_archive_scan, person_can_view

person_can_edit_child_form_person_competency

The task *person_can_edit_child_form_person_competency* is defined in the module person-simple-competency of the package iHRIS Common.

- Description:Can edit person_competency child forms of a person
 - Can perform the following sub-tasks: person_competency_can_view_evaluation_history, person_can_view_child_form_person_competency, person_can_view
-

person_can_edit_child_form_person_contact_emergency

The task *person_can_edit_child_form_person_contact_emergency* is defined in the module PersonContact of the package iHRIS Common.

- Description:Can edit emergency contact child form of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_contact_emergency, person_can_view

person_can_edit_child_form_person_contact_other

The task *person_can_edit_child_form_person_contact_other* is defined in the module PersonContact of the package iHRIS Common.

- Description:Can edit other contact child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_contact_other, person_can_view

person_can_edit_child_form_person_contact_personal

The task *person_can_edit_child_form_person_contact_personal* is defined in the module PersonContact of the package iHRIS Common.

- Description:Can edit personal contact child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_contact_personal, person_can_view

person_can_edit_child_form_person_contact_work

The task *person_can_edit_child_form_person_contact_work* is defined in the module PersonContact of the package iHRIS Common.

- Description:Can edit work contact child form of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_contact_work, person_can_view

person_can_edit_child_form_person_id

The task *person_can_edit_child_form_person_id* is defined in the module PersonID of the package iHRIS Common.

- Description:Can edit person_id child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_id, person_can_view

person_can_edit_child_form_person_language

The task *person_can_edit_child_form_person_language* is defined in the module PersonLanguage of the package iHRIS Common.

- Description:Can edit person_language child forms of a person
 - Can perform the following sub-tasks: person_can_view_child_form_person_language, person_can_view
-

person_can_edit_child_form_person_photo_passport

The task *person_can_edit_child_form_person_photo_passport* is defined in the module PersonPassportPhoto of the package iHRIS Common.

- Description:Can edit passpport photo of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_photo_passport, person_can_view

person_can_edit_child_form_person_position

The task *person_can_edit_child_form_person_position* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Can edit the position of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_position

person_can_edit_child_form_person_resume

The task *person_can_edit_child_form_person_resume* is defined in the module PersonResume of the package iHRIS Common.

- Description:Can edit resume of a person
- Can perform the following sub-tasks: person_can_view_child_form_person_resume, person_can_view

person_can_edit_child_form_person_scheduled_training_course

The task *person_can_edit_child_form_person_scheduled_training_course* is defined in the module training-course of the package iHRIS Common.

- Description:View a perons's scheduled training course
- Can perform the following sub-tasks: person_can_view_child_form_person_scheduled_training_course

person_can_edit_child_form_position_decision

The task *person_can_edit_child_form_position_decision* is defined in the module ihris-manage-Application of the package iHRIS Manage.

- Description:Can edit position decision child forms of a person
- Can perform the following sub-tasks: person_can_view_child_form_position_decision, person_can_view

person_can_edit_child_form_position_interview

The task *person_can_edit_child_form_position_interview* is defined in the module ihris-manage-Application of the package iHRIS Manage.

- Description:Can edit position interview child forms of a person
 - Can perform the following sub-tasks: person_can_view_child_form_position_interview, person_can_view
-

person_can_edit_child_form_registration

The task *person_can_edit_child_form_registration* is defined in the module ManageRegistration of the package iHRIS Manage.

- Description:Can edit registration child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_registration*, *person_can_view*, *person_can_edit*

person_can_edit_child_form_salary

The task *person_can_edit_child_form_salary* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Can edit the salary of a person
- Can perform the following sub-tasks: *person_can_view_child_form_salary*

person_can_edit_child_forms

The task *person_can_edit_child_forms* is defined in the module Person of the package iHRIS Common.

- Description:Can edit all of the child forms of a person
- Can perform the following sub-tasks: *person_can_edit_child_form_registration*, *person_can_view_child_forms*, *person_can_view*, *person_can_edit_child_form_person_archive_scan*, *person_can_edit_child_form_person_contact_work*, *person_can_edit_child_form_person_contact_personal*, *person_can_edit_child_form_person_contact_emergency*, *person_can_edit_child_form_person_contact_other*, *person_can_edit_child_form_demographic*, *person_can_edit_child_form_education*, *person_can_edit_child_form_employment*, *person_can_edit_child_form_person_person_id*, *person_can_edit_child_form_person_language*, *person_can_edit_child_form_notes*, *person_can_edit_child_form_person_photo_passport*, *person_can_edit_child_form_person_resume*, *person_can_edit_child_form_application*, *person_can_edit_child_form_position_interview*, *person_can_edit_child_form_position_decision*, *person_can_edit_child_form_benefit*, *person_can_edit_child_form_person_position*, *person_can_edit_child_form_confirmation*, *person_can_edit_child_form_person_competency*, *person_can_edit_child_form_person_scheduled_training_course*

person_can_view

The task *person_can_view* is defined in the module Person of the package iHRIS Common.

- Description:Can view the person page

person_can_view_child_form

The task *person_can_view_child_form* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Can view the salary of a person

person_can_view_child_form_accident

The task *person_can_view_child_form_accident* is defined in the module accident of the package iHRIS Manage.

- Description: Can view the workplace injuries and accidents assigned to a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_application

The task *person_can_view_child_form_application* is defined in the module ihris-manage-Application of the package iHRIS Manage.

- Description: Can view application child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_benefit

The task *person_can_view_child_form_benefit* is defined in the module ihris-manage-Benefit of the package iHRIS Manage.

- Description: Can view benefit child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_confirmation

The task *person_can_view_child_form_confirmation* is defined in the module ihris-manage-confirmation of the package iHRIS Manage.

- Description: Can view confirmation child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_demographic

The task *person_can_view_child_form_demographic* is defined in the module PersonDemographic of the package iHRIS Common.

- Description: Can view demographic child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_dependent

The task *person_can_view_child_form_dependent* is defined in the module dependents of the package iHRIS Common.

- Description: Can view a person's dependents
-

person_can_view_child_form_disciplinary_action

The task *person_can_view_child_form_disciplinary_action* is defined in the module *disciplinary_action* of the package *iHRIS Manage*.

- Description: Can view the workplace injuries and disciplinary actions assigned to a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_education

The task *person_can_view_child_form_education* is defined in the module *PersonEducation* of the package *iHRIS Common*.

- Description: Can view education child form of a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_employment

The task *person_can_view_child_form_employment* is defined in the module *PersonEmployment* of the package *iHRIS Common*.

- Description: Can view employment child form of a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_nextofkin

The task *person_can_view_child_form_nextofkin* is defined in the module *nextOfKin* of the package *iHRIS Common*.

- Description: Can view a person's nextofkin

person_can_view_child_form_notes

The task *person_can_view_child_form_notes* is defined in the module *PersonNotes* of the package *iHRIS Common*.

- Description: Can view notes child form of a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_person_archive_scan

The task *person_can_view_child_form_person_archive_scan* is defined in the module *PersonArchivedScan* of the package *iHRIS Common*.

- Description: Can view archive scan of a person
 - Can perform the following sub-tasks: *person_can_view*
-

person_can_view_child_form_person_competency

The task *person_can_view_child_form_person_competency* is defined in the module *person-simple-competency* of the package iHRIS Common.

- Description:Can view person_competency child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_contact_emergency

The task *person_can_view_child_form_person_contact_emergency* is defined in the module *PersonContact* of the package iHRIS Common.

- Description:Can view emergency contact child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_contact_other

The task *person_can_view_child_form_person_contact_other* is defined in the module *PersonContact* of the package iHRIS Common.

- Description:Can view other contact child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_contact_personal

The task *person_can_view_child_form_person_contact_personal* is defined in the module *PersonContact* of the package iHRIS Common.

- Description:Can view personal contact child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_contact_work

The task *person_can_view_child_form_person_contact_work* is defined in the module *PersonContact* of the package iHRIS Common.

- Description:Can view work contact child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_id

The task *person_can_view_child_form_person_id* is defined in the module *PersonID* of the package iHRIS Common.

- Description:Can view person_id child form of a person
 - Can perform the following sub-tasks: person_can_view
-

person_can_view_child_form_person_language

The task *person_can_view_child_form_person_language* is defined in the module PersonLanguage of the package iHRIS Common.

- Description:Can view person_language child form of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_photo_passport

The task *person_can_view_child_form_person_photo_passport* is defined in the module PersonPassportPhoto of the package iHRIS Common.

- Description:Can view passport photo of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_position

The task *person_can_view_child_form_person_position* is defined in the module ihris-manage-PersonPosition of the package iHRIS Manage.

- Description:Can view the position of a person

person_can_view_child_form_person_resume

The task *person_can_view_child_form_person_resume* is defined in the module PersonResume of the package iHRIS Common.

- Description:Can view resume of a person
- Can perform the following sub-tasks: person_can_view

person_can_view_child_form_person_scheduled_training_course

The task *person_can_view_child_form_person_scheduled_training_course* is defined in the module training-course of the package iHRIS Common.

- Description:View a perons's scheduled training course

person_can_view_child_form_position_decision

The task *person_can_view_child_form_position_decision* is defined in the module ihris-manage-Application of the package iHRIS Manage.

- Description:Can view position decision child form of a person
 - Can perform the following sub-tasks: person_can_view
-

person_can_view_child_form_position_interview

The task *person_can_view_child_form_position_interview* is defined in the module *ihris-manage-Application* of the package *iHRIS Manage*.

- Description: Can view position interview child form of a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_registration

The task *person_can_view_child_form_registration* is defined in the module *ManageRegistration* of the package *iHRIS Manage*.

- Description: Can view registration child form of a person
- Can perform the following sub-tasks: *person_can_view*

person_can_view_child_form_salary

The task *person_can_view_child_form_salary* is defined in the module *ihris-manage-PersonPosition* of the package *iHRIS Manage*.

- Description: Can view an existing salary of a person

person_can_view_child_forms

The task *person_can_view_child_forms* is defined in the module *Person* of the package *iHRIS Common*.

- Description: Can view all of the child forms of a person
- Can perform the following sub-tasks: *person_can_view_child_form_registration*,
person_can_view_child_form_person_archive_scan, *person_can_view_child_form_person_contact_work*,
person_can_view_child_form_person_contact_personal,
person_can_view_child_form_person_contact_emergency, *person_can_view_child_form_person_contact_other*,
person_can_view_child_form_demographic, *person_can_view_child_form_education*,
person_can_view_child_form_employment, *person_can_view_child_form_person_person_id*,
person_can_view_child_form_person_language, *person_can_view_child_form_notes*,
person_can_view_child_form_person_photo_passport, *person_can_view_child_form_person_resume*,
person_can_view_child_form_application, *person_can_view_child_form_position_interview*,
person_can_view_child_form_position_decision, *person_can_view_child_form_benefit*,
person_can_view_child_form_person_position, *person_can_view_child_form_salary*,
person_can_view_child_form_confirmation, *person_can_view_child_form_person_competency*,
person_competency_can_view_evaluation_history,
person_can_view_child_form_person_scheduled_training_course

person_competency_can_view_evaluation

The task *person_competency_can_view_evaluation* is defined in the module person-simple-competency of the package iHRIS Common.

- Description:Can view the competency evaluation of a person

person_competency_can_view_evaluation_history

The task *person_competency_can_view_evaluation_history* is defined in the module person-simple-competency of the package iHRIS Common.

- Description:Can view the competency evaluation history of a person

person_scheduled_training_course_can_edit_evaluation

The task *person_scheduled_training_course_can_edit_evaluation* is defined in the module training-course of the package iHRIS Common.

- Description:Edit a perons's scheduled training course evaluations
- Can perform the following sub-tasks: person_scheduled_training_course_can_view_evaluation

person_scheduled_training_course_can_view_evaluation

The task *person_scheduled_training_course_can_view_evaluation* is defined in the module training-course of the package iHRIS Common.

- Description:View a perons's scheduled training course evaluations

printed_forms_admin

The task *printed_forms_admin* is defined in the module PrintedForms of the package I2CE.

- Description:Allows full access to the Printed Forms System
- Can perform the following sub-tasks: printed_forms_can_access, printed_forms_all_generate, printed_forms_archive_admin

printed_forms_all_generate

The task *printed_forms_all_generate* is defined in the module PrintedForms of the package I2CE.

- Description:Allows access to the generating all of the printed forms System

printed_forms_archive_admin

The task *printed_forms_archive_admin* is defined in the module PrintedForms of the package I2CE.

- Description:Allows administration of all archived of the printed forms System
- Can perform the following sub-tasks: printed_forms_view_all_archives, printed_forms_create_all_archives

printed_forms_can_access

The task *printed_forms_can_access* is defined in the module PrintedForms of the package I2CE.

- Description:Allows minimal access to the Printed Forms System
-

printed_forms_create_all_archives

The task *printed_forms_create_all_archives* is defined in the module PrintedForms of the package I2CE.

- Description:Allows creating of all archived of the printed forms System

printed_forms_view_all_archives

The task *printed_forms_view_all_archives* is defined in the module PrintedForms of the package I2CE.

- Description:Allows viewing of all archived of the printed forms System

tasks_and_roles_admin

The task *tasks_and_roles_admin* is defined in the module tasks-roles of the package I2CE.

- Description:Allows complete access to the Task and Role Management System
- Can perform the following sub-tasks: tasks_and_roles_can_access, tasks_and_roles_can_edit_roles, tasks_and_roles_can_edit_tasks

tasks_and_roles_can_access

The task *tasks_and_roles_can_access* is defined in the module tasks-roles of the package I2CE.

- Description:Allows minimal access to the Task and Role Management System

tasks_and_roles_can_edit_roles

The task *tasks_and_roles_can_edit_roles* is defined in the module tasks-roles of the package I2CE.

- Description:Allows edit access to the Role Management System
- Can perform the following sub-tasks: tasks_and_roles_can_access, tasks_and_roles_can_edit_roles

tasks_and_roles_can_edit_tasks

The task *tasks_and_roles_can_edit_tasks* is defined in the module tasks-roles of the package I2CE.

- Description:Allows edit access to the Task Management System
- Can perform the following sub-tasks: tasks_and_roles_can_access, tasks_and_roles_can_edit_tasks

users_can_edit

The task *users_can_edit* is defined in the module UserForm of the package I2CE.

- Description:Can create a user on the system

users_can_edit_all

The task *users_can_edit_all* is defined in the module UserForm of the package I2CE.

- Description:Can edit all the users in the system.
 - Can perform the following sub-tasks: users_can_edit
-

iHRIS:Data Dictionary (4.0.4)

Field Name or Value	Definition	Alternate Names	Data Type	Used In
2 character alpha code	The unique two-character code that identifies a country established by the International Organization for Standards (ISO).	alpha code	text entry	all
academic level	The highest level of formal education attained by a person.	educational level	selection	iHRIS Qualify
address in new country	The mailing address given by a health worker who is out migrating to a foreign country.	-	text entry	iHRIS Qualify
administrator	A role that has full access to all functions in the system; this role is responsible for configuring the system and managing user accounts.	system administrator	value (Role)	all
alternate telephone number	A secondary phone number where a person or organization can be reached.	cell phone number, mobile number	text entry	iHRIS Manage, iHRIS Qualify
amount	The total amount of a benefit or special payment.	-	selection (from Currency) + number	iHRIS Manage
applicant	A person who has applied for an open position.	job applicant	value (from Employee Status)	iHRIS Manage
application date	The date a person applied to take an exam, to register as a health worker or for an open position.	application	date	iHRIS Qualify
available hours	The number and times of hours a person who is applying for part-time employment is available to work.	hours	text entry	iHRIS Manage
average salary	The average annual salary paid to an employee in a particular group, such as a cadre or pool of workers.	-	selection (from Currency) + number	iHRIS Plan
benefit type	A type of payment made to an employee that is separate from the employee's salary; the payment may be one-time or recurring.	benefit, special payment	selection	iHRIS Manage
birthplace	The geographical location where a person was born.	-	selection (Country + Region + District)	iHRIS Qualify
cadre	A broad category or subset of health workers characterized by the specific training, degree or other qualifications required to practice or be licensed in that field (i.e., nurse).	health cadre	selection	all
cadre pool	A pool of health workers, composing part or all of a cadre, to which assumptions are applied in a workforce projection.	pool	selection	iHRIS Plan
category	A broad subject area.	disciplinary action category, disruption category, projection category, training course category	selection or text entry	iHRIS Manage, iHRIS Qualify, iHRIS Plan
certificate	Certifies that a particular academic level has been achieved.	-	selection	iHRIS Qualify

certificate number	Identifies a particular certificate issued to a student.	-	text entry	iHRIS Qualify
classification	A broad category used to organize jobs; the job classification may or may not be equivalent to the health cadre.	job classification	selection	iHRIS Manage
closed	Position status that designates a position that has been filled by an employee; when a position is marked closed, the organization is not actively hiring for the position.	closed position	value (Position Status)	iHRIS Manage
code	Short identifier for an item, usually unique.	-	text entry	iHRIS Manage, iHRIS Qualify
comments	Notes about a position, job interview or job offer.	interview comments, position comments	text entry	iHRIS Manage
company address	The address of a person's employer.	-	text entry	iHRIS Manage
company name	The name of a person's employer.	company, employer, organization	text entry	iHRIS Manage
company telephone	The telephone number of a person's employer.	company phone, company telephone number	text entry	iHRIS Manage
competency	A skill performed to a specific standard under specific conditions.	competencies provided	selection	iHRIS Manage
competency type	A broad category of related competencies.	-	selection	iHRIS Manage
contact type	A preset category of contact information.	-	selection (preset values)	iHRIS Manage, iHRIS Qualify
continuing education course	A course that is required for a health worker to renew his/her license while practicing.	continuing education	selection	iHRIS Manage, iHRIS Qualify
cost	The amount of money associated with a change in the number of workers based on salary and other associated costs, such as training costs or severance pay.	average cost	selection (from Currency) + number	iHRIS Plan
cost increase	An annual increase in the cost associated with a change in the number of workers expressed as a percentage of the original cost.	-	number	iHRIS Plan
country	An independent nation state.	nation	selection	all
country trained in	A foreign country where a health worker received training.	-	selection (from Country)	iHRIS Qualify
county	The smallest geographic subset, typically located within a district.	sector	selection	iHRIS Manage, iHRIS Qualify

credit hours	The amount of credit received for completing a continuing education course; health professionals must typically complete a minimum number of credit hours to renew their licenses.	CEU, continuing education unit	number	iHRIS Manage, iHRIS Qualify
currency	The medium of exchange of money used in a country or other location.	-	selection	iHRIS Manage, iHRIS Plan
currency code	The unique three-letter code used to define a currency established by the International Organization for Standards (ISO).	-	text entry	iHRIS Manage, iHRIS Plan
currency symbol	The symbol used to identify a currency, such as dollars.	symbol	text entry	iHRIS Manage, iHRIS Plan
date disciplinary action occurred	The date a professional received a disciplinary notice.	disciplinary action date	date	iHRIS Qualify
data operations manager	A database management role that is responsible for managing data entry, including verifying and correcting data and updating standard lists in the system.	-	value (Role)	iHRIS Qualify
data source	The verifiable source of data entered in the system, such as a census, survey or information system.	-	text entry	iHRIS Plan
date added	The date a note was added to a person's record.	-	date	iHRIS Manage, iHRIS Qualify
date of birth	A person's birthday.	birthdate	date	iHRIS Manage, iHRIS Qualify
decision maker	A role that runs reports in order to view and analyze data, and make health workforce policy and planning decisions.	-	value (Role)	iHRIS Qualify
degree	Certifies that a particular academic level has been achieved, usually a higher education program.	-	selection	iHRIS Manage
department	A division within an organization, typically around similar job functions and following supervisory lines.	-	selection	iHRIS Manage
dependent	A legal dependent, such as a spouse or child.	number of dependents	number	iHRIS Manage
deployment date	The date a person is employed in a health facility as a licensed health worker.	deployment	date	iHRIS Qualify
description	Additional information about or a definition of an item used in selection menus.	job description	text entry	iHRIS Manage, iHRIS Plan
desired wage	The salary that an applicant for a job requests to perform that job.	desired salary	selection (from Currency) + number	iHRIS Manage
did not sit for exam	An incomplete or absent result on a qualifying examination.	absent, incomplete	value (Exam Results)	iHRIS Qualify
disciplinary action reason	A warning or notice issued to a health professional or employee as a result of an infraction.	disciplinary action, disciplinary notice	selection	iHRIS Qualify

discontinued	A position status that designates a position that is no longer required by an organization; no employee fills it and the organization is not soliciting applications for the position.	discontinued position	value (Position Status)	iHRIS Manage
display name	The name of a report or other item that is shown to users of the system.	-	text entry	iHRIS Manage, iHRIS Qualify
disruption date	The date a student left a training program.	-	date	iHRIS Qualify
disruption reason	The reason why a student left a training program.	discontinuation, disruption, training disruption	selection	iHRIS Qualify
district	A smaller geographic unit within a region created by the central government for easy administration.	province, state	selection	iHRIS Manage, iHRIS Qualify
duration of change	The number of years that a change affects a workforce projection	-	number	iHRIS Plan
education type	The type of qualification or degree a person has received, such as college/university, continuing education or informal.	-	selection	iHRIS Manage
elementary	The first level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level has a speaking vocabulary which is inadequate to express anything but the most elementary needs.	elementary proficiency, Level 1, S-1	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
email address	An address where a person or organization can be contacted by email.	email	text entry	iHRIS Manage, iHRIS Qualify
emergency contact	The person to notify if there is an emergency involving an employee, including the person's contact information.	-	value (Contact Type)	iHRIS Manage, iHRIS Qualify
employee	A person who is paid by an organization to perform a specific job.	-	value (from Employee Status)	iHRIS Manage
employee status	The status of an employee with the organization, such as a current employee, old employee or job applicant.	-	selection (preset values)	iHRIS Manage
enabled	Refers to whether a pool change is calculated and displayed in a projection.	-	yes/no	iHRIS Plan
end date	The date at which a position, training program, licensing period, etc. ends.	date ended, expiration, license expiration date	date	iHRIS Manage, iHRIS Qualify
ending position	The last position that a person held in an organization.	-	text entry	iHRIS Manage
ending salary	The salary that a person earned in the last position s/he held in an organization; also the highest salary in a salary grade.	end, end salary, ending wage, last salary	selection (from Currency) + number	iHRIS Manage
endorser date	The date a student is endorsed to take the national examination.	-	date	iHRIS Qualify

endorser name	A person who recommends a student graduating from a training program to take the national examination.	endorser	text entry	iHRIS Qualify
endorser qualifications	The qualifications of a person recommending students to take the national examination.	-	text entry	iHRIS Qualify
evaluation	An official assessment of an employee's performance in a class or competency.	competency evaluation, training course evaluation	selection	iHRIS Manage
exam date	The date that the qualifying examination is administered to health profession students.	-	date	iHRIS Qualify
exam number	The number that identifies a particular examination administered to a student graduating from a health training program.	-	text entry	iHRIS Qualify
exam results	The grade received on the test that every student graduating from a health training program must pass in order to qualify for registration.	exam, examination, national examination, results	selection (preset values)	iHRIS Qualify
exam try	An attempt by a student to pass the qualifying examination; students are limited to three tries.	-	selection (preset values)	iHRIS Qualify
executive manager	A person who may manage the entire organization or one district, department, office or facility within the organization. The Executive Manager views reports and analyzes data entered in the system in order to make HR decisions and set organizational policy.	-	value (Role)	iHRIS Manage
exit	A decrease in the supply of workers due to employees leaving the workforce.	-	selection (preset values)	iHRIS Plan
facility	A specific division within an organization that is defined by having its own budget and often has a unique facility code. Often a facility is responsible for providing health care services.	duty center, health facility, office, responsibility center	selection	iHRIS Manage, iHRIS Qualify
facility agent	The owner of a health facility or training institution, which also refers to the classification of the facility.	agent	selection	iHRIS Qualify
facility type	A type of health facility.	-	selection	iHRIS Manage, iHRIS Qualify
fax number	A number where a person or organization can be contacted by fax.	fax	text entry	iHRIS Manage, iHRIS Qualify
fail	A failing grade on a qualifying examination.	-	value (Exam Results)	iHRIS Qualify
felony conviction	A conviction of a crime resulting in prison time.	-	yes/no	iHRIS Manage
final try	The third and last attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
first name	A person's initial name.	Christian name, firstname, given name, name	text entry	all
first try	The initial attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
fluent	Native of bilingual proficiency in a language.	bilingual proficiency, Level 5, native proficiency, S-5	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage

full professional	The fourth level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to use the language fluently and accurately on all levels normally pertinent to professional needs.	full professional proficiency, Level 4, S-4	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
full-time employment	Employment for a standard number of hours of working time.	full-time	yes/no	iHRIS Manage
gender	Indicates whether a person is male or female.	sex	female/male	iHRIS Manage, iHRIS Qualify
grade obtained	A student's official grade upon completing a particular academic level.	grade	text entry	iHRIS Qualify
graduation date	Official date of completion of a training program or other educational program.	graduation, year of graduation	date	iHRIS Manage, iHRIS Qualify
health workforce planner	A role that has access to the projection creation and modeling functions but cannot configure the system or access user accounts.	-	value (Role)	iHRIS Plan
hiring date	The date on which an open position is filled.	filled date, hire date, hire year	TBD	iHRIS Manage
hiring decision	The date at which an official decision is made whether to offer a job to an applicant.	date of decision	date	iHRIS Manage
home residence	The address or geographical location where a person permanently lives, which may be different from the person's current residence.	permanent residence	selection (Country + Region + District)	iHRIS Qualify
HR manager	A manager of human resources personnel who is responsible for managing all system data and for ensuring that data in the system are complete, correct and up to date.	-	value (Role)	iHRIS Manage
HR staff	A data entry person in human resources who is responsible for entering and updating data in the system.	-	value (Role)	iHRIS Manage
identification code	A unique code used to identify a facility or training institution.	-	text entry	iHRIS Qualify
identification number	The unique identifier -- usually a number -- that, when combined with an Identification Type, is used to identify a person.	-	text entry	iHRIS Manage, iHRIS Qualify
identification type	An official document (such as Social Security Number, national health insurance or passport) used to identify a person.	identification	selection	iHRIS Manage, iHRIS Qualify
index number	The number issued to a student when s/he enters a new pre-service training program.	index	TBD	iHRIS Qualify
initial year of change	The first year in a projection that a pool change takes effect; the initial year of change may be the same as the start year of the projection.	initial year	year	iHRIS Plan
inspection date	The date when an institution was last inspected.	-	date	iHRIS Qualify

inspection results	Certification that a health facility, private practice clinic or training institution is qualified to provide services.	inspection, institution inspection	text entry	iHRIS Qualify
instructor	The teacher of a training class.	teacher, trainer	text entry	iHRIS Manage
intake	An increase in the supply of workers due to employees entering the workforce.	-	selection (preset values)	iHRIS Plan
intake date	The date a person enters a training program.	-	date	iHRIS Qualify
interview date	The date at which a formal meeting to assess the qualifications of a job applicant takes place.	date of interview, interview	date	iHRIS Manage
ISCO classification code	A unique code that identifies a job classification using a standard coding system established by the International Standard Classification of Occupations (ISCO) for classifying professions.	-	text entry	iHRIS Qualify
ISO numeric code	The unique numeric code that identifies a country established by the International Organization for Standards (ISO).	-	text entry	all
job	A general set of qualifications, duties and responsibilities that matches a particular job description and has a unique job code. There may be multiple instances of the same job within an organization.	designation, post	selection (from Job Title)	iHRIS Manage, iHRIS Qualify
job code	A unique identifier associated with a particular job that identifies it for the organization.	post code	text entry	iHRIS Manage, iHRIS Qualify
job offer	An offer to hire an applicant for a particular position and salary.	make a job offer, offer	yes/no	iHRIS Manage
job responsibilities	The duties expected to be performed by a particular job.	duties, responsibilities	text entry	iHRIS Manage
job title	The label used to describe a job, or a specific set of duties and responsibilities.	post title, title	text entry	iHRIS Manage, iHRIS Qualify
language	A foreign language other than a person's native language.	-	selection	iHRIS Manage
last evaluated	The date at which a person last received an evaluation.	-	date	iHRIS Manage
license number	The number issued with a license to practice as a health worker; this number may or may not be identical to the registration number.	-	number	iHRIS Manage, iHRIS Qualify
limited working	The second level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to satisfy routine social demands and limited work requirements.	Level 2, limited working proficiency, S-2	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
location	Refers to the country, region, district and (optionally) county where an organization, institution or facility is located.	geographical location, institution location	selection (from Country + Region + District + County)	iHRIS Manage, iHRIS Qualify

location selection	Designates a country that is used for determining geographical location, in addition to selecting a currency or nationality.	-	yes/no	iHRIS Manage, iHRIS Qualify
mailing address	An address, including city, country and zip code, where a person or organization can be contacted by mail.	address	text entry	iHRIS Manage, iHRIS Qualify
major	Primary field of study.	-	text entry	iHRIS Manage
marital status	A person's legal status, such as single, married, divorced or widowed.	-	selection	iHRIS Manage, iHRIS Qualify
materials approved	Approval of examination application materials.	-	yes/no	iHRIS Qualify
materials received	Examination application materials submitted by an applicant in advance of taking the exam.	-	yes/no	iHRIS Qualify
maximum amount of change	The maximum number of health workers that can enter the workforce in a projection.	-	number	iHRIS Plan
maximum number of students	The largest number of students accepted into a training course.	-	number	iHRIS Manage
midpoint	The average salary offered to new hires in a salary grade, which may not be equivalent to the true average of the salary range within that grade.	-	selection (from Currency) + number	iHRIS Manage
monthly	An event that occurs once a month.	-	value (Recurrence Frequency)	iHRIS Manage
name	Refers to the value used to create an item for selection menus.	-	text entry	all
nationality	The country where a person is a legal citizen.	citizenship	selection (from Country)	iHRIS Manage, iHRIS Qualify
no access	A role that prevents a user from accessing the system, or disables the user account.	-	value (Role)	all
notes	General information added to a record to provide additional information not accounted for by other fields.	primary contact person	text entry	iHRIS Manage, iHRIS Qualify
number of employed staff	The actual number of workers available for deployment.	supply	number	iHRIS Plan
number of students	The maximum number of students that can attend a specific training program.	-	number	iHRIS Qualify
OK to contact	Specifies whether a person's past employers may be contacted.	-	yes/no	iHRIS Manage
old applicant	A person who previously applied for an open position, but who has not applied for any positions that are currently open.	-	value (from Employee Status)	iHRIS Manage

old employee	A person who previously worked for an organization but has left the organization.	-	value (from Employee Status)	iHRIS Manage
once	An event that occurs only once, or does not recur.	-	value (Recurrence Frequency)	iHRIS Manage
open	A position status that designates a position that is required for the organization to operate and that the organization is actively hiring to fill.	open position	value (Position Status)	iHRIS Manage
organization requesting verification	The certifying board or professional council requesting the qualifications of a health worker who is applying to work in a foreign country.	-	text entry	iHRIS Qualify
other	Refers to all values other than those not explicitly listed for selection.	other contact	value (Contact Type)	iHRIS Manage, iHRIS Qualify
other names	A person's names other than the first name and surname, usually one or more middle names.	middle name, other name	text entry	all
out migration reason	The given by a health worker leaving the country where s/he was trained in order to practice in a foreign country.	out migration	selection	iHRIS Qualify
pass	A passing grade on a qualifying examination or on a facility inspection.	passed	value (Exam Results) or yes/no	iHRIS Qualify
password	A hidden phrase that provides secure access to the system.	-	text entry	all
people attending	The names of the people who attend a job interview.	interviewers	text entry	iHRIS Manage
percentage change	An annual change in the number of workers based on a percentage of the available number of workers leaving or entering the workforce.	rate of change	number	iHRIS Plan
permanent	A registration type that does not expire.	-	value (Registration Type)	iHRIS Qualify
personal contact	Refers to a person's home mailing address, telephone and other contact information.	home, personal	value (Contact Type)	iHRIS Manage, iHRIS Qualify
pool change	A change applied to a cadre pool that calculates either an increase or decrease in the number of available health workers in that pool.	-	selection	iHRIS Plan
population	The total number of people inhabiting a specific area, such as a country.	-	number	iHRIS Plan
population growth rate	The percentage by which the population of an area will grow annually.	growth rate, population growth	number	iHRIS Plan
position	An instance of a job that can be filled by one employee in one facility and represents one box on an organizational chart.	-	selection (from Position Code + Position Title)	iHRIS Manage
position code	A unique identifier associated with a particular position that identifies it for the organization.	-	text entry	iHRIS Manage
position description	The specific responsibilities for a particular position in addition to the general responsibilities for the job.	-	text entry	iHRIS Manage

position status	The status of a position as open, closed (filled) or discontinued.	status	selection (preset values)	iHRIS Manage
position title	A specific title different from the job title that defines one particular position within an organization.	title	text entry	iHRIS Manage
position type	A classification of a type of position.	-	selection	iHRIS Manage
post date	The date a position is opened for hiring.	date posted, posted date	date	iHRIS Manage
practice type	The type of registration issued to a health worker.	-	selection (preset values)	iHRIS Qualify
primary country	The country that is selected as the primary location for data in the system; more than one country may be set as the primary country.	-	yes/no	all
primary form	The form, or related set of data entry fields, on which a report relationship is based.	-	selection	iHRIS Manage, iHRIS Qualify
professional working	The third level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to speak the language with sufficient structural accuracy and vocabulary to participate effectively in most conversations on practical, social and professional topics.	Level 3, professional working proficiency, S-3	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
projection duration	The number of years in a projection, usually between 5 and 30 years. Also refers to the number of years that a pool change affects the projection.	duration	number	iHRIS Plan
projection name	A calculation of the workforce supply and required workers over time based on workforce data and assumptions made about future changes to the workforce that compares the supply to the requirements and shows the gap between the two.	graphical model, projection, workforce projection	text entry	iHRIS Plan
proposed end date	Date at which funding or the role for a position is tentatively scheduled to end, as distinguished from the end date.	-	date	iHRIS Manage
proposed hiring date	Date at which an organization would like to fill an open position, as distinguished from the actual hiring date.	-	date	iHRIS Manage
proposed salary	The salary that is proposed for an open position before it has been filled; does not refer to the actual salary for the position.	-	selection (from Currency) + number	iHRIS Manage
qualification	Specific educational level, training, competency, skill or experience that a person must have in order to enter a training program, become registered in a cadre or perform a job.	education, minimum qualification required, skill	selection or text entry (job application)	iHRIS Manage, iHRIS Qualify
rate amount of change increases each year	The percentage by which the annual change in the number of health workers increases annually.	-	number	iHRIS Plan
reading proficiency	A person's reading ability in a foreign language.	-	selection (preset values)	iHRIS Manage
reason for departure	A reason given for leaving employment or changing positions within the organization.	reason for leaving	selection; text entry (past employment)	iHRIS Manage

records officer	A role that is responsible for basic data entry, including initial indexing and upgrades of health professional students entering training programs, tracking out migration verifications and demographic data entry.	-	value (Role)	iHRIS Qualify
recurrence frequency	A regular repetition of a special payment, such as monthly or annually.	recurrence	selection (preset values)	iHRIS Manage
region	A major subdivision of a country containing districts.	-	selection	iHRIS Manage, iHRIS Qualify
registration council	An organization that registers or licenses health workers to practice in a country.	council, licensing board	selection	iHRIS Manage
registration date	The date at which a health worker is issued a registration number.	-	date	iHRIS Manage, iHRIS Qualify
registration number	A number that is issued when a health worker enters the profession within a particular cadre; the health worker retains the registration number as the primary identification number as long as s/he is licensed to practice in that cadre in the country.	-	number	iHRIS Manage, iHRIS Qualify
registration supervisor	A role that is responsible for data entry related to licensing updates, including entering initial registration, issuing new licenses and license renewals, issuing and renewing private practice licenses, and registering and licensing foreign-trained health care professionals applying to work in the country.	-	value (Role)	iHRIS Qualify
reinstatement date	The date a license is reissued to a health worker after a suspension due to a disciplinary action.	reinstatement	date	iHRIS Qualify
report	Display of data from the system as a table or graphical chart; typically, filters can be set on a report to determine the range of data displayed.	-	selection	iHRIS Manage, iHRIS Qualify
report relationship	A defined relationship between system forms on which a report is based.	form relationship, relationship	selection	iHRIS Manage, iHRIS Qualify
request date	The date that official documentation is requested.	-	date	iHRIS Qualify
residence	The location where a person is currently living; this may be different than the person's home residence.	current residence	selection (from Country + Region + District)	iHRIS Manage, iHRIS Qualify
resumption date	The date a student returned to a training program that was previously disrupted.	resumption	date	iHRIS Qualify
re-try	The second attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
role	Determines the activities that a user can perform within the system.	-	selection (preset values)	all

salary	The amount an employee is paid per year for a particular job.	current salary, wage	selection (from Currency) + number	iHRIS Manage
salary grade	Defines pay ranges for one or more jobs.	band, grade, salary band	selection	iHRIS Manage
salary increase	The amount that a salary is increased each year, expressed as a percentage of the salary.	-	number	iHRIS Plan
salary source	A monetary source for an employee's salary or special payments that is not the employing organization, such as a donor or nonprofit.	source	selection	iHRIS Manage
secondary school name	The school attended before entering a training institution.	high school	TBD	iHRIS Qualify
shortname	A unique name used to refer to a report.	relationship short name	text entry	iHRIS Manage, iHRIS Qualify
site	The location where a training class is given.	-	text entry	iHRIS Manage
speaking proficiency	A person's speaking ability in a foreign language.	-	selection (preset values)	iHRIS Manage
start date	The date at which a training program, position, license, etc. begins.	date started	date	iHRIS Manage, iHRIS Qualify
start year	The year in which a projection of the workforce begins, for which there is known workforce data.	base year	year	iHRIS Plan
starting position	The position that a person held when first employed by an organization.	-	text entry	iHRIS Manage
starting salary	The salary that a person earned when first employed by an organization; also the lowest salary in a salary grade.	first salary, start, start salary, starting wage	selection (from Currency) + number	iHRIS Manage
static change	An annual change in the number of workers based on a specific number of workers leaving or entering the workforce.	amount of change	number	iHRIS Plan
status	The current state of an institution, facility or training course (typically open or closed).	facility status, training course status	selection	iHRIS Manage, iHRIS Qualify
supervisor	A person who manages one or more employees of a lower grade.	manager	text entry (for past employers); selection (from Position Code + Position Title)	iHRIS Manage
surname	A family name or last name.	last name	text entry	all
suspend license	To revoke a health worker's license as a result of a disciplinary notice.	suspend, suspension	yes/no	iHRIS Qualify
targeted goals for the workforce	A goal or proposed outcome for workforce plans or projections, such as to meet a specific need or staff up to a certain level.	goals	text entry	iHRIS Plan
targeted number of positions	The number of health workers necessary to meet the health service need.	need, requirements, target	number	iHRIS Plan

targeted ratio of positions	A targeted number of health workers based on a ratio of one health worker per a certain number of people to be served.	health worker-to-population ratio, targeted ratio	number	iHRIS Plan
telephone number	A number where a person or organization can be contacted by telephone.	phone number, telephone	text entry	iHRIS Manage, iHRIS Qualify
temporary	A registration type that does expire.	-	value (Registration Type)	iHRIS Qualify
topic	The specific subject of a training course.	subject	text entry	iHRIS Manage
training course	An in-service program offered by a training institution that enables an employee to update or add to skills necessary for performing a job.	course, in-service training, training	selection	iHRIS Manage, iHRIS Qualify
training funder	A nonprofit or other funding organization that pays for employees to take a training course.	funder	selection	iHRIS Manage
training institution	A school that offers one or more programs to train employees, especially health workers.	institution, institution name, school	selection; text entry (for educational history or foreign training)	iHRIS Manage, iHRIS Qualify
training manager	A person who is responsible for managing in-service training programs for employees and updating employee competencies gained by training.	-	value (Role)	iHRIS Manage
training program	A pre-service, multi-year educational program offered by a training institution that, when completed, qualifies a person to be registered or licensed in a particular cadre.	pre-service training, training	selection	iHRIS Qualify
training requestor	The person or group who requests that an employee complete a training course.	requestor	selection	iHRIS Manage
username	A unique name used by a user to access the system.	-	text entry	all
verification change	The type of change made to a health worker's record as a result of verifying the record with an outside source.	changes made, verification	selection	iHRIS Qualify
verification date	The date a change was made to a record as a result of verifying the record with an outside source.	-	date	iHRIS Qualify
view	A display of data as a table or chart that shows specific fields sorted or aggregated in a pre-specified way; filters may be selected to limit the data displayed in the report view.	report view	text entry	iHRIS Manage, iHRIS Qualify
weekly	An event that occurs once a week.	-	value (Recurrence Frequency)	iHRIS Manage
work contact	Refers to a person's work mailing address, telephone number and other contact information.	work	value (Contact Type)	iHRIS Manage, iHRIS Qualify
writing proficiency	A person's writing ability in a foreign language.	-	selection (preset values)	iHRIS Manage
year	The year for which known data are being entered.	supply year, target year	year	iHRIS Plan
yearly	An event that occurs once a year.	annually	value (Recurrence Frequency)	iHRIS Manage

iHRIS:Data Dictionary (4.0.5)

Field Name or Value	Definition	Alternate Names	Data Type	Used In
2 character alpha code	The unique two-character code that identifies a country established by the International Organization for Standards (ISO).	alpha code	text entry	all
academic level	The highest level of formal education attained by a person.	educational level	selection	iHRIS Qualify
address in new country	The mailing address given by a health worker who is out migrating to a foreign country.	-	text entry	iHRIS Qualify
administrator	A role that has full access to all functions in the system; this role is responsible for configuring the system and managing user accounts.	system administrator	value (Role)	all
alternate telephone number	A secondary phone number where a person or organization can be reached.	cell phone number, mobile number	text entry	iHRIS Manage, iHRIS Qualify
amount	The total amount of a benefit or special payment.	-	selection (from Currency) + number	iHRIS Manage
applicant	A person who has applied for an open position.	job applicant	value (from Employee Status)	iHRIS Manage
application date	The date a person applied to take an exam, to register as a health worker or for an open position.	application	date	iHRIS Qualify
available hours	The number and times of hours a person who is applying for part-time employment is available to work.	hours	text entry	iHRIS Manage
average salary	The average annual salary paid to an employee in a particular group, such as a cadre or pool of workers.	-	selection (from Currency) + number	iHRIS Plan
benefit type	A type of payment made to an employee that is separate from the employee's salary; the payment may be one-time or recurring.	benefit, special payment	selection	iHRIS Manage
birthplace	The geographical location where a person was born.	-	selection (Country + Region + District)	iHRIS Qualify
cadre	A broad category or subset of health workers characterized by the specific training, degree or other qualifications required to practice or be licensed in that field (i.e., nurse).	health cadre	selection	all
cadre pool	A pool of health workers, composing part or all of a cadre, to which assumptions are applied in a workforce projection.	pool	selection	iHRIS Plan
category	A broad subject area.	disciplinary action category, disruption category, projection category, training course category	selection or text entry	iHRIS Manage, iHRIS Qualify, iHRIS Plan

certificate	Certifies that a particular academic level has been achieved.	-	selection	iHRIS Qualify
certificate number	Identifies a particular certificate issued to a student.	-	text entry	iHRIS Qualify
classification	A broad category used to organize jobs; the job classification may or may not be equivalent to the health cadre.	job classification	selection	iHRIS Manage
closed	Position status that designates a position that has been filled by an employee; when a position is marked closed, the organization is not actively hiring for the position.	closed position	value (Position Status)	iHRIS Manage
code	Short identifier for an item, usually unique.	-	text entry	iHRIS Manage, iHRIS Qualify
comments	Notes about a position, job interview or job offer.	interview comments, position comments	text entry	iHRIS Manage
company address	The address of a person's employer.	-	text entry	iHRIS Manage
company name	The name of a person's employer.	company, employer, organization	text entry	iHRIS Manage
company telephone	The telephone number of a person's employer.	company phone, company telephone number	text entry	iHRIS Manage
competency	A skill performed to a specific standard under specific conditions.	competencies provided	selection	iHRIS Manage
competency type	A broad category of related competencies.	-	selection	iHRIS Manage
contact type	A preset category of contact information.	-	selection (preset values)	iHRIS Manage, iHRIS Qualify
continuing education course	A course that is required for a health worker to renew his/her license while practicing.	continuing education	selection	iHRIS Manage, iHRIS Qualify
cost	The amount of money associated with a change in the number of workers based on salary and other associated costs, such as training costs or severance pay.	average cost	selection (from Currency) + number	iHRIS Plan
cost increase	An annual increase in the cost associated with a change in the number of workers expressed as a percentage of the original cost.	-	number	iHRIS Plan
country	An independent nation state.	nation	selection	all
country trained in	A foreign country where a health worker received training.	-	selection (from Country)	iHRIS Qualify
county	The smallest geographic subset, typically located within a district.	sector	selection	iHRIS Manage, iHRIS Qualify

credit hours	The amount of credit received for completing a continuing education course; health professionals must typically complete a minimum number of credit hours to renew their licenses.	CEU, continuing education unit	number	iHRIS Manage, iHRIS Qualify
currency	The medium of exchange of money used in a country or other location.	-	selection	iHRIS Manage, iHRIS Plan
currency code	The unique three-letter code used to define a currency established by the International Organization for Standards (ISO).	-	text entry	iHRIS Manage, iHRIS Plan
currency symbol	The symbol used to identify a currency, such as dollars.	symbol	text entry	iHRIS Manage, iHRIS Plan
date disciplinary action occurred	The date a professional received a disciplinary notice.	disciplinary action date	date	iHRIS Qualify
data operations manager	A database management role that is responsible for managing data entry, including verifying and correcting data and updating standard lists in the system.	-	value (Role)	iHRIS Qualify
data source	The verifiable source of data entered in the system, such as a census, survey or information system.	-	text entry	iHRIS Plan
date added	The date a note was added to a person's record.	-	date	iHRIS Manage, iHRIS Qualify
date of birth	A person's birthday.	birthdate	date	iHRIS Manage, iHRIS Qualify
decision maker	A role that runs reports in order to view and analyze data, and make health workforce policy and planning decisions.	-	value (Role)	iHRIS Qualify
degree	Certifies that a particular academic level has been achieved, usually a higher education program.	-	selection	iHRIS Manage
department	A division within an organization, typically around similar job functions and following supervisory lines.	-	selection	iHRIS Manage
dependent	A legal dependent, such as a spouse or child.	number of dependents	number	iHRIS Manage
deployment date	The date a person is employed in a health facility as a licensed health worker.	deployment	date	iHRIS Qualify
description	Additional information about or a definition of an item used in selection menus.	job description	text entry	iHRIS Manage, iHRIS Plan
desired wage	The salary that an applicant for a job requests to perform that job.	desired salary	selection (from Currency) + number	iHRIS Manage
did not sit for exam	An incomplete or absent result on a qualifying examination.	absent, incomplete	value (Exam Results)	iHRIS Qualify
disciplinary action reason	A warning or notice issued to a health professional or employee as a result of an infraction.	disciplinary action, disciplinary notice	selection	iHRIS Qualify

discontinued	A position status that designates a position that is no longer required by an organization; no employee fills it and the organization is not soliciting applications for the position.	discontinued position	value (Position Status)	iHRIS Manage
display name	The name of a report or other item that is shown to users of the system.	-	text entry	iHRIS Manage, iHRIS Qualify
disruption date	The date a student left a training program.	-	date	iHRIS Qualify
disruption reason	The reason why a student left a training program.	discontinuation, disruption, training disruption	selection	iHRIS Qualify
district	A smaller geographic unit within a region created by the central government for easy administration.	province, state	selection	iHRIS Manage, iHRIS Qualify
duration of change	The number of years that a change affects a workforce projection	-	number	iHRIS Plan
education type	The type of qualification or degree a person has received, such as college/university, continuing education or informal.	-	selection	iHRIS Manage
elementary	The first level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level has a speaking vocabulary which is inadequate to express anything but the most elementary needs.	elementary proficiency, Level 1, S-1	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
email address	An address where a person or organization can be contacted by email.	email	text entry	iHRIS Manage, iHRIS Qualify
emergency contact	The person to notify if there is an emergency involving an employee, including the person's contact information.	-	value (Contact Type)	iHRIS Manage, iHRIS Qualify
employee	A person who is paid by an organization to perform a specific job.	-	value (from Employee Status)	iHRIS Manage
employee status	The status of an employee with the organization, such as a current employee, old employee or job applicant.	-	selection (preset values)	iHRIS Manage
enabled	Refers to whether a pool change is calculated and displayed in a projection.	-	yes/no	iHRIS Plan
end date	The date at which a position, training program, licensing period, etc. ends.	date ended, expiration, license expiration date	date	iHRIS Manage, iHRIS Qualify
ending position	The last position that a person held in an organization.	-	text entry	iHRIS Manage
ending salary	The salary that a person earned in the last position s/he held in an organization; also the highest salary in a salary grade.	end, end salary, ending wage, last salary	selection (from Currency) + number	iHRIS Manage
endorser date	The date a student is endorsed to take the national examination.	-	date	iHRIS Qualify

endorser name	A person who recommends a student graduating from a training program to take the national examination.	endorser	text entry	iHRIS Qualify
endorser qualifications	The qualifications of a person recommending students to take the national examination.	-	text entry	iHRIS Qualify
evaluation	An official assessment of an employee's performance in a class or competency.	competency evaluation, training course evaluation	selection	iHRIS Manage
exam date	The date that the qualifying examination is administered to health profession students.	-	date	iHRIS Qualify
exam number	The number that identifies a particular examination administered to a student graduating from a health training program.	-	text entry	iHRIS Qualify
exam results	The grade received on the test that every student graduating from a health training program must pass in order to qualify for registration.	exam, examination, national examination, results	selection (preset values)	iHRIS Qualify
exam try	An attempt by a student to pass the qualifying examination; students are limited to three tries.	-	selection (preset values)	iHRIS Qualify
executive manager	A person who may manage the entire organization or one district, department, office or facility within the organization. The Executive Manager views reports and analyzes data entered in the system in order to make HR decisions and set organizational policy.	-	value (Role)	iHRIS Manage
exit	A decrease in the supply of workers due to employees leaving the workforce.	-	selection (preset values)	iHRIS Plan
facility	A specific division within an organization that is defined by having its own budget and often has a unique facility code. Often a facility is responsible for providing health care services.	duty center, health facility, office, responsibility center	selection	iHRIS Manage, iHRIS Qualify
facility agent	The owner of a health facility or training institution, which also refers to the classification of the facility.	agent	selection	iHRIS Qualify
facility type	A type of health facility.	-	selection	iHRIS Manage, iHRIS Qualify
fax number	A number where a person or organization can be contacted by fax.	fax	text entry	iHRIS Manage, iHRIS Qualify
fail	A failing grade on a qualifying examination.	-	value (Exam Results)	iHRIS Qualify
felony conviction	A conviction of a crime resulting in prison time.	-	yes/no	iHRIS Manage
final try	The third and last attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
first name	A person's initial name.	Christian name, firstname, given name, name	text entry	all
first try	The initial attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
fluent	Native of bilingual proficiency in a language.	bilingual proficiency, Level 5, native proficiency, S-5	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage

full professional	The fourth level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to use the language fluently and accurately on all levels normally pertinent to professional needs.	full professional proficiency, Level 4, S-4	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
full-time employment	Employment for a standard number of hours of working time.	full-time	yes/no	iHRIS Manage
gender	Indicates whether a person is male or female.	sex	female/male	iHRIS Manage, iHRIS Qualify
grade obtained	A student's official grade upon completing a particular academic level.	grade	text entry	iHRIS Qualify
graduation date	Official date of completion of a training program or other educational program.	graduation, year of graduation	date	iHRIS Manage, iHRIS Qualify
health workforce planner	A role that has access to the projection creation and modeling functions but cannot configure the system or access user accounts.	-	value (Role)	iHRIS Plan
hiring date	The date on which an open position is filled.	filled date, hire date, hire year	TBD	iHRIS Manage
hiring decision	The date at which an official decision is made whether to offer a job to an applicant.	date of decision	date	iHRIS Manage
home residence	The address or geographical location where a person permanently lives, which may be different from the person's current residence.	permanent residence	selection (Country + Region + District)	iHRIS Qualify
HR manager	A manager of human resources personnel who is responsible for managing all system data and for ensuring that data in the system are complete, correct and up to date.	-	value (Role)	iHRIS Manage
HR staff	A data entry person in human resources who is responsible for entering and updating data in the system.	-	value (Role)	iHRIS Manage
identification code	A unique code used to identify a facility or training institution.	-	text entry	iHRIS Qualify
identification number	The unique identifier -- usually a number -- that, when combined with an Identification Type, is used to identify a person.	-	text entry	iHRIS Manage, iHRIS Qualify
identification type	An official document (such as Social Security Number, national health insurance or passport) used to identify a person.	identification	selection	iHRIS Manage, iHRIS Qualify
index number	The number issued to a student when s/he enters a new pre-service training program.	index	TBD	iHRIS Qualify
initial year of change	The first year in a projection that a pool change takes effect; the initial year of change may be the same as the start year of the projection.	initial year	year	iHRIS Plan
inspection date	The date when an institution was last inspected.	-	date	iHRIS Qualify

inspection results	Certification that a health facility, private practice clinic or training institution is qualified to provide services.	inspection, institution inspection	text entry	iHRIS Qualify
instructor	The teacher of a training class.	teacher, trainer	text entry	iHRIS Manage
intake	An increase in the supply of workers due to employees entering the workforce.	-	selection (preset values)	iHRIS Plan
intake date	The date a person enters a training program.	-	date	iHRIS Qualify
interview date	The date at which a formal meeting to assess the qualifications of a job applicant takes place.	date of interview, interview	date	iHRIS Manage
ISCO classification code	A unique code that identifies a job classification using a standard coding system established by the International Standard Classification of Occupations (ISCO) for classifying professions.	-	text entry	iHRIS Qualify
ISO numeric code	The unique numeric code that identifies a country established by the International Organization for Standards (ISO).	-	text entry	all
job	A general set of qualifications, duties and responsibilities that matches a particular job description and has a unique job code. There may be multiple instances of the same job within an organization.	designation, post	selection (from Job Title)	iHRIS Manage, iHRIS Qualify
job code	A unique identifier associated with a particular job that identifies it for the organization.	post code	text entry	iHRIS Manage, iHRIS Qualify
job offer	An offer to hire an applicant for a particular position and salary.	make a job offer, offer	yes/no	iHRIS Manage
job responsibilities	The duties expected to be performed by a particular job.	duties, responsibilities	text entry	iHRIS Manage
job title	The label used to describe a job, or a specific set of duties and responsibilities.	post title, title	text entry	iHRIS Manage, iHRIS Qualify
language	A foreign language other than a person's native language.	-	selection	iHRIS Manage
last evaluated	The date at which a person last received an evaluation.	-	date	iHRIS Manage
license number	The number issued with a license to practice as a health worker; this number may or may not be identical to the registration number.	-	number	iHRIS Manage, iHRIS Qualify
limited working	The second level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to satisfy routine social demands and limited work requirements.	Level 2, limited working proficiency, S-2	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
location	Refers to the country, region, district and (optionally) county where an organization, institution or facility is located.	geographical location, institution location	selection (from Country + Region + District + County)	iHRIS Manage, iHRIS Qualify

location selection	Designates a country that is used for determining geographical location, in addition to selecting a currency or nationality.	-	yes/no	iHRIS Manage, iHRIS Qualify
mailing address	An address, including city, country and zip code, where a person or organization can be contacted by mail.	address	text entry	iHRIS Manage, iHRIS Qualify
major	Primary field of study.	-	text entry	iHRIS Manage
marital status	A person's legal status, such as single, married, divorced or widowed.	-	selection	iHRIS Manage, iHRIS Qualify
materials approved	Approval of examination application materials.	-	yes/no	iHRIS Qualify
materials received	Examination application materials submitted by an applicant in advance of taking the exam.	-	yes/no	iHRIS Qualify
maximum amount of change	The maximum number of health workers that can enter the workforce in a projection.	-	number	iHRIS Plan
maximum number of students	The largest number of students accepted into a training course.	-	number	iHRIS Manage
midpoint	The average salary offered to new hires in a salary grade, which may not be equivalent to the true average of the salary range within that grade.	-	selection (from Currency) + number	iHRIS Manage
monthly	An event that occurs once a month.	-	value (Recurrence Frequency)	iHRIS Manage
name	Refers to the value used to create an item for selection menus.	-	text entry	all
nationality	The country where a person is a legal citizen.	citizenship	selection (from Country)	iHRIS Manage, iHRIS Qualify
no access	A role that prevents a user from accessing the system, or disables the user account.	-	value (Role)	all
notes	General information added to a record to provide additional information not accounted for by other fields.	primary contact person	text entry	iHRIS Manage, iHRIS Qualify
number of employed staff	The actual number of workers available for deployment.	supply	number	iHRIS Plan
number of students	The maximum number of students that can attend a specific training program.	-	number	iHRIS Qualify
OK to contact	Specifies whether a person's past employers may be contacted.	-	yes/no	iHRIS Manage
old applicant	A person who previously applied for an open position, but who has not applied for any positions that are currently open.	-	value (from Employee Status)	iHRIS Manage

old employee	A person who previously worked for an organization but has left the organization.	-	value (from Employee Status)	iHRIS Manage
once	An event that occurs only once, or does not recur.	-	value (Recurrence Frequency)	iHRIS Manage
open	A position status that designates a position that is required for the organization to operate and that the organization is actively hiring to fill.	open position	value (Position Status)	iHRIS Manage
organization requesting verification	The certifying board or professional council requesting the qualifications of a health worker who is applying to work in a foreign country.	-	text entry	iHRIS Qualify
other	Refers to all values other than those not explicitly listed for selection.	other contact	value (Contact Type)	iHRIS Manage, iHRIS Qualify
other names	A person's names other than the first name and surname, usually one or more middle names.	middle name, other name	text entry	all
out migration reason	The given by a health worker leaving the country where s/he was trained in order to practice in a foreign country.	out migration	selection	iHRIS Qualify
pass	A passing grade on a qualifying examination or on a facility inspection.	passed	value (Exam Results) or yes/no	iHRIS Qualify
password	A hidden phrase that provides secure access to the system.	-	text entry	all
people attending	The names of the people who attend a job interview.	interviewers	text entry	iHRIS Manage
percentage change	An annual change in the number of workers based on a percentage of the available number of workers leaving or entering the workforce.	rate of change	number	iHRIS Plan
permanent	A registration type that does not expire.	-	value (Registration Type)	iHRIS Qualify
personal contact	Refers to a person's home mailing address, telephone and other contact information.	home, personal	value (Contact Type)	iHRIS Manage, iHRIS Qualify
pool change	A change applied to a cadre pool that calculates either an increase or decrease in the number of available health workers in that pool.	-	selection	iHRIS Plan
population	The total number of people inhabiting a specific area, such as a country.	-	number	iHRIS Plan
population growth rate	The percentage by which the population of an area will grow annually.	growth rate, population growth	number	iHRIS Plan
position	An instance of a job that can be filled by one employee in one facility and represents one box on an organizational chart.	-	selection (from Position Code + Position Title)	iHRIS Manage
position code	A unique identifier associated with a particular position that identifies it for the organization.	-	text entry	iHRIS Manage
position description	The specific responsibilities for a particular position in addition to the general responsibilities for the job.	-	text entry	iHRIS Manage

position status	The status of a position as open, closed (filled) or discontinued.	status	selection (preset values)	iHRIS Manage
position title	A specific title different from the job title that defines one particular position within an organization.	title	text entry	iHRIS Manage
position type	A classification of a type of position.	-	selection	iHRIS Manage
post date	The date a position is opened for hiring.	date posted, posted date	date	iHRIS Manage
practice type	The type of registration issued to a health worker.	-	selection (preset values)	iHRIS Qualify
primary country	The country that is selected as the primary location for data in the system; more than one country may be set as the primary country.	-	yes/no	all
primary form	The form, or related set of data entry fields, on which a report relationship is based.	-	selection	iHRIS Manage, iHRIS Qualify
professional working	The third level of five in the Interagency Language Roundtable (ILR) scale of language proficiency; a person at this level is able to speak the language with sufficient structural accuracy and vocabulary to participate effectively in most conversations on practical, social and professional topics.	Level 3, professional working proficiency, S-3	value (Speaking, Reading or Writing Proficiency)	iHRIS Manage
projection duration	The number of years in a projection, usually between 5 and 30 years. Also refers to the number of years that a pool change affects the projection.	duration	number	iHRIS Plan
projection name	A calculation of the workforce supply and required workers over time based on workforce data and assumptions made about future changes to the workforce that compares the supply to the requirements and shows the gap between the two.	graphical model, projection, workforce projection	text entry	iHRIS Plan
proposed end date	Date at which funding or the role for a position is tentatively scheduled to end, as distinguished from the end date.	-	date	iHRIS Manage
proposed hiring date	Date at which an organization would like to fill an open position, as distinguished from the actual hiring date.	-	date	iHRIS Manage
proposed salary	The salary that is proposed for an open position before it has been filled; does not refer to the actual salary for the position.	-	selection (from Currency) + number	iHRIS Manage
qualification	Specific educational level, training, competency, skill or experience that a person must have in order to enter a training program, become registered in a cadre or perform a job.	education, minimum qualification required, skill	selection or text entry (job application)	iHRIS Manage, iHRIS Qualify
rate amount of change increases each year	The percentage by which the annual change in the number of health workers increases annually.	-	number	iHRIS Plan
reading proficiency	A person's reading ability in a foreign language.	-	selection (preset values)	iHRIS Manage
reason for departure	A reason given for leaving employment or changing positions within the organization.	reason for leaving	selection; text entry (past employment)	iHRIS Manage

records officer	A role that is responsible for basic data entry, including initial indexing and upgrades of health professional students entering training programs, tracking out migration verifications and demographic data entry.	-	value (Role)	iHRIS Qualify
recurrence frequency	A regular repetition of a special payment, such as monthly or annually.	recurrence	selection (preset values)	iHRIS Manage
region	A major subdivision of a country containing districts.	-	selection	iHRIS Manage, iHRIS Qualify
registration council	An organization that registers or licenses health workers to practice in a country.	council, licensing board	selection	iHRIS Manage
registration date	The date at which a health worker is issued a registration number.	-	date	iHRIS Manage, iHRIS Qualify
registration number	A number that is issued when a health worker enters the profession within a particular cadre; the health worker retains the registration number as the primary identification number as long as s/he is licensed to practice in that cadre in the country.	-	number	iHRIS Manage, iHRIS Qualify
registration supervisor	A role that is responsible for data entry related to licensing updates, including entering initial registration, issuing new licenses and license renewals, issuing and renewing private practice licenses, and registering and licensing foreign-trained health care professionals applying to work in the country.	-	value (Role)	iHRIS Qualify
reinstatement date	The date a license is reissued to a health worker after a suspension due to a disciplinary action.	reinstatement	date	iHRIS Qualify
report	Display of data from the system as a table or graphical chart; typically, filters can be set on a report to determine the range of data displayed.	-	selection	iHRIS Manage, iHRIS Qualify
report relationship	A defined relationship between system forms on which a report is based.	form relationship, relationship	selection	iHRIS Manage, iHRIS Qualify
request date	The date that official documentation is requested.	-	date	iHRIS Qualify
residence	The location where a person is currently living; this may be different than the person's home residence.	current residence	selection (from Country + Region + District)	iHRIS Manage, iHRIS Qualify
resumption date	The date a student returned to a training program that was previously disrupted.	resumption	date	iHRIS Qualify
re-try	The second attempt to pass the qualifying examination.	-	value (Exam Try)	iHRIS Qualify
role	Determines the activities that a user can perform within the system.	-	selection (preset values)	all

salary	The amount an employee is paid per year for a particular job.	current salary, wage	selection (from Currency) + number	iHRIS Manage
salary grade	Defines pay ranges for one or more jobs.	band, grade, salary band	selection	iHRIS Manage
salary increase	The amount that a salary is increased each year, expressed as a percentage of the salary.	-	number	iHRIS Plan
salary source	A monetary source for an employee's salary or special payments that is not the employing organization, such as a donor or nonprofit.	source	selection	iHRIS Manage
secondary school name	The school attended before entering a training institution.	high school	TBD	iHRIS Qualify
shortname	A unique name used to refer to a report.	relationship short name	text entry	iHRIS Manage, iHRIS Qualify
site	The location where a training class is given.	-	text entry	iHRIS Manage
speaking proficiency	A person's speaking ability in a foreign language.	-	selection (preset values)	iHRIS Manage
start date	The date at which a training program, position, license, etc. begins.	date started	date	iHRIS Manage, iHRIS Qualify
start year	The year in which a projection of the workforce begins, for which there is known workforce data.	base year	year	iHRIS Plan
starting position	The position that a person held when first employed by an organization.	-	text entry	iHRIS Manage
starting salary	The salary that a person earned when first employed by an organization; also the lowest salary in a salary grade.	first salary, start, start salary, starting wage	selection (from Currency) + number	iHRIS Manage
static change	An annual change in the number of workers based on a specific number of workers leaving or entering the workforce.	amount of change	number	iHRIS Plan
status	The current state of an institution, facility or training course (typically open or closed).	facility status, training course status	selection	iHRIS Manage, iHRIS Qualify
supervisor	A person who manages one or more employees of a lower grade.	manager	text entry (for past employers); selection (from Position Code + Position Title)	iHRIS Manage
surname	A family name or last name.	last name	text entry	all
suspend license	To revoke a health worker's license as a result of a disciplinary notice.	suspend, suspension	yes/no	iHRIS Qualify
targeted goals for the workforce	A goal or proposed outcome for workforce plans or projections, such as to meet a specific need or staff up to a certain level.	goals	text entry	iHRIS Plan
targeted number of positions	The number of health workers necessary to meet the health service need.	need, requirements, target	number	iHRIS Plan

targeted ratio of positions	A targeted number of health workers based on a ratio of one health worker per a certain number of people to be served.	health worker-to-population ratio, targeted ratio	number	iHRIS Plan
telephone number	A number where a person or organization can be contacted by telephone.	phone number, telephone	text entry	iHRIS Manage, iHRIS Qualify
temporary	A registration type that does expire.	-	value (Registration Type)	iHRIS Qualify
topic	The specific subject of a training course.	subject	text entry	iHRIS Manage
training course	An in-service program offered by a training institution that enables an employee to update or add to skills necessary for performing a job.	course, in-service training, training	selection	iHRIS Manage, iHRIS Qualify
training funder	A nonprofit or other funding organization that pays for employees to take a training course.	funder	selection	iHRIS Manage
training institution	A school that offers one or more programs to train employees, especially health workers.	institution, institution name, school	selection; text entry (for educational history or foreign training)	iHRIS Manage, iHRIS Qualify
training manager	A person who is responsible for managing in-service training programs for employees and updating employee competencies gained by training.	-	value (Role)	iHRIS Manage
training program	A pre-service, multi-year educational program offered by a training institution that, when completed, qualifies a person to be registered or licensed in a particular cadre.	pre-service training, training	selection	iHRIS Qualify
training requestor	The person or group who requests that an employee complete a training course.	requestor	selection	iHRIS Manage
username	A unique name used by a user to access the system.	-	text entry	all
verification change	The type of change made to a health worker's record as a result of verifying the record with an outside source.	changes made, verification	selection	iHRIS Qualify
verification date	The date a change was made to a record as a result of verifying the record with an outside source.	-	date	iHRIS Qualify
view	A display of data as a table or chart that shows specific fields sorted or aggregated in a pre-specified way; filters may be selected to limit the data displayed in the report view.	report view	text entry	iHRIS Manage, iHRIS Qualify
weekly	An event that occurs once a week.	-	value (Recurrence Frequency)	iHRIS Manage
work contact	Refers to a person's work mailing address, telephone number and other contact information.	work	value (Contact Type)	iHRIS Manage, iHRIS Qualify
writing proficiency	A person's writing ability in a foreign language.	-	selection (preset values)	iHRIS Manage
year	The year for which known data are being entered.	supply year, target year	year	iHRIS Plan
yearly	An event that occurs once a year.	annually	value (Recurrence Frequency)	iHRIS Manage

Installing a Custom Site from Launchpad

In this tutorial, we will install a custom iHRIS Manage 4.0 site hosted on Launchpad. We will bazaar to download the code as well as discuss the basics on how to modify the code on Launchpad. We are assuming that you are using an Ubuntu Linux machine.

Our first goal is to install the iHRIS Suite 4.0. Then we will download the CSSC's iHRIS Manage Customizations. Next we will create the database and finally we will install the site in our web-server.

Launchpad First Steps

First you should create an account on Launchpad ^[1] if you not have already done so. We will refer to this account as **LAUNCHPAD_USER**.

Since we will want to contribute to the code, we will need to create a ssh public key ^[2] on your Ubuntu machine to add to Launchpad:

```
sudo apt-get install openssh-client
ssh-keygen -t rsa
```

When prompted, press Enter to accept the default file name for your key. Next, enter then confirm a password to protect your SSH key.

Your key pair is now stored in `~/.ssh/id_rsa.pub` (public key) and `~/.ssh/id_rsa` (private key). Now you need to upload the public portion of your SSH key to Launchpad. To do this, open in your web browser:

```
https://www.launchpad.net/~'''LAUNCHPAD_USER'''
```

You will see a place that says *SSH Keys* with an exclamation point (!) in a yellow circle next to it. Click on the (!) scroll down until you see *Add an SSH Key* and a text box. We will paste our public key into this text box. To do so type in a terminal:

```
gedit ~/.ssh/id_rsa.pub
```

you can now copy the contents of gedit (the public key) into the text box in the web browser. Now simply click on the button *Import Public Key*

For every computer/account that you use you will need to repeat these steps to create and import a public key.

Bazaar First Steps

First we need to make sure the Bazaar ^[3] (bzd) version control software is installed:

```
sudo apt-get install bzd bzrtools
```

You may wish to read the five minute tutorial ^[4] at this point. You should also let bzd know how you are:

```
bzd whoami "Your Name <your@email.add.ress>"
```

Join the iHRIS Team

Launchpad uses "teams" to control who can modify code it stores under bazaar.

If you wish to make modifications to the CSSC Customizations, you should join the ihris+cssc ^[5] team.

If you are working on a joint project, but not the CSSC's customizations, you should create a team in Launchpad and add yourself to it as well as the team *intrahealth+informatics*. For example, you could create the team *ihris+tanzania*.

Downloading iHRIS

We will now download the iHRIS Suite from Launchpad using bazaar (as opposed to the release tar.bz2 files) to get practice using bazaar.

Below, I will assume that there is only one user using the system, or at least only one user that should be modifying files in iHRIS. This is probably not the "recommended" way of doing things though.

Changing Permissions

We want to make sure we can easily modify files under */var/lib/iHRIS* without having to use sudo all the time.

```
sudo mkdir -p /var/lib/iHRIS
sudo chown -R `whoami`:`whoami` /var/lib/iHRIS
```

Release Code

Now we want to get the iHRIS Suite 4.0 release code from launchpad.

```
sudo mkdir -p /var/lib/iHRIS/lib/4.0
sudo chown -R `whoami`:`whoami` /var/lib/iHRIS/lib/4.0
cd /var/lib/iHRIS/lib/4.0
bazaar branch lp:i2ce/4.0 I2CE
bazaar branch lp:ihris-common/4.0 ihris-common
bazaar branch lp:ihris-manage/4.0 ihris-manage
bazaar branch lp:textlayout/4.0 textlayout
```

These branches will always contain the latest release code.

Development Code

If you wish to work with the development code instead, you should do this:

```
sudo mkdir -p /var/lib/iHRIS/lib/4.0-dev
sudo chown -R `whoami`:`whoami` /var/lib/iHRIS/lib/4.0-dev
cd /var/lib/iHRIS/lib/4.0-dev
bazaar branch lp:i2ce I2CE
bazaar branch lp:ihris-common ihris-common
bazaar branch lp:ihris-manage ihris-manage
bazaar branch lp:textlayout textlayout
```

These branches will always contain the main development code, which may or may be working at a particular time.

Downloading CSSC's Customizations

Create a directory for Sites

First we will create a directory that will hold all the sites we have on our system.

```
sudo mkdir -p /var/lib/iHRIS/sites/  
sudo chown -R `whoami`:`whoami` /var/lib/iHRIS/sites
```

We have two choices on how to download the CSSC Customizations. One possibility is to download it to *install* it, but do not want to make any code modifications. The other possibility is to download the code and have it setup to modify the customizations.

Download CSSC Customizations for no Modifications

We can download the CSSC customizations to our site directory by doing:

```
cd /var/lib/iHRIS/sites  
bzd branch lp:~ihris+cssc/ihris-manage/4.0-central cssc-central-4.0
```

You can still make modifications to the code, but they do not automatically get put back to launchpad once you commit.

Download CSSC Customizations for Modification

We can download the CSSC customizations to our site directory by doing:

```
cd /var/lib/iHRIS/sites  
bzd checkout lp:~ihris+cssc/ihris-manage/4.0-central cssc-central-4.0
```

To see why we are doing a checkout instead of a branch, read this ^[6]. To make sure everything is working OK, you should make sure the following succeeds:

```
cd /var/lib/iHRIS/sites/cssc-central-4.0  
bzd commit -m "test commit" --unchanged
```

Creating the Database

We will create a database called `cssc\_central\_4\_0` as follows:

```
mysql -u root -p  
mysql> CREATE DATABASE `cssc_central_4_0`;  
mysql> GRANT ALL PRIVILEGES ON `cssc_central_4_0`.* TO cssc@localhost identified by 'PASSWORD';
```

you should change **PASSWORD** to be the password you want.

Installing on the Web Server

Let us suppose we want to access the site at the URL:

```
http://localhost/iHRIS/cssc-central
```

Linking the Site

First we will need to link to our customized site under '/var/www' as follows:

```
sudo mkdir -p /var/www/iHRIS
sudo ln -s /var/lib/iHRIS/sites/cssc-central-4.0/pages /var/www/iHRIS/cssc-central
```

Setting the Database

We will need to specify the database and database user/password we are using. To do so:

```
mkdir -p /var/lib/iHRIS/sites/cssc-central-4.0/pages/local
cp /var/lib/iHRIS/sites/cssc-central-4.0/pages/config.values.php /var/lib/iHRIS/sites/cssc-central-4.0/pages/local/config.values.php
gedit /var/lib/iHRIS/sites/cssc-central-4.0/pages/local/config.values.php
```

Look for the the following variables and set their values:

Variable Name	Value
<code>\$i2ce_site_i2ce_path</code>	<code>/var/lib/iHRIS/lib/4.0/I2CE</code>
<code>\$i2ce_site_database</code>	<code>cssc_central_4_0</code>
<code>\$i2ce_site_database_user</code>	<code>cssc</code>
<code>\$i2ce_site_database_password</code>	PASSWORD (the password you set above)

Finishing Up

Just browse to the site at the URL:

```
http://localhost/iHRIS/cssc-central
```

to begin the iHRIS installation process.

Modifying the Code

When you make changes to the code, you should do so in small steps with a message about what you have done. This will help other developer's understand what you have done and to help track down bugs. This process is called *committing*.

```
bzr help commit
```

Ignored Files

Anything in a directory named *local* is ignored.

```
bzr help ignore
cd /var/lib/iHRIS/sites/cssc-central-4.0
bzr ignore
```

This is why in the above we copied `config.values.php` to `local/config.values.php` and set the database user name and password here. This way, if we are modifying the CSSC customizations we don't need to worry about the user name and password being uploaded to launchpad.

Updating files

If you are working with many people on a site customization, you can get the changes that they have made using the 'bzr update' command. For example:

```
cd /var/lib/iHRIS/sites/cssc-central-4.0
bzr update
```

Changed Files

To see which files have changed since the last time someone committed:

```
cd /var/lib/iHRIS/sites/cssc-central-4.0
bzr status
```

Committing Code

For instructions see:

```
bzr help commit.
```

Command Line Editors

You may find that you will need to be able to edit a file from the command line, for example if you ssh into an iHRIS Appliance. There are several command line editors available that you can use to edit files and you should be familiar with at least one of them.

- emacs: powerful but not userfriendly (Carl's choice)
- vim: powerful but not userfriendly (Luke's choice)
- nano: Nano is by the far the easiest one to use, but is not very powerful and you can only work with one file at a time:

Nano

- to open a file to edit, type `nano the_file_name.php` on the command line
- to determine the line number you hit `[CTRL]-C`
- Goto a line number `[CTRL]-_`
- save files with `[CTRL]-O`
- search for text with `[CTRL]-W`
- to delete a line `[CTRL]-K`
- to paste the line(s) you just cut `[CTRL]-U`
- if you decide to do a lot of editing in nano, you may want to add syntax highlighting. you can do so as follows:

```
nano ~/.nanorc
```

and save the following:

```
## Sample initialization file for GNU nano.
##
## Please note that you must have configured nano with --enable-nanorc
## for this file to be read! Also note that this file should not be in
## DOS or Mac format, and that characters specially interpreted by the
## shell should not be escaped here.
##
## To make sure a value is disabled, use "unset <option>".
##
## For the options that take parameters, the default value is given.
## Other options are unset by default.
##
## Quotes inside string parameters don't have to be escaped with
## backslashes. The last double quote in the string will be treated as
## its end. For example, for the "brackets" option, "'>]}" will match
## ", ', ), >, ], and }.

## Use auto-indentation.
set autoindent

## Backup files to filename~.
set backup

## The directory to put unique backup files in.
# set backupdir ""

## Do backwards searches by default.
# set backwards

## Use bold text instead of reverse video text.
set boldtext

## The characters treated as closing brackets when justifying
## paragraphs. They cannot contain blank characters. Only closing
## punctuation, optionally followed by closing brackets, can end
## sentences.
##
set brackets "'>]}"

## Do case sensitive searches by default.
# set casesensitive

## Constantly display the cursor position in the statusbar. Note that
## this overrides "quickblank".
set const
```



```
## Use cut to end of line by default.
# set cut

## Set the line length for wrapping text and justifying paragraphs.
## If fill is 0 or less, the line length will be the screen width less
## this number.
##
#set fill -8

## Enable ~/.nano_history for saving and reading search/replace
strings.
set historylog

## The opening and closing brackets that can be found by bracket
## searches. They cannot contain blank characters. The former set
must
## come before the latter set, and both must be in the same order.
##
set matchbrackets "<[{}>]"

## Use the blank line below the titlebar as extra editing space.
# set morespace

## Enable mouse support, if available for your system. When enabled,
## mouse clicks can be used to place the cursor, set the mark (with a
## double click), and execute shortcuts. The mouse will work in the X
## Window System, and on the console when gpm is running.
##
set mouse

## Allow multiple file buffers (inserting a file will put it into a
## separate buffer). You must have configured with
--enable-multibuffer
## for this to work.
##
# set multibuffer

## Don't convert files from DOS/Mac format.
# set noconvert

## Don't follow symlinks when writing files.
# set nofollow

## Don't display the helpful shortcut lists at the bottom of the
screen.
# set nohelp
```

```
## Don't add newlines to the ends of files.
set nonewlines

## Don't wrap text at all.
set nowrap

## Set operating directory.  nano will not read or write files outside
## this directory and its subdirectories.  Also, the current directory
## is changed to here, so any files are inserted from this dir.  A
blank
## string means the operating directory feature is turned off.
##
# set operatingdir ""

## Preserve the XON and XOFF keys (^Q and ^S).
# set preserve

## The characters treated as closing punctuation when justifying
## paragraphs.  They cannot contain blank characters.  Only closing
## punctuation, optionally followed by closing brackets, can end
## sentences.
##
# set punct "!.?"

## Do quick statusbar blanking.  Statusbar messages will disappear
after
## 1 keystroke instead of 26.  Note that "const" overrides this.
##
# set quickblank

## The email-quote string, used to justify email-quoted paragraphs.
## This is an extended regular expression if your system supports them,
## otherwise a literal string.  Default:
# set quotestr "^[          ]*[:>\\|])+"
## if you have extended regular expression support, otherwise:
# set quotestr "> "

## Fix Backspace/Delete confusion problem.
# set rebinddelete

## Fix numeric keypad key confusion problem.
# set rebindkeypad

## Do extended regular expression searches by default.
#set regexp

## Make the Home key smarter.  When Home is pressed anywhere but at the
```

```
## very beginning of non-whitespace characters on a line, the cursor
## will jump to that beginning (either forwards or backwards).  If the
## cursor is already at that position, it will jump to the true
## beginning of the line.
# set smarthome

## Use smooth scrolling as the default.
# set smooth

## Use this spelling checker instead of the internal one.  This option
## does not properly have a default value.
##
set speller "aspell -x -c"

## Allow nano to be suspended.
set suspend

## Use this tab size instead of the default; it must be greater than 0.
set tabsize 4

## Convert typed tabs to spaces.
set tabstospaces

## Save automatically on exit, don't prompt.
# set tempfile

## Disallow file modification; why would you want this in an rcfile? ;)
# set view

## The two single-column characters used to display the first
characters
## of tabs and spaces.  187 in ISO 8859-1 (0000BB in Unicode) and 183
in
## ISO-8859-1 (0000B7 in Unicode) seem to be good values for these.
set whitespace ". "

## Detect word boundaries more accurately by treating punctuation
## characters as part of a word.
# set wordbounds

## Here is an example for PHP
##
syntax "php" "\.php[2345s~]? $"

## php markings
color brightgreen "(<\?(php)?|\?>)"
```

```

## functions
color white "\<[a-z_]*\"

## types
color green "\<(var|float|global|double|bool|char|int|enum|const)\>"

## structure
color brightyellow "\<(class|new|private|public|function|for|foreach|if|while|do|else|els

## control flow
color magenta "\<(goto|continue|break|return)\>"

## strings
color brightyellow "<[^= ]*>" "\"(\.|[^\"])*\""

## comments
color brightblue "//.*"
color brightblue start="/\" end="\*/"
#color blue start="<" end=">"
#color red "&^[^;][:space:]]*;"

## Trailing whitespace
color ,green "[[:space:]]+$"

include "/usr/share/nano/html.nanorc"

#####
#
# Syntax highlighting for XML files
#
# Author: Josef 'Jupp' Schugt, jupp(a)rubyforge.org
# License: GPL 2 or later
#
# Version: 2004-02-25
#
#####

syntax "ml"
".*\.([jrs]?html?|xml|sgml?|lhtml|opml|kdevelop|vcproj|glade|xsd|plist|gcs|dtd|dcl)$"
"catalog$" "docbook$"
color white "^.$"
color green start="<" end=">"
color cyan "<[^> ]+"
color cyan ">"
color yellow start="<!DOCTYPE" end="[/]?>"
color yellow start="<!--" end="-->"

```

```

color red      "&[^;]*;"

### all *.js files  ( e.g. Firefox user.js, prefs.js )

## New updated taken from
http://wiki.linuxhelp.net/index.php/Nano_Syntax_Highlighting

syntax "JavaScript" "\.(js)$"
## Default
color white "^.*$"
## Decimal, cotal and hexadecimal numbers
color yellow "\<[+-]?([1-9][0-9]*|0[0-7]*|0x[0-9a-fA-F]+)([uU][lL]?|[lL][uU]?)?\>"
## Floating point number with at least one digit before decimal point
color yellow "\<[+-]?([0-9]+\.[0-9]*|[0-9]*\.[0-9]+)([EePp][+-]?[0-9]+)?[fFlL]?"
color yellow "\<[+-]?([0-9]+[EePp][+-]?[0-9]+)[fFlL]?"
## Keywords
color green "\<(break|case|catch|continue|default|delete|do|else|finally)\>"
color green "\<(for|function|if|in|instanceof|new|null|return|switch)\>"
color green "\<(switch|this|throw|try|typeof|undefined|var|void|while|with)\>"
## Type specifiers
color red "\<(Array|Boolean|Date|Enumerator|Error|Function|Math)\>"
color red "\<(Number|Object|RegExp|String)\>"
color red "\<(true|false)\>"
## String
color brightyellow "L?\"(\\"|^[^"])*\""
color brightyellow "L?'('|^[^']*')*'"
## Escapes
color red "\\[0-7][0-7]?[0-7]?|\\x[0-9a-fA-F]+|\\[bfnrt '\"?\\]"
## Comments
color magenta start="/\*" end="\*/"
color magenta "//.*$"

```

GUI Editors

We don't use these so I don't have any recommendations. You may want to look here ^[7] for some recommendations.

- gedit Not geared to programming. Installed by default on ubuntu desktop.
- scite ^[8] (sudo apt-get install scite)

Here are some IDEs

- geany A small GUI editor geared to programming (sudo apt-get install geany)
- bluefish ^[9] (sudo apt-get install bluefish)
- eclipse

References

- [1] <https://launchpad.net/>
- [2] <https://help.launchpad.net/YourAccount/CreatingAnSSHKeyPair>
- [3] <http://bazaar-vcs.org/en/>
- [4] <http://doc.bazaar-vcs.org/latest/en/mini-tutorial/index.html>
- [5] <http://www.launchpad.net/~ihris+cssc>
- [6] <http://bazaar-vcs.org/CheckoutTutorial>
- [7] <https://help.ubuntu.com/community/Programming>
- [8] <http://scintilla.org/SciTE.html>
- [9] <http://bluefish.openoffice.nl/features.html>

Installing iHRIS on Ubuntu 10.4 (Lucid)

Ubuntu 10.4 comes with PHP 5.3 so there a few a few issues that need to be corrected.

APC

To compile pecl packages yourself you'll need these packages installed. They may already be installed.

```
sudo apt-get install php5-dev apache2-prefork-dev
```

The version of APC that ships with 10.4 causes problems. You'll need to downgrade it for it to work. When it asks if you want to use the spin locks type in yes. Run the following commands in a terminal:

```
sudo apt-get remove php-apc
sudo pecl config-set preferred_state beta
sudo pecl install APC-3.1.2
sudo pecl config-set preferred_state stable
```

Now you need to set the configuration options for APC. Create or edit the ini file by typing:

```
sudo gedit /etc/php5/conf.d/apc.ini
```

The contents should be:

```
extension=apc.so
apc.shm_size=100
apc.write_lock=1
apc.slam_defense=0
```

Sessions

Now you need to set the session save path. The default is /tmp but that is causing problems and the script to clean up sessions doesn't look there. You'll need to edit the files for apache and cli and make the same change. To edit the apache php config type:

```
sudo gedit /etc/php5/apache2/php.ini
```

Find the line that looks like:

```
;session.save_path = "/tmp"
```

And change it to be (don't forget to remove the semi-colon):

```
session.save_path = "/var/lib/php5"
```

Now edit the cli config file and make the same change:

```
sudo gedit /etc/php5/cli/php.ini
```

Restart

Now restart apache and memcached (if you're using it) and try to access your site again.

```
sudo /etc/init.d/apache2 restart  
sudo /etc/init.d/memcached restart
```

Installing on Mini-Box

These are installation notes for getting the mini-box ^[1] LCD appliance up and running with Ubuntu Server 32-bit 9.04 (Jaunty) with an processor and making use of the menuing ^[2] system.

This document covers installation of Ubuntu and the bits of software to control the LCD Panel on the iHRIS Appliance. For information on installing the iHRIS Suite itself (including a full LAMP stack) see Installing the Debian Packages



<videoflash>6h79JeTiSQg</videoflash>

Ubuntu

Although we will intend to run this box without a monitor for the moment we will plug in the monitor to install Ubuntu from a USB-CDROM. Make sure the BIOS is configured to boot from the CD-ROM. Also, under Peripheral Devices you will need to enable all legacy support (or it will hang on installation).

For a flash drive, apparently Josh ^[3] has had some success following these directions ^[4].

We will do a Software Raid ^[5]. **Warning:** do not create the filesystem as ext4 as it will hurt mysql very badly ^[6]. Once it has been setup, we need to monitor ^[7] it using mdadm:

To do this:

```
sudo dpkg-reconfigure mdadm
```

Please enter the following:

```
Yes: periodic, monthly checks of the array
Yes: MD monitoring daemon
someone@somewhere.org: Email address for monitoring
Yes: Start with degraded array
```


Mail Server

We don't want our box to be the general mail server for the network. There is a mail server, postfix, installed by default on Ubuntu. We will want to set the mail server to relay email to some other place.

First we need to do:

```
sudo apt-get install postfix
```

Then select

```
Satellite System      //the type of system
somewhere.org         //the name of your organization
smtp.somewhere.org    //your smtp server to relay mail to
```

The above assumes that smtp.somewhere.org is an **open** relay which is probably not the case.

You will probably need to set Postfix up for SMTP Auth ^[8]

As an *alternative* here are some instructions for forwarding to a gmail account ^[9].

USBLCD Reader

First create a user 'lcdmenu' that can't login:

```
sudo adduser --disabled-login --gecos "" lcdmenu
```

Download and build the SDK ^[10] or at least just what it includes usblcd-src ^[11]. Install 'usbread' into the /home/lcdmenu/bin. To build it you will need to do this:

```
sudo apt-get install autoconf gcc-4.1-base gcc-4.1 gcc make \
    automake binutils binutils-dev libtool libusb-dev \
    libhid-dev bzip2
cd ~lcdmenu
sudo -u lcdmenu bzip2 branch lp:lcdmenu bin
cd ~/
wget http://www.mini-itx.com/store/information/usblcd/usblcd-src-0.1.4.tgz
tar -xzf usblcd-src-0.1.4.tgz
cd usblcd-0.1.4
rm src/Makefile.am lib/usblcd.c
ln -s ~lcdmenu/bin/usblcd.c lib/usblcd.c
ln -s ~lcdmenu/bin/Makefile.am src/Makefile.am
ln -s ~lcdmenu/bin/lcdmenu.c src/lcdmenu.c
./autogen.sh
./configure
sudo make install
sudo ldconfig
```

Now we want to change the splash the screen at boot-up

```
sudo usblcd splash ~lcdmenu/bin/splash.txt
```

LCD Menu

This applies to LCD Menu 1.0 ^[12] which is not packaged yet. You have already downloaded it via bzip in the step above

Now edit the "sudoers" file by running:

```
sudo visudo
```

and add this line to grant the lcdmenu user limited access to system functions

```
%lcdmenu ALL=NOPASSWD: /sbin/shutdown, /usr/sbin/service,
/usr/bin/mysqldump, /usr/bin/apt-get, /usr/local/bin/usblcd,
/usr/local/bin/lcdmenu, /usr/bin/killall
```

Create a "backup" user in mysql with localhost only access and no password which can lock and select all tables

```
mysql -u root -p
mysql> GRANT SELECT, LOCK TABLES on *.* TO backup@localhost IDENTIFIED BY PASSWORD '\';
mysql> quit;
```

(again no slashes)

Now we want it to setup to run periodically:

```
echo '* * * * * /home/lcdmenu/bin/lcdmenu_check.sh >/dev/null 2>&1' | \
sudo crontab -u lcdmenu -
```

We can get it up and running as fast as possible and put it a shutdown messages by putting it in the local startup ^[13]:

```
sudo vi /etc/init.d/local
```

Add these contents:

```
#!/bin/sh
case "$1" in
start)
    sudo -u lcdmenu /home/lcdmenu/bin/lcdmenu_check.sh

    ;;
stop)
    run=`ps a -Ulcdmenu | grep /home/lcdmenu/bin/lcdmenu.php | grep -v grep | cut -c1-5 | paste -s -`
    if [ "$run" ]; then
        kill -15 $run
    fi;
    run=`ps a -Ulcdmenu | grep /home/lcdmenu/bin/lcdmenu.php | grep -v grep | cut -c1-5 | paste -s -`
    if [ "$run" ]; then
        sleep 0.3
        kill -9 $run
    fi;
    killall lcdmenu

    /usr/local/bin/usblcd clear backlight 1 text 0 0 " Shutting Down " text 1 0 " Please Wait "

    ;;
esac
```

Now do:

```
sudo chmod +x /etc/init.d/local
sudo update-rc.d local defaults 99
```

GDM

In case you have GDM installed, let us have it not boot on startup. Note, you can now turn gdm on/off via the LCD Menu.

```
sudo update-rc.d -f gdm remove
```

Automount

The LCD Menuing system has a "backup MySQL database to a flash drive" feature. Since we will not be using GNOME, we will need a USB automounter:

```
sudo apt-get install usbmount
```

Then edit the file /etc/usbmount/usbmount.conf and add "vfat" to the FILESYSTEMS e.g:

```
FILESYSTEMS="ext2 ext3 vfat"
```

then make sure the FS_MOUNTOPTIONS line has at least:

```
FS_MOUNTOPTIONS="-fstype=vfat,gid=lcdmenu,dmask=0007,fmask=0117"
```

Power Button

Make sure acpid is installed and running and change /etc/acpi/powerbtn.sh to suit your needs. I suggest you just make it the following:

```
test -f /var/lock/acpislleep && exit 0
/sbin/shutdown -h now "Power button pressed"
```

UPS

Install nut and follow these directions ^[14] as well as whatever is available on the home page ^[15] of the nut package. nut is built for network access to a UPS but seems to be the most up-to-date package available.

Network Status

The MAC Address, to configure your router, can be obtained from the LCD Menu:

```
>F1:Server Status
>F2:Network Status
>F3:MAC Address
```

Similarly, if you have plugged the server into a network with DHCP, you can get the IP Address:

```
>F1:Server Status
>F2:Network Status
>F3:MAC Address
```

Webmin

See this webmin installation guide ^[16] or just cut and paste:

```
sudo aptitude install perl libnet-ssleay-perl openssl \
    libauthen-pam-perl libpam-runtime libio-pty-perl libmd5-perl
wget http://garr.dl.sourceforge.net/sourceforge/webadmin/webmin_1.500_all.deb
sudo dpkg -i webmin_1.500_all.deb
```

Browse to:

```
https://your-server-ip:10000/
```

and login as the user you created on Ubuntu installation.

References

- [1] <http://www.mini-box.com/M200-LCD-Enclosure?sc=8&category=87>
- [2] <https://launchpad.net/lcdmenu>
- [3] <http://suereth.blogspot.com/2008/03/my-new-toy-installing-ubuntu.html>
- [4] <http://edoceo.com/liber/ubuntu-live-usb>
- [5] <http://advosys.ca/viewpoints/2007/04/setting-up-software-raid-in-ubuntu-server/>
- [6] <http://ubuntuforums.org/showthread.php?t=1313834>
- [7] <http://ubuntuforums.org/showthread.php?t=237582>
- [8] http://postfix.state-of-mind.de/patrick.koetter/smtppauth/smtpp_auth_mailservers.html
- [9] <http://ubuntu-tutorials.com/tag/relayhost/>
- [10] [http://resources.mini-box.com/online/picoLCD%20x2%20\(OEM\)/Software/Linux/SDKSource/picoLCD20x2-SDK-0.1.7.tgz](http://resources.mini-box.com/online/picoLCD%20x2%20(OEM)/Software/Linux/SDKSource/picoLCD20x2-SDK-0.1.7.tgz)
- [11] <http://www.mini-itx.com/store/information/usblcd/usblcd-src-0.1.4.tgz>
- [12] <https://code.launchpad.net/~intrahealth+informatics/lcdmenu/dev-1.0>
- [13] <https://help.ubuntu.com/community/RcLocalHowto>
- [14] <http://www.crn.com/white-box/199000818>
- [15] <http://www.networkupstools.org/>
- [16] <http://www.ubuntugeek.com/ubuntu-serverinstall-gui-and-webmin-in-ubuntu-810-intrepid-ibex-guide.html>

Limiting Forms

In version 3.2 and greater we have unified the ability to search for forms by limiting the values of their fields.

Uses

The limit data structure is used in, for example:

- I2CE_Form::search()
- I2CE_Form::listFields()
- Form Relationships
- Report Limits

The methods of I2CE_Form add in the ability to limit values based on the storage mechanism. If you wish to create a new form storage mechanism with search capabilities, you will need to either produce some code to parse the limiting data structure described below or, if your storage mechanism is accessible to the database, you may simply subclass I2CE_FormStorage_Helper_DB.

Limit Styles

There are many ways that you may wish to limit the values of a particular field, we refer to these as a **limit style**. For example, *equals* or *like*.

Recall that every field has a type, such as INT or INT_LIST, which translates to a class, such as I2CE_FormField_INT or I2CE_FormField_INT_LIST, all of which sub-class I2CE_FormField. A type is made available to some sub-class (as well as well of all of its sub-classes) of I2CE_FormField.

Most of these limit style, and their attendant code, can be found in the module **form-limits**.

Structure of Limiting Data

We allow, on a per-form basis, logical compounds of limits of any field through a nested array (or magic data) structure. The structure of a limit *expression node* is as follows:

- **operator**: Required. Tells us what type of node this expression node is. Valid values are 'FIELD_LIMIT', 'AND', 'XOR', 'OR', and 'NOT'
- **operand**: Used only in the case of 'AND', 'XOR', 'OR' and 'NOT' in which case it is required. It is a sub-array/sub-node consisting of zero or more *limit expression nodes*. In the case of 'NOT' there is the further limitation that the number is exactly one.
- **field**: Used only need in the case of 'FIELD_LIMIT' in which case it is required. It is the name of the field for this form we are limiting on.
- **style**: Used only need in the case of 'FIELD_LIMIT' in which case it is required. It is the limit style.
- **data**: Used only need in the case of 'FIELD_LIMIT.' It is a associative array of data used to limit the data by. If not set, it should be interpreted as the empty array.

For example for a person, we may have:

```
array(
  'operator'=>'AND',
  'operand'=>array(
    0=>array(
      'operator'=>'FIELD_LIMIT',
      'field'=>'surname',
```

```
'style'=>'like',
'data'=>array(
    'value'=>'N%th'
)
)
1=>array(
    'operator'=>'NOT',
    'operand'=>array(
        0=>array(
            'operator'=>'OR',
            'operand'=>array(
                0=>array(
                    'operator'=>'FIELD_LIMIT',
                    'field'=>'othername',
                    'style'=>'equals',
                    'data'=>array(
                        'value'=>'Mike'
                    )
                )
            ),
            1=>array(
                'operator'=>'FIELD_LIMIT',
                'field'=>'othername',
                'style'=>'equals',
                'data'=>array(
                    'value'=>'Michael'
                )
            )
        )
    )
)
)
)
)
)
)
)
```

would be interpreted in SQL as:

```
((`person+surname` LIKE 'N%th') AND ( NOT (( `person+othername` = 'Mike') OR (`person+othername` = 'Michael'))))
```

Unfortunately, with such a statement, you would not find Mike Nesmith^[1].

Existing Styles

These are the limit styles provided by *form-limits* version 3.2.0. Please see the class itself for more up-to-date information.

- I2CE_FormField
 - null: No data array.
 - not_null: No data array.
 - null_not_null: Choose if a value is null or not. Data array has key 'value' which is either (evaluates to) true for null, or (evaluates to) false for not null.
 - max_parent: No data array. Only valid in form relationship context.
 - min_parent: No data array. Only valid in form relationship context.
 - max_parent_form: No data array. Only valid in form relationship context.
 - min_parent_form: No data array. Only valid in form relationship context.
 - I2CE_FormField_BOOL
 - truefalse: No data array.
 - true: No data array.
 - false: No data array.
 - I2CE_FormField_DB_DATE
 - greaterthan_now: No data array.
 - lessthan_now: No data array.
 - I2CE_FormField_DATE_Y
 - greaterthan: Data array has key 'year' which is a year (integer).
 - greaterthan_equals: Data array has key 'year' which is a year (integer).
 - equals: Data array has key 'year' which is a year (integer).
 - lessthan_equals: Data array has key 'year' which is a year (integer).
 - less_than: Data array has key 'year' which is a year (integer).
 - between: Data array has keys 'min' and 'max' each of which is an array containing the key 'year' which is a year (integer).
 - I2CE_FormField_DATE_YMD
 - greaterthan: Data array has key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - greaterthan_equals: Data array has key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - equals: Data array has key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - lessthan_equals: Data array has key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - less_than: Data array has key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - between: Data array has keys 'min' and 'max' each of which is an array containing the key 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - I2CE_FormField_DATE_MD
 - greaterthan: Data array has key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - greaterthan_equals: Data array has key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
-

- equals: Data array has key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
- lessthan_equals: Data array has key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
- less_than: Data array has key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
- between: Data array has keys 'min' and 'max' each of which is an array containing the key 'month' which is a month (integer), and 'day' which is the day of the month (integer).
- I2CE_FormField_DATE_HMS:
 - greaterthan: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
 - greaterthan_equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
 - equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
 - lessthan_equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
 - lessthan: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
 - between: Data array has keys 'min' and 'max' each of which is an array which contains the keys 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer).
- I2CE_FormField_DATE_TIME:
 - greaterthan: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - greaterthan_equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - lessthan_equals: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - lessthan: Data array has key 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
 - between: Data array has keys 'min' and 'max' each of which is an array which contains the keys 'hour' which is an hour (integer), 'minute' which is a minute (integer), and 'second' (integer), 'year' which is a year (integer), 'month' which is a month (integer), and 'day' which is the day of the month (integer).
- I2CE_FormField_DB_INT
 - between. Data array has keys 'min' and 'max.'
 - equals. Data array has key 'value' which is a scalar.
 - in. Data array has key 'value' which is a an array of scalar values.

- `greaterthan`. Data array has key 'value' which is a scalar.
- `greaterthan_equals`. Data array has key 'value' which is a scalar.
- `lessthan`. Data array has key 'value' which is a scalar.
- `lessthan_equals`. Data array has key 'value' which is a scalar.
- `I2CE_FormField_DB_STRING`
 - `between`. Data array has keys 'min' and 'max.'
 - `equals`. Data array has key 'value' which is a scalar.
 - `in`. Data array has key 'value' which is a an array of scalar values.
 - `greaterthan`. Data array has key 'value' which is a scalar.
 - `greaterthan_equals`. Data array has key 'value' which is a scalar.
 - `lessthan`. Data array has key 'value' which is a scalar.
 - `lessthan_equals`. Data array has key 'value' which is a scalar.
 - `like`. Data array has key 'value' which is a scalar.
 - `lowerlike`. Data array has key 'value' which is a scalar. match is case insensitive
 - `contains`. Data array has key 'value' which is a scalar. match is case insensitive
- `I2CE_FormField_DB_TEXT`
 - `between`. Data array has keys 'min' and 'max.'
 - `equals`. Data array has key 'value' which is a scalar.
 - `in`. Data array has key 'value' which is a an array of scalar values.
 - `greaterthan`. Data array has key 'value' which is a scalar.
 - `greaterthan_equals`. Data array has key 'value' which is a scalar.
 - `lessthan`. Data array has key 'value' which is a scalar.
 - `lessthan_equals`. Data array has key 'value' which is a scalar.
 - `like`. Data array has key 'value' which is a scalar.
 - `lowerlike`. Data array has key 'value' which is a scalar. match is case insensitive
 - `contains`. Data array has key 'value' which is a scalar. match is case insensitive
- `I2CE_FormField_YESNO`
 - `yesno`: No data array.
 - `yes`: No data array.
 - `no`: No data array.

References

- [1] http://en.wikipedia.org/wiki/Michael_Nesmith#The_Monkees

Linking Facilities and Departments

In iHRIS Manage, the module *ihris-manage-PersonPosition* defines the **position** form which contains the field **department** and the required field **facility** which are both independent lists. In this tutorial, we will discuss how to customize iHRIS Manage so that, when editing a position, the departments displayed are dependent on the facility chosen.

This tutorial applies to iHRIS Manage 4.0, although the concepts involved can be applied to iHRIS Qualify as well. Please refer to these articles:

- Defining Forms
- Forms and Form Classes

for background information on forms. You can see these changes in the Zanzibar-position ^[1] module.

Overview

Our goal is to have the departments for a position to depend on the facility chosen for the position. There are two ways that one could do this.

Option A

To the *department* form, we could add a required field *facility* which links to the *facility* form. In this way we would now have every department associated to a facility.

There are a few issues with this option:

- Suppose you have two hospitals, *Central Hospital* and *Coastal Hospital*. Each would presumably have a department such as *Emergency*. In this option, you would have to create an Emergency Department for each of the Hospitals. It would then make it difficult to run a report such as "list all employees in all facilities which work in the emergency department" because it really is "list all employees in all facilities which work in a department with the name *Emergency*." In particular, since we are entering "Emergency" multiple times, there is an increased potential for a spelling mistake which would affect data quality.
- At least for the moment, there is no built-in way to first select a facility and then select a department within a form.

Due to these weaknesses, we will not implement Option A in this tutorial.

Option B

We could create a new list form **facility_department** which contains two required fields, *facility* and *department* which map to the lists of the same name. Then in the position form, we no longer link to the list *facility* or *department* but to the list *facility_department*. This has the following advantages over Option A:

- We only have to enter the department *Emergency* once as we can associate it to many facilities via the *facility_department* form
- As *facility_department* is a tiered list (first select a facility, and then select a department) we can use the built-in display methods when selecting the department in the position.

We will implement option B in this tutorial.

Creating the module

We will encapsulate all of our customizations into a module *my-position* in order to:

- encapsulate the customizations conceptually
- ease maintenance
- ease sharing of the code

You may wish to review the Module Structure before continuing.

In your site directory, create a sub-directory 'modules' if it does not already exist and make sure you have an appropriate:

```
<path name='modules'>
  <value>./modules</value>
</path>
```

in your site configuration file.

Within the modules directory, create a new directory called *my_position*. Within the *my_position* directory, and create the file *my_position.xml* and add the following:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='my-position'>
  <metadata>
    <displayName>Customized iHRIS Position</displayName>
    <category>Site</category>
    <description>Customized version of the position form to list departments by
facility</description>
    <version>4.0.0.1</version>
    <requirement name='ihris-manage-Job'>
      <atLeast version='4.0' />
      <lessThan version='4.1' />
    </requirement>
    <requirement name='ihris-manage-PersonPosition'>
      <atLeast version='4.0' />
      <lessThan version='4.1' />
    </requirement>
    <path name='classes'>
      <value>./lib</value>
    </path>
    <path name='templates'>
      <value>./templates</value>
    </path>
  </metadata>
  <configurationGroup name='my-position' path='/'>
    </configurationGroup>
  </I2CEConfiguraiton>
```

Turning off the existing fields

Let us first look at the changes to "turn off" the facility and department fields in the position form.

The position form is implemented by the class *iHRIS_Position* in the *ihris-manage-PerosnPosition* module. Instead of removing them from the existing *iHRIS_Position* form, we will specify them as not being required and not saved in the database. We also remove the reference to them in the html template files for position.

Magic Data/Configuration Changes

We will create a new form class *My_Position* which extends the *iHRIS_Position* form class and set the *position* form to use this class:

```
<configurationGroup name='forms' path='/modules/forms/forms'>
  <configurationGroup name='position'>
    <!--Set the position form to use the My_Position class which we will define below-->
    <displayName>Position</displayName>
    <description>The Position Form</description>
    <configuration name='class' values='single'>
      <displayName>Class Name</displayName>
      <description>The name of the class providing the form</description>
      <value>My_Position</value>
    </configuration>
  </configurationGroup>
</configurationGroup>
<configurationGroup name='forms' path='/modules/forms/formClasses'>
  <configurationGroup name='My_Position'>
    <!--"turn off" the facility and department fields for position -->
    <configuration name="extends">
      <displayName>The class this form extends</displayName>
      <value>iHRIS_Position</value>
    </configuration>
    <configurationGroup name="fields">
      <configurationGroup name="department">
        <displayName>The field 'department'</displayName>
        <configuration name='required' type='boolean'>
          <value>>false</value>
        </configuration>
        <configuration name='in_db' type='boolean'>
          <value>>false</value>
        </configuration>
      </configurationGroup>
      <configurationGroup name="facility">
        <displayName>The field 'department'</displayName>
        <configuration name='required' type='boolean'>
          <value>>false</value>
        </configuration>
        <configuration name='in_db' type='boolean'>
          <value>>false</value>
        </configuration>
      </configurationGroup>
    </configurationGroup>
  </configurationGroup>
</configurationGroup>
```

```

    </configurationGroup>
  </configurationGroup>
</configurationGroup>

```

Template File Changes

Create a directory called 'templates' in the 'my_position' directory and copy these files:

- templates/en_US/lists_form_position.html
- templates/en_US/view_position.html

from the `ihis-manage-PersonPosition` module into the this directory. On the new copy `lists_form_position.html` remove the lines:

```

<span type="form" name="facility" showhead="default"></span>
<span type="form" name="department" showhead="default"></span>

```

On the new copy of `view_position.html` remove the lines:

```

<span type="form" name="position:facility" showhead="default" class="even"></span>
<span type="form" name="position:department" showhead="default"></span>

```

and the line:

```

<li task='can_edit_database_list_position'>
  <span type="form" name="position:facility"
href="lists?type=position&field=facility&forms%3Aposition%3A0%3Afields%3Afacility"
  >Select another Position</span>
</li>

```

Creating the facility_department

We will create a new form `facility_department` which is implemented by the form class `My_Facility_Department` which contains the mapped fields `facility` and `department`.

Magic Data/Configuration Changes

All of these changes are in the `my_position.xml` file.

First, we need to create the form class 'My_Facility_Department'. To do this, we add in the following under the configurationGroup named 'formClasses':

```

<configurationGroup name='My_Facility_Department'>
  <!-- pairs up facilities with a department list-->
  <configuration name="extends">
    <displayName>The class this form extends</displayName>
    <value>I2CE_List</value>
  </configuration>
  <configurationGroup name="fields">
    <configurationGroup name='facility'>
      <configuration name="formfield">
        <displayName>The form field type</displayName>
        <value>MAP</value>
      </configuration>
    </configurationGroup>
  </configurationGroup>

```

```

</configuration>
<configuration name="required" type="boolean">
  <displayName>This field is required to be set</displayName>
  <value>true</value>
</configuration>
</configurationGroup>
<configurationGroup name='department'>
  <configuration name="formfield">
    <displayName>The form field type</displayName>
    <value>MAP</value>
  </configuration>
  <configuration name="unique" type="boolean">
    <displayName>This field is required to be unique</displayName>
    <value>true</value>
  </configuration>
  <configuration name="unique_field">
    <displayName>This field is required to be unique for each facility</displayName>
    <value>facility</value>
  </configuration>
  <configuration name="required" type="boolean">
    <displayName>This field is required to be set</displayName>
    <value>true</value>
  </configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>

```

Next, let us add in the 'facility_department' form. To do this, we add in the following under the configurationGroup named 'forms':

```

<configurationGroup name='facility_department'>
  <displayName>Facility Department</displayName>
  <description>The Facility Department Form</description>
  <configuration name='class' values='single'>
    <displayName>Class Name</displayName>
    <description>The name of the class providing the form</description>
    <value>My_Facility_Department</value>
  </configuration>
  <configuration name='display' values='single'>
    <displayName>Display name</displayName>
    <description>The display name for this form</description>
    <value>Facility/Department</value>
  </configuration>
  <configuration name="storage" values='single'>
    <displayName>Storage Details</displayName>
    <description>The storage mechanism for this form.</description>
    <value>magicdata</value>
  </configuration>

```

```
</configurationGroup>
```

Next, we need to add in the 'facility_department' as a mapped field to the 'My_Position' class. To do this, we add in the following:

```
<configurationGroup name="facility_department">
  <configuration name="formfield">
    <displayName>The form field type</displayName>
    <value>MAP</value>
  </configuration>
  <configuration name="headers" type="delimited">
    <displayName>The headers for this field.</displayName>
    <value>default:Department</value>
  </configuration>
  <configuration name="required" type="boolean">
    <displayName>This field is required to be set</displayName>
    <value>true</value>
  </configuration>
  <configurationGroup name="meta">
    <configurationGroup name="display">
      <configurationGroup name="default">
        <configuration name="fields">
          <!-- the says that the default display is to first show/select the
          <value>facility_department:facility</value>
        </configuration>
      </configurationGroup>
    </configurationGroup>
  </configurationGroup>
</configurationGroup>
```

under the *fields* node for *My_Position*.

Finally, we want to create a 'task' that deals with editing and viewing the 'facility_department' list. We will want to make sure that the edit task implies the view task. We will also want to add these tasks to the the edit/view organization list task. To do so, we add in the following:

```
<configurationGroup name='tasks' path='/I2CE/tasks/task_description'>
  <configuration name='can_edit_database_list_facility_department'>
    <value>Edit the facility/department list</value>
  </configuration>
  <configuration name='can_view_database_list_facility_department'>
    <value>View the facility/department list</value>
  </configuration>
</configurationGroup>

<configurationGroup name='tasks_trickle_down' path='/I2CE/tasks/task_trickle_down/' >
  <configuration name='can_edit_database_list_facility_department' values='many'>
    <value>can_edit_organization_database_lists</value>
    <value>can_view_database_list_facility_department</value>
  </configuration>
```

```

<configuration name='can_edit_all_organization_database_lists' values='many'>
  <value>can_edit_database_list_facility_department</value>
</configuration>
<configuration name='can_view_all_organization_database_lists' values='many'>
  <value>can_view_database_list_facility_department</value>
</configuration>
</configurationGroup>

```

Template File Changes

In your copy of the view_postion.html file, add the following:

```

<!-- Show the facility_department with the default header -->
<span type="form" name="position:facility_department" showhead="default" class="even"><

```

and:

```

<li task='can_edit_database_list_position'>
  <span type="form"
    name="position:facility_department"
href="lists?type=position&field=facility_department&forms%3Aposition%3A0%3Afields
  Select another Position
  </span>
</li>

```

where you deleted the similar lines above.

In your copy of the file list_form_position.html add in the the following line:

```

<span type="form" name="facility_department" showhead="default"></span>

```

where you deleted the lines above.

Templates for facility_department

We need to create two templates to view and edit the facility_department form. We will put these in the 'my_postion/templates' directory. Create the file 'lists_form_facility_department.html' and add the following:

```

<tbody id="list_fields">
  <tr>
    <td class="formdata">
      <span type="form" name="facility_department:facility" showhead="default" addlink="1
    </td>
    <td class="formdata">
      <span type="form" name="facility_department:department" showhead="default" addlink=
    </td>
  </tr>
</tbody>

```

Now create the file 'view_list_facility_department.html' and add the following:

```

<div id="list_display" task='can_view_database_list_facility_department'>
  <div class="editRecord">

```



```

    <p>Edit This Information</p>
    <ul>
        <li task='can_edit_database_list_facility_department'><span type="form" name="facil
        <li><a href="lists?type=facility_department&amp;field=facility" >Select another Fac
    </ul>
</div> <!-- editRecord -->

<div class="dataTable">
    <table border="0" cellspacing="0" cellpadding="0">
        <tr>
            <th colspan="2">Associate Departments to A Facility</th>
        </tr>
        <span type="form" name="facility_department:facility" showhead="default" addlink="1
        <span type="form" name="facility_department:department" showhead="default" addlink=

    </table>
</div> <!-- dataTable -->

</div> <!-- list_display -->

```

The Facility Departments class

When a field maps to the facility_department form we want the display to be first the facility and then the department. In order to do this, we need to create the My_Facility_Department class as a file. To do so, first create the directory 'lib' in the 'my_position' directory. In this new directory, create a file 'My_Facility_Department.php' and add the contents:

```

class My_Facility_Department extends I2CE_List {
    /**
     * The main field name used for display a description of a record.
     */
    const MAIN_FIELD = "facility";
    /**
     * The secondary field name used for displaying a description of a
    record in combination with the MAIN_FIELD.
     */
    const SEC_FIELD = "department";
    /**
     * The sort field name to be used for sorting the display list.
    This can't be used with the SEC_FIELD option for display.
     */
}

```

(In an upcoming step, we shall remove this step and allow you to specify it in magic data.)

Edit Database List Templates

We finally want to customize our Edit Database Lists page so that the new list, *facility_department* shows up. First, create the directory *templates* in your site directory, if it doesn't already exist, and ensure that your site configuration file has the line:

```
<path name='templates'>
  <value>./templates</value>
</path>
```

Now, copy the files *lists.html* from the iHRIS Manage to this new directory. Edit the new copy and add the line:

```
<li task='can_edit_database_list_facility_department'><a href="lists?type=facility_depar
```

just after the similar line for Department.

Next, change the line:

```
<li task='can_edit_database_list_position'><a href="lists?type=position&field=facili
```

to:

```
<li task='can_edit_database_list_position'><a href="lists?type=position&field=facili
```

Enabling the Module

You can now enable your module by adding the following:

```
<requirement name='my-position'>
  <atLeast version='4.0' />
  <lessThan version='4.1' />
</requirement>
```

to your site configuration file.

Reporting and Form Relationship

Because the form relationships have changed:

- Old: the *position* form links to the *facility* and *department* forms.
- New: the *position* form links to the *facility_department* form which in turn links to the *facility* and *department* forms.

our form relationship used to define the staff reports need to be changed. Rather than detailing these changes in this tutorial you may look at them here ^[2]

References

- [1] <http://bazaar.launchpad.net/~ihris%2Bzanzibar/ihris-manage-zanzibar/central-4.0/files/head%3A/modules/ZNZPosition/>
- [2] <http://bazaar.launchpad.net/~ihris%2Bzanzibar/ihris-manage-zanzibar/central-4.0/files/head%3A/modules/ZNZReports/Reports/StaffReports/>

Linux (RedHat-Fedora) Installation

Getting Ready

Here are instructions for installing the iHRIS Suite on an Linux (RedHat or Fedora) system. If you need help installing a RedHat distribution, visit:

- [Fedora Documentation](#) ^[1]
- [RedHat Documentation](#) ^[2]

The following steps assume you have root-level access to your Linux machine. Root-level access is achieved by any of the following steps

- Login to your server directly as the root user.
- Use "su" at the command prompt to switch to the root user.
- Prepend the "sudo" command to each command listed here to execute as root.

First, if your Linux installation includes SELinux, disable it using by modifying /etc/sysconfig/selinux to read:

```
SELINUX=disabled
```

Now, install a Lamp ^[3] server.

```
yum install httpd mysql-server php php-devel php-mysql php-xml
```

Please ensure your system can send email properly before continuing. RedHat and Fedora typically will have a configured version of sendmail installed by default.

Configuring PHP

Next, you'll need to increase the memory limit for PHP. You can do this by editing the /etc/php.d/php.ini. Change the following line:

```
memory_limit = 32M
```

to:

```
memory_limit = 128M
```

Installing Pear and PECL Packages

We need to install a few Pear and PECL packages for PHP. For the Pear packages you can do:

```
yum install php-pear php-pecl-apc
pear install MDB2 MDB2#mysql text_password console_getopt
```

During certain activities like installation and upgrades you may need more memory than APC uses by default. To increase the memory limit, edit /etc/php.d/php.ini and change:

```
apc.shm_size=32
```

to

```
apc.shm_size=100
```

There are two optional packages you may wish to install:

```
yum install php-gd php-tidy
```

These packages are used to for inserting images into PDF output of reports and for exporting XML files in a nicely formatted manner.

The pecl package *FileInfo* is used to verify the validity of file types used for uploading (e.g. for uploaded images or documents). You can install this with the following commands:

```
yum install file-devel
pecl install Fileinfo
echo extension=fileinfo.so >> /etc/php.ini
```

Finally, edit `/etc/php.ini` and set your timezone:

```
date.timezone = America/New_York
```

Change "America/New_York" to match your locality -- the county and city spellings should match the directory structure found in `/usr/share/zoneinfo/`.

After installing these supplemental packages, be sure to restart apache with the following command:

```
apachectl restart
```

Database Setup

Manual Setup

To create the needed database you can do:

```
/etc/init.d/mysqld start
mysql -u root
mysql> CREATE DATABASE ihris_manage;
mysql> GRANT ALL PRIVILEGES ON ihris_manage.* TO ihris_manage@localhost identified by 'PASS';
```

where you substitute PASS with something appropriate. If you want to install iHRIS Qualify (or iHRIS Plan) just replace everywhere you see manage with qualify (or plan).

In version 4.0.1 of iHRIS we create mysql functions. If you are having trouble creating routines see this ^[4].

On Fedora systems, you'll also need to execute these commands to ensure database connectivity functions correctly:

```
ln -s /var/lib/mysql/mysql.sock /var/run/mysqld/mysqld.sock
```

Downloading the Software

To download the software you enter these commands:

```
cd /var/lib
mkdir iHRIS
cd /var/lib/iHRIS
mkdir 4.0.0
ln -s 4.0.0 4.0
ln -s 4.0 current
cd /var/lib/iHRIS/4.0.0
wget http://launchpad.net/ihris-manage/4.0/4.0.0/+download/ihris-manage-full-4_0_0.tar.bz2
tar -xjf iheris-manage-full-4_0_0.tar.bz2
```

Creating a Site Configuration File

We are going to start by modifying the *BLANK* site for iHRIS Manage. If you wish to install iHRIS Qualify or iHRIS Plan, you can follow the same instructions below but change *manage* to *qualify* or *plan*. To copy the *BLANK* site:

```
cd /var/lib/iHRIS/
mkdir sites
cp -R /var/lib/iHRIS/current/ihris-manage/sites/blank /var/lib/iHRIS/sites/manage
mv /var/lib/iHRIS/sites/manage/iHRIS-Manage-BLANK.xml /var/lib/iHRIS/sites/manage/iHRIS-Manage-Site.xml
```

We now need to edit the site configuration file:

```
vim /var/lib/iHRIS/sites/manage/iHRIS-Manage-Site.xml
```

by changing:

```
<path name='modules'>
  <value>./modules</value>
  <!-- If this site module is not installed under the iHRIS Manage
        file structure, then remember to include a path to the rest of
        the modules here.
        e.g. <value>../</value>
  -->
</path>
```

to:

```
<path name='modules'>
  <value>./modules</value>
  <value>/var/lib/iHRIS/current</value>
</path>
```

You may choose to change the email address feedback is sent to by changing:

```
<configuration name='email' path='to' values='single'>
<displayName>Email Address</displayName>
  <value>BLANK</value>
</configuration>
```

to:

```
<configuration name='email' path='to' values='single'>
<displayName>Email Address</displayName>
  <value>my_email@somewhere.com</value>
</configuration>
```

You may also choose to change *BLANK* everywhere with your organization's name. For best results, please choose one word, possibly with a dash, such as *Sample*, *MOH*, or *MOH-Taifeki*. To make this change, hit the replace icon, fill in *blank* under *Search for* and *MOH-Taifeki* under *Replace With*, then hit replace all.

Making the Site Available

We will now edit the configuration to let the site know about the database user and options:

```
vim /var/lib/iHRIS/sites/manage/pages/config.values.php
```

We now need to uncomment and set the value of a few variables. They are:

Variable Name	Value
\$i2ce_site_i2ce_path	/var/lib/iHRIS/current/I2CE
\$i2ce_site_database	ihris_manage
\$i2ce_site_database_user	ihris_manage
\$i2ce_site_database_password	YYYYYY (the password you set above)
\$i2ce_site_module_config	/var/lib/iHRIS/sites/manage/iHRIS-Manage-Site.xml

Save and quit.

Finally, we make iHRIS Manage site we just created available via the webserver:

```
ln -s /var/lib/iHRIS/sites/manage/pages /var/www/html/manage
cp /var/www/html/manage/htaccess.TEMPLATE /var/www/html/manage/.htaccess
vim /var/www/html/manage/.htaccess
```

We need to look for the line RewriteBase and change it to the web directory we want to use we are using, */manage*. You may now save and quit. You will see we are using the apache rewrite module. To enable the module:

```
a2enmod rewrite
```

Now we need to make sure we can use the *.htaccess* file.

```
vim /etc/httpd/conf/httpd.conf
```

Change:

```
<Directory /var/www/html/>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride None
    Order allow,deny
    allow from all
</Directory>
```

to:

```
<Directory /var/www/html>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride All
    Order allow,deny
    allow from all
</Directory>
```

Save and quit.

Finishing up

Let us restart the Apache webserver using:

```
/etc/init.d/httpd restart
```

Now we are ready to begin the site installation. Simply browse to:

`http://localhost/manage`

and wait for the site to initialize itself. Congratulations! You may log in as the *administrator* with the default password *administator*.

Files

Here are samples of the files we edited above:

- `/etc/httpd/sites-available/default`
- `/var/lib/iHRIS/sites/manage/iHRIS-Manage-Site.xml`
- `/var/www/manage/.htaccess`
- `/var/www/manage/config.values.php`

References

- [1] <http://docs.fedoraproject.org/>
- [2] <http://www.redhat.com/docs/>
- [3] http://en.wikipedia.org/wiki/LAMP_%28software_bundle%29
- [4] <http://www.ispirer.com/wiki/sqlways/troubleshooting-guide/mysql/import/binary-logging>

Linux (Ubuntu) Installation - 4.0.4

This page contains installation instructions on installing iHRIS version 4.0.4 manually.

Warning: See Installing iHRIS on Ubuntu 10.4 (Lucid) after completing these instructions to get iHRIS working on the latest release of Ubuntu.

Need help? Try our Project Communication

Getting Ready

Here are instructions for installing the iHRIS Suite on an Linux (Ubuntu) system. If you need help installing Ubuntu you may want to take a look at these directions for installing a Server ^[1] or a Desktop ^[2] system.

Note: Unless specifically mentioned, all the commands below are run using a terminal. You can start this in Ubuntu by going to Applications -> Accessories -> Terminal. Any time a command begins with **sudo** it will prompt for your password because this will be run with administrative privileges. When you run sudo multiple times, only the first time will ask for your password.

Note: Some installation commands will prompt for inputs in the terminal window, usually with a blue background. The mouse doesn't work to click on options here. You can use Tab to move between options and the space bar to check or uncheck selections.

Note: Some commands will launch the **gedit** file editor. Look at the documentation ^[3] if you need additional help.

We begin by install a Lamp ^[3] server (You can find more help here ^[4]):

```
sudo tasksel install lamp-server
```

If you have never used mysql on your system, you will be asked to set the 'root' password for mysql. We will refer to this password as XXXXX below.

Important: Make sure your email system is correctly configured. Under a default Ubuntu installation, you can do this with one of two commands:

```
sudo apt-get install postfix
sudo dpkg-reconfigure postfix
```

Follow the on-screen instructions to set up email on your system. For additional help with installing Postfix, look at these instructions ^[5]. On Debian systems, the same commands can be used, but `exim4` is the default MTA instead of `postfix`.

If you are using another Linux distribution, make sure your system can send email properly before continuing.

Configuring MYSQL

Make sure you have in `/etc/mysql/my.cnf` the following values set:

```
sudo gedit /etc/mysql/my.cnf
```

```
query_cache_limit      = 4M
query_cache_size       = 64M
```

It appears that they were reduced with Karmic

Configuring PHP

Next, you'll need to increase the memory limit for PHP. You can do this by editing the `/etc/php5/apache2/php.ini`.

```
sudo gedit /etc/php5/apache2/php.ini
```

Change the following line:

```
memory_limit = 32M
```

to:

```
memory_limit = 128M
```

Installing Pear and PECL Packages

We need to install a few Pear and PECL packages for PHP. For the Pear packages you can do:

```
sudo apt-get install php-pear php-apc php-mdb2 php-mdb2-driver-mysql
sudo pear install text_password console_getopt
```

During certain activities like installation and upgrades you may need more memory than APC uses by default. The `php-apc` package should have installed a file in `/etc/php5/conf.d/apc.ini`. Edit this file:

```
sudo gedit /etc/php5/conf.d/apc.ini
```


Then add the following lines:

```
apc.shm_size=100
apc.slam_defense = Off
```

See slam defense ^[6] and this ^[7].

You'll need to restart Apache after making this change.

```
sudo /etc/init.d/apache2 restart
```

There are two optional packages you may wish to install:

```
sudo apt-get install php5-gd php5-tidy
```

which are used to for inserting images into PDF output of reports and for exporting XML files in a nicely formatted manner

FileInfo

Note: If you're running Ubuntu 10.4 (Lucid Lynx) then you do not need to install FileInfo.

The pecl package *FileInfo* is used to verify the validity of file types used for uploading (e.g. for uploaded images or documents)

```
sudo apt-get install libmagic-dev php5-dev
sudo pecl install FileInfo
```

If this doesn't work, you can also try:

```
sudo pear install pecl/Fileinfo
echo extension=fileinfo.so | sudo tee
/etc/php5/apache2/conf.d/fileinfo.ini
```

Configuring Apache Web Server

You will see later we are using the apache rewrite module. To enable the module:

```
sudo a2enmod rewrite
```

Now we need to make sure we can use the *.htaccess* file.

```
sudo gedit /etc/apache2/sites-available/default
```

Change:

```
<Directory /var/www/>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride None
    Order allow,deny
    allow from all
</Directory>
```

to:

```
<Directory /var/www/>
    Options Indexes FollowSymLinks MultiViews
    AllowOverride All
    Order allow,deny
    allow from all
</Directory>
```

Save and quit.

Let us restart the Apache webserver using:

```
sudo /etc/init.d/apache2 restart
```

Downloading the Software

To download the software you enter these commands:

```
sudo mkdir -p /var/lib/iHRIS/lib/4.0.4
cd /var/lib/iHRIS/lib
sudo ln -s 4.0.4 4.0
cd /var/lib/iHRIS/lib/4.0.4
sudo wget
http://launchpad.net/ihris-manage/4.0/4.0.4/+download/ihris-manage-full-4_0_4.tar.bz2
sudo tar -xjf ihris-manage-full-4_0_4.tar.bz2
```

Database Setup

To create the needed database you can do:

```
mysql -u root -p
```

Enter the password you set above (XXXXXX) for MySQL. You will now be able to send commands to MySQL and the prompt should always begin with 'mysql> '. Type these commands:

```
CREATE DATABASE ihris_manage;
GRANT ALL PRIVILEGES ON ihris_manage.* TO ihris_manage@localhost
identified by 'PASS';
SET GLOBAL log_bin_trust_function_creators = 1;
exit
```

Substitute PASS with something appropriate. We'll refer to this password as YYYYYY.

If you want to install iHRIS Qualify (or iHRIS Plan) just replace everywhere you see manage with qualify (or plan).

In version 4.0.1 of iHRIS we create mysql functions. If you are having trouble creating routines see this ^[4].

Alternatively, you may choose to install phpmyadmin to administer database through the web

```
sudo apt-get install phpmyadmin
```

A screen will come up asking if you want to install for apache2 or lighttpd. Highlight apache2 and press the spacebar to select it. It will ask for the root password (XXXXXX) and you may also opt to create a phpmyadmin user to extra

features. Select a password for this user as well.

Now browse to:

<http://localhost/phpmyadmin>

login with the user 'root' and password XXXXX that you set above. Once logged in you will create a database and user called iHRIS_manage. To do this, click on the 'Privileges' link and select 'Add a new User'. Then fill out the form as follows:

Creating iHRIS_Manage Database and User

For security, make sure the password you choose is different than the root password for MySQL. Let us refer to this password as YYYYYY.

Creating a Site Configuration File

We are going to start by modifying the *BLANK* site for iHRIS Manage. If you wish to install iHRIS Qualify or iHRIS Plan, you can follow the same instructions below but change *manage* to *qualify* or *plan*. To copy the *BLANK* site:

```
sudo mkdir -p /var/lib/iHRIS/sites
sudo cp -R /var/lib/iHRIS/lib/4.0/ihris-manage/sites/blank
/var/lib/iHRIS/sites/manage
```

We now need to edit the site configuration file:

```
sudo gedit /var/lib/iHRIS/sites/manage/iHRIS-Manage-BLANK.xml
```

by changing:

```
<path name='modules'>
  <value>./modules</value>
  <!-- If this site module is not installed under the iHRIS Manage
       file structure, then remember to include a path to the rest of
       the modules here. e.g.
  -->
</path>
```

to:

```
<path name='modules'>
  <value>./modules</value>
  <value>/var/lib/iHRIS/lib/4.0</value>
</path>
```

Set Email Address

You may optionally choose to change the email address feedback is sent to by changing:

```
<configuration name='email' path='to' values='single'>
  <displayName>Email Address</displayName>
  <value>BLANK</value>
</configuration>
```

to:

```
<configuration name='email' path='to' values='single'>
  <displayName>Email Address</displayName>
  <value>my_email@somewhere.com</value>
</configuration>
```

Making the Site Available

We will now edit the configuration to let the site know about the database user and options:

```
sudo gedit /var/lib/iHRIS/sites/manage/pages/config.values.php
```

We now need to uncomment and set the value of a few variables. Commented lines will begin with two slashes (//) that you'll need to remove.

They are:

Variable Name	Value
\$i2ce_site_i2ce_path	/var/lib/iHRIS/lib/4.0/I2CE
\$i2ce_site_dsn	mysql://ihris_manage:YYYYYY@localhost/ihris_manage
\$i2ce_site_module_config	/var/lib/iHRIS/sites/manage/iHRIS-Manage-BLANK.xml

In \$i2ce_site_dsn, YYYYYY is the password you set above.

Save and quit.

Finally, we make iHRIS Manage site we just created available via the webserver:

```
sudo ln -s /var/lib/iHRIS/sites/manage/pages /var/www/manage
```

Pretty URLs

This is an optional step to make URLs cleaner by removing the index.php.

```
sudo cp /var/www/manage/htaccess.TEMPLATE /var/www/manage/.htaccess
sudo gedit /var/www/manage/.htaccess
```

We need to look for the line RewriteBase and change it to the web directory we want to use we are using, */manage*.

Change the line that looks like:

```
RewriteBase /iHRIS/manage-BLANK
```

to:

```
RewriteBase /manage
```

You may now save and quit.

Finishing Up

Now we are ready to begin the site installation. Simply browse to:

`http://localhost/manage`

and wait for the site to initialize itself. Congratulations! You may log in as the *i2ce_admin* with the password you used to connect to the database (YYYYYY that you set above).

Files

Here are samples of the files we edited above. **WARNING THESE ARE OUT OF DATE AND REFER TO AN OLD VERSION OF THE SOFTWARE**

- `/etc/apache2/sites-available/default`
- `/var/lib/iHRIS/sites/manage/iHRIS-Manage-Site.xml`
- `/var/www/manage/.htaccess`
- `/var/www/manage/config.values.php`

References

- [1] <http://www.howtoforge.com/perfect-server-ubuntu8.04-lts>
- [2] <http://www.howtoforge.com/the-perfect-desktop-ubuntu-8.04-lts-hardy-heron>
- [3] <https://help.ubuntu.com/community/gedit>
- [4] <https://help.ubuntu.com/community/ApacheMySQLPHP>
- [5] <https://help.ubuntu.com/community/PostfixBasicSetupHowto>
- [6] <http://pecl.php.net/bugs/bug.php?id=16843>
- [7] <http://t3.dotgnu.info/blog/php/user-cache-timebomb>

Magic Data Storage Mechanisms

You can add database storage mechanisms to I2CE_MagicData. The last one that is added is the "permanent" storage mechanism methods. All others that are added are used to cache the data stored in the permanent storage mechanism.

Database

This magic data storage mechanism is intended to be used as the "permanent" storage mechanism. By default it is stored into the database table 'config'

APC

There is magic data storage mechanism based on the Pear APC module and implemented by the class I2CE_MagicDataStorageAPC. It caches data in the memory segment between requests with a timeout of 5 minutes. Data cached by Apache is not cached on the command line.

To clear the cache manually you can use php-apc web interface.

SysV

There is magic data storage mechanism based on SysV I2CE_MagicDataStorageSysV. It is not available in windows. It creates shared memory segments to cache the data between requests. Its advantage over APC is that the same shared segments can be accessed via the command line. There is no time-out for the data stored.

To clear manually from the command line the shared memory segments

```
ipcs -m | grep www-data | awk '{print "ipcrm -m \"$2\"'} | sudo bash
```

Managing A Site In Launchpad

This tutorial will take you through the steps of managing a site via bazaar on Launchpad based on some customizations that you have already made on your Ubuntu machine for the the version 4.0 of iHRIS Qualify for the Nursing and Midwives Council.

We will assume that, for the purposes of this tutorial, that the existing customizations live under

```
/var/lib/iHRIS/sites/qualify
```

We need to make sure thae bazaar version control software is installed. Then we will setup a user account on launchpad and connect it to the account on your machine. We will also create a team to manage the customizations.

Setting up Bazaar

First we need to make sure the Bazaar^[3] (bZR) version control software is installed:

```
sudo apt-get install bZR bzrtools
```

You may wish to read the five minute tutorial^[4] at this point. You should also let bZR know how you are:

```
bZR whoami "Your Name <your@email.add.ress>"
```

Creating a Launchpad Account

First you should create an account on Launchpad^[1]. If you not have already done so, you can find some help here^[1].

We will refer to this account as **LAUNCHPAD_USER**.

Creating a Launchpad Team

Presumably, you will want to have several people be able to update the customizations you are storing on Launchpad. This is done by creating a team. To do so:

- Browse to the launchpad homepage^[1]
- Select "Register a Team"
 - For the *Name* I suggest something like *ihris-COUNTRY_NAME* or *ihris-ORGANIZATION_NAME*
 - For the *Display Name* you can use something like *iHRIS in COUNTRY_NAME*
 - For the Subscription policy, I suggest making it "Open"

Once the team is created, you can choose view its home page at

```
https://www.launchpad.net/~ihris-COUNTRY_NAME
```

To change some of it's details, browse to the team home page where you can:

- Add members to the team by the "Add Member" Link
- Change the owner of the team by "Change Details," scroll to the bottom, "Change Owner"
- Change the logo/icon for the team by "Change Details," scroll to the bottom, "Change Branding"

Adding Intrahealth Informatics

You may also wish to give the *intrahealth-informatics* team as a member of to the team you just created. This will enable the people in this team to edit the customizations

Linking your Launchpad Account to your Ubuntu Machine

Since we will want to contribute to the code, we need to let Launchpad know who are. To do this, we create a ssh public key ^[2] on your Ubuntu machine to add to Launchpad:

```
sudo apt-get install openssh-client
ssh-keygen -t rsa
```

When prompted, press Enter to accept the default file name for your key. Next, enter then confirm a password to protect your SSH key.

Your key pair is now stored in `~/.ssh/id_rsa.pub` (public key) and `~/.ssh/id_rsa` (private key). Now you need to upload the public portion of your SSH key to Launchpad. To do this, open in your web browser:

```
https://www.launchpad.net/~LAUNCHPAD_USER
```

You will see a place that says *SSH Keys* with an exclamation point (!) in a yellow circle next to it. Click on the (!) scroll down until you see *Add an SSH Key* and a text box. We will paste our public key into this text box. To do so type in a terminal:

```
gedit ~/.ssh/id_rsa.pub
```

you can now copy the contents of gedit (the public key) into the text box in the web browser. Now simply click on the button *Import Public Key*

Note: For every computer/account that you use you will need to repeat these steps to create and import a public key.

Creating A Project

The team is used to manage who can access the code. Now we need to create a place, or project, to handle these and any future customizations for iHRIS Qualify for the Nursing Council. To do so:

- Browse to the Launchpad home page <https://www.launchpad.net/>
- Select "Register a Project" with the details:
 - Step 1
 - Name is *ihris+nmc+COUNTRY_NAME*
 - Title is *iHRIS Qualify for NMC in COUNTRY_NAME*
 - Summary is *Implementation of iHRIS Qualify for the Nursing and Midwifery Council of COUNTRY_NAME*
 - Step 2
 - Click "No, this is a new Project"
 - For the License, check "GNU GPL V3"
 - Click "Complete Registration"

Your project now has its home page at

```
https://edge.launchpad.net/ihris+nmc+COUNTRY_NAME
```

From the project home page you can:

- Change the Maintainer by clicking the exclamation point yellow circle next to "Maintainer". You should set it to be the team *ihris-**COUNTRY_NAME*** that you created above
- Change the branding (icon)
- Edit the project details and set it to be "Part of:" the 'ihris-suite' project

Creating a Branch

A "branch" is where the actual code is hosted in the project. You may want to have several branches to keep track of the different versions of the iHRIS Qualify software as it gets updated. The primary branch is the "trunk" which will be working with here. We will need to create this on Launchpad by clicking on the "Code" tab under the projects's home page. This should take you to:

```
https://code.launchpad.net/ihris+nmc+COUNTRY_NAME
```

We will create a branch to handle the customizations of version 4.0 of iHRIS Qualify for the Nursing and Midwives council by:

- Select "Register A Branch" with the following details:
 - For the owner, make sure it is the team we created above *ihris-**COUNTRY_NAME***
 - For the "Name" use "NMC-4.0" is short for Nursing and Midwifery Council version 4.0
 - Branch Type is "Hosted"
 - Status is "Development"

The branch's home page is now:

```
https://code.edge.launchpad.net/~ihris-COUNTRY_NAME/ihris+nmc+COUNTRY_NAME/NMC-4.0
```

We wish to set this branch to be the main place to commit code for our project. To do so:

- Go to the projects home page
- select the "Code" tab and
- click "Set the Development Focus" and set:
 - The branch to be: *~ihris-**COUNTRY_NAME**/ihris+nmc+**COUNTRY_NAME**/NMC-4.0*

Adding your Customizations

To actually put our code customizations on Launchpad we do:

```
cd /var/lib/iHRIS/sites/qualify
bzzr init
bzzr push lp:ihris+nmc+COUNTRY_NAME --use-existing-dir
bzzr bind lp:ihris+nmc+COUNTRY_NAME
```

which tells our computer that the customizations under */var/lib/iHRIS/site/qualify* should be the same as the code on launchpad. To actually put the code on Launchpad, we will need to add in the files for our customization and make our first "commit:"

```
cd /var/lib/iHRIS/sites/qualify
bzzr add
bzzr commit -m "Initial Upload"
```

Here the *-m "Initial Upload"* is a short message describing that this is first *commit* of the branch.

Making more Customizations

Suppose that we changed one of the .html template files we can commit them to Launchpad by:

```
cd /var/lib/iHRIS/sites/qualify
bzz commit -m "Changed the main page header"
```

Updating the Customizations

If you are working on multiple machines or with multiple people, you may want to get the committed changes to the customizations onto your computer. You can do this by:

```
cd /var/lib/iHRIS/sites/qualify
```

```
bzz update
```

References

[1] <https://help.launchpad.net/YourAccount/NewAccount>

Managing Decentralized iHRIS Manage with Launchpad

This decentralized implementation of iHRIS is our answer on how to manage data in any of these settings:

- high Internet connectivity
- low Internet connectivity
- no Internet connectivity

It is designed to work easily, with minimal configuration, and maximal functionality.

Suppose that we are interested in setting up a decentralized implementation of iHRIS Manage in the country Taifeki. Let us assume we are going to work on a three tier implementation: national, region and district. We will show how to take advantage of [1] to maintain the various customizations needed for each of the sites.

Data Management

We first need to decided on a data management policy that is compatible with our data structure.

Decentralized Data Structure

Our decentralized data module is "vertical" in that it allows data to flow from the district to the region to the national level. It also allows that the data flow in the reverse direction. We do not allow data to flow "horizontally." In other words, we do not have a mechanism for the data on a person in district A to be given to district B.

We always that there is only one site that can write each data component. A data block consists of all the data for one form in one site. Examples of data components are:

- all the jobs at the national level
 - all of the facilities in a specific region
 - all of the positions in a specific district
-

Data Management Policy

These questions need to be answered:

- Who can see which data?
 - (Examples) Should a district be able to see the facilities in another district?
- Who can edit which data?
 - (Examples) Who maintains the list of facilities? The jobs? The positions? Is it at the national, regional or district level?

These questions need to be answered for all the forms within iHRIS Manage and all sites (national, regional and district-level).

Example

If you decide that each facility is maintained at the regional level. This means the following:

- At the national level, the facility data needs to be componentized by regions and the facility and facility_contact forms will use the (read-only) multi-flat storage mechanism to aggregate the cached data tables from the regional level.
- At the regional level, the facility data is not componentized. Since the facility and facility contact information is not subject to frequent changes and you do not need to keep track of the history, you would choose to use the (read-write) magic data form storage mechanism in your data policy.
- At the district level, the facility and facility contact data is exported from the region within two modules: *ihris-manage-taifeki-northern-region-facility* and *ihris-manage-taifeki-northern-region-facility_contact*. You would choose to use (read-only) magic data form storage mechanism in your data policy.

Migrating Forms from Entry to MagicData

This tutorial will explain how to migrate forms from previous versions that were stored in the entry table and move them to magic data storage as well as update any mapped fields that referenced the values. For a more complicated example look at the Geography module in iHRIS Common or the Education sub-module in the Person module in iHRIS Common.

Step 1: Change a Form's Storage Mechanism

In iHRIS 4.0, storage mechanisms were added to forms. The default storage method is to use the entry tables as in previous versions of iHRIS. For distributed systems you may want to have some forms be stored in magic data so they can be managed centrally more easily and can be updated by module updates to keep consistent IDs across all the distributed systems.

First we need to change the storage for the form to magic data in the module configuration file. For earlier versions this section needs to be added. If you're migrating a form that already has storage defined, you just need to change the storage to be magic data. These changes will be under the "forms" section of your configuration at the path: `/modules/forms/forms/<form_name>`. This just includes the new storage section. The class and display sections should already be there for this form. You'll also need to update the version for this module and include that same version number in the storage section.

```
<configurationGroup name="forms" path="/modules/forms">
  <configurationGroup name="forms">
    <configurationGroup name="form_XXXXX">
      <configuration name="storage" values="single">
```

```

    <displayName>Storage Mechanism</displayName>
    <description>The storage mechanism for this form.</description>
    <version>X.X.X</version>
    <value>magicdata</value>
  </configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>

```

Step 2: Save Data From The Previous Storage Mechanism

Now we need to make sure we save any old data before the storage mechanism is changed for the form. For example if the field `person.nationality` is mapped to the country form and the country form is moving from entry storage to magicdata then you'll need to save the old value so you can change it to the correct new value once the country form has been migrated. This is all done using the `pre_upgrade()` method for the module class for the given module. A helper method is in `I2CE_FormStorage` called `storeMigrateData()` to save this data for later reference.

You'll need to know the version that is being upgraded to so you only save the data at the correct time for this module. In the example code "X.X.X" is used. You'll also need to determine a migrate path to use for everything you'll be upgrading. This is so that everything can be referred to later in one place if you need to access it. It can be any text or even the version number you're upgraded to. It should be under the magic data path of: `/I2CE/formsData/migrate_date/XXXXXX`.

```

public function pre_upgrade( $old_vers, $new_vers, $new_storage ) {
    if ( I2CE_Validate::checkVersion( $old_vers, "<", "X.X.X" ) ) {
        $migrate_path = "/I2CE/formsData/migrate_data/MyUpgrade";
        I2CE_FormStorage::storeMigrateData( array( "FORM" => array(
"FIELD1", "FIELD2" ) ), $migrate_path );
    }
    return parent::pre_upgrade( $old_vers, $new_vers, $new_storage );
}

```

Step 3: Move Forms To The New Storage Mechanism and Migrate Any Mapped Values

Now the forms need to be migrated to the new storage mechanism and any mapped fields that were stored in the previous step need to be migrated to its new ID. This can all be done in the `upgrade()` method for the module class. There are two helper methods in `I2CE_FormStorage` to assist with this: `migrateForm()` and `migrateField()`.

You'll use the same migrate path that was used in the `pre_upgrade()` method. You'll also need to create a user object to save the changes. Use the ID of an administrative user. You can repeat the function for every form that needs to be migrated.

```

public function upgrade( $old_vers, $new_vers ) {
    if ( I2CE_Validate::checkVersion( $old_vers, "<", "X.X.X" ) ) {
        $user = new I2CE_User( $user_id, false, false, false );
        $migrate_path = "/I2CE/formsData/migrate_data/MyUpgrade";

        if ( !I2CE_FormStorage::migrateForm( "FORM", "entry", $user,
$migrate_path ) ) {
            return false;
        }
    }
}

```

```

    }

    if ( !I2CE_FormStorage::migrateField( "FORM", array( "FIELD1" =>
"FIELD1_MAPPED_FORM", "FIELD2" => "FIELD2_MAPPED_FORM" ),
        $migrate_path, $user ) ) {
        return false;
    }
}
return true;
}

```

Step 4: Check The Migration

When you next access the site it will run the upgrade methods for any modules you have upgraded. When it has finished you will see the old data under magic data at the path: `/I2CE/formsData/migrate_data/MyUpgrade` (or whatever path you used). You'll also find the forms that are now stored in magic data under `/I2CE/formsData/forms/`. You'll want to check to make sure any fields that were migrated successfully use the new ID for each mapped value.

Module Structure

What is a Module?

The iHRIS Suite is based on the Intrahealth Informatics Core Engine (I2CE) which use a module structure to encapsulate and maintain "code" into manageable pieces organized by the functionality provided. By "code" we mean the entire collection of php, html, javascript, xml, image files, css, flash, etc that provide the functionality of a web-based application.

A module may require other modules that it needs to run.

A module is versioned to keep track of the changes to functionality and API that a module has.

Why Modules?

- The main reason to use a module system is to increase code manageability. The various components of the iHRIS Suite (Qualify, Manage, and Plan) are used in a variety of settings each requiring their own customizations.
 - Each of the iHRIS Suite's components (Qualify, Manage, Plan) share some common functionality and the module system ensures proper code re-use.
 - The module system lets many customizations to be encapsulated without having to change the underlying code base. This allow a local developer to make their changes without worrying about having to redo those changes anytime the core system is updated.
 - As modules are organized by the functionality that they provide to the system, a developer can quickly find the relevant code to change by looking at the relevant modules.
 - Customizations to the software encapsulated in a module can be easily shared among developers.
-

The I2CE Module

This is the "top"-most module. Every module implicitly has this as a requirement. It is the core module which provides the minimal functionality including magic data, file search, the templating system, and the module factory. It has no requirements.

I2CE provides many optional sub-modules. For example:

- Admin -- Provides a module management system.
- Background Process -- Provides a platform independent means to launch and monitor background processes
- Custom Reports -- Provides the Custom Reporting functionality
- Flash Charts -- provides a php interface to the maani flash charting system
- Forms -- provides the basic form and field structure used by our software
- MooTools -- provides a php interface to the MooTools javascript library
- Tasks and Roles -- provides a task based management system for user roles

The Site Module

The "bottom"-most module is the **Site Module**. This module is the one that is loaded by the **index.php** file and tells the system which modules we are using by your system. It is the appropriate place to perform basic customizations to the system, for example changing the image displayed on the login page or to display your organization's name. See for example Tutorial: Customizing iHRIS Manage

Module Configuration File

A module exists by defining its configuration files. There is one top-level node `<I2CEConfiguration>` under which there are two possible nodes:

- The `<metadata>` tag is required.
- The `<configurationGroup>` tag is optional.

The `<I2CEConfiguration>` tag has a required attribute **name** whose values should be a unique short name to describe this module such as *I2CE*, *ihris-manage* or *mercury_javascript_popup*. The DTD which describes the format of the configuration file is located in *I2CE/lib/I2CE_Configuration.DTD*. As an example:

```
<?xml version="1.0"?>
<!DOCTYPE I2CEConfiguration SYSTEM "I2CE_Configuration.dtd">
<I2CEConfiguration name='mercury_javascript_popup'>
  <metadata>
    Some stuff defined below
  </metadata>
  <configurationGroup name='mercury_javascript_popup'>
    Some stuff defined below
  </configurationGroup>
</I2CEConfiguration>
```

metadata

The DTD has for the <metadata> tag allows the following nodes:

```
<!ELEMENT metadata (displayName,className?,category?,description?,creator?,email?,link?,
    version,(enable|requirement|conflict|path)*,priority?)>
```

For the most part, the orders of these tags matter due to limitations in the structure of DTDs. The exceptions is that the <enabled>, <requirement>, <conflict> and <path> tags can be listed in any order amongst themselves.

displayName

This tag is required it is human readable name of this module which is displayed, for example, in the *Configure Modules* page

Example: <displayName>Popup Box</displayName>

className

The tag is optional and it associates a class for the module. See #The Module Class for specific information about the module's class

Example: <className>I2CE_Module_JavascriptPopup</className>

category

This is an optional tag that is used to group similar modules together by category in the *Configure Modules* page.

Example: <category>Javascript Library</category>

description

This is an optional tag which gives a description of this module which is displayed in the *Configure Modules* page.

Example: <description>Provides a javascript popup box</description>

creator

This is an optional tag which shows the creator in the *Configure Modules* page.

Example: <creator>Freddy Mercury</creator>

link

This is an optional tag which gives a URL for the module in the *Configure Modules* page.

Example: <link>http://en.wikipedia.org/wiki/Freddie_Mercury</link>

version

This is a required tag which you can use to version your module.

Example: <version>1.0.0</version>

requirement

This is an optional tag, of which you can have as many as you want. Each tag needs to have the attribute **name** whose the value is the name of a module required by this module. This tag can have up to four possible sub-tags:

- atLeast

- `atMost`
- `lessThan`
- `greaterThan`

each of which need to have the attribute **version** with a value of a version of the module. As an example:

```
<requirement name='I2CE'>
  <atLeast version='3.1' />
  <lessThan version='3.2' />
</requirement>
```

says that our module requires that I2CE have version at least 3.1 and less than version 3.2.

In order for a module to be loaded, it must successfully meet all of its requirements.

conflict

This is an optional tag of which you can have as many as you wish. This is opposite of the `<requirement>` tag and lists all the modules that this module conflicts with. As an example:

```
<conflict name='plant_javascript_popup'>
</conflict>
<conflict name='ringo_javascript_popup'>
  <lessThan version=3.2 />
</conflict>
```

Says that our module conflicts with all versions of Robert Plant ^[1]'s javascript popup, but only conflicts with Starr ^[2]'s popup for versions less than 3.2.

A module will fail to load if it conflicts with any other modules that are already loaded.

enable

This tag is optional of which you can have as many as you wish. This tag requires the attribute **name** with the value the short name of a module. This tag is weaker than the `<requirement>` tag in that it will try to enable the named module, but it will not cause the cause this module to fail to load if it can't. It also differs from the `<requirement>` and `<conflict>` tags as there is no version information (under the subtags `atLeast`, `atMost`, `lessThan`, `greaterThan`). As an example:

```
<enable name='alex_patterson_javascript_paginator' />
```

Says that if the Alex Patterson ^[3]'s javascript paginator module is able to loaded, then load it. Otherwise don't worry about it.

path

This is an optional tag of which there can be as many as you wish. Each `<path>` tag requires the attribute **name** and can have as many sub-tags `<value>` as you wish. The `<path>` tag enables a module to specify directories to be added to the file search utility group by category. The categories are specified by the name attribute and some commonly used names are:

- `templates` These are the directories to search for html template files
 - `images` These are the directories to search for image files
 - `css` These are the directories to search for CSS files
 - `scripts` These are the directories to search for javascript files
-

- **classes** These are the directories to search for files containing php classes. The convention here is that MyClass is located in the file MyClass.php
- **modules** These are the directories to look for (sub-)modules of the current module.

For more information about the paths allowed, see [Technical Overview: File Search Paths](#)

priority

This tag is optional. If not set, the priority of a module is 50.

Example: `<priority>50</priority>`

Here are some standard priorities:

- I2CE 0
- sub-modules of I2CE 50
- ihris-common 100
- sub-modules of ihris-common 150
- ihris-manage, ihris-qualify, ihris-plan 200
- sub-modules ihris-manage, ihris-qualify, ihris-plan 250
- a site module 400

Configuration (Magic) Data

The `<configurationGroup>` node is optional. If it is present it has to have the attribute **name** which has the same value as the attribute **name** in the containing `<I2CEConfiguration>` tag.

All magic data is relative to the path defined by the this configurationGroup. There are three options:

- The attribute path is not present. In the following example, the magic data is stored under */modules/mercury_javascript_path*.

Example:

```
<configurationGroup name='mercury_javascript_popup'>
    SOME STUFF GOES HERE
</configurationGroup>
```

- The attribute path is present. In the following example, the magic data is stored under */some/other/place*.

Example:

```
<configurationGroup name='mercury_javascript_popup' path='/some/other/place'>
    SOME STUFF GOES HERE
</configurationGroup>
```

- The module is 'I2CE'. The magic data is stored relative to */I2CE*

This `<configurationGroup>` node does double duty. It provides the configuration data that is stored into magic data. It also provides, via the *Admin* module, a treed menu system to edit the magic data set by this system. This allows for dynamic customizations of your site.

See [Technical Overview: Configuration \(Magic\) Data](#) for more detailed information.

The Module Class

The module class is intended to provide php functionality to the class. The module class is named by the optional `<className>` tag in the `<metadata>` section of the module configuration file. It needs to exist in the *classes* paths of the module and it needs to subclass **I2CE_Module** which is found in *i2ce/lib/I2CE_Module.php*.

There are three basic types of functionality it provides. The first are methods to be called when a method is enabled, upgraded or disabled. The second is to provide hooks into the system. The third is to provide fuzzy methods.

Enabling/Disabling a Module

There are several methods used to initialize, enable, disable and upgrade a module which are called by the module factory. All of these methods expect that the module returns true to indicate success.

- When a module is enabled the method **action_enable()** is called.
- Before a module is enabled for the first time **action_initialize()** is called.

This is the appropriate place to do things like ensure that any tables in the database the module expects to have are created.

For example, the module 'I2CE' has its own class 'I2CE_Module_Core' which does the following:

- Checks that the user database table is there, if not it creates it.
- Makes sure that there is an administrative user for the system. If not, it creates it.
- Checks that the config table for magic data is present, if not it creates it.
- When a module is disabled the method **action_disabled()** is called.
- When the version in the configuration file changes **upgrade(\$old_vers,\$new_vers)** is called.

Hooked Methods

There are certain specific places in the code that may naturally lend themselves to be hooked in for greater functionality. A module may hook into the system at various points. To add a hook at some point you add either the line:

```
I2CE_ModuleFactory::callHooks('some_hook_name',$some_argument);
```

or the line:

```
I2CE_ModuleFactory::callHooks('some_hook_name');
```

I2CE_ModuleFactory will take care of calling all modules that register hooks for that point, with either the one or no arguments as appropriate. All hooked methods are called (in order of priority). The result of each hooked method is appended to an array which is then returned back from the callHooks() method.

A module registers the methods to call via its getHooks() method which returns an array with keys the hook name and value the method name in the module's class.

Fuzzy Methods

A fuzzy method is a method that a module provides to some other PHP class extended I2CE_Fuzzy via the `__call()` method. There are three reasons to use fuzzy methods:

- PHP cannot do multiple-inheritance for classes which makes it difficult to combine functionality of two classes into one. One can always do an interface, but then one has to rewrite a lot of code.
- The second is to provide modular functionality that can be turned on and off.
- The functionality of a class may need to change depending if the class is called from a webserver or from the command line.

The later reason is why they are *fuzzy*: the methods may or not be present in the class depending on which modules you have turned on. The fuzzy methods that a module provides are defined by arrays returned from the methods `getMethods()` and `getCLIMethods()`. The results of these methods are processed every time the module is enabled or a change is detected to the module's class source file. When a module is disabled, the fuzzy methods it provides are removed from the class.

For example the module *FormWorm*'s `getMethod()` returns:

```
array('I2CE_Page->addFormWorm'=>'addFormWorm',
      'I2CE_Template->addFormWorm'=>'addFormWorm'
    )
```

when the module *FormWorm* is turned on, this provides the methods `addFormWorm()` to both the class `I2CE_Page` and `I2CE_Template` as well as any child classes of these. The general form for this array is:

```
CLASS->CLASSMETHOD => MODULEMETHOD
```

where `CLASSMETHOD` is a fuzzy method provided to the class `CLASS`. This fuzzy method is implemented by calling `MODULEMETHOD` on the instance of the module's class. The first argument to `MODULEMETHOD` will be the class that the fuzzy method was called and the remaining arguments are the arguments that `CLASSMETHOD` was called with.

For example, if `$page` is an instance of `I2CE_Page` then the call:

```
$page->addFormWorm($arg1, $arg2)
```

results that the module factory will takes its instance, `$module`, of the `I2CE_Module_FormWorm` and call:

```
$module->addFormWorm($page, $arg1, $arg2);
```

Fuzzy method will only have access to the public methods and variables of the calling class (`I2CE_Page` in this example). Incidentally, this encourages the development of a good API for the calling class.

Like the other components of a module (such as template files), fuzzy methods are prioritized and only the one of the lowest priority is called. You can see the documentation for the classes `I2CE_Module` and `I2CE_ModuleFactory` for more information.

References

- [1] http://en.wikipedia.org/wiki/Robert_Plant
- [2] http://en.wikipedia.org/wiki/Ringo_starrrRingo
- [3] http://en.wikipedia.org/wiki/Alex_Patterson

Pages and Templates

Pages

A page is the basic piece that handles each URL request. It is the basic functional unit of the system in a URL request is processed and displayed. The logic of a page is handled by a class which subclasses `I2CE_Page` via the `action()` method. Pages can be established to live directly under the base URL of the site, or under a module and all requests are delegated to the appropriate page class by the wrangler. The GET and POST variables are (by-default) pre-processed by the page class. All pages, again by default, make use of a `[#Template|templating]` which acts as a wrapper for the Document Object Model ^[1] (DOM). There is also a built in task and role based permission system.

There are also, by abuse of language, pages for the PHP CLI. We will only describe the pages which URL Requests in this article.

Page Classes

All requests are eventually delegated by the wrangler to a sub-class of `I2CE_Page`. This class handles all the business logic of the page. It should determine the appropriate action to take based on whether it is a POST or GET request. Multiple pages can be handled by one page class. On construction, the page is passed an array of arguments that is defined by page style and a *request remainder*. One can optionally over-ride what gets sent as the array of POST and GET variables.

Page Logic

Here is an overview of the underlying default page logic:

- The POST and GOT variables are (usually) pre-processed.
- The array of arguments is produced by the wrangler as it process the page's style.
- The root or main template files, if any are loaded. This is specified as the 'templates' argument.
- Optionally included in this page's arguments are task and role restrictions for the page:
 - The roles allowed to view the page are stored under the key 'access'
 - The tasks that a user/role must have in order to view the page are stored under the key 'tasks'
- Once the user has passed the access restrictions for the page the following occurs:
 - The 'pre_page_action' hook is called
 - Any default html files are loaded for a page into the template that was created for the page
The default html file(s) are stored under the argument 'defaultHTMLFile'
 - The `action()` method is called
 - If the `action()` method did not return false then the 'post_page_action' hook is called
 - If the `action()` method returns false then a user error message is generated.
 - If the page requested a redirect, the redirect is performed and execution halts.
 - If the page did not request a redirect then:
 - Any echo, print_r, etc. statements are appended to the bottom of the template's DOM. These echo's, etc. should only be present for debugging purposes and should not be present in production code.
 - Unless the page was requested to supress its output, the template displays it's (HTML) output.
This is the only echo statement that should be used on a production site to display html.

The action() Method

A sub-class of `I2CE_Page` should usually implement all of its logic by over-riding the `action()` method.

Variable Conversion

The POST and GET variables, unless specifically requested not to, are pre-processed. In addition to the POST and GET variables, REQUEST variables are created which are (usually) any variables that exist as either POST or GET variables. There are a few things that (usually) occur:

- If the GET variable 'req_query' exists, it parses the value and stores it as REQUEST variables
- Any variables names with ':'s are processed to defined multi-dimension arrays. For example:

```
$_GET = array(
    'some:thing'] => '5'
    'some:otherthing' => '6'
)
```

becomes:

```
$_GET = array(
    'some'=>array(
        'thing'=>'5'
        'otherthing'=>'6'
    )
)
```

- If a variable is named 'i2ce_json' is is `json_decode()`d and merged back in the variables.

Wrangler

The wrangler is the main software component which delegates URL Request first to a pair of a *page name* and module and then to the appropriate page class. Let us suppose for this section that our site lives at the following base URL:

```
http://my.site.org/manage
```

Converting a URL to a Page

Pages can live directly under the base URL, or under a module. The wrangler processes the URL via the `I2CE_Wrangler->processPath()` method and returns a *page name*, the module the *page name* is registered with, and a *request remainder*. The module that a *page name* is registered under is often not the module that provides the *page class*. Let us outline the logic for the example:

```
http://my.site.org/manage/some/thing/is/here
```

- If there is nothing after the base URL, then the module is 'I2CE' and the *page name* is 'home'.
There is no *request remainder*.
This is not the case in the above example.
- If 'some' is registered as a *page name* provided by 'I2CE', then the module is 'I2CE' and the *page name* is 'some'.
The *request remainder* is then *thing/is/here*.
some is considered to be a *page name* registered under 'I2CE' if the magic data path `/I2CE/page/some` exists.
- Otherwise the module is 'some' and the following rules apply:

- If there is nothing after the 'some', then the module is 'some' and the *page name* is 'home'
There is no *request remainder*
This is not the case in the above example.
- If 'thing' is a registered as a *page name* for 'some' then, the module is 'some' and the *page name* is 'some.'
The *request remainder* is then *is/here*

Once the path has been processed, we verify that the returned page exists for the given module. If it does not, we try to handle the request by looking for a *default page name* for the module. The *default page name*, if defined exists at the magic data path `/modules/$module/default_page`.

The registered module, the *page name*, and the *request remainder* call all be accessed through I2CE_Pages's API.

Page Styles

Once we have a valid module and page name associated to a URL, we begin processing the page's styles. A page style can consist of three components:

- Another page style which this page style inherits the properties of
- A page class to associate to a page
- A nested array of arguments to pass the the page class constructor. These are merged into any inherited arguments by `I2CE_Util::merge_recursive()`

Templates

Each page instance is assigned a template which is an instance of I2CE_TemplateMeister, and usually an instance of the sub-class I2CE_Template.

The Template is essentially a wrapper class for a DOMDocument object with some useful convenience methods built in. Although the additional functionality provided by I2CE_TemplateMeister and I2CE_Template is initially very limited, it is greatly augmented by making use of fuzzy methods.

The page will display the DOM contained in the template as html after the page has finished processing.

Template Data

The most significant way the I2CE_Template case is augmented is to provide "Template Data." The module *template-data* provides the ability to assign arbitrary data to any node in the DOM. The data exists in categories, such as 'FORM' or 'OPTION' and applies to all sub-nodes of the given node. Each piece of data is assigned a name.

If the node is an given by specifying an *id* (rather than giving an explicit instance of DOMNode) the data will be held in a cache until a node with the given *id* is added to the template.

When looking for a piece of data assigned to a particular node, we start at the given node and walk up the DOM until the named data is found.

For each category of template data, a default bit of data may be assigned which applies for the whole DOM.

There are several modules which make explicit use of the template data structure.

Warning: The template data mechanism assumes that there is only one template in use per request. Be very careful if you are using multiple templates in one page each making use of template data.

Display Data

Display data are template data in the category 'DISPLAY' which can be set with the `setDisplayData()` and `setDisplayDataImmediate()` methods and provide a convenient way of manipulating the template files loaded. The template will look for any DOMElements with the name attribute set and process them according to their tag name and the template data, if any, stored under the name attribute. Here is a list of the commonly used tags that are processed and their rules:

- `div`, `pre`, `span`, `textarea`: the value of the template data is appended to the next content of the element
- `input`: If the template data is an array, it is considered to be an array or `attribute=>value` pairs which are set on the element.

If it is scalar valued, it is processed according to the value of the attribute type as follows:::

- `input`: the attribute value is set to the value of the template data
- `checkbox`: if it evaluates to true, then the attribute 'checked' is set. otherwise it is removed
- `select`: If the value of the template data is an array, `<option>` tags are added with value attribute set to be the array key and the text content set to the corresponding array value
- `a`: if the template data is of scalar type then:
 - if the href value is not set, it is set to be the value of the template data.
 - if the href is set the value template data is appended with either a `?` or a `&` as appropriate to the href attribute
- `img`: If the template data is an array, it is used as a set of `attribute=>value` pairs. If it is scalar, then the `src` attribute is set
- `form`: If the template data is an array, it is used as a set of `attribute=>value` pairs. If it is scalar, then the action attribute is set
- `meta`: If the template data is a scalar the content attribute is set
- If the element has the attribute `ifset` with (case insensitive) value 'true' or 't' or '1' and the template data is not set, then it is removed.
- If the element has the attribute `ifset` with (case insensitive) value other than 'true' or 't' or '1' and the template data is set, then it not removed.

Options

Closely related to the Display Data module is the Options module which saves template data in the category 'OPTIONS.' It process tags of the form:

```
<select id='some_id' />
```

and if it finds an OPTION template data named 'some_id' it will append a `<select>` tag for each of these bits of data.

Form Data

A form can be set on any node and can be referenced as

```
<span type='form' name='form:field' />
```

where you would substitute 'form' and 'field' as appropriate. If the 'form' is not specified it uses the default form, if any, set for the page.

Module Attribute

Any DOM Elements with the attribute type set to be 'module' and 'name' attribute are processed according to certain rules. The value of the name attribute is the name of a module. The following attributes are recognized:

- ifenabled: can be t, true, !t or !true. If true and the module is not enabled, or false and the module is enabled the node is removed.
- if: Tries to call the module's function with the value of the attribute 'if.' If the module returns (something which casts to) false the node is removed. Prepending the value with a ! causes the opposite behavior.
- call: The value is used as the value of a method to call in the module's class.

Suppose we have someMethod(\$node,\$template,\$args) where \$node is the node, \$template is the template object and the argument is the array of arguments \$args = (\$arg1,...,\$argN) where [argM] is turned into \$argM according to the following rules: if [argM] starts with a \$ then it refers to template data and the following rules apply: The string has the form \$abcd. The value of \$argM becomes the template display data with name 'abcd.' The string has the form \${WXYZ}abcd. The value of \$argM becomes the template data with category XYZ and with name 'abcd.' <NODE> becomes the instance of DOMNode (if any) that the permission string was called on <TEMPLATE> becomes the instance of I2CE_Template (if any) that the permission parser was called on <USER> becomes the instance of I2CE_User that is this session if [argM] starts with a single quote ' then it is a string until the next non-escaped ' is found if [argM] starts with a double quote " then it is a string until the next non-escaped " is found. In addition the following substitution rules apply: any substring starting with \$ and consisting of alpha-numeric characters, - or _ is interpreted as template display data to be substituted For example "my name is \$name" becomes "my name is Joe" if the template data named 'name' and with type DISPLAY is "Joe" any substring starting with \${ is read until an enclosing } is found. The string between the \${ and } is the name of DISPLAY template data which is then substituted. To prevent the above, { and \$ may be escaped with a \ any string of alpha-numeric character (and a few permitted punctuation marks) are interpreted as follows: if is is of the form abcd(, then it is interpreted as another method to call on \$module as: \$module->abcd(\$subargs) where sub-args are processed (recursively) according to the same rules and bounded by the next enclosing) otherwise if is is of the form wxyz->abcd(, then it is interpreted as another method to call on \$sub_module as: \$sub_module->abcd(\$subargs) where sub-args are processed (recursively) according to the same rules and bounded by the next enclosing) and \$sub_module is the module class instance associated with wxyz otherwise it is interpreted as a string

Arguments are separated by spaces or commas

Tags

As "special cases" of moudle functions, following attributes are scanned for and processed:

- printf attribute: Appends to the node the results of printf substitution of the string with the specified arguments. It also is locale aware and can make use of plural forms.
printf="this is something %s',\$data'

Scripts

Any scripts tags found in the body of the HTML are moved to the header.

Tasks and Roles

Tasks and roles are used to limit page access and well as the data displayed in the DOM.

References

[1] http://en.wikipedia.org/wiki/Document_Object_Model

Pluggable Authentication

With verison 4.0.3 of the iHRIS Suite we now provide a pluggable authentication module.

The authentication modules are:

- I2CE User Access (Default)
- DHIS User Access
- LDAP User Access
- LDAP Hybrid User Access

Security Note: There is a new administrator account created on the system. The user name is 'i2ce_admin' and the password is the same password used for mysql database connection.

Printed Forms

The printed forms module is used to print "standardized" or "official" forms based upon the data in the system. For example, it might be the registration number for a nurse. The output will be PDF.

This module first appears in version 4.0.5 of the iHRIS Suite.

Source Data

The source data for the printed form will be based on a form relationship.

Page Interaction

Print

At the first phase of this module, the only interaction is to produces the printed forms based on what is stored in magic data. There will be no "document design" component. The standard form will be accessed through a URL with the name of the standardized form and a GET/POST variable containing one or more of the id's for the primary form in the form relationship. For example:

```
http://''<SITE_URL>/PrintedForms/print/registration?ids[]=person|12&ids[]=person|14&ids=[]person|22
```

Hitting this URL would cause the following to happen:

- verify that a standardized form called **registration** exists
 - verify that the user has the appropriate permission to view this standardized form:
 - Check to see if the user has the task 'printed_forms_all_generate'
 - If not, check to see if the task 'printed_forms_generate_**registration**' exists and the user has this task
 - for each of the ids, *person|12*, *person|14*, *person|22* fill out the details of the standardized report by using the corresponding row in the report table if it exists (see below).
-

Menu

One should be able to see which forms can be generated for a given id. Calling

```
http://''<SITE_URL>/PrintedForms/menu?id=person|12
```

will show all the printed forms whose primary form is person. Then for each of these you will have a link to the corresponding print page.

You should also link to the corresponding archive page and show which PDF forms have already been archived for that person sorted by type and date.

Archive

You should also create a form, say *generated_doc* which contains the following fields:

- document: A binary field which will contain the PDF it
- date: the date it was generated by
- type: the print standard form (e.g. registration in the above example)

When calling the archive page as:

```
http://''<SITE_URL>/PrintedForms/archive/registration?ids[]=person|12&ids[]=person|14&ids=[]person|22
```

It will:

- check to see if 'generated_form' is a child form of person. If not execution stops.
- for each of the id's it will create the PDF form (only one on each page/document) and save it as a child *generated_doc* form

Magic Data Details

All standardized forms will be stored under the magic data node:

```
/modules/PrintedForms/forms
```

In the example above the details defining the registration form would be stored under:

```
/modules/PrintedForms/forms/registration
```

The details for a specific form are as follows (all measurements are in mm):

- relationship: Required scalar node. the name of the form relationship that this form is based off of. It needs to be the name of a child node of */modules/CustomReports/relationships*
- displayName: Optional scalar node. The name of the printed letter as displayed to the end user.
- archive: Optional scalar node. If set it should be a named form in the relationship. If it is a valid named form, then it will enable archiving of this printed letter as a child form of the corresponding named form. You should ensure that this form has *generated_doc* as a valid child form.
- layout_details: Optional parent node describing the page layout details for the form. It contains the following child nodes.
 - encoding: Optional scalar node. The encoding used by the renderer(PDF). Defaults to ASCII
 - hyphenation_file: Optional scalar node. File used for hyphenation. Defaults to *hyph_en_US.dic*
 - orientation: Optional scalar node. Defaults to 'P' for portrait. The other option is 'L' for landscape
 - size: Optional scalar node. Defaults to 'A4' to describe the paper to be used. Should be one of the ISO 216 standard paper sizes, e.g. 'A4', or one of the North American paper sizes, e.g. 'letter' or 'legal'
 - rows: Optional scalar node: Defaults to 1. The number of rows of forms to be printed on the page.
 - cols: Optional scalar node: Defaults to 1. The number of columns of forms to be printed on the page.

- **border:** Optional scalar node. Defaults to 0 if rows and columns are 1, otherwise it defaults to 1. The width of the border drawn around the forms.
- **vert_pad:** Optional scalar node. Defaults to 10. The vertical padding used on the page boundary
- **horiz_pad:** Optional scalar node. Defaults to 10. The horizontal padding used on the page boundary
- **vert_pad_border:** Defaults to 0. The vertical padding used between forms
- **horiz_pad_border:** Defaults to 0. The vertical padding used between forms
- **text_properties:** An optional parent node defining the default text properties of the element types of the document. Child node names are the name of the element types (image or text). Possible values are:
 - **font:** Optional scalar node. Defaults to helvetica. Should be limited to one of the standard pdf fonts: times, helvetica, courier
 - **size:** Optional positive integer node. Size in points of font. Defaults to 12.
 - **alignment:** Optional scalar node. Defaults to 'L' for left. Can be 'R' or 'J', 'L' or 'C'
 - **color:** Optional color foreground/text color. Use html style hex colors. Defaults to black #000000 ,
 - **bg_color:** Optional background color. Use html style hex colors. Defaults to 'none' for transparent.
 - **style:** Optional scalar node. Default to blank. Can contain any of the following characters, B for bold, U for underline, I for italic
- **elements:** Parent node. Children should be numerically indexed. Elements are added to the standard document in increasing numeric order of the node name of the element. Each of the child nodes will contain the following:
 - **text_properties:** An optional parent node defining the properties which applies to this node and all of its sub-elements of this. The definition is the same as above.
 - **type:** Required scalar node. Should be one of 'text' 'image' or 'value'
 - **definition:** Depends on the type. See below.

Definition for type: Text

The text element is just certain text to be placed in the document. It should consist of the following nodes:

- **printf:** Optional scalar node. The a printf string to be placed here. Defaults to . *Example: "%s, %s has registration number %s"*
- **printf_args:** Optional parent node. An array of arguments to substitute into the printf as follows
 - **formname+field:** a report form fields to substitute into the printf. E.g. "person+surname, person+fisrtname, registration+number":
 - **+relationshipFunction:** The evaluation of the named function in the the form relationship. Example +age65 which be the year the person turns 65 in the staff relationship
 - **++date(XYZ):** The data formatted according to XYZ (unquoted) via strftime^[1] functions. Example ++date(%Y) is the four digit year
 - **++date:** The date. This is the same as ++date(%x).
 - **++user:** The name of the user printing the form
 - **++eval(XYZ):** Evaluate the php code XYZ. Example is ++eval(strftime("%Y")+60) would add 60 to the current year
- **horiz_min:** Required numeric scalar node. If the alignment is 'L' it is the left most coordinate to place this text. If the alignment is 'R' it is the right-most coordiante of the text
- **horiz_max:** Optional numeric scalar node. If not set and the allignment is 'J' then the alignment reverts to 'L'. If set and allignment if 'L' is the right-most coordinate. If set and alignment is 'R' then it is the left-most coordinate. If set and alignment is 'J' then the this is the right-most coordinate and *horiz-min* is the left-most coodinate.
- **vert_max:** Optional numeric scalar node. The bottom most coordinate to place this text.
- **vert_min:** Required numeric scalar value. The top most coordinate to place this text.

Definition for Type: Image

- image: Required standard node. the name of the image file to place. It can either be:
 - A file name, in which case the search path used is "PDF_IMAGES"
 - A string like "form://**form+field**" where form is a named form in the relationship and field is a field of time IMAGE (e.g. "form://passport+image")
- horiz_min: Required numeric scalar node. The left most coordinate to place the image.
- vert_min: Required numeric scalar node. The top most coordinate to place the image
- horiz_max: Optional numeric scalar node. The right most coordinate to place the image. If set, image is rescaled if needed.
- vert_max: Optional numeric scalar node. The bottom most coordinate to place the image. If set, image is rescaled if needed.

Example

For example, to produce a Staff Hire Letter in iHRIS Manage you could define it as:

```
<configurationGroup name="sample-hire-letter" path="/modules/PrintedForms/forms/sample_
  <configuration name="relationship">
    <value>staff</value>
  </configuration>
  <configuration name="archive">
    <value>person</value>
  </configuration>
  <configuration name="displayName">
    <value>Staff Hire Letter</value>
  </configuration>
  <configurationGroup name="elements">
    <configurationGroup name="0">
      <configuration name="type">
        <value>image</value>
      </configuration>
      <configuration name="definition" values='many' type='delimited'>
        <value>image:iHRISManage_logo_whiteBG.png</value>
        <value>horiz_min:5</value>
        <value>vert_min:1</value>
      </configuration>
    </configurationGroup>
    <configurationGroup name="50">
      <configuration name="type">
        <value>text</value>
      </configuration>
      <configuration name="text_properties" values='many' type='delimited'>
        <value>style:I</value>
      </configuration>
      <configuration name="definition" values='many' type='delimited'>
        <value>horiz_min:33</value>
        <value>vert_min:6</value>
        <value>printf:Certification of Employment</value>
```

```

    </configuration>
</configurationGroup>
<configurationGroup name="51">
  <configuration name="type">
    <value>text</value>
  </configuration>
  <configuration name="text_properties" values='many' type='delimited'>
    <value>style:BU</value>
  </configuration>
  <configuration name="definition" values='many' type='delimited'>
    <value>horiz_min:33</value>
    <value>vert_min:12</value>
    <value>printf:Ministry of Health</value>
  </configuration>
</configurationGroup>

<configurationGroup name="52">
  <configuration name="type">
    <value>text</value>
  </configuration>
  <configuration name="definition" values='many' type='delimited'>
    <value>horiz_min:160</value>
    <value>vert_min:6</value>
    <value>printf:%s</value>
  </configuration>
  <configuration name="printf_args" path='definition/printf_args' values='many' type='delimited'>
    <value>0:++date(%e %B %Y)</value>
  </configuration>
</configurationGroup>

<configurationGroup name="100">
  <configuration name="type">
    <value>text</value>
  </configuration>
  <configuration name="definition" values='many' type='delimited'>
    <value>horiz_min:3</value>
    <value>vert_min:50</value>
    <value>printf:Dir Sir/Madam,

Please accept this letter as certification of employment for %s %s.

On %s, employment began as %s in the %s department of %s.

Sincerely,
%s</value>
  </configuration>
  <configuration name="printf_args" path='definition/printf_args' values='many' type='delimited'>

```

```
<value>0:person+firstname</value>
<value>1:person+surname</value>
<value>2:staff+start_date</value>
<value>3:position+title</value>
<value>4:department+name</value>
<value>5:facility+name</value>
<value>6:++user</value>
</configuration>
</configurationGroup>
</configurationGroup>
</configurationGroup>
```

References

[1] <http://us2.php.net/manual/en/function.strftime.php>

README File for iHRIS

iHRIS Full Suite: Manage, Qualify, Common, I2CE and TextLayout

Version 4.0.5

Release date: 2010-6-14

CONTENTS

1. Contact Information
2. About This Software
3. New Features/Bug Fixes in This Release
4. Hardware and Software Requirements
5. Getting Started
6. Known Issues
7. About the Capacity Project

1. CONTACT INFORMATION

HRIS Strengthening team of Capacity*Plus*

Web: www.capacityplus.org/hris/

Email: hris@capacityplus.org

Voice: 1-919-313-9100

IntraHealth International

6340 Quadrangle Drive, Suite 200

Chapel Hill NC 27517 USA

2. ABOUT THIS SOFTWARE

Capacity*Plus* develops the iHRiS Suite core solutions addressing specific issues in human resources for health (HRH) leadership. The iHRIS Suite is free and Open Source software, distributed under the GPL.

iHRIS Manage is a human resources management tool that enables an organization to design and manage a comprehensive human resources strategy. iHRIS Manage helps an organization manage its workforce more effectively and efficiently, while reducing costs and data errors. Using the system, the HR professional can create a hierarchy of positions for an organization based on standard titles, job classifications and job descriptions, even spread over diverse geographic locations, offices and facilities. HR staff can solicit job applications for open positions, assign employees to fill positions and maintain a searchable database of all employees, their identifying information and their qualifications. Managers can track each employee's history with the organization, including their position and salary histories, and record the reason for departure when the employee leaves. iHRIS Manage is primarily intended to be used to manage health care workers employed by a country's Ministry of Health, a hospital or other large health care organization, or a private provider of health care services. However, it may be readily adapted to other types of organizations and workforces.

iHRIS Qualify is a health worker training, licensing and certification tracking system. The system enables a licensing or certification authority for a health worker cadre, such as nurses or physicians, to track data on the complete cadre in a country from pre-service training through attrition. The database captures information about health professionals from the time they enter pre-service training through registration, certification and licensure, and it is updated every time a professional's license or certification is renewed. This system is also capable of tracking continuing medical education attained by health workers, capturing data about foreign-trained workers applying to work within the country and recording out migration verification requests.

iHRIS Common includes common page classes, template files and images for the iHRIS Suite of software: iHRIS Manage, iHRIS Qualify and iHRIS Plan.

IntraHealth Informatics Core Engine (I2CE) is a set of classes for handling database-driven HTML forms with templates and database abstraction. It is the core programming engine for the iHRIS Suite of software.

TexLayout is tools to handle text layout designed to create nicely formatted PDF files. This is used to generate PDF versions of reports.

3. NEW FEATURES/BUG FIXES IN THIS RELEASE

View a full list of new features and bug fixes here: [\[\[1\]\]](#)

The following new user functions are included in this release:

- The ability to generate and archive standardized documents such as a License Certificate or Employment/Hire Letter
- Speed improvements and better handling of geography in report generation
- A Dependents Module, which was coded-in-country at a Tanzania developer training and enables iHRIS Manage to track information on health worker dependents
- Support for SDMX-HD code lists, <http://www.sdmx-hd.org/>, to increase interoperability of iHRIS with other Health Information Systems such as OpenMRS and DHIS

Full Italian and French translations for beta testing

The following bug fixes are included in this release:

4. HARDWARE AND SOFTWARE REQUIREMENTS

The following software is required to be installed before installing iHRIS:

- Apache Webserver 2.2+: <http://www.apache.org>
- MySQL 5.0+: <http://www.mysql.com>
- PHP 5.2.6+: <http://www.php.net>
- MDB2 from PEAR: <http://pear.php.net/package/MDB2>
- MySQL driver from PEAR: http://pear.php.net/package/MDB2_Driver_mysql
- Text Password from PEAR: http://pear.php.net/package/Text_Password
- Console GetOpt from PEAR: http://pear.php.net/package/Console_Getopt
- APC from PECL: <http://pecl.php.net/package/APC> or <http://pecl4win.php.net> (Windows)

In order to generate PDF reports, the tcpdf package (<http://www.tcpdf.org>) is required.

A web browser is required to run the software. Firefox 2+ (<http://www.mozilla.com/en-US/firefox/>) or Internet Explorer 7+ (<http://www.microsoft.com/windows/downloads/ie/getitnow.mspx>) is highly recommended.

Optional:

- Tidy from PECL: <http://pecl.php.net/package/tidy> (included by default for Ubuntu but not Windows)
- GD Php Library: <http://www.libgd.org>

5. INSTALLATION INSTRUCTIONS

Linux (Ubuntu) installation instructions are available on our wiki: http://open.intrahealth.org/wiki/index.php/Linux_%28Ubuntu%29_Installation

Before using the system, you should read the User's Manual, which can be accessed by clicking the Help button on any screen or on our wiki at <http://open.intrahealth.org/ihrismanual/>. The section "Before Installing the System" provides helpful worksheets for collecting the data needed to enter in the system.

If you have questions or need support, please visit the iHRIS Website by clicking that button on any screen (<http://www.capacityproject.org/hris/>) and use the Contact Us form to send us your question.

6. KNOWN ISSUES

The following are known bugs in this release of iHRIS. These bugs will be corrected as soon as possible in a subsequent minor release. Please report any bugs to hris@capacityproject.org or by submitting a bug report at <https://bugs.launchpad.net/ihris-suite/>.

7. ABOUT CapacityPlus

CapacityPlus is developing free, Open Source HRIS solutions, distributed under the GPL, to supply health sector leaders and managers with the information they need to assess HR problems, plan effective interventions and evaluate those interventions. We don't provide just software but rather a program of technical assistance and expertise to ensure that the technology is transferred effectively and serves the ability of decision makers to use data to lead and manage. Our participatory approach results in systems that are appropriate for the context in which they are used and sustainable after we leave.

CapacityPlus is a USAID-funded global project focused on the health workforce needed to achieve the Millennium Development Goals. CapacityPlus is led by IntraHealth International, Inc. Find out more at www.capacityplus.org

Development of this software was made possible by the support of the American people through USAID. The contents are the responsibility of the user and do not reflect the views of USAID, the United States Government or IntraHealth International.

References

[1] http://open.intrahealth.org/mediawiki/IHRIS_Suite_4.0_Development

Recreate All Form Caches

If you've imported data multiple times, the form cache will include some of that old data. To completely recreate all the form caches follow these steps. These instructions are for iHRIS version 3.1.x. These are advanced instructions and should only be done if you know what you are doing. You should back up your database before doing this in case anything goes wrong.

1. Open up two browser windows. One to the site and one on phpmyadmin.
2. Go to Configure System then Browse Magic Data.
3. Click modules
4. Click CachedForms
5. Click times
6. Click generation
7. This should list all the forms on the site with a number. Click the Erase button at the bottom of the page. Make sure the path at the top is: /modules/CachedForms/times/generation
8. With PHPMyAdmin drop all the tables that start with hippo_. You can check them all in the table list and then select "Drop" from the dropdown at the bottom. It'll display a confirmation message. Just make sure it's only the hippo_* tables.
9. Back on the site go to Configure System then Cached Forms.
10. At the bottom of the page click the link at Generate Cache for all forms.
11. That should be it when it finishes redoing the form caches.
12. You can then wait for the reports to regenerate automatically or go to Create Reports -> Reports and click the generate link next to them all.

Setting An Establishment

Starting with version 4.0.6 of iHRIS Manage you now have the option of setting staffing norm and establishments.

You may have several different types of establishments or staffing norms at your organization. For example:

- Funded Positions
- Staffing Norms set by the ministry of health
- Recommended positions based on a master plan

These norms may also change yearly and be linked either to a facility, a facility type, a job or a cadre.

The establishment module lets you track these establishments within the system. You can also create a report showing the number of filled positions against the establishment.

Create an establishment type

An establishment type is simply a name you can use to refer to the establishment you wish to deal with, for example "Funded Positions."

To set an establishment type:

- Click on "Configure System"
- Click on "Administer Database."
- Click on "Establishment Type" under "Planning Information"
- Add a new establishment type. In the example it would be "Funded Position"

Creating an establishment period

The establishment period is simply a year that a given establishment type is effective, for example "2010" for the the "Funded Positions."

To set an establishment period:

- Click on "Configure System"
- Click on "Administer Database."
- Click on "Establishment Period" under "Planning Information"
- Add a new "Establishment Period"
 - Set the "Establishment Type" as you wish. In the example above it would be "Funded Postions"
 - Set the year of applicability as you wish. In the example above it would be "2010"

Creating the establishments

Now that you have the establishment period set up, you can now set the specific establishments. For each establishment, you can specify either the job or cadre, and either the facility or facility type.

Now you can choose to set the establishment for the job Enrolled Nurses with the facility type Primary Health Care Unit (PHCU). If you need to, you can also set the number of Enrolled Nurses for one or more of the PHCUs.

- Click on "Configure System"
 - Click on "Administer Database."
 - Click on "Establishments" under "Planning Information"
 - Add a new "Establishment"
 - Set the "Establishment Period." In the example above it would be "Funded Positions - 2010"
 - Choose the Facility or Facility Type.
 - Choose the Job or Cadre
-

- Set the amount/number of health workers for this establishment

Note: When the system is determining the establishment associated for a particular position it checks to see if an establishment has been set for the pair (job, facility). If there is no establishment found, it will check the (cadre,facility) or (job,facility_type). Finally, it will check if the (cadre,facility_type) has an establishment.

Supporting Software

This documentation is current as of iHRIS version 3.1 (August 15, 2008).

The server has been installed with Ubuntu 8.04 LTS, a long-term release that will be supported for five years. The IP address is #.#.#.# and can be accessed from inside the local network. All references below will use this address and should be updated if it is changed.

General documentation on Ubuntu can be found at the Ubuntu website ^[1].

Server Information

Updates

Install software updates using the Update Manager (System → Administration → Update Manager). It will display any packages that need updating, and those packages can then be installed. Install new packages using Synaptic Package Manager (System → Administration → Synaptic Package Manager).

MySQL

MySQL can be administered using terminal commands (Applications → Accessories → Terminal). See documentation on MySQL ^[2].

MySQL can also be administered using PHP MyAdmin at <http://#.#.#.#/phpmyadmin/>. The administrative login is XXXX and the password is XXXXXXXX. The password can be changed via the privileges link with PHP MyAdmin.

Apache 2

The installed web server is Apache 2. See documentation ^[3]. The configuration files are located in /etc/apache2/ on the server. The log files are saved in /var/log/apache2/. The files displayed by the web server are in /var/www/.

PHP 5

PHP 5 is installed to run the iHRIS Plan software. See documentation ^[4].

References

[1] <http://help.ubuntu.com/8.04/>

[2] <http://dev.mysql.com/doc/refman/5.0/en/index.html>

[3] <http://httpd.apache.org/docs/2.2/>

[4] <http://www.php.net/manual/en/>

Swiss Magic Data -- Form Relationships

In this article we over view the swiss magic structure used to create the web interface to define form relationships. Recall that a swiss node of type XXX is implemented by the class I2CE_Swiss_XXX. All the classes mentioned are contained in the

```
I2CE/modules/Forms/modules/FormRelationships/lib
```

directory.

FormRelationship_Base

This is the base class which is sub-classed by all of the Swiss classes used to edit form Relationships.

FormRelationships

The **root swiss node** of a the form relationship editor has type *FormRelationships*. It has the following functionality:

- It is a container node which contains all of the form relationships.
- Creates a new form relationship with a given "Display Name" and "Short Name" by creating a new child magic data node. The new relationship can be based on:
 - Choosing a primary form
 - Choosing an existing relationship to copy from.

All children of this swiss node have type #FormRelationship.

FormRelationship

This is the swiss node that contains all the information about a particular form relationship.

It has the following functionality:

- Specify the form
- Specify the display name of this form in the relationship
- Specify the description of this form in the relationship
- links to the joined forms menu
- links to the menu for limiting this form
- links to the menu sql functions menu

The child swiss nodes are named:

- 'reporting_functions' with type #FormRelationship_ReportingFunctions
- 'joins' with type #FormRelationship_Joins
- 'where' #FormRelationship_Where

FormRelationship_Joins

This is the swiss node that contains all information about forms joined to the form of the parent swiss node. It has the functionality:

- Join in a form related the the form defined by parent swiss node

All children of this swiss node have type #FormRelationship_Join.

FormRelationship_Join

This is the swiss node that represents a form joined into the form relationship.

It subclasses #FormRelationship and has almost the same functionality and children. The difference is that:

- It does not link to the SQL Functions menu
- It shows how this form is joined to the parent form in the relationship (the primary form does not need this as it has no parent)
- It allows you to "drop empty rows."

Note: The language should be cleaned up here as we use form relationships outside of the Custom

Reporting scenario. It means that a set of forms potentially satisfying a form relationship is will fail to satisfy the relationship if there is no form matching the where clause at this node.

FormRelationship_Where

This provides a where (sub)-clause for a form relationship. It has the following functionality:

- if not specified, allow you to specify the "type" of the node as either a logical operator (AND, OR, NOT, XOR) or as a limit on a field in the form
- if specifed, allows you to change the "type"

There is one child swiss node 'operands' which has type #FormRelationship_Where_Operands

Note: The functionality of this swiss node should probably be moved to a sub-module of the FormLimits modules

FormRelationship_Where_Operands

This node is used in the case where the parent swiss node is one of the logical operators AND, OR, NOT or XOR. It has the following functionality:

- Displays the existing operands
- Adds a new operand for the logical operators if possible (NOT has only one operand)
- Allows you to remove an operand

All children of this node are of type #FormRelationship_Where

Note: The functionality of this swiss node should probably be moved to a sub-module of the FormLimits modules

FormRelationship_ReportingFunctions

This swiss node is a container for all of the SQL functions that are defined for the form relationship. It has the following functionality:

- display the existing sql functions in the relationship
- adds in a place for a new sql function determined by "Short Name," a "Display Name" and a "Description"

All children of this node have type #FormRelationship_ReportingFunctions.

Note: This functionality should probably be moved to be a sub-module of Forms.

SQLFunction

This swiss node is used to define a SQL function in a relationship. It has the following functionality:

- edit the display name
- edit the description
- edit the SQL function which is applied to any of the form fields in the relationship
- choose the return type of the SQL function to be any of the (non-abstract) subclasses of I2CE_FormField.

Note: This functionality should probably be moved to be a sub-module of Forms.

Swiss Magic Data Editor

The Swiss Magic Data Editor is a set of php classes to hierarchically edit and view the configuration magic data.

Features

- Provides different ways of traversing the configuration magic data hierarchy via different factories
- Lots of AJAX goodness built in to display sub-menus within the current menu
- Used in the "Form Relationship" builder and the "Custom Reporting" tool
- Used in the "Configure Modules" tool
- Processing and Displaying of data is already localized. You only need to call "renameInputs()" to rename any of your html form elements.

Examples

- Form Relationships
- Reports
- Report Views

The Swiss Node

A **swiss node** is a subclass of I2CE_Swiss. You can think of the I2Ce_Swiss classes as defining a GUI widget for interacting with magic data. Associated to a swiss node is:

- a magic data node

A swiss node has the following functions:

- display values saved at its magic data node
 - create a user interface to edit the values at its magic data node
 - process an associative array of values to update the magic data node
 - determine the *types* of its child swiss nodes. A node of type \$type is a node of class I2CE_Swiss_\$type.
-

Methods To Implement

When creating a new Swiss type you only need to implement these methods:

- `displayValues()` The method used to display the data associated with swiss node. Can be defined for different actions. There are two main actions:
 - `view`: The action to display a read-only view of the magic data at that node.
 - `edit`: The action to display an edit view of the magic data data at that node.
- `processValues()` The method used to process an associated array of values and update the magic data. Needs to be defined
- `getChildType()` Gets the type of the swiss child with the given name.

Useful Methods

The following methods should be used

- `getStorage()` Gets the magic data node associate to the swiss node.
- `getChild()` Gets the child swiss node with the given name.
- `renameInputs()` Needs to be called to rename all html input/select/textarea form elements of the given DOMNode are associated to that swiss node.
- `addAjaxLink()` Adds a link to child swiss node. If the browser is AJAX happy, it will do so in a AJAX manner. Otherwise it is simply a link
- `get/set/hasField()` Convenience methods to access the named (scalar) magic data child node.

The Swiss Factories

The Swiss Factory handles:

- provides the appropriate magic data node associated to a swiss node
- creates the appropriate child swiss nodes
- traverses the swiss nodes when given a path
- pre-process GET/POST variables and passes them to the appropriate swiss node.
- handles errors in updating values based on GET/POST values.
- implements the Iterator and Count Interface

The Swiss Factory is determined by:

- the root magic data node
- the root swiss node class

There are two factories available Swiss Magic and Swiss Config. These have corresponding `I2CE_Page` sub-classes to access the web interface.

Swiss Magic Factory

This is the swiss factory do create dynamic content in I2CE. This includes:

- Custom Form Relationships
- Custom Reports
- Custom Report Views

Parent and Children

Any (non-scalar) magic data node can serve as the root swiss node.

The children of a swiss node are in one to one correspondence with the child nodes of the corresponding magic data node. The names of the child swiss nodes are the same as the names of the child magic data nodes.

Page Access

This factory can be accessed in the web interface as in instance of the `I2CE_Page_SwissMagic` class. This is done for:

- Form Relationships
- Custom Reports
- Custom Report Views

Swiss Config Factory

This is the Swiss Factory designed for the configure modules tool.

Parent And Children

In this factory the child swiss nodes of a given swiss class are defined by a module configuration XML#Defining Magic Data in Configuration Files file. The root parent swiss node is the main `<configurationGroup>` in the configuration XML file.

The child swiss nodes associated to a given `<configurationGroup>` are exactly the child `<configuration>`s and `<configurationGroup>`s on that node. The names of the child swiss nodes are the names of the child `<configuration>` and `<configurationGroup>` nodes.

The magic data node associated to a swiss node is the exactly the magic data node associated to the given `<configuration>` or `<configurationGroup>` node as defined by the **path** and **name** attributes.

Page Access

For the "Configure Modules" page, each module instantiates the a swiss factory by the an instance of the `I2CE_Page_SwissConfig` class.

Tasks and Roles

Roles

A role is a collection of tasks that can be assigned to a user's account.

- role names are defined as the children of the magic data path `/I2CE/roles/names`
- a role `$role` has a display name defined at `/I2CE/roles/names/$role/display_name`
- roles can inherit tasks from one another by adding it as a value of a child node of `/I2CE/roles/names/$role/trickle_up`

For example, in iHRIS Manage at the `/I2CE/roles/names/hr_staff` we have:

- `display_name => HR Staff`
- `trickle_up => Array`
 - `0 => admin`
 - `1 => hr_manager`

says that the role `hr_staff` is displayed as 'HR Staff' and that an `hr_manager` or `admin` has all the tasks that a `hr_staff` has.

Tasks

A task can be both a collection of sub-tasks that this task has and description of some action that can be checked for permission. Task information is stored in magic data under `/I2CE/tasks/`. To create a task you create a scalar type child node of `/I2CE/tasks/task_description`. That name node of the node is the name used to reference the task. The value of the node is the description of the task displayed in the Task and Role Management page. For example, the magic data node `/I2CE/tasks/task_description` may look something like:

- `custom_report_admin => Allows administration of the Custom Reporting System`
- `custom_reports_can_access => Allows minimal access to the Custom Reporting System`
- `custom_reports_delete => Allows deletion of data about custom reports`
- `custom_reports_can_access_relationships => Allows access to the Custom Report Relationships`

You can define the sub tasks of a task `$task` by specifying `/I2CE/tasks/task_trickle_down_task`. For example, the magic data node `/I2CE/tasks/task_trickle_down/custom_reports_admin` may look like:

- `0 => custom_reports_can_access`
- `1 => custom_reports_delete_reports`

which says that the 'custom_report_admin' task has all the tasks and rights defined by 'custom_reports_can_access' and 'custom_reports_delete_reports.'

The tasks that are assigned to a role `$role` are the values of the children under `/I2CE/tasks/role_trickle_down/$role`

A user with the role 'admin' has all tasks.

Uses of Tasks and Roles

The tasks and roles are used in several places:

- The main I2CE_Page class checks for basic permission for the page.
- Several pages perform checks for specific roles and tasks in their action() method.
- Just before displaying the HTML the I2CE_Template class verifies that all tasks, roles and permissions are satisfied on each node.

Task and Role Administration

For deployment across many computers, tasks and roles should be set up in an appropriate module configuration file.

For setting tasks and roles dynamically, the module 'tasks-roles' provides the page named 'roles' and the page named 'tasks' that allows creating new roles and tasks as well as defining the permission inheritance.

Permissions and the Permission Parser

The permission parser allows logical expressions to combine several types permissions, such as *task*, *roles*, into a *permission string*.

We can assign tasks, roles and permissions to DOM nodes by:

- Setting the attribute *role*.
If the value is X, this results in the permission string *role(X)* which is passed to the permission parser
- Setting the attribute *task*.
If the value is X, this results in the permission string *task(X)* which is passed to the permission parser
- Setting the attribute *permission*.

If the node fails any of the role, task or permission checks it will remove the node

Permission Types: task and role

The task and role type permissions are formed by surrounding a role name with role() or a task name with task(). For example, you can create the following *permission string*:

```
(task(can_edit_database_list_facility_type) & task(can_edit_database_list_fav_color) || role(admin)
```

By default, tasks and roles are 'OR'ed together so the following are all the same:

- task(can_edit_database_list_facility_type) or task(can_edit_database_list_fav_color)
- task(can_edit_database_list_facility_type) | task(can_edit_database_list_fav_color)
- task(can_edit_database_list_facility_type) task(can_edit_database_list_fav_color)
- task(can_edit_database_list_facility_type,can_edit_database_list_fav_color)
- task(can_edit_database_list_facility_type can_edit_database_list_fav_color)
- task(can_edit_database_list_facility_type|can_edit_database_list_fav_color)

Permission Type: module

Any public function of a module class can be called by the permission parser. For example, suppose that the module 'my_module' has a method 'my_method()' then we can use as the permission string with arguments:

```
module('my_module','my_method', [arg1], ... , [argN])
```

which would results in the call:

```
$module->my_method($arg1,..,$argN)
```

where \$module is the instance of the module class for the module 'my_module.'

Permission Type: form

The 'forms' module adds in the form type. The permission string with arguments:

```
form('form_name', 'form_method', [arg1] , ... , [argN])
```

results in the call:

```
$form->form_method($arg1,..,$argN)
```

where \$form is the result of getting the form by the name of 'form_name' via template data for node (if there was any) the permission string was assigned to.

Arguments

A permission type (such as role, task, form or module) in a permission string behaves essentially like a function. Suppose that we have the general shape for a piece of a permission string:

```
type([arg1],[arg2],...,[argN])
```

Then this results in the method call:

```
$permissionParser->hasPermission_$type($node,$args)
```

where \$node is the DOMNode the permission string was called on and \$args is the array(\$arg1...\$argN). The permission parser turns [argM] into \$argM according to the following rules:

- if [argM] starts with a \$ then it refers to template data and the following rules apply:
 - The string has the form \$abcd. The value of \$argM becomes the template display data with name 'abcd.'
 - The string has the form \${WXYZ}abcd. The value of \$argM becomes the template data with category 'WXYZ' and with name 'abcd.'
- <NODE> becomes the instance of DOMNode (if any) that the permission string was called on
- <TEMPLATE> becomes the instance of I2CE_Template (if any) that the permission parser was called on
- <USER> becomes the instance of I2CE_User that is this session
- if [argM] starts with a single quote ' then it is a string until the next non-escaped ' is found
- if [argM] starts with a double quote " then is is a string until the next non-escaped " is found.

In addition the following substitution rules apply:

- any substring starting with \$ and consisting of alpha-numeric characters, - or _ is interpreted as template display data to be substituted

For example "my name is \$name" becomes "my name is Joe" if the template data named 'name' and with type DISPLAY is "Joe"

- any substring starting with {\$ is read until an enclosing } is found. The string between the \${ and } is the name of DISPLAY template data which is then substituted.
 - To prevent the above, { and \$ may be escaped with a \
 - any other string of alpha-numeric characters (and a few permitted punctuation marks) is interpreted as a string
- Arguments may be separated by a comma a space or a l.

New Types

A module can add in a fuzzy method of the form *hasPermission_\$type* to the *I2CE_PermissionParser* class to enable a new permission type. For example the 'forms' module does this by adding in a new permission type 'form.'

Technical Overview: Form Storage -- CSV

This is a form storage mechanism designed to read data from a CSV file. It is primarily designed to import data. This form storage mechanism is present in version >= 4.0.3.

This is a read-only form storage mechanism. By default it will read in the CSV dump of a *hippo_XXX* as exported by phpmyadmin according to the following options:

- Export: CSV
- Fields Terminated By: ,
- Fields Enclosed By: "
- Fields Escaped By: \
- Lines Terminated By: AUTO
- Replace NULL By:
- Put fields names in the first row: Checked
- Compression: None

Here is a screen shot

Form Storage Options

The options specifying a CSV storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/CSV
```

It has the following structure:

- file: The CSV file that the data should be read from. This can either be an absolutely given file path, a relative file path, or the URL of a stream handled by php. If it is a relative file path, then it uses the CSV file search category. The file can also be a path to a scalar node in magic data as indicated by 'mdn://path/in/magic/data' .
- delimiter: The delimited used to split a line (one character only). Defaults to ','
- enclosure: the field enclosure character (one character only). Defaults to '"'
- has_header: Whether or not the first row is a header row. Defaults to true.
- use_header: Defaults to true. If true and has_header is set to true, then the columns are referenced by the column header. This header names are case insensitive and ignore any white space padding. If evaluates to false, then the columns are assumed to be numerically indexed.
- id: Optional parent node. The data defining how to associate an id per line of this file.
 - index: If set, and use_header or has_header is false, it is the numeric index of the column that this data is saved in.

- **header:** Applies if *use_header* and *has_header* are true. If set it is the header name of index of the column that this data is saved in. By default it is "id"
- **form_prepend:** Optional scalar node. Defaults to true. If true, it means the form name has been prepended to the id. Otherwise, it assume that the column is just the id.
- **parent:** optional parent node. The data defining how to associate a parent id per line of this file.
 - **enabled:** Optional scalar node. If present and evaluates to false, it means getParent() should return the trivial parent id, '0'.
 - **index:** If set, and *use_header* or *has_header* is false, it is the numeric index of the column that this data is saved in.
 - **header:** Applies if *use_header* and *has_header* are true. If set it is the header name of index of the column that this data is saved in. By default it is "parent"
- **fields:** Optional parent node. Specifies how the data of the your form is associate to a row of your table. Each child of this node is the name of a field \$field of your form. By default, all fields of a form are populated, and are all assumed to come from the column with that field name "\$form+\$field"
- **\$field:** Optional parent node with the following child nodes.
 - **enabled:** Optional scalar node. If present and evaluates to false, it means we should not populate this field.
 - **index:** If set, and *use_header* or *has_header* is false, it is the numeric index of the column that this data is saved in.
 - **header:** Applies if *use_header* and *has_header* are true. If set it is the header name of index of the column that this data is saved in. By default it is "\$field"

Global Options

There are global options for CSV form storage. They are specified at:

```
/modules/forms/storage_options/CSV
```

This has the structure:

- **closeCSV:** defaults to false. If true, we close the CSV file between access. Otherwise, we allow PHP to handle closing the file resource at the end of the script's call.

Technical Overview: Form Storage -- Eval

This form storage mechanism is present in version $\geq 4.0.3$.

Form Storage Options

The options specifying a php-eval storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/eval
```

It has the following structure:

- records: The function to call to get the list of available records/form ids
- parent: optional parent node
 - populate: optional scalar node. if set, it is the php code used to get the parent id of the current id. the current id can be accessed as \$id
- fields: optional parent node containing a sub node for each field indexed by the \$fieldName
 - \$fieldName: optional parent node
 - populate: optional scalar node. if set, it is the php code used to get the db-value of the field for the current id. the current id can be accessed as \$id

Technical Overview: Form Storage -- SDMX CrossSectional

This is a form storage mechanism designed to read data from an SDMX-HD code list file. This form storage mechanism is present in version $\geq 4.0.6$.

This is a read-only form storage mechanism.

This form storage mechanism requires PHP 5.3 or greater

Form Storage Options

The options specifying a SDMX Cross Sectional storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/SDMX_CrossSectional
```

It has the following structure:

- file: Required scalar node. The SDMX file that the data should be read from. This can either be an absolutely given file path, a relative file path, or the URL of a stream handled by php. If it is a relative file path, then it uses the SDMXHD file search category. The file can also be a path to a scalar node in magic data as indicated by 'mdn://path/in/magic/data'
- namespace: Optional scalar node. defaults to 'ns'.
- parent: optional parent node. The data defining how to associate a parent id DOM Node.
 - attribute: Required scalar node. The name of the attribute which contains the parent. If neither 'query' or this is set, there is not parent data. 'query' takes precedence.
 - eval: Optional scalar node. If set it is a code php code which modifies the id, stored in the \$val variable. For example '\$val = strtoupper(\$val);'

- **map_data**: Optional parent node. .It is used to map the given field via a SDMX-HD Code List that is in the system
 - **list**: Required scalar node. The list that we want this field to take values in
 - **codelist**: Required scalar node: The name of the SDMX-HD code list which this attribute takes values in, in other words the value we wish to map from.
 - **mapping_form**: Optional scalar node. The name of the form which contains the mapping data between the SDMX-HD Code List and the list we wish to map to. If the module **Lists-LinkTo-List** is enabled and the value is not set then it defaults to *list_linkto_list_XXXX* where XXXX is the form storage mechanism of the list. If set, the form should subclass *I2CE_ListLink_List*.
- **fields**: Optional parent node. Specifies how the data of the your form is associate to a row of your table. Each child of this node is the name of a field \$field of your form.
 - **\$field**: Optional parent node with the following child nodes.
 - **attribute**: Required scalar node. The name of the attribute which contains the parent. If neither 'query' nor this is set, there is not data. 'query' takes precedence
 - **eval**: Optional scalar node. If set it is a code php code which modifies the id, stored in the \$val variable. For example '\$val = strtoupper(\$val);'
 - **map_data**: Optional parent node. .It is used to map the given field via a SDMX-HD Code List that is in the system
 - **list**: Required scalar node. The list that we want this field to take values in
 - **codelist**: Required scalar node: The name of the SDMX-HD code list which this attribute takes values in, in other words the value we wish to map from.
 - **mapping_form**: Optional scalar node. The name of the form which contains the mapping data between the SDMX-HD Code List and the list we wish to map to. If the module **Lists-LinkTo-List** is enabled and the value is not set then it defaults to *list_linkto_list_XXXX* where XXXX is the form storage mechanism of the list. If set, the form should subclass *I2CE_ListLink_List*.

Technical Overview: Form Storage -- SDMX-HD

This is a form storage mechanism designed to read data from an SDMX-HD code list file. This form storage mechanism is present in version $\geq 4.0.5$.

This is a read-only form storage mechanism. This storage mechanism will only work for forms that are or extend I2CE_SimpleList.

This form storage mechanism requires PHP 5.3 or greater

Form Storage Options

The options specifying a SDMX-HD storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/SDMXHD
```

It has the following structure:

- **file:** The SDMX-HD file that the data should be read from. This can either be an absolutely given file path, a relative file path, or the URL of a stream handled by php. If it is a relative file path, then it uses the SDMXHD file search category. The file can also be a path to a scalar node in magic data as indicated by 'mdn://path/in/magic/data'
- **CodeListID:** The code list ID to be read. This is for files that may have more than one code list defined. This must be set.

Global Options

There are global options for SDMX-HD form storage. They are specified at:

```
/modules/forms/storage_options/SDMX-HD
```

This has the structure:

- **closeFile:** defaults to false. If true, we close the file between access. Otherwise, we allow PHP to handle closing the file resource at the end of the script's call.

Form Definition

To use SDMX-HD storage for a form use the following configuration. Replace \$form, \$form_name, \$file_location and \$CL_ID with the appropriate values.

```
<configurationGroup name="$form">
  <displayName>SDMX-HD Code List: $form</displayName>
  <description>The SDMX-HD Code List: $form_name</description>
  <configuration name="class" values="single">
    <value>I2CE_SimpleList</value>
  </configuration>
  <configuration name="display" values="single" locale="en_US">
    <value>$form_name</value>
  </configuration>
  <configuration name="storage" values="single">
    <value>SDMXHD</value>
  </configuration>
  <configurationGroup name="storage_options" path="storage_options/SDMXHD">
```



```
<configuration name="file" values="single">
  <values>$file_location</value>
</configuration>
<configuration name="CodeListID" values="single">
  <value>$CL_ID</value>
</configuration>
</configurationGroup>
</configurationGroup>
```

An example for gender may be:

```
<configurationGroup name="cl_gender">
  <displayName>SDMX-HD Code List: cl_gender</displayName>
  <description>The SDMX-HD Code List: Gender</description>
  <configuration name="class" values="single">
    <value>I2CE_SimpleList</value>
  </configuration>
  <configuration name="display" values="single" locale="en_US">
    <value>Gender</value>
  </configuration>
  <configuration name="storage" values="single">
    <value>SDMXHD</value>
  </configuration>
  <configurationGroup name="storage_options" path="storage_options/SDMXHD">
    <configuration name="file" values="single">
      <values>CL_GENDER+SDMX-HD+1.0.xml</value>
    </configuration>
    <configuration name="CodeListID" values="single">
      <value>CL_GENDER</value>
    </configuration>
  </configurationGroup>
</configurationGroup>
```

Technical Overview: Form Storage -- XML

This is a form storage mechanism designed to read data from an xml list file. This form storage mechanism is present in version $\geq 4.0.6$.

It assumes that each distinct instance of a forms can be read from a distinct node.

This is a read-only form storage mechanism.

This form storage mechanism requires PHP 5.3 or greater

Form Storage Options

The options specifying a XML storage for \$form are stored at:

```
/modules/forms/forms/$form/storage_options/XML
```

It has the following structure:

- **file:** Required scalar node. The xml file that the data should be read from. This can either be an absolutely given file path, a relative file path, or the URL of a stream handled by php. If it is a relative file path, then it uses the file search category named below. The file can also be a path to a scalar node in magic data as indicated by 'mdn://path/in/magic/data'
- **search:** Required scalar node. The search category.
- **basequery:** Required scalar node. The xpath query to get the base node of the data
- **dataquery:** Required scalar node. The xpath query to get the data nodes.
- **id:** Optional parent node. The data defining how to associate an id `<namespace:OBS_VALUE/>`.
 - **query:** Optional scalar node. A xpath query, relative to the data node, for which the text content is this id's base value. Needs to return exactly one DOMNode.
 - **attribute:** Optional scalar node. The name of the attribute which contains the id. If not set the id is the numeric document order of OBS_VALUE nodes starting at 1.
 - **eval:** Optional scalar node. If set it is a code php code which modifies the id, stored in the \$id variable. For example `'$id = strtoupper($id);'`
 - **form_prepend:** Optional scalar node. Defaults to true. If true, it means the form name (with a l) has been prepended to the id and we need to strip it out to get the id. If ieval is also set, and this is true, the form is stripped before passing to the eval.
- **parent:** optional parent node. The data defining how to associate a parent id DOM Node
 - **query:** Optional scalar node. A xpath query, relative to the data node, for which the text content is this field's base value. Needs to return exactly one DOMNode.
 - **attribute:** Optional scalar node. The name of the attribute which contains the parent. If neither 'query' or this is set, there is not parent data. 'query' takes precedence.
 - **eval:** Optional scalar node. If set it is a code php code which modifies the id, stored in the \$val variable. For example `'$val = strtoupper($val);'`
- **fields:** Optional parent node. Specifies how the data of the your form is associate to a row of your table. Each child of this node is the name of a field \$field of your form.
 - **\$field:** Optional parent node with the following child nodes.
 - **query:** Optional scalar node. A xpath query, relative to the data node, for which the text content is this field's base value. Needs to return exactly one DOMNode.
 - **attribute:** Optional scalar node. The name of the attribute which contains the parent. If neither 'query' nor this is set, there is not data. 'query' takes precedence

- eval: Optional scalar node. If set it is a code php code which modifies the id, stored in the \$val variable. For example '\$val = strtoupper(\$val);'

TextLayout Tools Module List (4.0.6)

This is a list of all modules available in version 4.0.6-release of the package TextLayout Tools ^[1]

tcpdf

This describes version 4.0.0 of the module tcpdf (tcpdf)

- Source: textlayout/modules/tcpdf ^[2]
- Description: This is a wrapper for the tcpdf PDF generation utility
- Requirements:
 - I2CE at least 4 and less than 5
- Paths:
 - Classes: modules/tcpdf/tcpdf ^[3]
C128AObject, C128BObject, C128CObject, C39Object, I25Object

textlayout

This describes version 4.0.6 of the module Text Layout (textlayout) It is the top module of this package

- Source: textlayout/ ^[4]
 - Description: I2CE Text Layout Tool
 - Requirements:
 - I2CE at least 4 and less than 5
 - tcpdf at least 4.0 and less than 4.1
 - Paths:
 - Classes: /lib ^[5] ,/tcpdf ^[6]
I2CE_Encoding, I2CE_FontMetric, I2CE_FontMetricAFM, I2CE_FontMetricMultiDirection,
I2CE_FontMetricTTF, I2CE_Hyphen, I2CE_PDF, I2CE_TextCell, I2CE_TextTable, I2CE_UTF8
 - Afm_path: /CoreFonts ^[7]
 - Pdf_core: /CoreFonts ^[7]
 - Ttf_path: /usr/share/fonts/truetype/** ,/usr/local/share/fonts/truetype/**
 - Hyphen_path: /dicts ^[8] ,/usr/share/myspell/dicts
 - Modules: /modules ^[9]
tcpdf
-

References

- [1] <https://launchpad.net/textlayout>
- [2] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/modules/tcpdf>
- [3] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/modules/tcpdf/tcpdf>
- [4] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/>
- [5] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/lib>
- [6] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/tcpdf>
- [7] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/CoreFonts>
- [8] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/dicts>
- [9] <http://bazaar.launchpad.net/~intrahealth+informatics/textlayout/4.0.6-release/files/head:/modules>

Turn Off Background Processes

Background processes are run at configured intervals as users access the site. The main use of background processes is to keep report caches up to date for your site. On sites with large amounts of data you may want to disable running background processes and manually set up a cron job ^[1] to cache reports on a predefined interval instead of as users access the site. This may speed up access on some pages when users begin to access your site after a longer lull in activity. See the [How To Configuring Report Generation Timing and Configuring Form Cache Generation Timing](#) for more information on the settings to control report generation.

Here is a sample cron-job entry to generate all reports every night at 2:00am.

```
0 2 * * * /usr/bin/php ''/var/www/manage''/index.php
--page=/CustomReports/generate --nocheck=1 > /dev/null 2>&1
```

References

- [1] <http://en.wikipedia.org/wiki/Cron>

Upgrading From 3.1

These are directions for upgrading iHRIS Manage from version 3.1 under Ubuntu.

First Steps

Get The Source Code

You can either get the released or the development code. Suppose that **[base_path]** is the directory which contains i2ce, common, manage etc.

Backup Database

We should back up the database. Go into phpmyadmin, select your database, click on operations, and copy the database to a new name **[database_name]**.

Logging

Open up a new terminal on the machine.

```
cd [base_path]/i2ce/tools
php apache_tail.php 0
```

Main Configuration

Copy the existing site directory over to a new directory and update the **config.values.php** to:

- set the `$i2ce_site_database` to **[database_name]**, the name of the new database
- set `$i2ce_site_i2ce_path` to **[base_path]/i2ce**, the directory where the new version of I2CE is located

If you have URL Rewriting turned on, you will want to update your **.htaccess** file. Look for the line `RewriteBase` and change it to the web directory you are using.

Site Configuration File

Versions

We need to go through your site configuration (XML) file and look for any *conflicts* and any *requirements* with version info from 3.1 and update them to the new version. For example, if you have something that looks like:

```
<requirement name='ihris-manage'>
  <atLeast version='3.1' />
  <lessThan version='3.2' />
</requirement>
```

it should be, for the 3.2 development version:

```
<requirement name='ihris-manage'>
  <atLeast version='3.2' />
  <lessThan version='3.3' />
</requirement>
```

or for the 4.0 release version:

```
<requirement name='ihris-manage'>
  <atLeast version='4.0' />
  <lessThan version='4.1' />
</requirement>
```

for the release version.

You should probably update the

```
<version>3.1.X</version>
```

to be:

```
<version>3.2.0</version>
```

or:

```
<version>4.0.0</version>
```

as appropriate.

Modules

There were new modules created in the 3.2/4.0 code base for iHRIS Manage. Here are modules that did not exist in 3.1 which you probably want to enable in 3.2 or 4.0:

```
<enable name='PersonContact' />
<enable name='ihris-manage-PersonDemographic' />
<enable name='PersonEducation' />
<enable name='PersonEmployment' />
<enable name='PersonID' />
<enable name='PersonLanguage' />
<enable name='PersonNotes' />
```

You may also want:

```
<enable name='stub' />
<enable name="FileDump" />
<enable name="StretchPage" />
<enable name="messageBox" />
<enable name="messageNotice" />
<enable name="localeSelector" />
```

Changes to HTML Templates

There have been some changes to template files to better support localization.

Some of these changes may be in the *main.html* and the *welcome.html* files in the site templates folder.

Welcome Role

Change things like:

```
Logout as <span name='welcome_role' />
```

to:

```
<span printf=" 'Log out as %s',ihris-common->getUserRole()" />
```

Welcome Name

Change things like:

```
Welcome, <span name='welcome_name'> ,
```

to:

```
<span printf=" 'Welcome, %s',ihris-common->getUserNames()" />
```

Using Bazaar to Contribute Code

We maintain all of our code in Launchpad ^[1] using the Bazaar ^[2] version control system.

Bazaar

Installing Bazaar

You can install bazaar under ubuntu via

```
sudo apt-get install bzr bzrtools
```

Using Bazaar

You should try the five minute tutorial ^[4]. The software sources are below as well as some directions to set up a development server. Happy committing.

Bazaar Branches

There are a few software components that we maintain, and for each there is a release and development trunk.

- Release
 - i2ce ^[3] bzr branch lp:i2ce/3.1
 - ihris-common ^[4] bzr branch lp:ihris-common/3.1
 - ihris-manage ^[5] bzr branch lp:ihris-manage/3.1
 - ihris-plan ^[6] bzr branch lp:ihris-plan/1.0
 - ihris-qualify ^[7] bzr branch lp:ihris-qualify/3.1
 - textlayout ^[8] bzr branch lp:textlayout/3.1
- Development

- i2ce^[9] bzd branch lp:i2ce
- ihris-common^[10] bzd branch lp:ihris-common
- ihris-manage^[11] bzd branch lp:ihris-manage
- ihris-plan^[12] bzd branch lp:ihris-plan
- ihris-qualify^[13] bzd branch lp:ihris-qualify

Working On The Code

Suppose you want to setup a development server on your machine to play around with the code. Here are some steps that you can take to install iHRIS Manage under your home directory and setup up the apache and mysql web server.

Installing The Required Software

First we need to install some prerequisites for the software

```
sudo apt-get tasksel install lamp-server
sudo apt-get install php-apc php5-gd php5-tidy
```

Creating The Database

You can create the database, which we will call iheris_manage by:

```
mysql -u root -p
mysql> CREATE DATABASE iheris_manage;
mysql> GRANT ALL PRIVILEGES ON iheris_manage.* TO iheris_manage@localhost identified by 'PASS';
```

here you should change 'PASS' to whatever you want. You can also use phpmyadmin to create the database.

Getting The Code

Now we want to get the code from launchpad.

```
mkdir ~/iheris-dev
cd ~/iheris-dev
bzd branch lp:i2ce
bzd branch lp:iheris-common common
bzd branch lp:iheris-manage manage
bzd branch lp:textlayout/3.1 textlayout
```

Binding The Code

You may wish to bind your branch to the launchpad hosted branch to automatically commit there. For example, for iHRIS Manage, you can do:

```
bzd bind bzd+ssh://<YOUR USER NAME>@bazaar.launchpad.net/~intrahealth+informatics/iheris-manage/3.2-dev/
```

Configuring The Software

In iHRIS Manage, there is a demo site setup with sample data. We can make this available in apache by doing the following:

```
cd /var/www
sudo mkdir iheris-dev
cd /var/www/iheris-dev
sudo ln -s ~/iheris-dev/manage/sites/Demo/pages manage
```


Once we complete some configuration options, you can access the site at:

```
http://127.0.0.1/ihris-dev/manage
```

To complete the configuration we need to tell the application which database we want to use: We will now edit the configuration to let the site know about the database user and options:

```
gedit ~/ihris-dev/manage/sites/Demo/pages/config.values.php
```

We now need to uncomment and set the value of a few variables. They are:

Variable Name	Value
<code>\$i2ce_site_i2ce_path</code>	<code>/home/YOUR_USER_NAME/ihris-dev/i2ce</code>
<code>\$i2ce_site_database</code>	<code>ihris_manage</code>
<code>\$i2ce_site_database_user</code>	<code>ihris_manage</code>
<code>\$i2ce_site_database_password</code>	<code>PASS (the password you set above)</code>
<code>\$i2ce_site_module_config</code>	<code>/home/YOUR_USER_NAME/ihris-dev/manage/sites/Demo/iHRIS-Manage-Demo.xml</code>

Save and quit.

URL Rewriting

Finally, we can make our url's pretty by turning on rewriting. This is an optional step.

```
sudo a2enmod rewrite
cd ~/ihris-dev/manage/sites/Demo/pages
cp htaccess.TEMPLATE .htaccess
gedit .htaccess
```

We need to look for the line `RewriteBase` and change it to the web directory we want to use we are using, `/ihris-dev/manage`. You may now save and quit.

To make sure we can use our new `.htaccess` file do:

```
sudo gedit /etc/apache2/sites-available/default
```

and change:

```
<Directory /var/www/>
Options Indexes FollowSymLinks MultiViews
AllowOverride None
Order allow,deny
allow from all
</Directory>
```

to:

```
<Directory /var/www/>
Options Indexes FollowSymLinks MultiViews
AllowOverride All
Order allow,deny
allow from all
</Directory>
```

Coding Policy

Indentation and Formatting

No tabs please. All tabs should be converted to 4 spaces. The indentation style for (PHP) code should be `bsd` ^[14].

Documentation

We document our php code with `phpdoc` ^[15].

References

- [1] <http://www.launchpad.net>
- [2] <http://bazaar-vcs.org/>
- [3] <https://code.launchpad.net/~intrahealth+informatics/i2ce/3.1.4-release>
- [4] <https://code.launchpad.net/~intrahealth+informatics/ihris-common/3.1.4-release>
- [5] <https://code.launchpad.net/~intrahealth+informatics/ihris-manage/3.1.4-release>
- [6] <https://code.launchpad.net/~intrahealth+informatics/ihris-plan/1.0.4-release>
- [7] <https://code.launchpad.net/~intrahealth+informatics/ihris-qualify/3.1.4-release>
- [8] <https://code.launchpad.net/~intrahealth+informatics/textlayout/3.1.4-release>
- [9] <https://code.launchpad.net/~intrahealth+informatics/i2ce/3.2-dev>
- [10] <https://code.launchpad.net/~intrahealth+informatics/ihris-common/3.2-dev>
- [11] <https://code.launchpad.net/~intrahealth+informatics/ihris-manage/3.2-dev>
- [12] <https://code.launchpad.net/~intrahealth+informatics/ihris-plan/1.1-dev>
- [13] <https://code.launchpad.net/~intrahealth+informatics/ihris-qualify/3.2-dev>
- [14] http://en.wikipedia.org/wiki/Indent_style#BSD_KNF_style
- [15] <http://www.phpdoc.org/>

Article Sources and Contributors

Adding Fields to the Person Form - 4.0 *Source:* <http://open.intrahealth.org/w/index.php?oldid=11523> *Contributors:* Litlfred

Adding Forms and Fields *Source:* <http://open.intrahealth.org/w/index.php?oldid=10931> *Contributors:* Lduncan, MarkAHershberger

Adding ISCO 88 Job Codes to iHRIS Manage *Source:* <http://open.intrahealth.org/w/index.php?oldid=4224> *Contributors:* Litlfred, Lucaswood, MarkAHershberger

Automatically Generated Integers *Source:* <http://open.intrahealth.org/w/index.php?oldid=11560> *Contributors:* Lduncan

Configuration (Magic) Data *Source:* <http://open.intrahealth.org/w/index.php?oldid=4626> *Contributors:* Litlfred, MarkAHershberger

Configuring Form Cache Generation Timing *Source:* <http://open.intrahealth.org/w/index.php?oldid=12054> *Contributors:* Lduncan

Configuring Report Generation Timing *Source:* <http://open.intrahealth.org/w/index.php?oldid=11961> *Contributors:* Lduncan

Creating a New Form Field *Source:* <http://open.intrahealth.org/w/index.php?oldid=4673> *Contributors:* Litlfred

Creating Translations *Source:* <http://open.intrahealth.org/w/index.php?oldid=32927> *Contributors:* Lduncan, Litlfred, MarkAHershberger

Custom Reporting -- An Overview *Source:* <http://open.intrahealth.org/w/index.php?oldid=4351> *Contributors:* Litlfred

Custom Reporting -- Creating a Staff List Example *Source:* <http://open.intrahealth.org/w/index.php?oldid=11663> *Contributors:* Litlfred

Custom Reporting -- Creating Form Relationships *Source:* <http://open.intrahealth.org/w/index.php?oldid=4407> *Contributors:* Litlfred

Custom Reporting -- Creating Report Views *Source:* <http://open.intrahealth.org/w/index.php?oldid=4347> *Contributors:* Litlfred

Custom Reporting -- Creating Reports *Source:* <http://open.intrahealth.org/w/index.php?oldid=4390> *Contributors:* Litlfred

Customizing Form and Field Headers *Source:* <http://open.intrahealth.org/w/index.php?oldid=31085> *Contributors:* Lduncan, Litlfred

Customizing iHRIS Manage *Source:* <http://open.intrahealth.org/w/index.php?oldid=4641> *Contributors:* Litlfred, MarkAHershberger, Sturlington

Data Interoperability *Source:* <http://open.intrahealth.org/w/index.php?oldid=4393> *Contributors:* Litlfred, MarkAHershberger

Database Structure *Source:* <http://open.intrahealth.org/w/index.php?oldid=4207> *Contributors:* Lduncan, Litlfred, MarkAHershberger

Decentralized iHRIS Data Policy *Source:* <http://open.intrahealth.org/w/index.php?oldid=33675> *Contributors:* Litlfred

Defining Forms *Source:* <http://open.intrahealth.org/w/index.php?oldid=9046> *Contributors:* Litlfred, MarkAHershberger

Enabling Translations *Source:* <http://open.intrahealth.org/w/index.php?oldid=34882> *Contributors:* Litlfred

Exporting and Updating Form Caches Using Profiles - 4.0.6 *Source:* <http://open.intrahealth.org/w/index.php?oldid=32923> *Contributors:* Litlfred

Exporting Standardized Data *Source:* <http://open.intrahealth.org/w/index.php?oldid=33697> *Contributors:* Litlfred

File Search Paths *Source:* <http://open.intrahealth.org/w/index.php?oldid=4188> *Contributors:* Litlfred, MarkAHershberger

Form Caches *Source:* <http://open.intrahealth.org/w/index.php?oldid=12055> *Contributors:* Lduncan, Litlfred

Form Storage -- Entry/Last Entry *Source:* <http://open.intrahealth.org/w/index.php?oldid=4209> *Contributors:* Litlfred, MarkAHershberger

Form Storage -- Flat Table *Source:* <http://open.intrahealth.org/w/index.php?oldid=31407> *Contributors:* Litlfred, MarkAHershberger

Form Storage -- Magic Data *Source:* <http://open.intrahealth.org/w/index.php?oldid=4191> *Contributors:* Litlfred, MarkAHershberger

Form Storage -- Multi-Flat Table *Source:* <http://open.intrahealth.org/w/index.php?oldid=31406> *Contributors:* Litlfred, MarkAHershberger

Form Storage Mechanisms *Source:* <http://open.intrahealth.org/w/index.php?oldid=33551> *Contributors:* Lduncan, Litlfred, MarkAHershberger

Forms and Form Classes *Source:* <http://open.intrahealth.org/w/index.php?oldid=4195> *Contributors:* Litlfred, MarkAHershberger

HowTo: Install Memcached *Source:* <http://open.intrahealth.org/w/index.php?oldid=29088> *Contributors:* Lduncan, Litlfred

I2CE Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33765> *Contributors:* Litlfred

iHRIS Common Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33771> *Contributors:* Litlfred

iHRIS Ideas List *Source:* <http://open.intrahealth.org/w/index.php?oldid=29132> *Contributors:* Lduncan, Litlfred

iHRIS Manage Form Fields - 4.0 *Source:* <http://open.intrahealth.org/w/index.php?oldid=34900> *Contributors:* Litlfred

iHRIS Manage Form Fields - 4.0.7 *Source:* <http://open.intrahealth.org/w/index.php?oldid=34902> *Contributors:* Litlfred

iHRIS Manage Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33768> *Contributors:* Litlfred

iHRIS Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33762> *Contributors:* Litlfred

iHRIS Qualify Form Fields *Source:* <http://open.intrahealth.org/w/index.php?oldid=34896> *Contributors:* Litlfred

iHRIS Qualify Form Fields - 4.0.7 *Source:* <http://open.intrahealth.org/w/index.php?oldid=34903> *Contributors:* Litlfred

iHRIS Qualify Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33774> *Contributors:* Litlfred

iHRIS Regional Rollout *Source:* <http://open.intrahealth.org/w/index.php?oldid=11677> *Contributors:* Cbales, Litlfred

iHRIS Role List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33753> *Contributors:* Litlfred

iHRIS Suite 4.0 Development *Source:* <http://open.intrahealth.org/w/index.php?oldid=33708> *Contributors:* Lduncan, Litlfred

iHRIS Task List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33750> *Contributors:* Litlfred

iHRIS:Data Dictionary (4.0.4) *Source:* <http://open.intrahealth.org/w/index.php?oldid=30106> *Contributors:* Litlfred

iHRIS:Data Dictionary (4.0.5) *Source:* <http://open.intrahealth.org/w/index.php?oldid=31393> *Contributors:* Cbales

Installing a Custom Site from Launchpad *Source:* <http://open.intrahealth.org/w/index.php?oldid=33650> *Contributors:* Litlfred

Installing iHRIS on Ubuntu 10.4 (Lucid) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33731> *Contributors:* Lduncan, Litlfred

Installing on Mini-Box *Source:* <http://open.intrahealth.org/w/index.php?oldid=11564> *Contributors:* Litlfred, MarkAHershberger

Limiting Forms *Source:* <http://open.intrahealth.org/w/index.php?oldid=4384> *Contributors:* Lduncan, Litlfred, MarkAHershberger

Linking Facilities and Departments *Source:* <http://open.intrahealth.org/w/index.php?oldid=4383> *Contributors:* Litlfred

Linux (RedHat-Fedora) Installation *Source:* <http://open.intrahealth.org/w/index.php?oldid=11536> *Contributors:* Jstrobe

Linux (Ubuntu) Installation - 4.0.4 *Source:* <http://open.intrahealth.org/w/index.php?oldid=29082> *Contributors:* Lduncan

Magic Data Storage Mechanisms *Source:* <http://open.intrahealth.org/w/index.php?oldid=4198> *Contributors:* Litlfred, MarkAHershberger

Managing A Site In Launchpad *Source:* <http://open.intrahealth.org/w/index.php?oldid=33706> *Contributors:* Litlfred

Managing Decentralized iHRIS Manage with Launchpad *Source:* <http://open.intrahealth.org/w/index.php?oldid=33671> *Contributors:* Litlfred

Migrating Forms from Entry to MagicData *Source:* <http://open.intrahealth.org/w/index.php?oldid=4263> *Contributors:* Lduncan, MarkAHershberger

Module Structure *Source:* <http://open.intrahealth.org/w/index.php?oldid=10918> *Contributors:* Lduncan, Litlfred, MarkAHershberger

Pages and Templates *Source:* <http://open.intrahealth.org/w/index.php?oldid=4667> *Contributors:* Litlfred, MarkAHershberger

Pluggable Authentication *Source:* <http://open.intrahealth.org/w/index.php?oldid=12122> *Contributors:* Litlfred

Printed Forms *Source:* <http://open.intrahealth.org/w/index.php?oldid=31403> *Contributors:* Lduncan, Litlfred

README File for iHRIS *Source:* <http://open.intrahealth.org/w/index.php?oldid=32580> *Contributors:* Cbales, Litlfred, Sturlington

Recreate All Form Caches *Source:* <http://open.intrahealth.org/w/index.php?oldid=4337> *Contributors:* Lduncan, Litlfred

Setting An Establishment *Source:* <http://open.intrahealth.org/w/index.php?oldid=33539> *Contributors:* Litlfred

Supporting Software *Source:* <http://open.intrahealth.org/w/index.php?oldid=4200> *Contributors:* Litlfred, MarkAHershberger, Sturlington

Swiss Magic Data -- Form Relationships *Source:* <http://open.intrahealth.org/w/index.php?oldid=4498> *Contributors:* Litlfred

Swiss Magic Data Editor *Source:* <http://open.intrahealth.org/w/index.php?oldid=4488> *Contributors:* Litlfred

Tasks and Roles *Source:* <http://open.intrahealth.org/w/index.php?oldid=4219> *Contributors:* Litlfred, MarkAHershberger

Technical Overview: Form Storage -- CSV *Source:* <http://open.intrahealth.org/w/index.php?oldid=33555> *Contributors:* Litlfred

Technical Overview: Form Storage -- Eval *Source:* <http://open.intrahealth.org/w/index.php?oldid=11498> *Contributors:* Litlfred

Technical Overview: Form Storage -- SDMX CrossSectional *Source:* <http://open.intrahealth.org/w/index.php?oldid=33552> *Contributors:* Litlfred

Technical Overview: Form Storage -- SDMX-HD *Source:* <http://open.intrahealth.org/w/index.php?oldid=33553> *Contributors:* Lduncan, Litlfred

Technical Overview: Form Storage -- XML *Source:* <http://open.intrahealth.org/w/index.php?oldid=33554> *Contributors:* Litlfred

TextLayout Tools Module List (4.0.6) *Source:* <http://open.intrahealth.org/w/index.php?oldid=33777> *Contributors:* Litlfred

Turn Off Background Processes *Source:* <http://open.intrahealth.org/w/index.php?oldid=14814> *Contributors:* Lduncan, Litlfred

Upgrading From 3.1 *Source:* <http://open.intrahealth.org/w/index.php?oldid=4158> *Contributors:* Lduncan, Litlfred, MarkAHershberger, Mnamutso

Using Bazaar to Contribute Code *Source:* <http://open.intrahealth.org/w/index.php?oldid=4230> *Contributors:* Litlfred, Lucaswood, MarkAHershberger

Image Sources, Licenses and Contributors

Image:Forms-person-position-map.gif *Source:* <http://open.intrahealth.org/w/index.php?title=File:Forms-person-position-map.gif> *License:* unknown *Contributors:* Litlfred

File:screenshot-create-relationship.gif *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshot-create-relationship.gif> *License:* unknown *Contributors:* Litlfred

File:Screenshort-join-person-position.gif *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshort-join-person-position.gif> *License:* unknown *Contributors:* Litlfred

File:Screenshot-limit-person-position-AND.png *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshot-limit-person-position-AND.png> *License:* unknown *Contributors:* Litlfred

File:Screenshot-limit-person-position-FIELDS.png *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshot-limit-person-position-FIELDS.png> *License:* unknown *Contributors:* Litlfred

File:Screenshot-limit-person-position-FIELDS2.png *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshot-limit-person-position-FIELDS2.png> *License:* unknown *Contributors:* Litlfred

File:Screenshot-join-position.png *Source:* <http://open.intrahealth.org/w/index.php?title=File:Screenshot-join-position.png> *License:* unknown *Contributors:* Litlfred

image:export_cadre1.png *Source:* http://open.intrahealth.org/w/index.php?title=File:Export_cadre1.png *License:* unknown *Contributors:* Litlfred

image:export_cadre2.png *Source:* http://open.intrahealth.org/w/index.php?title=File:Export_cadre2.png *License:* unknown *Contributors:* Litlfred

Image:Mini-box-ihris-suite.jpg *Source:* <http://open.intrahealth.org/w/index.php?title=File:Mini-box-ihris-suite.jpg> *License:* unknown *Contributors:* Litlfred

Image:Phpmyadmin_create_user.gif *Source:* http://open.intrahealth.org/w/index.php?title=File:Phpmyadmin_create_user.gif *License:* unknown *Contributors:* Litlfred

License

GNU Free Documentation License 1.2
<http://www.gnu.org/copyleft/fdl.html>
