

```
1
2
3  AI-Assisted Development 'and' {
```

```
4
5  [Git Mastery Objective]
```

```
6
7
8
9
10  Alberto Larios Espina 1º DAM
```

```
11  A brief intro about using AI as a pair programmer to build a
12  functional web game.
```

```
13  };
14
```

Table Of 'Contents' {

01 Theory Lesson

An AI generated project hosted in a GitHub repository with a README published.

02 Features of the Topic

A Git cheat sheet for all the process.

03 Practical Exercise

Step-by-step of how to create a github repository and how to manage it.



1
2
3
4
5
6
7
8
9
10
11
12
13
14

01 {

[Git Cheat Sheet]

}

Git Cheat Sheet

```
git init {
```

```
  [ ] Initializes a new local  
  Git repository.
```

```
}
```

```
Git status {
```

```
  [ ] Checks the state of the  
  working directory and  
  staging area.
```

```
}
```

```
git add <file> {
```

```
  [ ] Adds specific files to  
  the staging area (use .  
  for all).
```

```
}
```

```
git commit -m "msg" {
```

```
  [ ] Records the staged  
  changes with a  
  descriptive message.
```

```
}
```

```
git branch <name> {
```

```
  [ ] Creates a new branch for  
  feature development.
```

```
}
```

```
git checkout <name> {
```

```
  [ ] Switches the current  
  working branch.
```

```
}
```

```
git merge <name> {
```

```
  [ ] Combines changes from the  
  specified branch into the  
  current one.
```

```
}
```

```
git remote add origin {
```

```
  [ ] Connects your local  
  repository to a remote  
  GitHub server.
```

```
}
```

```
git push -u origin main {
```


```
  [ ] Uploads local content to  
  the remote repository for  
  the first time.
```

```
}
```

1
2 02 {
3
4
5
6
7
8
9
10
11
12 }
13
14

[Creating a repository]

Creating the foundation on Github;

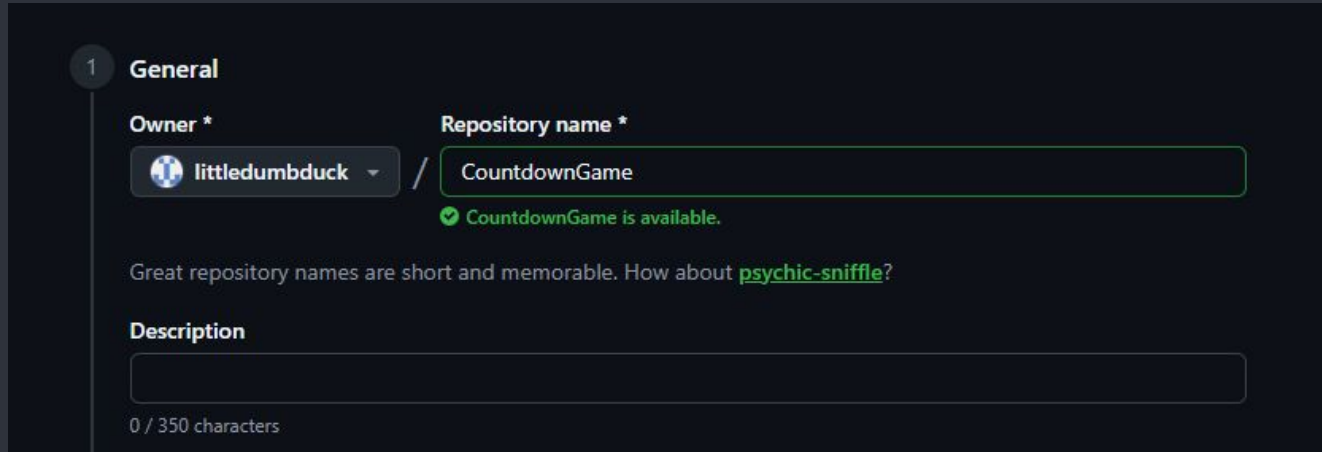

The screenshot shows the 'General' tab of the GitHub 'Create new repository' form. The 'Owner' is set to 'littledumbduck' and the 'Repository name' is 'CountdownGame'. A green checkmark indicates that the name is available. The 'Description' field is empty, and the character count is '0 / 350 characters'.

1 **General**

Owner * Repository name *

 littledumbduck / CountdownGame

✔ CountdownGame is available.

Great repository names are short and memorable. How about [psychic-sniffle?](#)

Description

0 / 350 characters

First we need to create a Github repository. We can do it in Github's website writing the name in the new repository option in the main menu.

Creating new project, branch and first push;

Página de códigos activa: 65001

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git init
Initialized empty Git repository in C:/Users/Usuario/Documents/GitHub/CountdownGame/.git/
```

Now it's time to use our VSC terminal. In a new project we use `git init` command. We will start the new Git project with it.

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>echo "# CountdownGame" >> README.md

C:\Users\Usuario\Documents\GitHub\CountdownGame>git add README.md

C:\Users\Usuario\Documents\GitHub\CountdownGame>git commit -m "first commit"
[main (root-commit) 435e304] first commit
1 file changed, 1 insertion(+)
create mode 100644 README.md

C:\Users\Usuario\Documents\GitHub\CountdownGame>git branch -M main

C:\Users\Usuario\Documents\GitHub\CountdownGame>git remote add origin https://github.com/littledumbduck/CountdownGame.git

C:\Users\Usuario\Documents\GitHub\CountdownGame>git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 239 bytes | 239.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/littledumbduck/CountdownGame.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.

C:\Users\Usuario\Documents\GitHub\CountdownGame>
```

After creating a `README.md` file with command `"echo"`, we can add all files with `"git add ."` or individual commands like `"git add README.md"` and start with our first commit with command `"git commit -m 'first commit'".`

Branch will be created with `"git branch -M main"` to create the main branch and then add our github repository with `"git remote add origin URL"`. We will be ready to push our commit with `"git push -u origin main"`.


```
1
2
3 03 {
4
5
6 [New branches and merge]
7
8
9
10
11
12 }
13
14
```


Project expansion;

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git branch alberto  
  
C:\Users\Usuario\Documents\GitHub\CountdownGame>git checkout alberto  
Switched to branch 'alberto'  
  
C:\Users\Usuario\Documents\GitHub\CountdownGame>git branch  
* alberto  
main
```

This time we will create the project with GitHub Copilot's help. Before that, we will create a new branch to work in a different workflow without modifying our main branch. We will start it with “`git branch alberto`” and change to the branch with “`git checkout alberto`”. With command “`git branch`” we can list all existing branches and check on which branch are we on.

Branch Management;

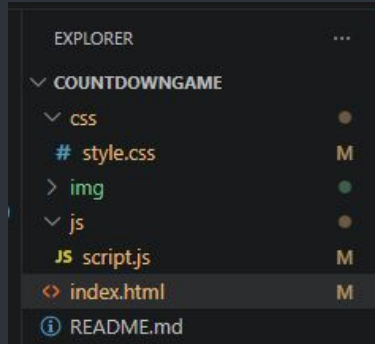

On this step we will have GitHub Copilot's help to develop our project. Once it is done, we need to commit and push it. We will add all our new files again with `git add .` and commit them with `git commit -m "Countdown game implemented"`. Once the commit is done, we push it with `git push origin alberto` so our personal branch will be ready to merge.

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git branch
* alberto
  main

C:\Users\Usuario\Documents\GitHub\CountdownGame>git add .
warning: in the working copy of 'css/style.css', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'index.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'js/script.js', LF will be replaced by CRLF the next time Git touches it

C:\Users\Usuario\Documents\GitHub\CountdownGame>git commit -m "Countdown game implemented"
[alberto 94631a3] Countdown game implemented
 7 files changed, 261 insertions(+)
 create mode 100644 img/4.png
 create mode 100644 img/5.png
 create mode 100644 img/6.png
 create mode 100644 img/7.png

C:\Users\Usuario\Documents\GitHub\CountdownGame>git push origin alberto
Enumerating objects: 19, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 12 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (12/12), 95.82 KiB | 13.69 MiB/s, done.
Total 12 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'alberto' on GitHub by visiting:
remote:   https://github.com/littledumbduck/CountdownGame/pull/new/alberto
remote:
To https://github.com/littledumbduck/CountdownGame.git
 * [new branch]   alberto -> alberto

C:\Users\Usuario\Documents\GitHub\CountdownGame>
```

Feature Implementation & Branch Push;

Now it's time to come back to our main branch. We do it with “`git checkout main`” then we can start merge with our personal branch.

In order to merge both branches we will use “`git merge alberto`” so, in case there's no conflicts, alberto's new commits will be moved to our main branch to push them with “`git push origin main`”.

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
```

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git merge alberto
Updating 6665522..94631a3
Fast-forward
```

```
css/style.css | 138 ++++++
img/4.png     | Bin 0 -> 28865 bytes
img/5.png     | Bin 0 -> 9211 bytes
img/6.png     | Bin 0 -> 8396 bytes
img/7.png     | Bin 0 -> 55072 bytes
index.html    | 26 ++++++
js/script.js  | 97 ++++++
7 files changed, 261 insertions(+)
create mode 100644 img/4.png
create mode 100644 img/5.png
create mode 100644 img/6.png
create mode 100644 img/7.png
```

```
C:\Users\Usuario\Documents\GitHub\CountdownGame>git push origin main
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/littledumbduck/CountdownGame.git
6665522..94631a3  main -> main
```


```
C:\Users\Usuario\Documents\GitHub\CountdownGame>
```

04 {

[Deployment of version
in GitHub Pages]

}

Deployment;

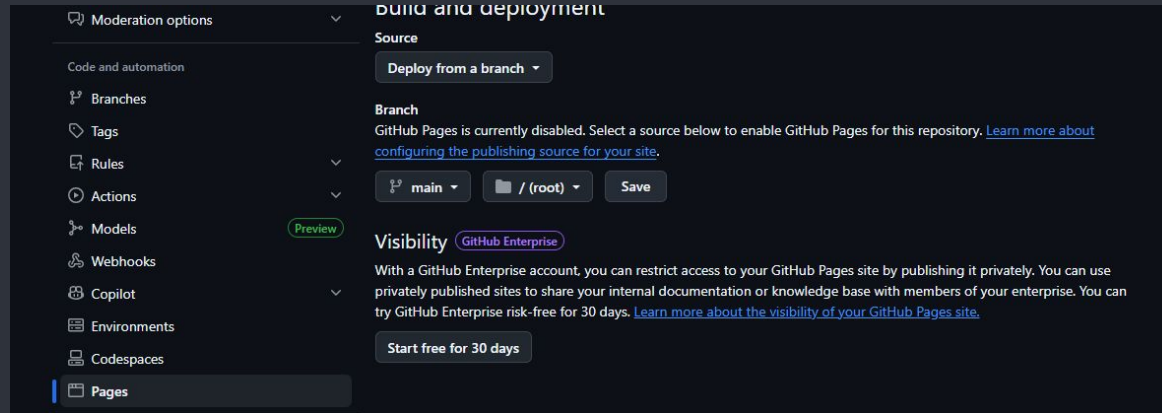

Last step is publishing our project in GitHub Pages. We need to get in our repository's website > Settings > Pages and look for branch to switch it to main and "save". After a couple of minutes our project will be deployed in a GitHub's website.

This time, our project is published here: <https://littledumbduck.github.io/CountdownGame/>

1
2
3
4
5
6
7
8
9
10
11
12
13
14

```
Many {  
Thanks;  
|  
}
```