

PyTorch Tutorial: Part III

Yunfei Teng

yt1208@nyu.edu

Department of Electrical and Computer Engineering
New York University Tandon School of Engineering

March 5, 2019

In this tutorial, some advanced models will be introduced.

* All the materials included in the slides are only used for the purpose of academic education.

- 1 Normalization
- 2 Autoencoder
- 3 ResNet
- 4 Skip-connection
- 5 U-Net
- 6 VisualBackProp
- 7 Generative Adversarial Nets

Normalization


Why do we need normalization?

- Batch Norm: Reduce internal co-variate shift.
- Instance Norm: Reduce the influence of contrast.

* Instance Norm is a special case of Batch Norm ($batchsize = 1$).

Batch Norm Paper: <https://arxiv.org/pdf/1502.03167.pdf>

Instance Norm Paper: <https://arxiv.org/pdf/1607.08022.pdf>

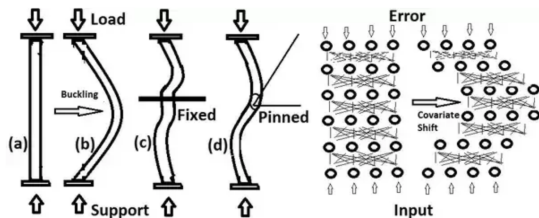

For both, Buckling or Co-Variate Shift a small perturbation leads to a large change in the later.

Debiprasad Ghosh, PhD, Uses AI in Mechanics

Figure: Visual explanation from Quora: Co-Variate Shift

Normalization

Ideally, all the samples are i.i.d, but it's almost impossible. That's why we need normalization.

It not only accelerates the speed of convergence, but also increases the accuracy.

Input: Values of x over a mini-batch: $\mathcal{B} = \{x_{1...m}\}$;
Parameters to be learned: γ, β

Output: $\{y_i = \text{BN}_{\gamma, \beta}(x_i)\}$

$$\mu_{\mathcal{B}} \leftarrow \frac{1}{m} \sum_{i=1}^m x_i \quad // \text{ mini-batch mean}$$
$$\sigma_{\mathcal{B}}^2 \leftarrow \frac{1}{m} \sum_{i=1}^m (x_i - \mu_{\mathcal{B}})^2 \quad // \text{ mini-batch variance}$$
$$\hat{x}_i \leftarrow \frac{x_i - \mu_{\mathcal{B}}}{\sqrt{\sigma_{\mathcal{B}}^2 + \epsilon}} \quad // \text{ normalize}$$
$$y_i \leftarrow \gamma \hat{x}_i + \beta \equiv \text{BN}_{\gamma, \beta}(x_i) \quad // \text{ scale and shift}$$

Figure: Core Algorithm of Batch Normalization

Autoencoder

Autoencoder is useful for information compression. Training an autoencoder to minimize reconstruction error amounts to maximizing a lower bound on the **mutual information** between input and learnt representation in latent space. [Stacked Denoising Autoencoders]

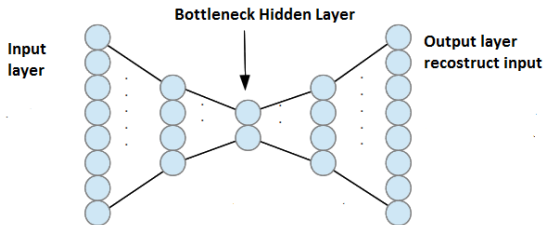


Figure: autoencoder architecture

Extended reading VAE: <https://arxiv.org/pdf/1312.6114.pdf>

ResNet Paper: <https://arxiv.org/pdf/1512.03385.pdf>

- Understand why the gradients are unstable. [gradient problem]
- Using residual blocks makes training arbitrarily deep neural nets become possible.

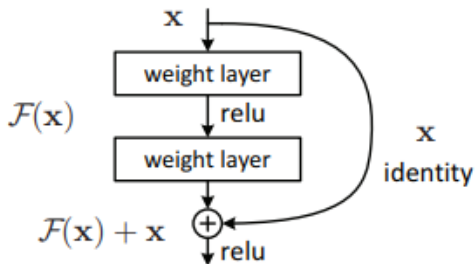


Figure: Residual block

Skip-connection

Effect of skip-connection: <https://arxiv.org/pdf/1712.09913.pdf>

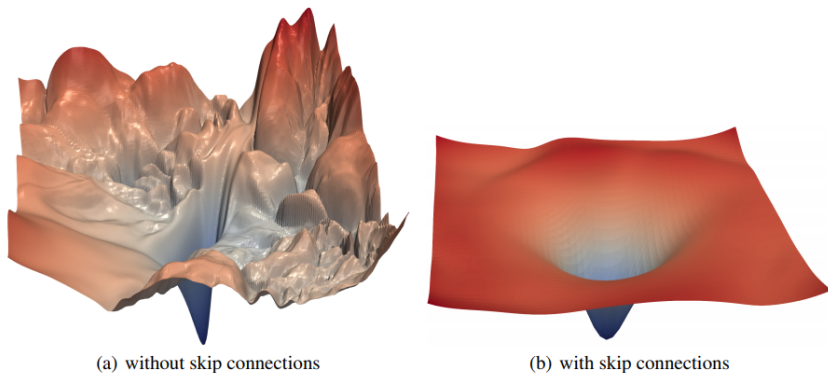


Figure: The loss surfaces of ResNet-56 with/without skip connections.

U-Net

U-Net was first used for image segmentation but it's also a great autoencoder architecture.

U-net Paper: <https://arxiv.org/pdf/1505.04597.pdf>

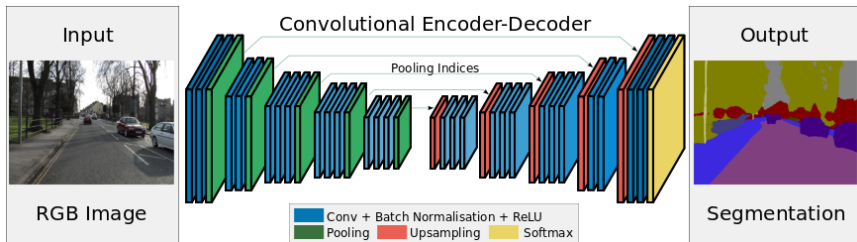


Figure: SegNet

VisualBackProp: Efficient visualization of CNNs

VisualBackProp Paper: <https://arxiv.org/pdf/1611.05418.pdf>

Intuition: The feature maps contain less and less irrelevant information to the prediction decision when moving deeper into the network.

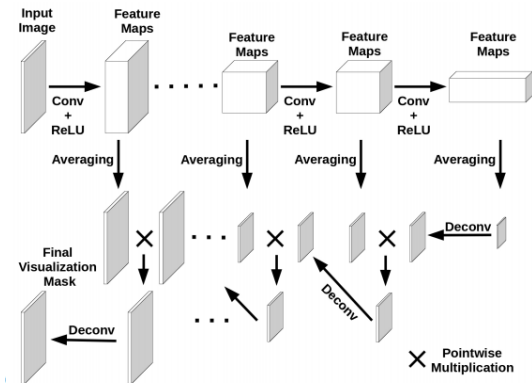


Figure: VisualBackProp

Generative Adversarial Nets

GAN Paper: <https://arxiv.org/pdf/1406.2661.pdf>

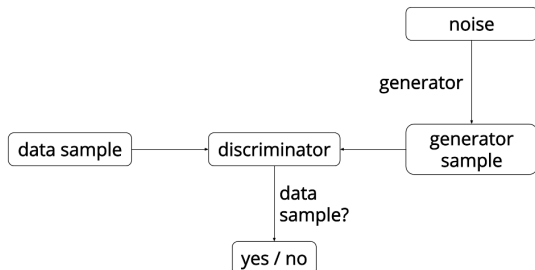


Figure: Generative adversarial nets

Extended Reading:

- Minimax: <https://en.wikipedia.org/wiki/Minimax>