


LittleWeebLibrary.Services.  
DirectoryWebSocketService.SetLittle  
WeebSettings

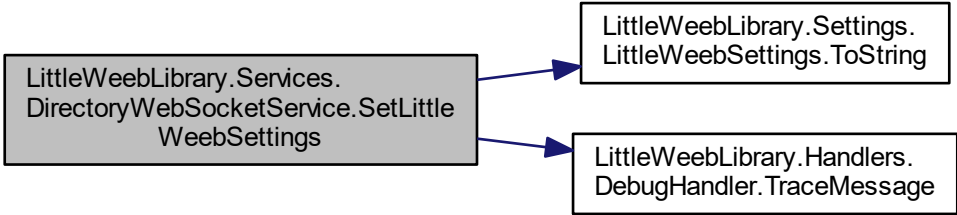

```
graph LR; A["LittleWeebLibrary.Services.  
DirectoryWebSocketService.SetLittle  
WeebSettings"] --> B["LittleWeebLibrary.Settings.  
LittleWeebSettings.ToString"]; A --> C["LittleWeebLibrary.Handlers.  
DebugHandler.TraceMessage"]
```

The diagram illustrates two calls to the `SetLittleWeebSettings` method. The first call is from `LittleWeebLibrary.Services.DirectoryWebSocketService` to `LittleWeebLibrary.Settings.LittleWeebSettings.ToString`. The second call is from `LittleWeebLibrary.Handlers.DebugHandler` to `TraceMessage`.

LittleWeebLibrary.Settings.  
LittleWeebSettings.ToString

LittleWeebLibrary.Handlers.  
DebugHandler.TraceMessage