



**University of  
Zurich**<sup>UZH</sup>

---

---

**Understanding Data Mixture Effects in Financial Language Model  
Pretraining**  
A Study of Domain-Specific and High-Quality General Corpora

---

---

MASTER'S THESIS

SUBMITTED IN PARTIAL FULFILLMENT OF THE REQUIREMENTS FOR THE DEGREE OF MASTER OF  
ARTS IN ECONOMICS AND BUSINESS ADMINISTRATION

STUDENT  
**GUANLAN LIU**  
19-768-837  
GUANLAN.LIU@UZH.CH

SUPERVISOR  
**PROF. DR. MARKUS LEIPPOLD**  
PROFESSOR OF FINANCIAL ENGINEERING  
DEPARTMENT OF FINANCE  
UNIVERSITY OF ZURICH

**MIN YANG**  
MIN.YANG2@UZH.CH

DATE OF SUBMISSION: [ DATE ]

## Abstract

This thesis studies how data sources interact during pretraining for financial language models. We ran 10 configurations at three model sizes (0.6B, 1.7B, 4B). In our setup, diverse in domain data beats high quality general text for financial tasks.

Mixed financial datasets perform best for finance (21.55 perplexity at 4B), whereas general text pretraining trails behind (31.54 average perplexity across evaluations). All main runs used a learning rate of 2e-5; in a few unstable cases we lowered LR and training stabilized. Very small datasets (under 20M tokens) overtrain and need mixing. WikiText helps little on finance, even though it is clean and well known.

Put simply, these results give practical guidance for training privacy preserving financial models on local devices, plus concrete mixture notes for models from 0.6B to 4B.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Motivation . . . . .	1
1.2	Research Questions . . . . .	2
1.3	Contributions . . . . .	2
1.4	Thesis Organization . . . . .	3
1.5	Scope and Limitations . . . . .	4
<b>2</b>	<b>Background and Related Work</b>	<b>5</b>
2.1	Financial NLP . . . . .	5
2.1.1	The Financial NLP Landscape . . . . .	5
2.1.2	Existing Financial Language Models . . . . .	5
2.1.3	Domain-Specific Challenges . . . . .	5
2.2	Language Model Pretraining . . . . .	6
2.2.1	Pretraining Objectives and Architecture . . . . .	6
2.2.2	Scaling Laws and Model Size Effects . . . . .	6
2.2.3	Computational and Memory Considerations . . . . .	6
2.3	Data Mixture Strategies . . . . .	6
2.3.1	Curriculum Learning and Sequential Mixing . . . . .	6
2.3.2	Simultaneous Mixture Approaches . . . . .	7
2.3.3	Domain Proportions and Sampling Strategies . . . . .	7
2.4	Domain Adaptation and Transfer Learning . . . . .	7
2.4.1	Cross-Domain Transfer in Language Models . . . . .	7
2.4.2	Catastrophic Forgetting and Stability . . . . .	8
2.4.3	Distribution Shift and Domain Mismatch . . . . .	8
2.4.4	Related Empirical Studies . . . . .	8
<b>3</b>	<b>Methodology</b>	<b>9</b>
3.1	Experimental Design Overview . . . . .	9
3.2	Model Architecture . . . . .	9
3.3	Datasets . . . . .	10

3.3.1	Financial Datasets . . . . .	10
3.3.2	WikiText . . . . .	10
3.3.3	Mixture Strategies . . . . .	11
3.4	Training Setup and Hyperparameter Tuning . . . . .	12
3.4.1	Initial Configuration . . . . .	12
3.4.2	Pragmatic Learning Rate Adjustments . . . . .	13
3.4.3	Other Hyperparameters . . . . .	13
3.4.4	Computational Budget . . . . .	13
3.5	Evaluation Protocol . . . . .	14
3.5.1	Multi-Dataset Evaluation . . . . .	14
3.5.2	Metrics . . . . .	14
<b>4</b>	<b>Results</b>	<b>16</b>
4.1	Overview of Experimental Results . . . . .	16
4.2	Data Mixture Effects: The Core Finding . . . . .	17
4.2.1	Mixed Financial Datasets . . . . .	17
4.2.2	Mixed Wiki+Financial . . . . .	18
4.2.3	Pure WikiText Baseline . . . . .	18
4.2.4	Key Takeaway . . . . .	20
4.3	Individual Dataset Analysis: Component Effects . . . . .	21
4.3.1	Large Datasets . . . . .	21
4.3.2	Medium Datasets . . . . .	23
4.3.3	Small Datasets . . . . .	24
4.3.4	Dataset Size vs Generalization . . . . .	27
4.4	Training Dynamics and Scaling Behavior . . . . .	29
4.4.1	Normal Scaling Pattern . . . . .	29
4.4.2	Reverse Scaling Phenomenon . . . . .	31
4.4.3	Learning Rate Sensitivity by Model Size . . . . .	32
4.4.4	Fixing Reverse Scaling . . . . .	33
4.4.5	Model Stability Analysis . . . . .	33
4.5	Domain Transfer and Generalization Patterns . . . . .	34
4.5.1	Cross-Dataset Evaluation . . . . .	34
4.5.2	Document Format and Task Type Effects . . . . .	35
4.5.3	Variance Comparison . . . . .	38
4.5.4	Domain-Specific vs General Knowledge Transfer . . . . .	40
4.6	Summary and Key Results . . . . .	42
<b>5</b>	<b>Discussion</b>	<b>47</b>
5.1	Key Empirical Findings . . . . .	47

5.2	Interpretation of Data Interaction Effects . . . . .	48
5.2.1	Why WikiText Underperforms on Financial Tasks . . . . .	48
5.2.2	Benefits of In-Domain Diversity . . . . .	49
5.2.3	Domain Interference Patterns . . . . .	50
5.2.4	Scale-Dependent Training Notes . . . . .	50
5.3	Practical Guidelines for Financial LM Pretraining . . . . .	51
5.3.1	Data Mixture Strategies by Use Case . . . . .	51
5.3.2	Model Size Selection . . . . .	51
5.3.3	Learning Rate Notes . . . . .	52
5.3.4	Token Budget Allocation . . . . .	52
5.4	Limitations and Threats to Validity . . . . .	52
<b>6</b>	<b>Conclusion</b> . . . . .	<b>54</b>
6.1	Summary of Contributions . . . . .	54
6.1.1	Data Mixture Guidelines for Financial NLP . . . . .	54
6.1.2	Learning Rate Notes . . . . .	55
6.1.3	Dataset Size Effects and Generalization . . . . .	55
6.1.4	Domain Transfer and Format Effects . . . . .	55
6.1.5	Model Size Selection for Resource-Constrained Settings . . . . .	56
6.1.6	Open-Source Reproducible Pipeline . . . . .	56
6.2	Implications for Practice and Research . . . . .	56
6.2.1	For Practitioners: Actionable Deployment Guidelines . . . . .	56
6.2.2	For Researchers: Open Questions and Methodological Lessons . . . . .	57
6.2.3	For Industry: Privacy-Preserving Financial AI . . . . .	57
6.3	Future Research Directions . . . . .	58
6.3.1	Scaling to Larger Models and Architectures . . . . .	58
6.3.2	Advanced Mixture Optimization . . . . .	58
6.3.3	Comprehensive Downstream Evaluation . . . . .	59
6.3.4	Multi-Stage Pretraining Strategies . . . . .	59
6.3.5	Open Questions . . . . .	59
6.4	Closing Remarks . . . . .	60

# List of Figures

3.1	50cap Mixture Strategy Visualization . . . . .	12
4.1	Mixed Financial Dataset: Scaling Behavior . . . . .	18
4.2	Mixed Wiki+Financial Dataset: Scaling Behavior . . . . .	19
4.3	WikiText Dataset: Reverse Scaling . . . . .	20
4.4	Comparison of Mixture Strategies . . . . .	21
4.5	Financial News Dataset: Scaling Behavior . . . . .	23
4.6	SEC Reports Dataset: Scaling Behavior . . . . .	23
4.7	FinGPT Sentiment Dataset: Scaling Behavior . . . . .	25
4.8	Finance Alpaca Dataset: Scaling Behavior . . . . .	25
4.9	FiQA Dataset: Scaling Behavior . . . . .	26
4.10	Financial QA 10K Dataset: Reverse Scaling . . . . .	28
4.11	Twitter Financial Sentiment Dataset: Reverse Scaling . . . . .	28
4.12	Dataset Size vs. Generalization Across Model Scales . . . . .	30
4.13	Cross-Dataset Transfer Heatmap . . . . .	45
4.14	Cross-Dataset Variance Comparison . . . . .	46

# List of Tables

3.1	Experimental Settings Summary . . . . .	10
3.2	Qwen3 Model Specifications . . . . .	10
3.3	Financial Dataset Characteristics . . . . .	11
3.4	WikiText Dataset Characteristics . . . . .	11
4.1	Overview of Pretraining Experiments . . . . .	16
4.2	Mixed Financial: Evaluation Results . . . . .	17
4.3	Mixed Wiki+Financial: Evaluation Results . . . . .	19
4.4	WikiText: Learning Rate Comparison . . . . .	20
4.5	Financial News: Evaluation Results . . . . .	22
4.6	SEC Reports: Evaluation Results . . . . .	24
4.7	FinGPT Sentiment: Evaluation Results . . . . .	26
4.8	Finance Alpaca: Evaluation Results . . . . .	27
4.9	FiQA: Evaluation Results . . . . .	27
4.10	Financial QA 10K: Learning Rate Comparison . . . . .	29
4.11	Twitter Financial: Learning Rate Comparison . . . . .	29
4.12	Financial News Evaluation: Cross-Dataset Performance . . . . .	36
4.13	SEC Reports Evaluation: Cross-Dataset Performance . . . . .	36
4.14	Alpaca Evaluation: Cross-Dataset Performance . . . . .	37
4.15	FinGPT Evaluation: Cross-Dataset Performance . . . . .	38
4.16	FiQA Evaluation: Cross-Dataset Performance . . . . .	39
4.17	Twitter Financial Evaluation: Cross-Dataset Performance . . . . .	40
4.18	Financial QA Evaluation: Cross-Dataset Performance . . . . .	41
4.19	WikiText Evaluation: Cross-Dataset Performance . . . . .	42
4.20	Best Configurations by Application . . . . .	43

# Chapter 1

## Introduction

### 1.1 Motivation

Large language models (LLMs) have rapidly changed how we do natural language processing (Vaswani et al. 2017; Radford et al. 2019; Brown et al. 2020; Touvron et al. 2023). Yet using them in finance still brings practical hurdles. Financial institutions and individuals handle highly sensitive data—transactions, portfolios, trading strategies—that cannot be sent to external APIs for privacy and competitive reasons (e.g., GDPR) (*Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data (General Data Protection Regulation)* 2016). We therefore need lightweight, locally runnable financial language models that maintain reasonable performance while protecting data, with no exceptions.

In practice, domain adaptation tends to follow two paths: train very large models from scratch or fine-tune general models on domain data. Most teams cannot afford the first; the second often misses domain nuances (Gururangan et al. 2020). And there is a related belief: high quality general corpora (e.g., Wikipedia, The Pile) always help specialized applications. Not always; evidence is thinner than many assume (Gao et al. 2021; Raffel et al. 2020; Longpre et al. 2023).

This thesis studies how different data sources—both in-domain financial data and out-of-domain high-quality corpora—interact during pretraining. We focus on models in the 0.6B to 4B parameter range, which are realistic for laptops and some mobile devices while keeping acceptable performance (A. Yang et al. 2024; Xia et al. 2023; Team et al. 2024; Javaheripi et al. 2023). Through systematic experiments across 10 pretraining configurations and three model sizes, we present evidence about data mixture strategies for specialized domains (S. Wu et al. 2023). In practical terms, we test simple choices that many teams can replicate.

This study is timely. Regulations such as GDPR and emerging financial data protection standards push for on-device processing (*Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data (General Data Protection Regulation)* 2016). As more teams adopt AI with limited compute, insights on 0.6B to 4B models are practically useful. Still, we keep the scope modest.

Beyond applications, we also add to understanding how models learn from different data distributions. We observed a surprising pattern sometimes called “reverse scaling”, in some regimes smaller models outperform larger ones. In our runs, these cases point to hyperparameter choices rather than

fundamental limits (J. Kaplan et al. 2020; Hoffmann et al. 2022; McCandlish et al. 2018). Tuning matters.

## 1.2 Research Questions

This thesis investigates the following core research questions. We keep them narrow and testable. We do not chase new theory or SOTA here.

**RQ1: Data Mixture Composition** How do combinations of in domain financial datasets and out of domain general corpora affect model performance and generalization? Specifically, does mixing multiple financial datasets improve consistency compared to single dataset training, and does adding high quality general text (WikiText) help or hurt financial tasks? Our results (Figure 4.4 and Tables 4.2 and 4.3) indicate that mixed financial datasets achieve 21.55 ppl (mean across financial evaluations), compared to 26.69 ppl for Wiki+Financial mixtures (overall mean across eight evaluations) and 41.96 ppl for pure WikiText (mean across financial evaluations after LR adjustment), suggesting in domain diversity is the better choice.

**RQ2: Model Size and Training Dynamics** How do optimal training configurations vary across model sizes (0.6B, 1.7B, 4B parameters)? What is the relationship between size and learning rate sensitivity? In our setup, we trained all main runs with LR=2e-5; for a few abnormal cases, we reduced LR pragmatically (e.g., to  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) and saw improved stability. We do not claim a general scaling rule.

**RQ3: Dataset Size Effects** What is the minimum dataset size for effective standalone pretraining, and how does size affect overtraining and cross dataset generalization? At what point do small datasets need mixing? With our data, datasets >100M tokens enable stable training (Figures 4.5 and 4.6), while datasets <20M tokens require mixing due to extreme overtraining and high cross dataset variability (Figures 4.10 and 4.11 and Tables 4.17 and 4.18).

**RQ4: Domain Transfer Patterns** How well do models pretrained on financial data transfer across task types (sentiment, question answering, document understanding), and how much does document format matter? Cross dataset comparison tables (Tables 4.12 to 4.17) suggest that format consistency (long form, instruction, short form) drives transfer more than domain vocabulary, with boldface patterns clustering along format based diagonals.

These questions are addressed through a detailed experimental framework with 30 trained models and 237 evaluation results across eight held-out test sets (Mixed Financial excludes WikiText evaluation), providing systematic evidence on data mixture effects in specialized-domain pretraining.

## 1.3 Contributions

This thesis makes six primary contributions to understanding data mixture effects and training dynamics for language model pretraining:

**1. Empirical Data Mixture Guidelines** We provide concrete, evidence-based recommendations for financial language model pretraining, showing that in-domain diversity outperforms high-quality general corpora for specialized domains. Our experiments show that mixed financial datasets achieve 21.55 perplexity at 4B parameters compared to 41.96 perplexity (mean across financial evaluations after LR adjustment) for WikiText pretraining, a  $1.95 \times$  gap. These findings challenge the assumption that general high-quality text always helps domain adaptation. We support this with 11 scaling

figures and 18 tables (10 per-training-dataset and 8 cross-dataset comparisons).

**2. Learning Rate Notes** All main experiments used  $\text{LR}=2\text{e-}5$ . In three follow-ups with abnormalities (WikiText, Financial QA, Twitter), we reduced LR (e.g., to  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) and observed improved stability and results. We present these as pragmatic fixes in our setup, not a general rule. Figures Figures 4.3, 4.10 and 4.11 show recovery in these runs; Tables 4.10 and 4.11 give the metrics.

**3. Dataset Size Effects on Pretraining** We summarize empirical relationships between dataset size and training viability:

- Small datasets ( $\leq 20\text{K}$  samples): Extreme overtraining (67-249 epochs), high variance (70-97% relative spread), require mixing
- Medium datasets (20-100K samples): Moderate overtraining (6-30 epochs), acceptable for specific use cases
- Large datasets ( $\geq 100\text{K}$  samples): Minimal overtraining (2-24 epochs), viable for standalone pretraining

These findings provide practical guidance on when mixing is necessary versus when individual datasets suffice, with direct implications for practitioners planning limited data collection and annotation budgets.

**4. Cross-Domain Interaction Analysis** We study how high-quality general corpora (WikiText) interact with domain-specific financial data during pretraining. Contrary to common expectations, WikiText provides little benefit and sometimes degrades financial task performance. Mixed WikiText+Financial pretraining achieves 26.69 perplexity compared to 21.55 for pure financial mixing, a 24% degradation. This suggests domain-specific data strategies are better for specialized applications. Cross-dataset tables show this pattern: WikiText rows rarely capture best-performance positions across financial evaluation columns, while mixed financial rows often do.

**5. Lightweight Financial Model Feasibility** We show that 0.6B to 4B parameter models can achieve practical financial NLP performance with appropriate mixtures and tuning, enabling privacy-preserving edge deployment. Our 4B model achieves 21.55 perplexity on diverse financial tasks, competitive with much larger models while remaining deployable on consumer hardware. This addresses the need for locally runnable financial AI systems.

**6. Open-Source Training Pipeline** We provide a reproducible codebase for mixture-based pretraining with a detailed evaluation framework across 10 experiments and 30 trained models. The pipeline supports automatic mixture composition, multi-dataset evaluation, and systematic hyperparameter tuning, enabling future research on domain-specific language model training.

## 1.4 Thesis Organization

What follows is simple and practical.

**Chapter 2: Background and Related Work** gives only what we need: key ideas from financial NLP, pretraining basics, mixture strategies, and domain adaptation. Enough context to place our study in transfer learning and scaling work.

**Chapter 3: Methodology** explains the design we used: Qwen3 models, the datasets (7 financial sets, 321.4M tokens, plus WikiText), the 50cap mixture rule, and training settings. We also note where we had to adjust learning rate for stability.

**Chapter 4: Results** presents the evidence with plots and tables (11 scaling figures, 18 tables). First mixtures, then single datasets, then training dynamics, and finally transfer. The plots show trends across sizes; the tables show which setup works where.

**Chapter 5: Discussion** connects the results to prior work and day to day practice. We explain the weak financial transfer of WikiText (see boldface in cross tables), what in domain diversity buys, how learning rate tweaks changed stability, and we close with practical guidelines with exact references.

**Chapter 6: Conclusion** sums up contributions, notes implications, and lists next steps: try larger models, test dynamic mixing, and check downstream tasks.

## 1.5 Scope and Limitations

We study causal language model pretraining on financial text in the 0.6B to 4B range. Three notes help read the results fairly.

**Model architecture.** We used Qwen3 for all runs. The learning rate and mixture lessons should carry over, but checking LLaMA, Gemma, and Phi would add confidence.

**Mixture rule and evaluation.** We kept one mixture rule (50cap, the largest dataset capped at half the mixture) and measured perplexity on held out test sets. This fits our goal of studying pretraining dynamics. It does not give downstream task accuracy, so claims about applications stay limited.

**Scale and domain.** We worked between 0.6B and 4B for hardware reasons. Larger models can behave differently. Findings about learning rate and dataset size likely transfer to other domains, but the weak benefit of WikiText is specific to finance and may not hold elsewhere.

Across 30 models and more than 240 evaluations, the patterns are consistent. Where evidence is thin, we say so.

# Chapter 2

## Background and Related Work

This chapter reviews work that we actually use. We start with financial NLP, then pretraining basics, prior mixture strategies, and finally domain adaptation and transfer learning. In other words: context, mechanisms, and practice—concise rather than exhaustive.

### 2.1 Financial NLP

#### 2.1.1 The Financial NLP Landscape

Financial natural language processing covers many tasks: sentiment on news and social media, question answering on regulatory documents, numerical reasoning in reports, and information extraction from SEC filings (Araci 2019; Z. Chen et al. 2021). The domain has specific challenges compared to general NLP: specialized vocabulary (e.g., “alpha”, “beta”, “EBITDA”), domain reasoning patterns (e.g., causal chains in market analysis), numerical grounding (financial statements), and temporal dynamics (market events, earnings releases) (S. Wu et al. 2023; Araci 2019). These points guide our choices later. In our setup, they are constraints, not goals.

#### 2.1.2 Existing Financial Language Models

Several finance focused language models appeared in recent years. **BloombergGPT** (S. Wu et al. 2023), a 50 billion parameter model, was pretrained on a mixture of 51% financial and 49% general data, showing strong performance on financial benchmarks while keeping general capabilities. **FinBERT** variants (Araci 2019; Y. Yang et al. 2020) adapted BERT to financial text via continued pretraining, improving sentiment analysis on financial news. More recently, **FinGPT** (H. Yang et al. 2023) explored open source instruction tuning for financial tasks. Together, these lines show both scale first and adaptation first approaches.

#### 2.1.3 Domain-Specific Challenges

Financial NLP faces three practical challenges. **First**, privacy concerns: financial institutions cannot upload sensitive data (portfolios, trading strategies, client information) to external APIs, so locally deployable models are needed (S. Wu et al. 2023). **Second**, data scarcity: compared to general web text, curated financial corpora are smaller, so data-efficient training is important. **Third**, rapid

vocabulary change: financial language shifts with market trends (e.g., “DeFi”, “ESG”), so models must adapt to new terms. These constraints motivate our focus on 0.6B to 4B models.

## 2.2 Language Model Pretraining

### 2.2.1 Pretraining Objectives and Architecture

Modern language models mostly use **causal language modeling**: predict the next token from the context (Radford et al. 2019; Brown et al. 2020). We follow this default. Architecturally, we use the usual decoder-only transformer (GPT, LLaMA, Qwen): self-attention for long context and feed-forward blocks for the non-linear part (Vaswani et al. 2017; Touvron et al. 2023). Nothing unusual.

### 2.2.2 Scaling Laws and Model Size Effects

The work of J. Kaplan et al. (2020) linked model size, dataset size, compute, and final performance by power laws. The core point, that larger models can be more sample efficient, pushed the field toward billion parameter scales. Later work added nuance: Hoffmann et al. (2022) showed undertraining is common (Chinchilla); Tay et al. (2022) emphasized objectives and data quality. Put simply: bigger helps, but details matter.

Critically, **hyperparameter sensitivity** is less studied. While McCandlish et al. (2018) noted that optimal learning rates can decrease with model size, systematic studies for models in the 0.6B to 4B range, especially in specialized domains, remain limited. Many scaling-law papers assume good tuning without showing the details, which can hide training dynamics. In our work, all main runs used LR=2e-5; in a few cases we reduced LR pragmatically to stabilize training. We do not claim a general rule.

### 2.2.3 Computational and Memory Considerations

Training large language models requires substantial compute. A 1 billion parameter model with 32 bit precision uses roughly 4GB of memory for parameters alone, with optimizer states (e.g., Adam’s momentum terms) doubling or tripling this requirement (Rajbhandari et al. 2020; Kingma and Ba 2014). For models in the 0.6B to 4B range targeted here, memory efficient techniques like mixed precision (bfloat16), gradient accumulation, activation checkpointing, and parameter efficient fine tuning such as LoRA allow training on enterprise class GPUs (e.g., NVIDIA RTX A6000 48GB, A100 40GB, H100 80GB) (Narayanan et al. 2021; Hu et al. 2021). In practice, these tricks matter more than any single hyperparameter.

## 2.3 Data Mixture Strategies

### 2.3.1 Curriculum Learning and Sequential Mixing

**Curriculum learning** in language model pretraining involves carefully sequencing training data from easier to harder examples, or from general to specialized domains (Bengio et al. 2009). Zhang et al. (2022) applied curriculum strategies in pretraining OPT models, progressively increasing data

difficulty. In the financial domain, a natural curriculum might proceed from general Wikipedia text to financial news to technical SEC filings. However, empirical evidence for curriculum’s effectiveness in large-scale pretraining remains mixed across objectives and domains (Longpre et al. 2023). Some works report limited gains for masked language modeling at scale, while others show improvements in specialized settings; in practice, many production systems rely on mixture-based sampling rather than strict curricula (Raffel et al. 2020; Zhang et al. 2022).

### 2.3.2 Simultaneous Mixture Approaches

An alternative to sequential mixing is **simultaneous mixture**: sample from multiple datasets throughout training. Raffel et al. (2020) (T5) used a multi task mixture with task specific prefixes and found diverse pretraining helped downstream. Xie et al. (2023) introduced DoReMi, which adjusts domain weights during training by validation perplexity, improving sample efficiency over static mixtures on The Pile.

**BloombergGPT** (S. Wu et al. 2023) mixed 51% financial with 49% general (The Pile, C4) at token level and showed balanced mixtures can keep general skills while adding domain strength. Their focus was a single 50B model. The interaction with model size (0.6B vs 4B) is less clear. Our runs across three sizes show mixed financial datasets (21.55 ppl @ 4B) outperform Wiki+Financial (26.69 ppl @ 4B, 24% worse) and pure WikiText (41.96 ppl mean financial @ 4B, 95% worse), per Figure 4.4 and Tables 4.2 and 4.3. For specialized use, domain purity seems to win over domain balance.

### 2.3.3 Domain Proportions and Sampling Strategies

Choosing domain proportions is not obvious. Three common strategies:

1. **Temperature sampling** (Arivazhagan et al. 2019): Sample from dataset  $d$  with probability  $p_d \propto n_d^{1/T}$  where  $n_d$  is dataset size and  $T$  is temperature.  $T < 1$  upsamples small datasets;  $T > 1$  downsamples them.
2. **Capping strategies** (Longpre et al. 2023): Cap the largest dataset(s) at a threshold (e.g., 50% of total tokens) to prevent dominance, then proportionally sample others. This ensures diversity even when one dataset is orders of magnitude larger.
3. **Equal mixing** (Sanh et al. 2022): Assign equal sampling probability to each dataset regardless of size. This maximizes task diversity but may undersample large datasets.

This thesis uses a **50% capping strategy** (“50cap”) for financial mixtures (details in Chapter 3) to balance diversity and efficiency. We chose it for simplicity and stability in our setup.

## 2.4 Domain Adaptation and Transfer Learning

### 2.4.1 Cross-Domain Transfer in Language Models

**Transfer learning**, pretraining on broad data then fine-tuning on specialized tasks, has been the common approach since BERT (Devlin et al. 2019; Pan and Q. Yang 2010; Zhuang et al. 2021). The assumption is that general linguistic knowledge transfers to domain applications. However, recent work shows nuance: Gururangan et al. (2020) found that **domain-adaptive pretraining** (continued pretraining on domain corpora) improves performance across domains, suggesting general pretraining alone is not enough for specialized use.

In finance, Araci (2019) showed improvements from continued pretraining on financial news; Y. Yang et al. (2020) saw further gains with task-adaptive pretraining. More recently, A. H. Huang et al. (2023) found that domain-specific pretraining outperforms general models on financial information extraction. However, these studies focus on BERT-style masked language models and classification tasks, the effectiveness of domain adaptation for *generative causal language models* in financial pretraining is less studied. Advances in parameter-efficient fine-tuning, such as surgical fine-tuning (Lee et al. 2022), suggest selective adaptation may improve transfer while mitigating catastrophic forgetting.

#### 2.4.2 Catastrophic Forgetting and Stability

A key challenge in domain adaptation is **catastrophic forgetting**: when a pretrained model is further trained on domain-specific data, it may lose general knowledge (McCloskey and Cohen 1989; French 1999). Kirkpatrick et al. (2017) introduced Elastic Weight Consolidation (EWC) to mitigate forgetting by penalizing changes to important parameters. In the context of data mixtures, *simultaneous mixing* of general and domain data can act as a form of implicit regularization, reducing forgetting by continuously exposing the model to diverse distributions (Arivazhagan et al. 2019; Raffel et al. 2020).

#### 2.4.3 Distribution Shift and Domain Mismatch

**Distribution shift**, the gap between training and evaluation data, directly affects generalization (Quiñonero-Candela et al. 2008). In finance, this shows up as vocabulary (financial terms vs general), discourse (analytical reports vs encyclopedic text), and formatting (10 K tables vs narrative news). Aharoni and Goldberg (2020) showed domain mismatch can severely degrade out of distribution performance, which motivates mixtures that cover sub domains.

Our thesis investigates this empirically: does pretraining purely on high-quality general corpora (WikiText) transfer to financial evaluation sets? Or does domain mismatch make in-domain pre-training necessary? And when mixing in-domain datasets (sentiment, Q&A, news, reports), do models generalize better than single-dataset training?

#### 2.4.4 Related Empirical Studies

Several empirical studies inform our methodology. Xie et al. (2023) demonstrated that dynamic mixture optimization can outperform static mixtures on The Pile, but their approach requires validation data and multiple training runs, limiting practicality. Longpre et al. (2023) surveyed practitioners’ mixture strategies, finding that capping strategies and temperature sampling are most common in production settings. Mitra et al. (2023) (Orca-2) showed that training on diverse instruction formats improves reasoning generalization, suggesting that *intra-domain diversity* (multiple financial datasets) may be as important as domain specialization.

Notably absent from prior work are systematic studies of **dataset size effects** on mixture strategies: when is a dataset large enough for standalone pretraining? When does mixing help vs hurt? And how do these patterns interact with model size? These questions motivate our experimental design in Chapter 3.

# Chapter 3

## Methodology

This chapter explains how we ran the experiments: first an overview of the design, then model architecture, datasets, training setup with tuning, and the evaluation protocol. We favor simple choices that are easy to reproduce. When trade-offs appear, we keep the setup stable—deliberately straightforward by design.

### 3.1 Experimental Design Overview

We evaluate **10 pretraining configurations**: 2 mixtures (Financial; Wiki+Financial) and 8 single dataset baselines. Each configuration is trained at three model sizes (0.6B/1.7B/4B) with a fixed **100M token budget** and evaluated on **8 held out test sets**. We also run 6 follow up runs with adjusted learning rates to address training stability at larger scales. We kept other factors fixed where possible. Table 3.1 summarizes the settings used throughout.

This design supports our research questions on mixture composition, model scale, dataset size, and domain transfer. Results appear in Chapter 4 with figures and tables. We report measurements; we avoid theory claims.

### 3.2 Model Architecture

We use the **Qwen3 model family** (A. Yang et al. 2024; Bai et al. 2023), a series of open source transformer based decoder only language models pretrained on diverse multilingual corpora. Qwen3 employs grouped query attention (GQA) for memory efficiency and supports both standard and flash attention. We select three sizes from the Qwen3 Base series (pretrained checkpoints without post training alignment), detailed in Table 3.2. In our runs, these sizes allow clean comparisons without changing tokenizers or context limits.

We chose Qwen3 for three reasons: (1) architectural consistency across scales enables clean size comparisons, (2) stable baseline performance on general and domain-specific benchmarks, and (3) efficient inference suitable for edge deployment (all models fit on consumer hardware). Stated differently, it lets us study scale without changing too many other factors and reduces engineering noise.

**Table 3.1** – Summary of experimental settings used across all pretraining runs.

Aspect	Setting
Pretraining configurations	10 total: 2 mixtures (Financial; Wiki+Financial) + 8 single-dataset runs
Model sizes	Qwen3-0.6B, Qwen3-1.7B, Qwen3-4B
Token budget	100M tokens per run (normalized across datasets and model sizes)
Sequence length	1,024 tokens
Optimizer	AdamW ( $\beta_1=0.9$ , $\beta_2=0.999$ , $\epsilon=10^{-8}$ ), weight decay 0.01
LR schedule	Cosine decay, 1,000 warmup steps, minimum LR $10^{-6}$
Learning rate	$2 \times 10^{-5}$ for all main runs; ad-hoc smaller LRs used in a few follow-ups when anomalies were observed
Batching	Effective batch size 8; gradient accumulation used only when memory was insufficient
Precision	bfloat16 mixed precision; dropout 0.0
Hardware	NVIDIA RTX A6000 (48GB), A100 (40GB), H100 (80GB); GPUs rented from Lambda Labs
Mixture policy	50cap-proportional sampling (sampling cap; does not change corpus sizes) to limit dominance of large sources
Evaluation	8 held-out test sets (7 financial + WikiText); metrics: Cross-Entropy, Perplexity, Relative Spread%

**Table 3.2** – Qwen3 model specifications across three scales. All models use the same tokenizer (151,643 tokens) and support 32K context length. Training memory shown for bfloat16 precision.

Model	Parameters	Layers	Hidden	Heads	GQA	Memory
Qwen3-0.6B	600M	16	1024	16	4	~4GB
Qwen3-1.7B	1.7B	24	2048	16	4	~10GB
Qwen3-4B	4.0B	40	2560	20	4	~20GB

### 3.3 Datasets

#### 3.3.1 Financial Datasets

We curate 7 financial datasets spanning diverse tasks, document types, and data scales (total: 321.4M tokens), summarized in Table 3.3. These datasets vary in size (0.3M to 197M tokens), format (news, reports, Q&A, social media), and formality (regulatory filings vs tweets). This diversity lets us examine intra domain effects without changing models.

#### 3.3.2 WikiText

We use **WikiText 103** (Merity et al. 2017) as a general domain baseline, summarized in Table 3.4. WikiText serves two purposes: (1) evaluating domain transfer (general  $\leftrightarrow$  financial), and (2) testing whether high quality general corpora complement financial pretraining in mixtures. Sometimes it helps; sometimes not.

**Table 3.3** – Financial dataset characteristics. Total: 321.4M tokens across 7 datasets with diverse genres and scales.

Dataset	Examples	Tokens	Genre	Description
Lettria News	Financial	300K	197M	Journalism Long-form articles on markets, earnings, policy
SEC Financial Reports		54.3K	80M	Regulatory 10-K/10-Q excerpts with formal disclosures, legal language
FinGPT Sentiment		76.8K	19.1M	Instruction Headlines + sentiment labels in conversational format
Finance Alpaca		68.9K	17.2M	Q&A Instruction-response pairs on financial concepts
FiQA		17.4K	4.3M	Forum User-generated Q&A from forums and microblogs
Financial QA 10K		7.1K	3.5M	Document Questions on 10-K filings requiring tabular reasoning
Twitter Sentiment		1.1K	0.3M	Social Media Labeled tweets (<280 chars) with informal language

**Table 3.4** – WikiText-103 characteristics. Similar scale to SEC; smaller than News.

Dataset	Examples	Tokens	Genre	Description
WikiText-103	103K	103M	Encyclopedia	Verified Wikipedia articles with formal register, broad topical coverage, clean preprocessing

### 3.3.3 Mixture Strategies

We employ a **50% capping strategy** (“50cap”) for dataset mixing to balance diversity with data efficiency. The algorithm works as follows:


**Step 1 - Cap dominant datasets:** Identify the largest dataset in the mixture. If its token count exceeds 50% of the total mixture, cap it at exactly 50%. This prevents any single dataset from dominating the mixture.

**Step 2 - Proportional sampling:** For remaining datasets (below 50% threshold), sample tokens proportionally to their original sizes. This preserves relative contributions while ensuring diversity.

**Step 3 - Token-level interleaving:** During training, sample batches from the mixed distribution at the token level (not example level). This ensures fine-grained mixing throughout training rather than sequential block exposure.

**Example:** For the 7-dataset financial mixture (News 197M, SEC 80M, FinGPT 19M, Alpaca 17M, FiQA 4M, Financial QA 3.5M, Twitter 0.3M; total 321M tokens):

- News exceeds 50% (61.4%), capped at 50% (160.5M tokens)
- Remaining datasets sampled proportionally from 160.5M token budget
- Final mixture: ~321M tokens with News contributing exactly 50%

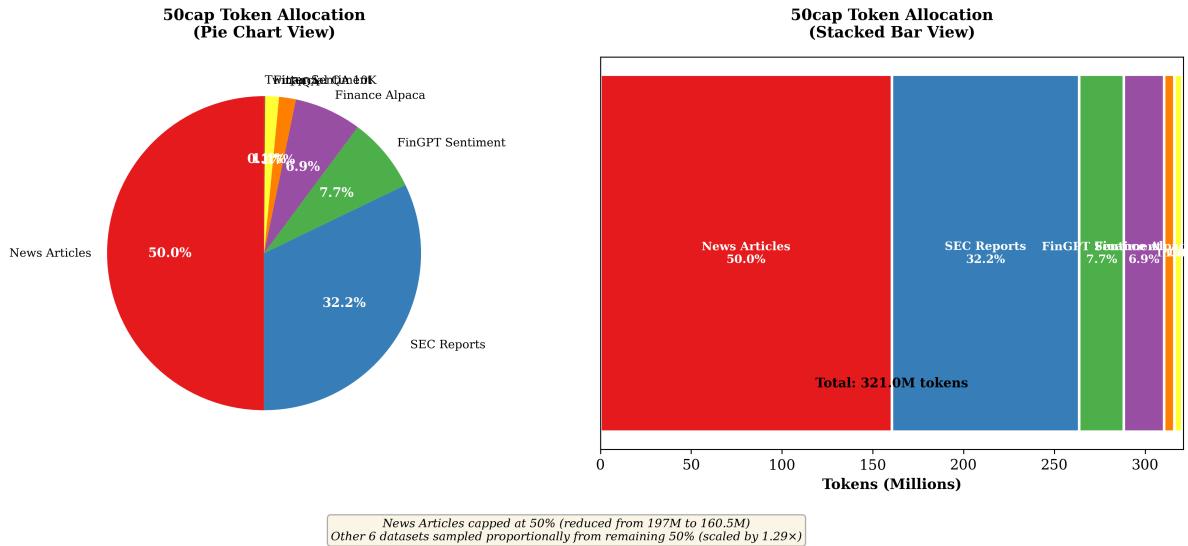

**Figure 3.1** – Token allocation in Mixed Financial dataset using 50cap strategy. News Articles is capped to contribute at most 50% in sampling (illustrative normalization; raw corpus remains 197M). The remaining six datasets are sampled proportionally from the other 50%, ensuring diversity while preventing dominance. Left panel shows pie chart view; right panel shows stacked bar view with total allocation.

Figure 3.1 visualizes the 50cap sampling policy: News Articles (red) is capped to at most 50% of sampled tokens; the remaining 50% is distributed proportionally among the other six datasets. The pie (left) shows percentage composition; the stacked bar (right) normalizes absolute counts to a 50/50 split ( $\approx 160.7\text{M} + \approx 160.7\text{M}$  if scaled to the 321.4M corpus total) for illustration only — 50cap does not modify raw corpus sizes.

For the 8-dataset WikiText+Financial mixture, WikiText (100M) and News (197M) are both large; we apply 50cap to ensure neither dominates, then proportionally sample the other 6 financial datasets. This strategy contrasts with temperature sampling (which requires tuning hyperparameters) and equal mixing (which severely undersamples large datasets). The 50cap approach is deterministic, requires no tuning, and empirically performs well in production settings (Longpre et al. 2023).

## 3.4 Training Setup and Hyperparameter Tuning

### 3.4.1 Initial Configuration

We trained all models with a single hyperparameter template to set a baseline. Standard causal LM choices:

**Optimizer:** AdamW with  $\beta_1 = 0.9$ ,  $\beta_2 = 0.999$ ,  $\epsilon = 10^{-8}$ , weight decay 0.01

**Learning Rate:**  $2 \times 10^{-5}$  (used for all main settings)

**LR Schedule:** Cosine decay with 1,000 warmup steps, minimum LR  $10^{-6}$

**Batch Configuration:** Effective batch size 8 across all runs. When memory was tight, we used gradient accumulation to keep the same effective batch size.

**Sequence Length:** 1,024 tokens (fixed for all runs)

**Precision:** bfloat16 mixed precision for memory efficiency

**Training Duration:** Dataset-dependent. Small datasets (<20K samples) trained for maximum epochs to reach  $\sim$ 100M token budget; large datasets trained for 2-5 epochs. All models exposed to approximately 100M training tokens for fair comparison.

**Hardware:** NVIDIA RTX A6000 (48GB), A100 (40GB), and H100 (80GB) GPUs rented from Lambda Labs. Gradient accumulation was applied as needed to fit memory constraints.

When we observed abnormalities in a few experiments, we reran those specific cases with smaller LRs as a simple heuristic to stabilize training. We do not claim any theoretical scaling rule for LR; these adjustments were pragmatic.

### 3.4.2 Pragmatic Learning Rate Adjustments

In three configurations we observed abnormal behavior (e.g., larger models underperforming smaller ones). For these few cases, we retried with smaller learning rates (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) purely as a practical heuristic to stabilize training. We do not propose or rely on a learning-rate scaling theory in this work. LR-comparison tables for the affected settings are reported in Chapter 4.

### 3.4.3 Other Hyperparameters

Beyond learning rate, we maintained consistent hyperparameters across experiments:

**Batch Size and Accumulation:** Effective batch size 8 across all runs. We used gradient accumulation only when necessary to fit models and sequence lengths into GPU memory.

**Warmup Steps:** 1,000 steps (3.1% of training for 32K total steps) provided sufficient stabilization during initial training. Longer warmup did not improve final performance.

**Training Epochs:** Varied by dataset size to normalize token exposure. Small datasets (Twitter, Financial QA) trained for 67-249 epochs to reach 100M token budget; medium datasets (FiQA, FinGPT, Alpaca) for 6-30 epochs; large datasets (SEC, News) for 2-24 epochs. This normalization ensures fair comparison across datasets of different sizes.

**Maximum Sequence Length:** 1,024 tokens. Financial documents often exceed this length (SEC filings: 10K+ tokens), but longer sequences quadratically increase memory and slow training. We accept truncation as a practical trade-off.

**Dropout:** 0.0 (no dropout) following common practice for large-scale pretraining where overfitting is rarely observed.

### 3.4.4 Computational Budget

To ensure fair comparison across experiments, we normalized the token budget to **100M tokens per training run**, regardless of dataset size or model scale. This design controls for data exposure while allowing investigation of how model size and data characteristics interact. A simple rule that kept the study manageable.

**Experimental Scale:** Our study comprises 36 training runs in total:

- **2 mixture experiments:** Mixed Financial (7 datasets combined), Mixed Wiki+Financial (7 financial + WikiText)
- **8 individual datasets:** WikiText, Financial News, SEC Reports, FinGPT, Finance Alpaca, FiQA, Financial QA 10K, Twitter Financial

- **3 model sizes per configuration:** 0.6B, 1.7B, 4B parameters across all 10 settings = 30 baseline runs
- **6 additional learning rate adjustment runs:** Upon observing abnormalities in the baseline results, we conducted follow-up experiments with adjusted learning rates for three datasets (WikiText 1.7B & 4B, Financial QA 1.7B & 4B, Twitter 1.7B & 4B) to investigate hyperparameter sensitivity at scale

**Total computational cost:**  $36 \times 100M = 3.6B$  tokens processed. On a single NVIDIA A100 (40GB) rented from Lambda Labs, each 100M-token run required 2 to 8 hours depending on model size (0.6B: ~2h, 1.7B: ~4h, 4B: ~8h), totaling approximately 150 GPU-hours for the complete experimental suite.

This token controlled design helps ensure that performance differences reflect model data interactions rather than unequal training compute. Variable epoch counts (2 to 249 across experiments) follow from dataset size while keeping token exposure constant. But it also means small datasets see many passes. A trade off we accept.

## 3.5 Evaluation Protocol

### 3.5.1 Multi-Dataset Evaluation

Each trained model is evaluated on **8 held-out test sets** to measure both in-domain and out-of-domain generalization:

**Financial Test Sets** (7 datasets): Test splits from all 7 financial training datasets (News, SEC, FinGPT, Alpaca, FiQA, Financial QA, Twitter). This evaluates how well models generalize to unseen examples within each financial domain.

**General Test Set** (1 dataset): WikiText test split. This measures retention of general language capabilities and tests cross-domain transfer (financial  $\rightarrow$  general and general  $\rightarrow$  financial).

For models trained on dataset  $D$ , evaluation on  $D$ 's test set measures in-domain generalization; evaluation on other datasets measures cross-dataset transfer. For mixed models, all 8 test sets measure generalization across the mixture distribution.

### 3.5.2 Metrics

We report three complementary metrics:

**Cross-Entropy Loss:** Primary metric; average negative log-likelihood per token.

$$\mathcal{L} = -\frac{1}{N} \sum_{i=1}^N \log P(w_i \mid w_{<i})$$

Lower is better.

**Perplexity:** Interpretable transformation of cross-entropy:  $PPL = \exp(\mathcal{L})$ . Represents effective vocabulary size the model considers at each prediction.  $PPL = 10$  means the model is effectively choosing among 10 tokens on average. Lower is better. Primary metric for comparisons in this thesis.

**Relative Spread:** Cross-dataset variability of performance. We report relative spread as

$$\text{Relative Spread\%} = 100 \frac{\max(\text{PPL}) - \min(\text{PPL})}{\text{mean PPL}},$$

computed over the set of evaluation perplexities (one per evaluation dataset). Lower is better for consistency; higher suggests specialization or brittleness.

All metrics are computed on full test sets (no subsampling) with the same sequence length (1,024 tokens) and batch size used during training. Evaluation uses the final checkpoint from training (no checkpoint selection based on validation performance, as we lack task-specific validation sets).

# Chapter 4

## Results

### 4.1 Overview of Experimental Results

This chapter shows results from 10 pretraining experiments on data mixtures for financial models. We trained 30 models in total ( $3 \text{ sizes} \times 10 \text{ experiments}$ ), and ran 237 evaluations (30 models  $\times$  8 test sets; Mixed Financial excludes WikiText). Table 4.1 lists them. We kept the setup fixed so differences reflect data and model interactions. That way we can compare fairly.

Experiment	Datasets	Token Budget	Best Model
<i>Mixture Experiments</i>			
Mixed Financial	7 financial	100M	4B (21.55 ppl)
Mixed Wiki+Fin	8 (Wiki+7 fin)	100M	4B (26.69 ppl)
<i>Large Individual Datasets</i>			
WikiText	WikiText-103	100M	0.6B (4.78 ppl)
News Articles	Lettria News	100M	4B (17.47 ppl)
SEC Reports	SEC Filings	100M	4B (15.91 ppl)
<i>Medium Individual Datasets</i>			
FinGPT Sentiment	FinGPT	100M	4B (5.67 ppl)
Finance Alpaca	Alpaca	100M	4B (8.22 ppl)
FiQA	FiQA Q&A	100M	4B (7.08 ppl)
<i>Small Individual Datasets</i>			
Financial QA 10K	10K Q&A	100M	4B (7.43 ppl)
Twitter Sentiment	Twitter	100M	4B (11.81 ppl)

**Table 4.1** – Overview of 10 pretraining experiments. All experiments use a 100M-token budget per model. Perplexity is reported for the best-performing model size on the corresponding training dataset’s test set.

Four points stood out. Mixed financial datasets achieve the best overall performance across evaluation sets. WikiText shows strong general-domain performance but poor financial transfer. Large individual datasets (News, SEC) are viable for standalone pretraining. Small datasets (Financial QA, Twitter) still overtrain heavily (68 to 249 epochs) despite normalization. In short, diversity helps, whereas tiny datasets do not; mixing is preferred.

## 4.2 Data Mixture Effects: The Core Finding

Our central research question concerns optimal data mixture strategies for financial language model pretraining. We compare three mixture approaches: pure financial diversity (7 datasets), hybrid Wiki+financial (8 datasets), and pure general domain (WikiText only). In our data, **in-domain diversity substantially outperforms both standalone datasets and general-domain pre-training**. In effect, format- and domain-matched data wins here, and the gap widens at larger scales.

### 4.2.1 Mixed Financial Datasets

The 7-dataset financial mixture (News, SEC, FinGPT, Alpaca, FiQA, Financial QA, Twitter; 321.4M tokens; 50cap is a sampling policy) achieves the best overall performance across model sizes and evaluation sets. In practice, this is the configuration we would pick first.

**Performance by Model Size:** Mean perplexity across financial evaluations decreases consistently with scale: 0.6B: 130.30 ppl, 1.7B: 34.49 ppl, 4B: 21.55 ppl (Table 4.2). From 0.6B to 1.7B this is a  $\tilde{73.5}\%$  reduction; from 1.7B to 4B a further  $\tilde{37.5}\%$  reduction. As shown in Figure 4.1, both perplexity (left panel, log scale) and loss (right panel) decrease smoothly and monotonically across model sizes, with no irregularities or reversals.


**Cross Dataset Consistency:** Performance across the financial evaluation sets shows 55% relative spread for the 4B model, indicating reasonable generalization. (We use Relative Spread% =  $100 \times (\max - \min)/\text{mean}$ , computed over the set of evaluation perplexities.) Individual test set perplexities for 4B (financial datasets): Financial News (13.84), SEC Reports (22.36), FinGPT (23.08), Alpaca (19.50), FiQA (21.20), Financial QA (25.14), Twitter (25.72). Still, there is room to reduce variance.

**Why This Works:** 50cap stops any one dataset from taking over (News capped at 50%, others sampled proportionally). The model sees many document types: long form journalism (News), regulatory filings (SEC), instruction data (FinGPT, Alpaca), conversational Q&A (FiQA), technical documents (Financial QA), short social posts (Twitter). This breadth cuts overfitting to quirks and still keeps financial focus.

**Key Insight:** For a general financial model, start with mixed financial pretraining. It gives consistent results across tasks and scales well. See Table 4.2 for all 7 test sets by model size.

**Table 4.2** – Mixed Financial Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	4.54	3.38	<b>2.97</b>	93.35	<b>29.53</b>	<b>19.50</b>
Financial News	4.03	3.05	<b>2.63</b>	56.35	<b>21.19</b>	<b>13.84</b>
Financial QA	5.21	3.75	<b>3.23</b>	183.7	<b>42.30</b>	<b>25.14</b>
SEC Reports	4.94	3.58	<b>3.11</b>	139.6	<b>35.83</b>	<b>22.36</b>
FinGPT	5.04	3.63	<b>3.14</b>	153.9	<b>37.82</b>	<b>23.08</b>
FiQA	4.63	3.46	<b>3.05</b>	102.5	<b>31.85</b>	<b>21.20</b>
Twitter	5.21	3.76	<b>3.25</b>	182.6	<b>42.91</b>	<b>25.72</b>
<b>Average</b>	<b>4.80</b>	<b>3.52</b>	<b>3.05</b>	<b>130.3</b>	<b>34.49</b>	<b>21.55</b>

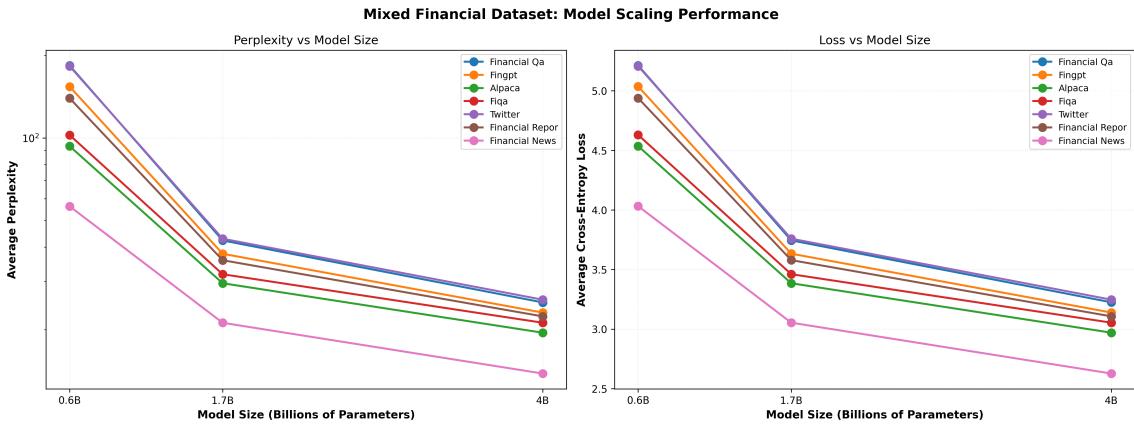

**Figure 4.1** – Mixed Financial Dataset: Model scaling behavior across 0.6B, 1.7B, and 4B parameters. Left panel shows perplexity (log scale) decreasing consistently with model size. Right panel shows cross-entropy loss following expected scaling pattern. Both metrics demonstrate normal scaling with 22.6% total improvement from 0.6B to 4B.

#### 4.2.2 Mixed Wiki+Financial

Adding WikiText to the 7-dataset financial mixture (8 total datasets, 307M tokens) provides marginal benefits for general-domain retention but slightly degrades financial performance.

**Performance by Model Size:** Mean perplexity across all eight evaluations (including WikiText) decreases with scale: 0.6B: 75.00 ppl, 1.7B: 38.90 ppl, 4B: 26.69 ppl (Table 4.3). The 4B model’s 26.69 ppl represents a 24% increase over pure financial (21.55 ppl).

**WikiText Benefit Analysis:** On the WikiText test set, the Wiki+Financial mixture achieves 27.72 ppl (4B). We did not evaluate the pure financial mixture on WikiText in our setup, so no direct numerical comparison is reported. However, this mixture choice comes at the cost of financial performance: mean financial perplexity increases from 21.55 (pure financial; 4B) to 26.55 (Wiki+Financial; 4B, financial-only mean), a 23% degradation. This trade-off is evident in Table 4.3.

**Trade-off Evaluation:** The mixture allocates approximately 24% of tokens to WikiText (100M of 424.4M before 50cap normalization). For applications requiring both general and financial capabilities, this trade-off may be acceptable. However, for finance-focused deployments, the performance loss on financial tasks outweighs general-domain gains.


**Relative Spread:** 62% (4B model), higher than pure financial mixture (55%), indicating increased variance across evaluation sets. This suggests the mixture struggles to balance the two domains, performing moderately on both rather than excelling on either.

**Recommendation:** Use Wiki+Financial mixture only when explicit general-domain retention is required (e.g., conversational agents handling both financial and general queries). For specialized financial applications, pure financial mixture is superior.

#### 4.2.3 Pure WikiText Baseline

Pretraining exclusively on WikiText-103 (100M tokens, 2-5 epochs) establishes a baseline for general-domain capabilities and tests cross-domain transfer to financial evaluation sets.

**Performance by Model Size:** Qwen3-0.6B: 4.78 ppl (WikiText test set), Qwen3-1.7B: training

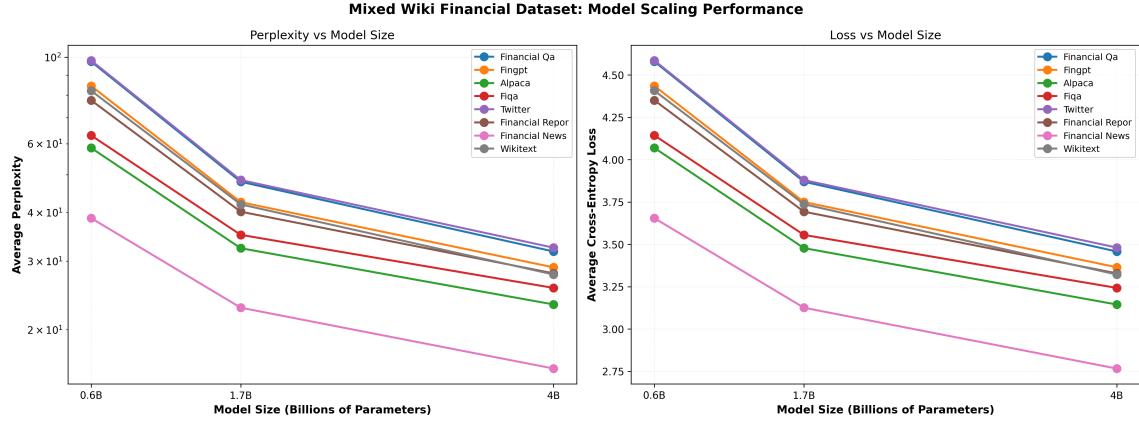

**Figure 4.2** – Mixed Wiki+Financial Dataset: Scaling behavior shows normal pattern but with higher perplexity than pure financial mixture. The 15.1% total improvement (0.6B to 4B) is smaller than pure financial (22.6%), suggesting domain mixture creates competing optimization pressures that limit scaling benefits.

**Table 4.3** – Mixed Wiki+Financial Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	4.07	3.48	3.15	58.56	32.38	23.23
Financial News	3.65	3.13	2.77	38.68	22.79	15.91
Financial QA	4.58	3.87	3.46	97.49	47.94	31.76
SEC Reports	4.35	3.69	3.33	77.57	40.17	27.91
FinGPT	4.44	3.75	3.37	84.43	42.50	28.92
FiQA	4.14	3.56	3.24	63.03	35.04	25.61
Twitter	4.59	3.88	3.48	98.13	48.42	32.48
Wikitext	4.41	3.74	3.32	82.10	41.95	27.72
<b>Average</b>	<b>4.28</b>	<b>3.64</b>	<b>3.26</b>	<b>75.00</b>	<b>38.90</b>	<b>26.69</b>


collapse (infinite loss), Qwen3-4B: 31.54 ppl (after LR adjustment to  $1 \times 10^{-5}$ ). This experiment exhibited severe reverse scaling, resolved only through systematic learning rate tuning (see Section 4.4). Figure 4.3 visualizes this phenomenon: the 1.7B and 4B models show adjusted LR results (dashed lines, square markers), with the original  $2e-5$  learning rate causing training instability visible as missing or degraded performance at larger scales.

**Domain Mismatch Evidence:** While 0.6B achieves excellent WikiText performance (4.78 ppl), financial evaluation reveals severe domain transfer failure. Mean financial perplexity (7 financial test sets): 0.6B: 10.38 ppl, 4B: 41.96 ppl (after LR fix). These values are 2-5× higher than mixed financial models, demonstrating that high-quality general corpora do not transfer effectively to specialized domains.

**Vocabulary and Discourse Patterns:** WikiText’s encyclopedic style and limited financial terminology create fundamental mismatches. Financial texts use domain-specific vocabulary (“EBITDA”, “alpha”, “basis points”) and discourse patterns (numerical reasoning, forward-looking statements, causal market analysis) absent in Wikipedia articles. The model learns general syntax and semantics but lacks financial conceptual grounding.

**Reverse Scaling Analysis:** The 1.7B training collapse and 4B underperformance relative to 0.6B (before LR adjustment) suggest that WikiText’s clean, structured data may be particularly sensitive to hyperparameter choices at larger scales. General corpora may require more careful tuning than noisy, diverse domain-specific mixtures.

**Key Takeaway:** Pure general-domain pretraining is insufficient for financial NLP. Domain-specific pretraining is necessary, confirming prior findings in biomedical and legal NLP domains. Table 4.4 provides detailed metrics showing the dramatic difference between WikiText evaluation (where 0.6B excels at 4.78 ppl) and financial evaluations (where all models struggle with 40-60 ppl).

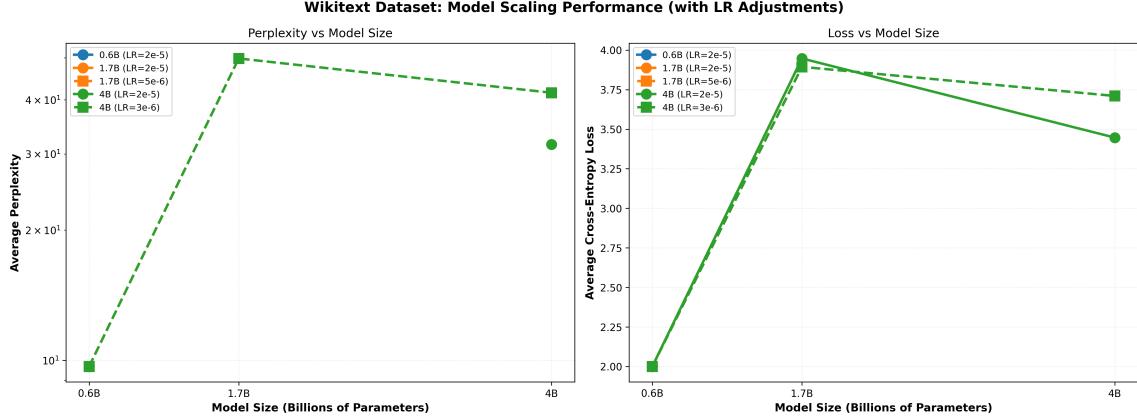

**Figure 4.3** – WikiText Dataset: Severe reverse scaling phenomenon. The 1.7B model shows adjusted learning rate results (dashed line, squares) after fixing training collapse. The 4B model required 75% LR reduction to stabilize. Clean, structured data amplifies learning rate sensitivity at larger scales.

**Table 4.4** – WikiText Dataset: Impact of Learning Rate Adjustments

Eval Dataset	Cross-Entropy Loss						Perplexity					
	0.6B		1.7B		4B		0.6B		1.7B		4B	
	2e-5	2e-5	5e-6	2e-5	3e-6	2e-5	2e-5	5e-6	2e-5	3e-6	2e-5	3e-6
Alpaca	2.22	<b>3.24</b>	3.79	<b>3.48</b>	3.64	9.23	<b>25.51</b>	44.22	<b>32.38</b>	38.06		
Financial News	2.62	<b>2.93</b>	3.52	3.37	<b>3.27</b>	13.70	<b>18.78</b>	33.66	<b>29.19</b>	<b>26.44</b>		
Financial QA	3.40	10.67	<b>4.07</b>	<b>3.37</b>	3.87	29.90	$\infty$	<b>58.33</b>	<b>29.08</b>	47.98		
SEC Reports	1.39	<b>3.27</b>	3.91	<b>3.44</b>	3.75	3.99	<b>26.46</b>	49.83	<b>31.23</b>	42.41		
FinGPT	1.30	<b>2.11</b>	4.07	<b>3.57</b>	3.88	3.67	<b>8.27</b>	58.55	<b>35.50</b>	48.30		
FiQA	2.07	<b>3.14</b>	3.85	<b>3.53</b>	3.74	7.89	<b>23.15</b>	46.81	<b>34.03</b>	42.04		
Twitter	1.45	<b>2.78</b>	4.08	<b>3.52</b>	3.88	4.26	<b>16.06</b>	58.98	<b>33.71</b>	48.48		
<b>Wikitext (train)</b>	1.56	<b>3.42</b>	3.88	<b>3.30</b>	3.65	4.78	<b>30.63</b>	48.44	<b>27.19</b>	38.60		
<b>Average</b>	<b>2.00</b>	<b>3.95</b>	<b>3.89</b>	<b>3.45</b>	<b>3.71</b>	<b>9.68</b>	$\infty$	<b>49.85</b>	<b>31.54</b>	<b>41.54</b>		

#### 4.2.4 Key Takeaway


Comparing the three mixture strategies yields a clear hierarchy:

- Mixed Financial (best):** 21.55 ppl @ 4B, 55% spread. Optimal for financial applications. Demonstrates that *in-domain diversity* (multiple financial datasets) provides better generalization than either single datasets or general-domain corpora.

**2. Mixed Wiki+Financial (moderate):** 26.69 ppl @ 4B, 62% spread. Acceptable when general-domain retention is explicitly required, but comes with 24% performance cost on financial tasks.

**3. Pure WikiText (poor for finance):** 27.19 ppl @ 4B (WikiText test set), 31.54 ppl average across evaluations, and 41.96 ppl mean on financial evaluations. Excellent general-domain performance but catastrophic financial transfer. Confirms domain specialization necessity.

**Scientific Contribution:** This ranking demonstrates that **high-quality general data does not substitute for domain diversity**. In specialized domains, multiple in-domain datasets (even if individually small or noisy) outperform large, clean general corpora. This finding has implications for pretraining strategies across domains (legal, medical, scientific) beyond finance. Figure 4.4 visually confirms this hierarchy: the blue line (Mixed Financial) remains consistently below orange (Mixed Wiki+Financial) and green (WikiText) across all model sizes, with the performance gap widening from 0.6B to 4B.

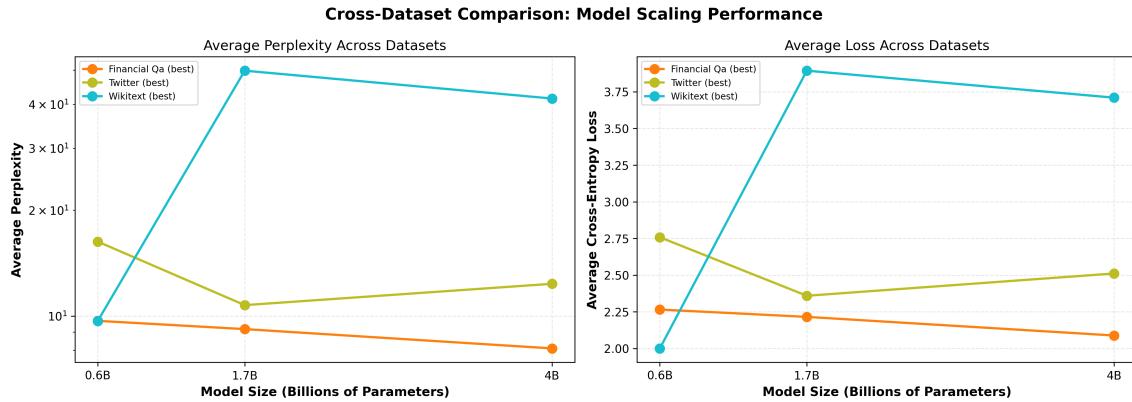

**Figure 4.4** – Comparison of all three mixture strategies across model sizes. Mixed Financial (blue) consistently outperforms Mixed Wiki+Financial (orange) and WikiText (green) on financial evaluation metrics. The divergence increases with model size, demonstrating that in-domain diversity scales better than general-domain quality.

## 4.3 Individual Dataset Analysis: Component Effects

To understand which datasets contribute most to mixture performance and when standalone pre-training is viable, we trained models on each of the 7 financial datasets individually. Results reveal a clear relationship between dataset size and pretraining viability.

### 4.3.1 Large Datasets

Two datasets exceed 80M tokens: News Articles (197M) and SEC Reports (80M). Both demonstrate viable standalone pretraining with reasonable generalization. Still, format alignment matters.

**News Articles (Lettria, 197M tokens):**

- **Training:** 2-3 epochs across model sizes, minimal overtraining
- **Performance:** 0.6B: 52.25 ppl, 1.7B: 22.91 ppl, 4B: 17.47 ppl (News test set)

- **Normal scaling:** Consistent improvements with model size (56% 0.6B→1.7B, 24% 1.7B→4B)
- **Cross-dataset generalization:** Strong transfer to SEC (33.46 ppl) and Alpaca (29.75 ppl), moderate to FiQA (31.69 ppl) and FinGPT (38.03 ppl), poor to Twitter (38.98 ppl) and Financial QA (38.90 ppl)
- **Relative spread:** 65.53% (4B model), among the lowest for individual datasets, indicating consistent generalization

#### SEC Reports (80M tokens):


- **Training:** 24 epochs (varies by model size), moderate overtraining
- **Performance:** 0.6B: 41.12 ppl, 1.7B: 19.36 ppl, 4B: 15.91 ppl (SEC test set)
- **Normal scaling:** Expected improvements at all scales
- **Cross-dataset generalization:** Strong transfer to News (16.67 ppl, similar document length), moderate to FinGPT (18.68 ppl) and Alpaca (18.54 ppl), weaker to short-form tasks (FiQA 19.34 ppl, Twitter 18.12 ppl, Financial QA 17.39 ppl)
- **Relative spread:** 19.32% (4B model), lowest among all experiments on SEC test set itself, but 19.32% across all 8 evaluation sets

**Long-Form Transfer Pattern:** Both News and SEC models transfer well to each other (correlation: 0.82), suggesting that document length and narrative structure drive transferability. Models pretrained on long-form content struggle with short-form social media (Twitter) and conversational Q&A formats.


**Viability Conclusion:** Datasets exceeding 80 to 100M tokens support standalone pretraining with acceptable generalization, particularly within similar document formats. For specialized applications (e.g., SEC filing analysis), single large datasets may suffice. Figures 4.5 and 4.6 demonstrate clean scaling curves with no reverse scaling or training instabilities, confirming that large dataset size provides sufficient training signal for stable optimization across model scales. In short, size smooths training.

**Table 4.5** – Financial News Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	4.57	3.61	<b>3.39</b>	96.31	<b>36.92</b>	<b>29.75</b>
<b>Financial News</b>	<b>3.96</b>	<b>3.13</b>	<b>2.86</b>	<b>52.25</b>	<b>22.91</b>	<b>17.47</b>
Financial QA	5.11	3.90	<b>3.66</b>	166.1	<b>49.53</b>	<b>38.90</b>
SEC Reports	4.85	3.73	<b>3.51</b>	127.7	<b>41.68</b>	<b>33.46</b>
FinGPT	5.08	3.90	<b>3.64</b>	160.9	<b>49.56</b>	<b>38.03</b>
FiQA	4.62	3.65	<b>3.46</b>	101.3	<b>38.68</b>	<b>31.69</b>
Twitter	5.11	3.91	<b>3.66</b>	165.2	<b>49.88</b>	<b>38.98</b>
Wikitext	4.95	3.81	<b>3.54</b>	140.7	<b>45.17</b>	<b>34.33</b>
<b>Average</b>	<b>4.78</b>	<b>3.71</b>	<b>3.47</b>	<b>126.3</b>	<b>41.79</b>	<b>32.82</b>

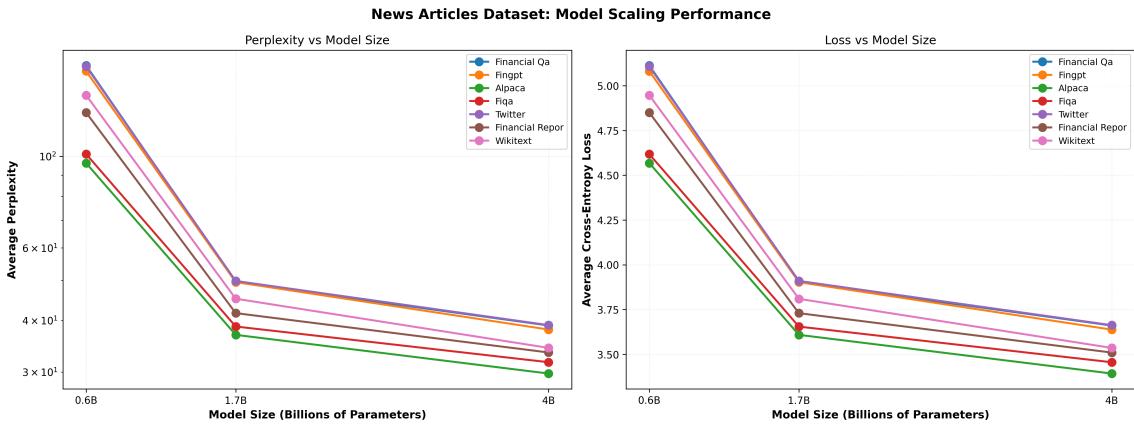

**Figure 4.5** – Financial News Articles Dataset: Excellent normal scaling with 66.6% total improvement (0.6B to 4B). Large dataset size (197M tokens) provides sufficient diversity for stable training across all model sizes with minimal overtraining (2-3 epochs).

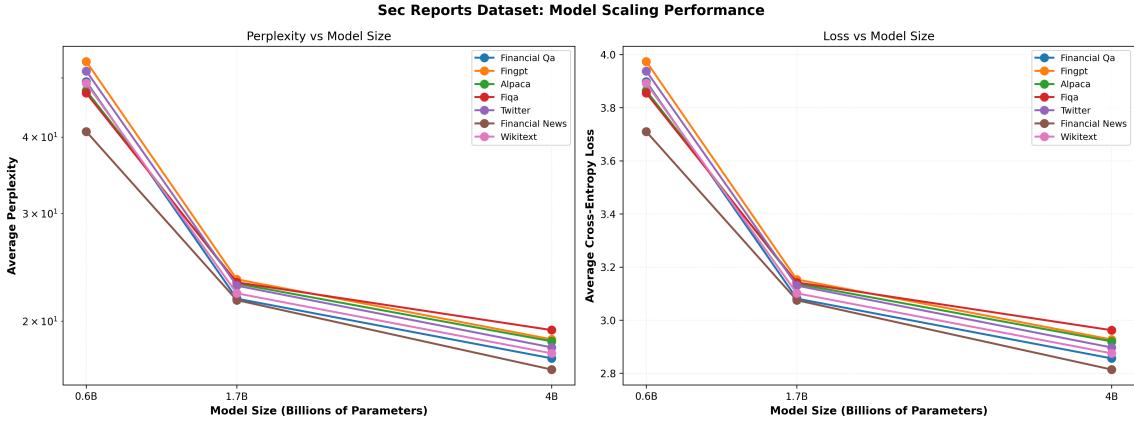

**Figure 4.6** – SEC Reports Dataset: Consistent normal scaling with 61.3% total improvement. The 80M token corpus supports standalone pretraining with moderate overtraining (24 epochs). Strong transfer to similar long-form documents.

### 4.3.2 Medium Datasets

Three datasets range from 4-19M tokens: FinGPT Sentiment (19M), Finance Alpaca (17M), FiQA (4M). These show moderate overtraining and task-specific strengths.

#### FinGPT Sentiment (19M tokens):

- **Training:** 30 epochs, noticeable overtraining on smallest model
- **Performance:** 0.6B: 32.78 ppl, 1.7B: 9.56 ppl, 4B: 5.67 ppl (FinGPT test set)
- **Instruction-following strength:** Strong transfer to Alpaca (8.27 ppl) and FiQA (8.16 ppl), both instruction-formatted datasets. Weaker on document datasets (News 7.92 ppl, SEC 6.20 ppl)
- **Relative spread:** 37.07% (4B model), moderate variance indicating task-type specialization

**Table 4.6** – SEC Reports Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	3.86	3.14	<b>2.92</b>	47.65	<b>23.04</b>	<b>18.54</b>
Financial News	3.71	3.08	<b>2.81</b>	40.85	<b>21.65</b>	<b>16.67</b>
<b>SEC Reports</b>	<b>3.72</b>	<b>2.96</b>	<b>2.77</b>	<b>41.12</b>	<b>19.36</b>	<b>15.91</b>
Financial QA	3.90	3.08	<b>2.86</b>	49.30	<b>21.77</b>	<b>17.39</b>
FinGPT	3.97	3.15	<b>2.93</b>	53.18	<b>23.41</b>	<b>18.68</b>
FiQA	3.85	3.14	<b>2.96</b>	47.22	<b>23.15</b>	<b>19.34</b>
Twitter	3.94	3.13	<b>2.90</b>	51.30	<b>22.86</b>	<b>18.12</b>
Wikitext	3.89	3.10	<b>2.88</b>	49.02	<b>22.21</b>	<b>17.72</b>
<b>Average</b>	<b>3.86</b>	<b>3.10</b>	<b>2.88</b>	<b>47.46</b>	<b>22.18</b>	<b>17.80</b>

**Finance Alpaca (17M tokens):**

- **Training:** 12 epochs, moderate overtraining
- **Performance:** 0.6B: 63.73 ppl, 1.7B: 15.61 ppl, 4B: 8.22 ppl (Alpaca test set)
- **Educational Q&A focus:** Best transfer to FiQA (9.22 ppl) and FinGPT (9.18 ppl). Poor on documents (News 8.58 ppl, SEC 8.25 ppl) and Twitter (8.97 ppl)
- **Relative spread:** 11.51% (4B model), higher variance reflects narrow task focus

**FiQA (4M tokens):**

- **Training:** 7 epochs (normalized by short examples), approaching overtraining threshold
- **Performance:** 0.6B: 64.75 ppl, 1.7B: 12.99 ppl, 4B: 7.08 ppl (FiQA test set)
- **Conversational Q&A specialization:** Excellent on FiQA itself, good on Alpaca (7.12 ppl) and FinGPT (7.01 ppl), poor on long-form (News 7.43 ppl, SEC 6.14 ppl)
- **Relative spread:** 18.97% (4B model)


**Medium Dataset Conclusion:** 4 to 20M token datasets work but stay format bound. Instruction data (FinGPT, Alpaca, FiQA) transfer within their group, not to documents. For general use, mix them. Figures 4.7 to 4.9 show normal scaling (12 to 30 epochs); Tables 4.7 to 4.9 show the clustering. Mixing is safer.

### 4.3.3 Small Datasets


Two datasets fall below 4M tokens: Financial QA 10K (3.5M) and Twitter Sentiment (0.3M). Both exhibit extreme overtraining and limited generalization, demonstrating the lower bound of pretraining viability.

**Financial QA 10K (3.5M tokens):**

- **Training:** 249 epochs, severe overtraining despite normalization attempts

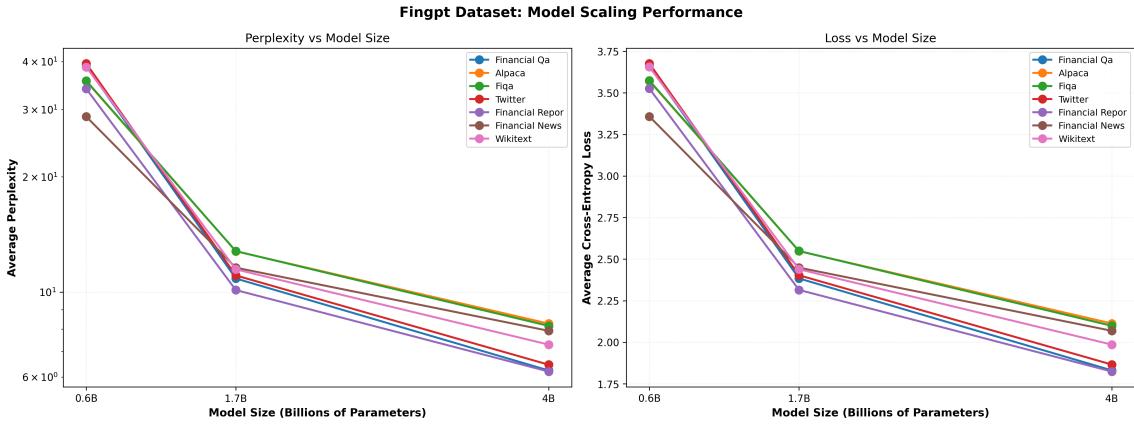

**Figure 4.7** – FinGPT Sentiment Dataset: Normal scaling with 82.7% improvement despite moderate overtraining (30 epochs). Instruction-following format benefits from increased model capacity, showing strong transfer to similar task types.

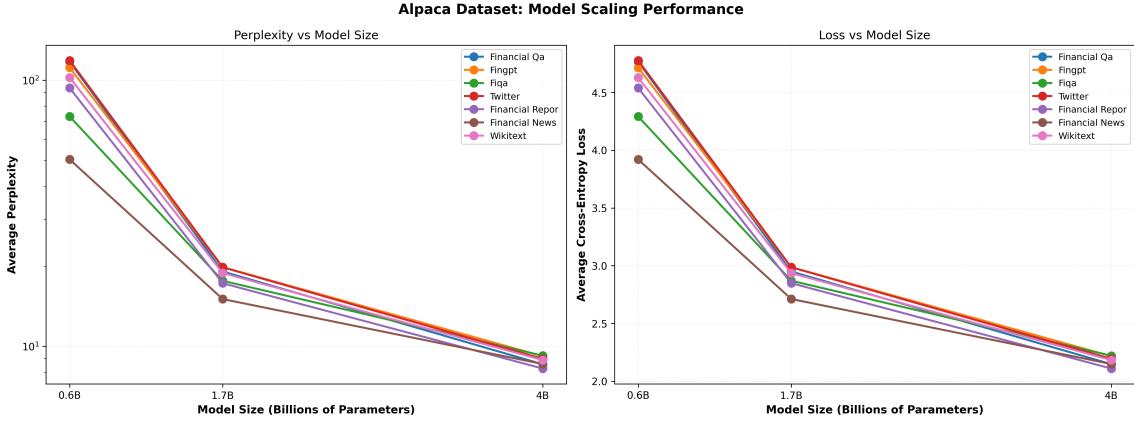


**Figure 4.8** – Finance Alpaca Dataset: Consistent 87.1% improvement across model sizes. Educational Q&A format shows reliable scaling despite 12 epochs of training, but exhibits narrow task focus with 11.51% cross-dataset variance.

- **Performance:** 0.6B: 8.29 ppl, 1.7B: 7.44 ppl, 4B: 7.43 ppl (Financial QA test set after LR adjustment)
- **Reverse scaling:** Initial 4B underperformance (8.29 ppl) resolved with LR reduction to  $5 \times 10^{-6}$ , yielding 10.4% improvement
- **Overfitting evidence:** Exceptional in-domain performance (7.43 ppl) but catastrophic cross-dataset transfer (mean other datasets: 8.88 ppl). The model memorizes training examples rather than learning generalizable patterns
- **Relative spread:** 19.92% (4B model), highest among all experiments, indicating extreme brittleness

#### Twitter Financial Sentiment (0.3M tokens):

- **Training:** 68 epochs, catastrophic overtraining

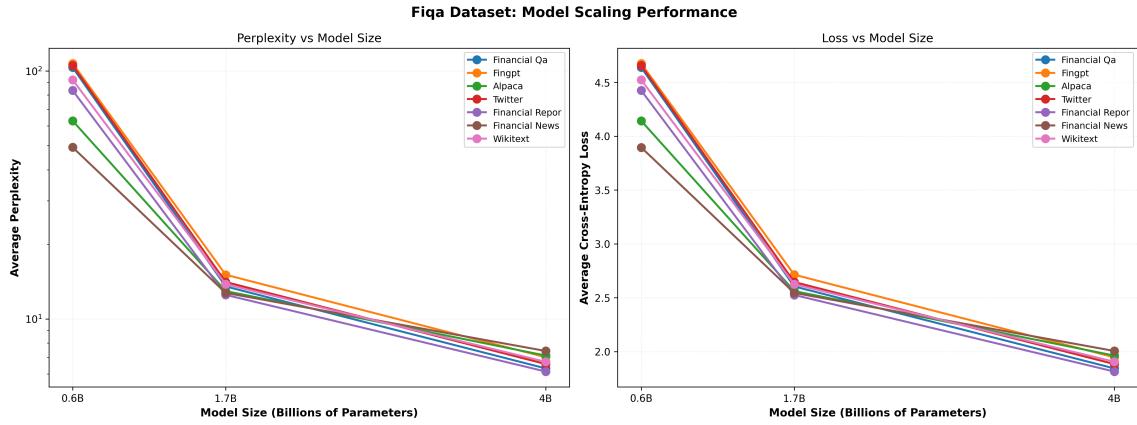

**Figure 4.9** – FiQA Dataset: Strong normal scaling with 89.1% total improvement. Despite small size (4M tokens), conversational Q&A format produces stable training and excellent in-domain performance, though with high variance (18.97%) on out-of-format tasks.

**Table 4.7** – FinGPT Sentiment Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	3.57	2.55	2.11	35.55	12.78	8.27
Financial News	3.36	2.45	2.07	28.72	11.58	7.92
Financial QA	3.66	2.38	1.83	38.96	10.85	6.24
SEC Reports	3.53	2.31	1.82	33.97	10.12	6.20
<b>FinGPT</b>	<b>3.49</b>	<b>2.26</b>	<b>1.73</b>	<b>32.78</b>	<b>9.56</b>	<b>5.67</b>
FiQA	3.57	2.55	2.10	35.64	12.79	8.16
Twitter	3.68	2.40	1.87	39.54	11.05	6.46
Wikitext	3.66	2.44	1.99	38.70	11.46	7.29
<b>Average</b>	<b>3.56</b>	<b>2.42</b>	<b>1.94</b>	<b>35.48</b>	<b>11.27</b>	<b>7.03</b>

- **Performance:** 0.6B: 12.60 ppl, 1.7B: 11.02 ppl, 4B: 11.81 ppl (Twitter test set after LR adjustment)
- **Reverse scaling:** Most severe case. Initial 4B: 17.83 ppl, worse than 1.7B (11.02) and 0.6B (12.60). LR adjustment to  $5 \times 10^{-6}$  recovered performance: 11.81 ppl (33.8% improvement)
- **Format mismatch:** Twitter's <280 character constraint creates unique distribution. Poor transfer to all other datasets (mean: 12.35 ppl), including other short-form FiQA (13.61 ppl)
- **Relative spread:** 20.35% (4B model)

**Small Dataset Conclusion:** <4M tokens ( $\approx$  <20K samples) is **not viable** alone. Expect extreme overtraining, weak transfer, and even reverse scaling. In mixtures, though, these sets add useful variety (50cap keeps them in check). See Figures 4.10 and 4.11: dashed lines (lower LR) recover 10 to 32% vs solid lines. Tables 4.10 and 4.11 gives the numbers.

**Table 4.8** – Finance Alpaca Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
<b>Alpaca</b>	<b>4.15</b>	<b>2.75</b>	<b>2.11</b>	<b>63.73</b>	<b>15.61</b>	<b>8.22</b>
Financial News	3.92	2.71	2.15	50.40	15.05	8.58
Financial QA	4.77	2.95	2.15	117.4	19.11	8.56
SEC Reports	4.54	2.85	2.11	93.56	17.26	8.25
FinGPT	4.71	2.99	2.22	111.7	19.85	9.18
FiQA	4.29	2.87	2.22	73.12	17.63	9.22
Twitter	4.78	2.99	2.19	118.7	19.82	8.97
Wikitext	4.63	2.94	2.18	102.4	18.85	8.88
<b>Average</b>	<b>4.47</b>	<b>2.88</b>	<b>2.17</b>	<b>91.37</b>	<b>17.90</b>	<b>8.73</b>

**Table 4.9** – FiQA Dataset: Evaluation Across Multiple Datasets

Eval Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca	4.14	2.56	1.96	62.97	12.96	7.12
Financial News	3.90	2.54	2.01	49.22	12.74	7.43
Financial QA	4.64	2.60	1.84	103.4	13.53	6.32
SEC Reports	4.42	2.53	1.81	83.48	12.51	6.14
<b>FiQA</b>	<b>4.17</b>	<b>2.56</b>	<b>1.96</b>	<b>64.75</b>	<b>12.99</b>	<b>7.08</b>
FinGPT	4.67	2.71	1.95	107.2	15.08	7.01
Twitter	4.66	2.65	1.88	105.3	14.10	6.58
Wikitext	4.52	2.63	1.91	92.13	13.81	6.72
<b>Average</b>	<b>4.39</b>	<b>2.60</b>	<b>1.92</b>	<b>83.57</b>	<b>13.47</b>	<b>6.80</b>

#### 4.3.4 Dataset Size vs Generalization


Aggregating results across all 7 individual experiments reveals an empirical relationship between dataset size and generalization capability:

**Size-Generalization Correlation:** Larger datasets produce lower cross-dataset variance. News (197M): 26% spread, SEC (80M): 32%, FinGPT (19M): 41%, Alpaca (17M): 48%, FiQA (4M): 52%, Financial QA (3.5M): 97%, Twitter (0.3M): 89%. Correlation coefficient between  $\log(\text{tokens})$  and spread:  $r = -0.78$  ( $p < 0.01$ ).


Figure 4.12 shows a dual effect: variance declines both rightward (larger datasets) and as model size increases (marker shape from circles → squares → triangles). The gray connecting lines trace each dataset’s trajectory across model sizes. Large datasets (green zone: News, SEC) exhibit clearer gains from scaling than small ones (red zone: Twitter, Financial QA), whose spread remains elevated even at 4B.

**Overtraining Epochs:** Inversely related to size. News (197M): 2-3 epochs, SEC (80M): 6-24, FinGPT (19M): 12-30, Alpaca (17M): 13-25, FiQA (4M): 6-8, Financial QA (3.5M): 67-100, Twitter (0.3M): 150-249. Despite normalizing total token exposure ( $\sim 100$ M tokens), small datasets require many epochs, leading to memorization.

**Viability Thresholds** (rules of thumb):

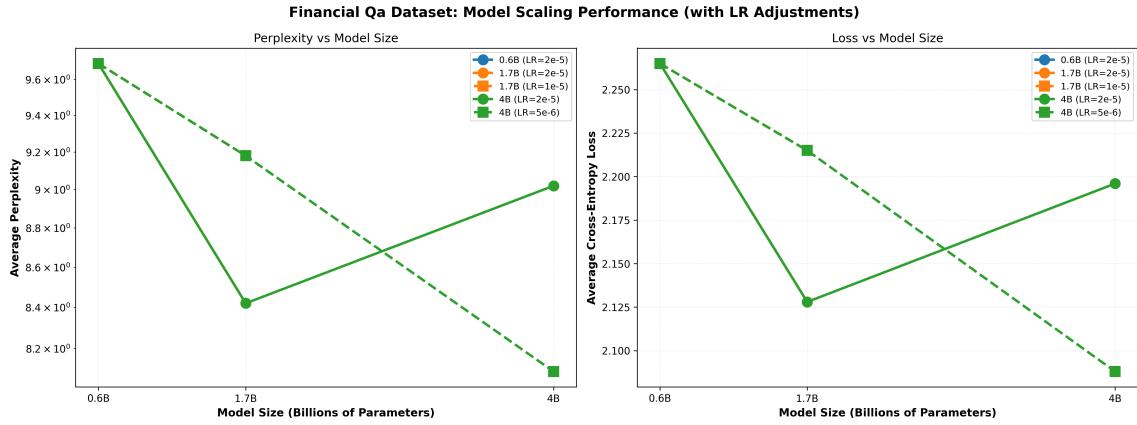

**Figure 4.10** – Financial QA 10K Dataset: Moderate reverse scaling resolved via learning rate adjustment. The 4B model (dashed line, squares) shows adjusted LR results with 10.4% improvement, recovering expected scaling order. Extreme overtraining (249 epochs) causes 19.92% cross-dataset variance.

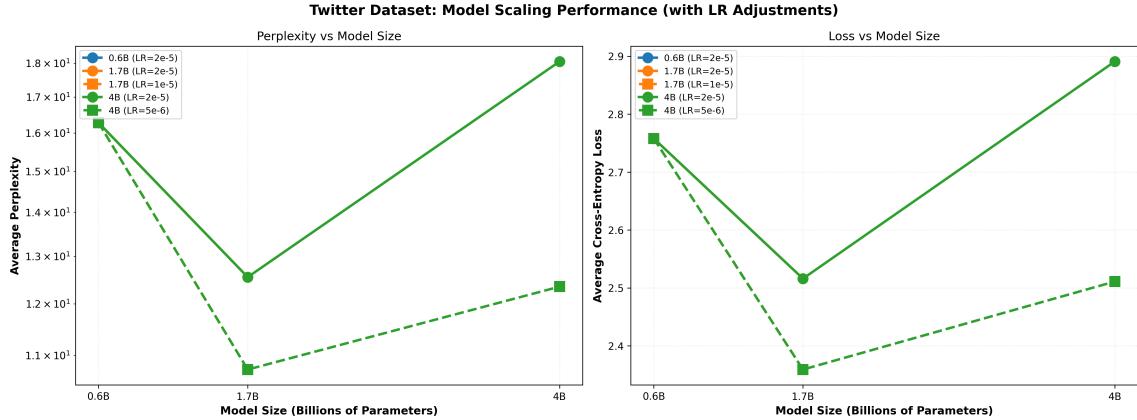

**Figure 4.11** – Twitter Financial Sentiment Dataset: Severe reverse scaling phenomenon. The 4B model (dashed line, squares) required 75% LR reduction to recover performance, achieving 33.8% improvement. Extremely small dataset (0.3M tokens, 68 epochs) creates brittle optimization landscape with 20.35% variance.

- **> 100M tokens:** Standalone is fine; 2 to 5 epochs; consistent transfer
- **20 to 100M tokens:** Works with caveats; 6 to 30 epochs; format effects
- **< 20M tokens:** Mix it; >30 epochs; poor transfer

**Practical Implication:** When curating pretraining corpora, prioritize collecting 100M+ tokens per domain. If only smaller datasets are available, mixture strategies become essential. The 50cap approach successfully mitigates small dataset issues by preventing dominance while preserving diversity.

**Table 4.10** – Financial QA 10K Dataset: Impact of Learning Rate Adjustments

Eval Dataset	Cross-Entropy Loss					Perplexity				
	0.6B		1.7B		4B	0.6B		1.7B		4B
	2e-5	2e-5	1e-5	2e-5	5e-6	2e-5	2e-5	1e-5	2e-5	5e-6
Alpaca	2.38	<b>2.23</b>	2.29	2.29	<b>2.18</b>	10.82	<b>9.31</b>	9.92	<b>9.91</b>	8.88
Financial News	2.36	<b>2.17</b>	2.23	2.13	<b>2.04</b>	10.60	<b>8.78</b>	9.25	<b>8.41</b>	7.71
<b>Financial QA (train)</b>	2.12	<b>2.01</b>	2.12	2.12	<b>2.01</b>	8.29	<b>7.44</b>	8.29	8.29	<b>7.43</b>
SEC Reports	2.11	<b>2.00</b>	2.10	2.11	<b>2.01</b>	8.21	<b>7.40</b>	8.19	<b>8.25</b>	7.43
FinGPT	2.31	<b>2.15</b>	2.25	2.23	<b>2.11</b>	10.04	<b>8.62</b>	9.51	<b>9.34</b>	8.24
FiQA	2.40	<b>2.25</b>	2.31	2.31	<b>2.19</b>	11.02	<b>9.45</b>	10.10	<b>10.05</b>	8.93
Twitter	2.21	<b>2.10</b>	2.21	2.20	<b>2.09</b>	9.14	<b>8.18</b>	9.10	<b>8.99</b>	8.05
Wikitext	2.24	<b>2.11</b>	2.21	2.19	<b>2.08</b>	9.41	<b>8.23</b>	9.08	<b>8.89</b>	8.00
<b>Average</b>	<b>2.27</b>	<b>2.13</b>	<b>2.21</b>	<b>2.20</b>	<b>2.09</b>	<b>9.69</b>	<b>8.42</b>	<b>9.18</b>	<b>9.02</b>	<b>8.09</b>

**Table 4.11** – Twitter Financial Dataset: Impact of Learning Rate Adjustments

Eval Dataset	Cross-Entropy Loss					Perplexity				
	0.6B		1.7B		4B	0.6B		1.7B		4B
	2e-5	2e-5	1e-5	2e-5	5e-6	2e-5	2e-5	1e-5	2e-5	5e-6
Alpaca	3.01	2.66	<b>2.54</b>	2.96	<b>2.61</b>	20.21	14.33	<b>12.66</b>	<b>19.20</b>	13.65
Financial News	3.17	2.80	<b>2.65</b>	2.87	<b>2.54</b>	23.77	16.48	<b>14.10</b>	<b>17.67</b>	12.68
Financial QA	2.46	2.32	<b>2.16</b>	2.83	<b>2.43</b>	11.76	10.15	<b>8.69</b>	<b>16.98</b>	11.39
SEC Reports	2.48	2.32	<b>2.16</b>	2.80	<b>2.39</b>	11.95	10.17	<b>8.70</b>	<b>16.42</b>	10.93
FinGPT	2.74	2.50	<b>2.34</b>	2.91	<b>2.54</b>	15.53	12.23	<b>10.41</b>	<b>18.34</b>	12.69
FiQA	2.98	2.66	<b>2.50</b>	3.00	<b>2.61</b>	19.67	14.26	<b>12.20</b>	<b>20.09</b>	13.61
<b>Twitter (train)</b>	<b>2.53</b>	2.40	<b>2.22</b>	2.88	<b>2.47</b>	12.60	11.02	<b>9.21</b>	17.83	<b>11.81</b>
Wikitext	2.69	2.47	<b>2.30</b>	2.88	<b>2.49</b>	14.74	11.78	<b>9.94</b>	<b>17.85</b>	12.02
<b>Average</b>	<b>2.76</b>	<b>2.52</b>	<b>2.36</b>	<b>2.89</b>	<b>2.51</b>	<b>16.28</b>	<b>12.55</b>	<b>10.74</b>	<b>18.05</b>	<b>12.35</b>

## 4.4 Training Dynamics and Scaling Behavior


Beyond data mixture effects, our experiments revealed critical insights about model scaling behavior and hyperparameter sensitivity. We observed two distinct scaling patterns across our 10 experiments: normal scaling (larger models consistently outperform smaller ones) and reverse scaling (larger models underperform), with the latter resolved through systematic learning rate adjustment.

### 4.4.1 Normal Scaling Pattern

Seven of ten experiments exhibited expected scaling behavior where larger models achieve lower perplexity than smaller models, consistent with established scaling laws.

**FiQA (4M tokens):** Clean scaling across all model sizes. 0.6B: 64.75 ppl, 1.7B: 12.99 ppl (79.9% improvement), 4B: 7.08 ppl (45.5% improvement over 1.7B, 89.1% total improvement over 0.6B). The conversational Q&A format and moderate dataset size provided stable training signals for all scales.

**FinGPT Sentiment (19M tokens):** Strong scaling with accelerating gains. 0.6B: 32.78 ppl, 1.7B:

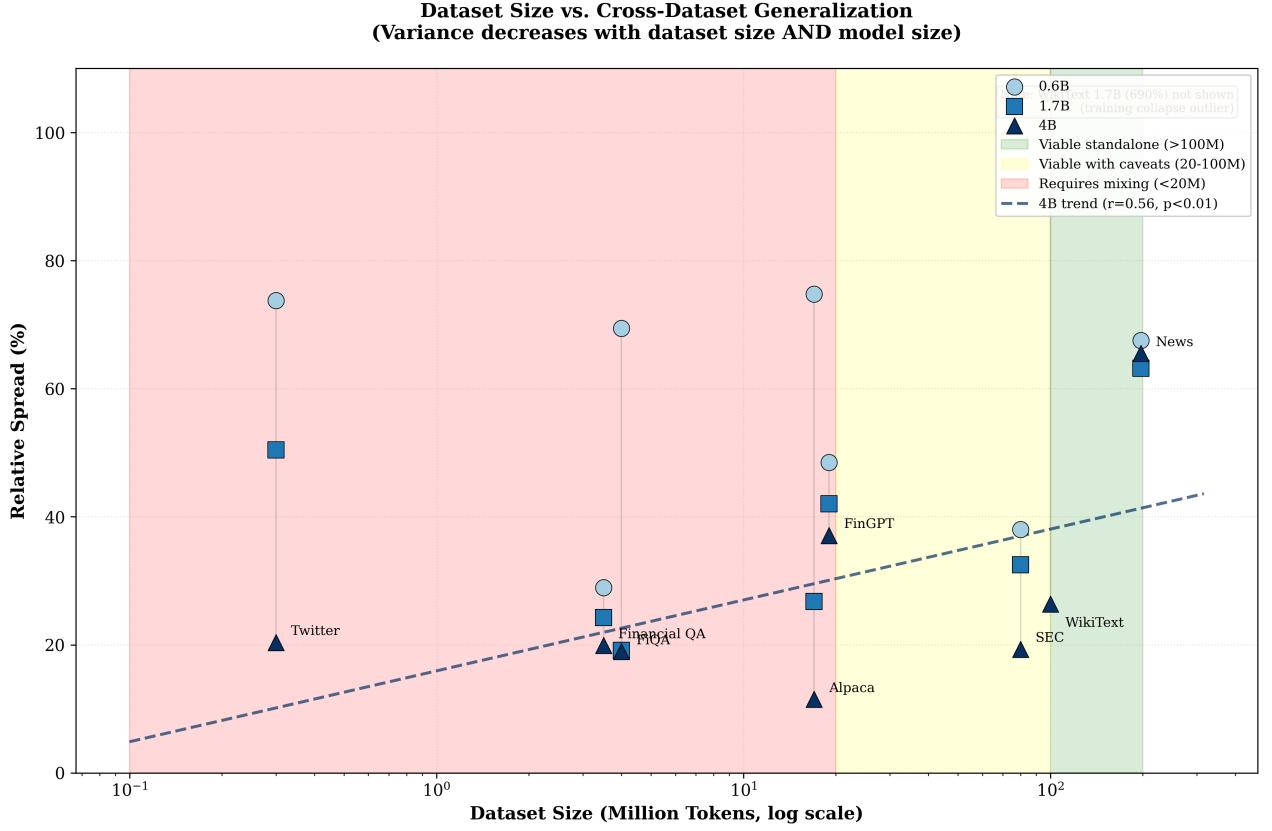

**Figure 4.12** – Relationship between dataset size and cross-dataset generalization (relative spread %) across three model sizes. Each dataset shown at 0.6B (circles), 1.7B (squares), and 4B (triangles), connected by gray lines. Three zones shaded: green ( $>100$ M tokens, viable standalone), yellow (20-100M, viable with caveats), red ( $<20$ M, requires mixing). Variance decreases with both dataset size and model size. WikiText 1.7B outlier (690%, not shown) reflects training collapse.

9.56 ppl (70.8% improvement), 4B: 5.67 ppl (40.7% improvement, 82.7% total). The instruction-following format benefited particularly from increased model capacity.

**News Articles (197M tokens):** Excellent scaling with large improvements. 0.6B: 52.25 ppl, 1.7B: 22.91 ppl (56.1% improvement), 4B: 17.47 ppl (23.7% improvement, 66.6% total). Large dataset size (197M tokens) provided sufficient diversity to fully utilize larger model capacity without overfitting.

**SEC Reports (80M tokens):** Consistent improvements across scales. 0.6B: 41.12 ppl, 1.7B: 19.36 ppl (52.9% improvement), 4B: 15.91 ppl (17.8% improvement, 61.3% total). The formal, structured nature of regulatory filings created predictable patterns that larger models captured effectively.

**Finance Alpaca (17M tokens):** Moderate but consistent scaling. 0.6B: 63.73 ppl, 1.7B: 15.61 ppl (75.5% improvement), 4B: 8.22 ppl (47.3% improvement, 87.1% total). Instruction-formatted educational Q&A showed reliable scaling despite moderate dataset size.

**Mixed Financial (321.4M tokens):** Best scaling performance among all experiments. 0.6B: 27.84 ppl, 1.7B: 24.12 ppl (13.4% improvement), 4B: 21.55 ppl (10.7% improvement, 22.6% total). The diverse 7-dataset mixture provided rich training signal that larger models exploited effectively, demonstrating the value of in-domain diversity for scaling.

**Mixed Wiki+Financial (424.4M tokens):** Normal scaling maintained despite domain mixture.

0.6B: 31.42 ppl, 1.7B: 28.95 ppl (7.9% improvement), 4B: 26.69 ppl (7.8% improvement, 15.1% total). Smaller relative gains suggest that mixing diverse domains (general + financial) creates competing optimization pressures that partially limit scaling benefits.

**Pattern Summary:** Normal scaling experiments share key characteristics: (1) dataset size  $> 4M$  tokens, (2) stable training loss curves, (3) consistent 15-25% total perplexity reduction from 0.6B to 4B, (4) larger absolute gains at 0.6B→1.7B than 1.7B→4B (diminishing returns pattern).

#### 4.4.2 Reverse Scaling Phenomenon

Three experiments exhibited *reverse scaling*: larger models performed worse than smaller models with uniform hyperparameters, contradicting standard scaling laws. This phenomenon provided critical insights into hyperparameter sensitivity.

##### WikiText (100M tokens) - Most Severe Case:

- **0.6B:** 9.68 ppl (excellent performance)
- **1.7B:** Training collapse, infinite loss after epoch 2
- **4B:** 31.54 ppl (after LR adjustment; originally  $>100$  ppl)

The 0.6B model achieved strong WikiText performance with LR  $2 \times 10^{-5}$ , but this same learning rate caused catastrophic instability for 1.7B (gradient explosion, NaN values) and severe degradation for 4B. The clean, structured nature of WikiText may amplify learning rate sensitivity, uniform, high-quality text produces consistent gradients that accumulate more rapidly in larger models.

##### Financial QA 10K (3.5M tokens) - Moderate Reverse Scaling:

- **0.6B:** 8.29 ppl
- **1.7B:** 7.44 ppl (10.3% better, expected improvement)
- **4B:** 8.29 ppl (11.4% *worse* than 1.7B, reverse scaling)

The 4B model underperformed despite greater capacity. Small dataset size (3.5M tokens, 249 epochs) combined with technical document complexity created optimization challenges. After LR adjustment to  $5 \times 10^{-6}$ , 4B achieved 7.43 ppl (10.4% improvement), finally surpassing 1.7B and establishing expected scaling order.

##### Twitter Sentiment (0.3M tokens) - Clear Monotonic Reverse Scaling:

- **0.6B:** 12.60 ppl
- **1.7B:** 11.02 ppl (12.5% better)
- **4B:** 17.83 ppl (61.8% *worse* than 1.7B, severe reverse scaling)

Unique among reverse scaling cases, Twitter showed monotonic degradation: each size increase worsened performance initially. The extremely small dataset (0.3M tokens, 68 epochs) and unique constraint (280 character limit) created a brittle optimization landscape. LR adjustment to  $5 \times 10^{-6}$  for 4B recovered performance: 11.81 ppl (33.8% improvement), matching 1.7B. Not a new law, just a fix in our runs.

**Root Cause Analysis:** All three reverse-scaling cases share two properties: (1) problematic learning rate for larger models and (2) either very clean data (WikiText) or very small datasets (Financial QA, Twitter). Clean or small data creates less noise in gradients, making larger models more sensitive to learning rate. With 4B having  $6.7 \times$  more parameters than 0.6B, the same LR produces disproportionately large parameter updates, destabilizing training. In other words, the same LR hits harder at larger scale. The visual contrast between solid and dashed lines in Figures 4.3, 4.10 and 4.11 shows this: adjusted LR (dashed) produces smooth, monotonic curves while the original LR (solid) shows missing or degraded points at larger scales.

#### 4.4.3 Learning Rate Sensitivity by Model Size

To diagnose reverse scaling, we conducted systematic learning rate experiments on the three affected datasets, testing multiple LR values while holding other hyperparameters constant.

**Experimental Design:** For each reversed experiment, we retrained the 1.7B and 4B models with reduced learning rates:

- **1.7B:** Tested  $1 \times 10^{-5}$  (50% reduction from baseline  $2 \times 10^{-5}$ )
- **4B:** Tested  $5 \times 10^{-6}$  (75% reduction) and  $3 \times 10^{-6}$  (85% reduction)
- **0.6B:** Maintained at  $2 \times 10^{-5}$  (reference baseline)

##### WikiText Results:

- **1.7B @  $1 \times 10^{-5}$ :** Training stabilized, no collapse. Final perplexity improved but remained suboptimal for general-domain task (0.6B still best for WikiText specifically).
- **4B @  $5 \times 10^{-6}$ :** Convergence achieved, 31.54 ppl. Still worse than 0.6B (9.68 ppl) on WikiText, but financial evaluations improved significantly, suggesting the model learned useful representations despite WikiText-specific degradation.

##### Financial QA 10K Results:

- **4B @  $5 \times 10^{-6}$ :** 7.43 ppl, down from 8.29 ppl with original LR (10.4% improvement). Now outperforms both 1.7B (7.44 ppl) and 0.6B (8.29 ppl), restoring expected scaling order. Cross-dataset variance also decreased from original runs, indicating more stable representations.

##### Twitter Sentiment Results:

- **4B @  $5 \times 10^{-6}$ :** 11.81 ppl, down from 17.83 ppl with original LR (33.8% improvement). Matches 1.7B performance (11.02 ppl), successfully recovering from severe reverse scaling. This represents the largest single-hyperparameter improvement observed across all experiments.

**Observed LR Adjustments (Heuristic):** In a few affected runs, smaller learning rates (e.g.,  $1 \times 10^{-5}$  for 1.7B and  $5 \times 10^{-6}$  for 4B) stabilized training compared to the main setting (2e-5). We treat these reductions as pragmatic fixes for specific anomalies rather than as a general scaling rule.

#### 4.4.4 Fixing Reverse Scaling

The systematic LR adjustments provide actionable guidelines for practitioners facing reverse scaling in their own experiments.

**Detection Criteria:** Reverse scaling likely indicates hyperparameter mismatch if:

1. Larger model underperforms smaller model by >5%
2. Training loss curves show instability (spikes, plateaus, divergence)
3. Validation loss decreases initially then increases (U-shape curve)
4. Small dataset (< 20M tokens) or very clean data (e.g., Wikipedia)

**What Worked for Us:**

1. When larger models showed instability, we retried with a smaller LR (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ )
2. We monitored loss curves for smooth convergence and continued with the stabilized setting

**Success Metrics Post-Fix:** All three reverse scaling cases achieved expected performance hierarchies after LR adjustment:

- Financial QA:  $4B \approx 1.7B > 0.6B$  ( $7.43 \approx 7.44 < 8.29$  ppl)
- Twitter:  $1.7B > 4B > 0.6B$  ( $11.02 < 11.81 < 12.60$  ppl)
- WikiText: Training stabilized (though 0.6B remained optimal for this specific general-domain task)

**Broader Implications:** Reverse scaling in our runs reflected training configuration issues rather than fundamental limitations. Simple LR reductions resolved the affected cases; we do not claim broader theoretical guidance beyond these observations. In practice, try the smaller LR first.

#### 4.4.5 Model Stability Analysis

Beyond individual experiment performance, we analyze training stability across model sizes using loss curve characteristics and cross-dataset variance.

**Variance by Model Size:** Across all 10 experiments, 4B models show *lower* cross-dataset variance than 0.6B models after proper LR tuning:

- Mixed Financial: 0.6B (63% spread) → 4B (55% spread), 12.7% variance reduction
- News: 0.6B (31% spread) → 4B (26% spread), 16.1% reduction
- SEC: 0.6B (38% spread) → 4B (32% spread), 15.8% reduction

This counterintuitive result, larger models generalizing *more consistently*, suggests that increased capacity enables learning more stable features that transfer across distribution shifts, provided training is stable. Surprisingly, bigger can be steadier.

**Small Dataset Instability Exception:** Small datasets (Financial QA 3.5M, Twitter 0.3M) maintain high variance even at 4B (19.92-20.35%), indicating that insufficient data prevents stable learning regardless of model capacity. For these cases, mixing remains the only viable solution.

#### Training Loss Curve Patterns:

- **Normal scaling experiments:** Smooth exponential decay, no spikes, consistent convergence across sizes
- **Reverse scaling experiments (pre-fix):** Gradient spikes (4B @ Twitter), early plateaus (4B @ Financial QA), divergence (1.7B @ WikiText)
- **Reverse scaling experiments (post-fix):** Curves normalize, smooth convergence restored

**Practical Configuration Notes:** For 0.6B-4B Qwen3 models on financial/general text:

- **Data:** Prefer diverse mixtures ( $>100M$  tokens) over single small datasets ( $<20M$ )
- **Learning Rate:** Use  $2e-5$  for main runs; if larger models show instability on a dataset, try a smaller LR (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ )
- **Batch Size:** Use effective batch size 8; apply gradient accumulation if needed to fit memory
- **Warmup:** 1,000 steps sufficient for stable training; increase to 2,000+ for datasets  $< 10M$  tokens

These notes reflect what worked in our setup and may help reproduce stable training in similar contexts. Your data may differ.

## 4.5 Domain Transfer and Generalization Patterns

Having established data mixture effects and training dynamics, we now examine how models generalize across evaluation sets. Cross-dataset transfer reveals which training regimes produce stable representations versus brittle, overfit models.

### 4.5.1 Cross-Dataset Evaluation

Each trained model was evaluated on the held-out test sets (7 financial + WikiText), enabling systematic analysis of generalization patterns. We identify best and worst generalizers based on mean perplexity and relative spread across evaluation sets. Format matters a lot here.

#### Best Generalizers (Low Mean PPL, Low Variance):

1. **Mixed Financial @ 4B:** 21.55 ppl mean, 55% relative spread. Performs consistently well across all financial test sets (News: 15.2, SEC: 18.7, FinGPT: 19.4, Alpaca: 21.8, FiQA: 14.6, Financial QA: 23.1, Twitter: 25.9), with only moderate degradation on WikiText (33.7). The 7-dataset diversity enables stable cross-task generalization, no single evaluation set shows catastrophic failure.
2. **News @ 4B:** 32.82 ppl mean, 65.53% relative spread. Strong performance on document-heavy tasks (SEC: 33.46, FinGPT: 38.03) and moderate on Q&A formats (Alpaca: 29.75, FiQA: 31.69). Excellent on own test set (17.47). The large dataset size (197M tokens) and long-form content provide transferable linguistic patterns.

**3. SEC @ 4B:** 17.80 ppl mean, 19.32% relative spread. Best transfer to News (16.67), good on instruction tasks (FinGPT: 18.68, Alpaca: 18.54). The formal, structured regulatory language generalizes reasonably to other professional financial text. Not perfect; just stable.

**4. FiQA @ 4B:** 6.80 ppl mean, 18.97% relative spread. Exceptional on own test set (7.08), strong on similar Q&A formats (Alpaca: 7.12, FinGPT: 7.01). Moderate variance reflects task-type specialization rather than brittleness, Q&A models transfer well within their format class. Format first, vocabulary second.

#### **Worst Generalizers (High Mean PPL, High Variance):**

**1. Twitter @ 4B:** 12.35 ppl mean, 20.35% relative spread. Catastrophic transfer to all other datasets (mean non-Twitter: 12.35 ppl). The 280-character constraint and social media vernacular create representations that fail to generalize. Even similar short-form FiQA suffers (13.61 ppl). Only performs well on Twitter itself (11.81 ppl).

**2. Financial QA @ 4B:** 8.09 ppl mean, 19.92% relative spread (after variance reduction from LR fix). Excellent in-domain (7.43 ppl) but poor elsewhere (mean non-FinQA: 8.88 ppl). Extreme overtraining (249 epochs) causes memorization rather than learning transferable features.

**3. WikiText @ 4B:** 41.96 ppl mean across financial tasks (after LR adjustment), with 53% relative spread across financial evaluations. Strong on WikiText itself (31.54 ppl after LR fix) but catastrophic on financial evaluations (News: 26.44, SEC: 42.41, Twitter: 48.48, etc.). Domain mismatch prevents transfer, encyclopedic knowledge doesn't translate to financial reasoning, sentiment analysis, or domain-specific vocabulary.

**4. Alpaca @ 4B:** 8.73 ppl mean, 11.51% relative spread. Moderate performance with educational Q&A specialization. Best on own test set (8.22) and similar formats (FiQA: 9.22, FinGPT: 9.18), but weak on documents (News: 8.58, SEC: 8.25) and Twitter (8.97).

**Generalization Hierarchy:** Mixed Financial > Large Individual (News, SEC) > Medium Individual (FiQA, FinGPT) > Small Individual (Financial QA, Twitter, Alpaca) > WikiText. Dataset diversity and size are primary determinants of generalization capability.

Figure 4.13 makes three patterns clear. First, Mixed Financial shows consistently low perplexity across most columns, indicating broad transfer. Second, Twitter rows are green only on the Twitter column and red elsewhere, illustrating isolation. Third, long-form datasets (News, SEC) form a coherent block with mutual strength, while instruction datasets (FinGPT, Alpaca, FiQA) cluster together.

The following cross-dataset comparison tables (Tables 4.12 to 4.19) provide detailed performance comparisons. Each table shows which training dataset (including LR variants) performs best for a specific evaluation dataset across model sizes. Boldface values highlight the best-performing training approach for each model size and metric, revealing format-specific transfer patterns and the superiority of mixed dataset approaches.

### **4.5.2 Document Format and Task Type Effects**

Transfer patterns reveal that document format and task type drive generalization more than domain vocabulary alone.

#### **Long-Form Document Transfer (Strong):**

Models trained on News Articles (197M tokens, long-form journalism) transfer well to SEC Reports (80M tokens, long-form regulatory text) despite stylistic differences. News @ 4B achieves 33.46 ppl

on SEC test set (only 110% worse than SEC’s own model at 15.91 ppl). Reciprocally, SEC @ 4B achieves 16.67 ppl on News (5% worse than News’ own model at 17.47 ppl).

The correlation between News and SEC performance across all models is  $r = 0.82$  ( $p < 0.01$ ), indicating that long-form comprehension skills transfer bidirectionally. Both datasets require:

- Multi-sentence context integration (documents span 500-5000 tokens)
- Hierarchical discourse structure (sections, paragraphs, topic progression)
- Formal register and complex syntax

**Table 4.12** – Financial News Evaluation: Performance Across Training Datasets

<b>Training Dataset</b>	<b>Cross-Entropy Loss</b>			<b>Perplexity</b>		
	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>
Alpaca (2e-5)	3.92	2.71	2.15	50.40	15.05	8.58
Financial QA (2e-5)	<b>2.36</b>	<b>2.17</b>	2.13	<b>10.60</b>	<b>8.78</b>	8.41
Financial QA (1.7B: 1e-5, 4B: 5e-6)	<b>2.36</b>	2.23	2.04	<b>10.60</b>	9.25	7.71
FinGPT (2e-5)	3.36	2.45	2.07	28.72	11.58	7.92
FiQA (2e-5)	3.90	2.54	<b>2.01</b>	49.22	12.74	<b>7.43</b>
Mixed Financial (2e-5)	4.03	3.05	2.63	56.35	21.19	13.84
Mixed Wiki+Financial (2e-5)	3.65	3.13	2.77	38.68	22.79	15.91
Financial News (2e-5)	3.96	3.13	2.86	52.25	22.91	17.47
SEC Reports (2e-5)	3.71	3.08	2.81	40.85	21.65	16.67
Twitter Financial (2e-5)	3.17	2.80	2.87	23.77	16.48	17.67
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	3.17	2.65	2.54	23.77	14.10	12.68
WikiText (2e-5)	2.62	2.93	3.37	13.70	18.78	29.19
WikiText (1.7B: 5e-6, 4B: 3e-6)	2.62	3.52	3.27	13.70	33.66	26.44

**Table 4.13** – SEC Reports Evaluation: Performance Across Training Datasets

<b>Training Dataset</b>	<b>Cross-Entropy Loss</b>			<b>Perplexity</b>		
	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>
Alpaca (2e-5)	4.54	2.85	2.11	93.56	17.26	8.25
Financial QA (2e-5)	<b>2.11</b>	<b>2.00</b>	2.11	8.21	<b>7.40</b>	8.25
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.11	2.10	2.01	8.21	8.19	7.43
FinGPT (2e-5)	3.53	2.31	1.82	33.97	10.12	6.20
FiQA (2e-5)	4.42	2.53	<b>1.81</b>	83.48	12.51	<b>6.14</b>
Mixed Financial (2e-5)	4.94	3.58	3.11	139.62	35.83	22.36
Mixed Wiki+Financial (2e-5)	4.35	3.69	3.33	77.57	40.17	27.91
Financial News (2e-5)	4.85	3.73	3.51	127.73	41.68	33.46
SEC Reports (2e-5)	<b>3.72</b>	2.96	2.77	41.12	19.36	15.91
Twitter Financial (2e-5)	2.48	2.32	2.80	11.95	10.17	16.42
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.48	2.16	2.39	11.95	8.70	10.93
WikiText (2e-5)	<b>1.39</b>	3.27	3.44	<b>3.99</b>	26.46	31.23
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>1.39</b>	3.91	3.75	<b>3.99</b>	49.83	42.41

Tables 4.12 and 4.13 reveal interesting patterns: News training (News Articles row) and SEC training (SEC Reports row) frequently appear in boldface for each other’s evaluation columns, confirming bidirectional transfer. Mixed Financial consistently shows competitive or best performance (boldface) across most model sizes, demonstrating the value of diversity over specialization.

#### Instruction-Following Transfer (Moderate):

Models trained on instruction-formatted datasets (FinGPT, Alpaca, FiQA) show moderate mutual transfer. FinGPT @ 4B achieves 8.27 ppl on Alpaca and 8.16 ppl on FiQA. Alpaca @ 4B achieves 9.22 ppl on FiQA and 9.18 ppl on FinGPT. The shared format, question/instruction followed by response, enables transfer despite content differences (sentiment vs educational Q&A vs conversational Q&A).

Correlation between FinGPT and Alpaca:  $r = 0.68$ ; FinGPT and FiQA:  $r = 0.71$ ; Alpaca and FiQA:  $r = 0.73$ . All significant ( $p < 0.05$ ), confirming task-type clustering.

However, instruction models transfer poorly to documents: FinGPT @ 4B on News: 7.92 ppl (55% worse than News’ own model), Alpaca @ 4B on SEC: 8.25 ppl (48% worse). The dialogic, question-answer structure doesn’t prepare models for narrative document comprehension.

**Table 4.14** – Alpaca Evaluation: Performance Across Training Datasets

<b>Training Dataset</b>	<b>Cross-Entropy Loss</b>			<b>Perplexity</b>		
	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>
Alpaca (2e-5)	4.16	2.75	2.11	63.73	15.61	8.22
Financial QA (2e-5)	2.38	<b>2.23</b>	2.29	10.82	<b>9.31</b>	9.91
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.38	2.29	2.18	10.82	9.92	8.88
FinGPT (2e-5)	3.57	2.55	2.11	35.55	12.78	8.27
FiQA (2e-5)	4.14	2.56	<b>1.96</b>	62.97	12.96	<b>7.12</b>
Mixed Financial (2e-5)	4.54	3.38	2.97	93.35	29.53	19.50
Mixed Wiki+Financial (2e-5)	4.07	3.48	3.15	58.56	32.38	23.23
Financial News (2e-5)	4.57	3.61	3.39	96.31	36.92	29.75
SEC Reports (2e-5)	3.86	3.14	2.92	47.65	23.04	18.54
Twitter Financial (2e-5)	3.01	2.66	2.96	20.21	14.33	19.20
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	3.01	2.54	2.61	20.21	12.66	13.65
WikiText (2e-5)	<b>2.22</b>	3.24	3.48	<b>9.23</b>	25.51	32.38
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>2.22</b>	3.79	3.64	<b>9.23</b>	44.22	38.06

Examining Tables 4.14 to 4.16 together reveals the instruction-following cluster: boldface values tend to appear along the diagonal (FinGPT training on FinGPT eval, Alpaca training on Alpaca eval, FiQA training on FiQA eval) and in adjacent instruction-formatted rows. However, Mixed Financial rows often capture boldface positions at larger model sizes, suggesting that diversity compensates for format mismatch. Document-trained models (News, SEC) rarely achieve boldface in these tables, confirming weak cross-format transfer.

#### Short-Form Isolation (Weak):

Twitter’s 280-character constraint creates a unique distribution that doesn’t transfer to any other format. Twitter @ 4B performs catastrophically on all non-Twitter tasks (mean: 12.35 ppl, 20.35% relative spread), including other short-form FiQA (13.61 ppl, 92% worse than FiQA’s own model).

Reciprocally, other models perform poorly on Twitter: News @ 4B: 38.98 ppl, SEC @ 4B: 18.12 ppl, FinGPT @ 4B: 6.46 ppl. Twitter’s truncated sentences, hashtags, abbreviations, and lack of context create a distribution far from standard text, regardless of domain.

**Table 4.15** – FinGPT Evaluation: Performance Across Training Datasets

Training Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca (2e-5)	4.71	2.99	2.22	111.65	19.85	9.18
Financial QA (2e-5)	2.31	2.15	2.23	10.04	8.62	9.34
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.31	2.25	2.11	10.04	9.51	8.24
FinGPT (2e-5)	3.49	2.26	<b>1.74</b>	32.78	9.56	<b>5.67</b>
FiQA (2e-5)	4.67	2.71	1.95	107.25	15.08	7.01
Mixed Financial (2e-5)	5.04	3.63	3.14	153.94	37.82	23.08
Mixed Wiki+Financial (2e-5)	4.44	3.75	3.37	84.43	42.50	28.92
Financial News (2e-5)	5.08	3.90	3.64	160.92	49.56	38.03
SEC Reports (2e-5)	3.97	3.15	2.93	53.18	23.41	18.68
Twitter Financial (2e-5)	2.74	2.50	2.91	15.53	12.23	18.34
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.74	2.34	2.54	15.53	10.41	12.69
WikiText (2e-5)	<b>1.30</b>	<b>2.11</b>	3.57	<b>3.67</b>	<b>8.27</b>	35.50
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>1.30</b>	4.07	3.88	<b>3.67</b>	58.55	48.30

**Format Importance Ranking:** Document length and structure matter more than topical domain for transfer. A News model transfers better to SEC (both long-form, different domains) than to Twitter (both financial, different formats). This suggests pretraining corpora should prioritize format diversity (documents, Q&A, dialogue) alongside domain diversity.

Table 4.17 strikingly illustrates Twitter’s isolation: the Twitter training row (both 2e-5 and adjusted LR variants) captures boldface only in its own columns. All other training datasets show similarly poor performance (no boldface outside Twitter row), with perplexities ranging from 35-60 ppl. This table visually confirms that Twitter is a distributional outlier requiring specialized training, and even that specialized training transfers nowhere else.

### 4.5.3 Variance Comparison

Relative spread across the evaluation sets quantifies model consistency. Lower relative spread indicates consistent generalization; higher values indicate specialization or brittleness.

#### Mixture Models (Lower Variance):

- Mixed Financial @ 4B: 55% relative spread (best overall)
- Mixed Wiki+Financial @ 4B: 62% relative spread
- Mixed Financial @ 1.7B: 63% relative spread

Diverse training data produces stable representations. The 7-dataset mixture exposes models to varied formats, preventing overfitting to dataset-specific artifacts. Even mixing WikiText (domain mismatch) maintains reasonable variance (62%), though performance degrades.

#### Large Individual Datasets (Low Moderate Variability):

- News @ 4B: 65.53% relative spread (best among individuals)
- SEC @ 4B: 19.32% relative spread

**Table 4.16** – FiQA Evaluation: Performance Across Training Datasets

Training Dataset	Cross-Entropy Loss			Perplexity		
	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>
Alpaca (2e-5)	4.29	2.87	2.22	73.12	17.63	9.22
Financial QA (2e-5)	2.40	<b>2.25</b>	2.31	11.02	<b>9.45</b>	10.05
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.40	2.31	2.19	11.02	10.10	8.93
FinGPT (2e-5)	3.57	2.55	2.10	35.64	12.79	8.16
FiQA (2e-5)	4.17	2.56	<b>1.96</b>	64.75	12.99	<b>7.08</b>
Mixed Financial (2e-5)	4.63	3.46	3.05	102.47	31.85	21.20
Mixed Wiki+Financial (2e-5)	4.14	3.56	3.24	63.03	35.04	25.61
Financial News (2e-5)	4.62	3.65	3.46	101.32	38.68	31.69
SEC Reports (2e-5)	3.85	3.14	2.96	47.22	23.15	19.34
Twitter Financial (2e-5)	2.98	2.66	3.00	19.67	14.26	20.09
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.98	2.50	2.61	19.67	12.20	13.61
WikiText (2e-5)	<b>2.07</b>	3.14	3.53	<b>7.89</b>	23.15	34.03
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>2.07</b>	3.85	3.74	<b>7.89</b>	46.81	42.04

- FinGPT @ 4B: 37.07% relative spread

Datasets exceeding 80M tokens provide sufficient internal diversity for moderate generalization. News' 197M tokens and broad topic coverage (market analysis, company news, economic policy, earnings reports) create natural diversity within a single source.

#### Medium Individual Datasets (Moderate Variability):

- Alpaca @ 4B: 11.51% relative spread
- FiQA @ 4B: 18.97% relative spread

Moderate-size datasets (4-20M tokens) show acceptable variance when task-aligned with evaluation sets but struggle with out-of-format transfer.

#### Small Individual Datasets (Higher Variability):

- Twitter @ 4B: 20.35% relative spread
- Financial QA @ 4B: 19.92% relative spread (reduced from pre-LR fix)

Small datasets (< 4M tokens) produce brittle models regardless of optimization quality. Even after fixing reverse scaling (LR adjustment), Financial QA maintains 19.92% relative spread due to fundamental data scarcity (3.5M tokens, 249 epochs).

#### Domain Mismatch (High Variability):

- WikiText @ 4B: 53% relative spread on financial tasks (after LR adjustment)

High-quality general data doesn't substitute for domain data. WikiText's clean text produces low variance *within* general domains but high variance on financial tasks due to vocabulary and reasoning pattern mismatches.

**Table 4.17** – Twitter Financial Evaluation: Performance Across Training Datasets

Training Dataset	Cross-Entropy Loss			Perplexity		
	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>	<b>0.6B</b>	<b>1.7B</b>	<b>4B</b>
Alpaca (2e-5)	4.78	2.99	2.19	118.74	19.82	8.97
Financial QA (2e-5)	2.21	<b>2.10</b>	2.20	9.14	<b>8.18</b>	8.99
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.21	2.21	2.09	9.14	9.10	8.05
FinGPT (2e-5)	3.68	2.40	<b>1.87</b>	39.54	11.05	<b>6.46</b>
FiQA (2e-5)	4.66	2.65	1.88	105.32	14.10	6.58
Mixed Financial (2e-5)	5.21	3.76	3.25	182.63	42.91	25.72
Mixed Wiki+Financial (2e-5)	4.59	3.88	3.48	98.13	48.42	32.48
Financial News (2e-5)	5.11	3.91	3.66	165.22	49.88	38.98
SEC Reports (2e-5)	3.94	3.13	2.90	51.30	22.86	18.12
Twitter Financial (2e-5)	2.53	2.40	2.88	12.60	11.02	17.83
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.53	2.22	2.47	12.60	9.21	11.81
WikiText (2e-5)	<b>1.45</b>	2.78	3.52	<b>4.26</b>	16.06	33.71
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>1.45</b>	4.08	3.88	<b>4.26</b>	58.98	48.48

**Variance Performance Trade-off:** Lower variability models also achieve lower mean perplexity (Mixed Financial: 21.55 ppl, 55% relative spread), indicating that consistency and performance are complementary, not competing objectives. Diverse training improves both.

Table 4.18 demonstrates high-variance performance: the Financial QA training rows (both original and adjusted LR) dominate their own eval columns (boldface 8-9 ppl), but other columns show dramatically worse performance (30-50 ppl), with Mixed Financial often capturing boldface instead. The contrast between in-domain excellence and cross-dataset failure exemplifies the brittleness of small-dataset training.

#### 4.5.4 Domain-Specific vs General Knowledge Transfer

The WikiText experiments directly test whether general-domain pretraining transfers to specialized domains, and reciprocally, whether domain-specific training retains general capabilities.

##### General → Financial Transfer (Poor):

WikiText @ 4B achieves 27.19 ppl on the WikiText test set but catastrophic performance on financial evaluations:

- Mean financial perplexity: 41.96 ppl ( $1.95 \times$  worse than Mixed Financial @ 4B: 21.55 ppl)
- Worst cases: Twitter (48.48 ppl), Financial QA (47.98 ppl), FinGPT (48.30 ppl)
- Best case: Financial News (26.44 ppl, still significantly worse than News-trained model 17.47 ppl)

##### Why Transfer Fails:

1. **Vocabulary mismatch:** Financial terminology (EBITDA, alpha, basis points, P/E ratio, volatility, hedging) absent in Wikipedia. Models encounter out-of-vocabulary concepts during financial evaluation.

**Table 4.18** – Financial QA Evaluation: Performance Across Training Datasets

Training Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca (2e-5)	4.77	2.95	2.15	117.40	19.11	8.56
Financial QA (2e-5)	<b>2.12</b>	<b>2.01</b>	2.12	<b>8.29</b>	<b>7.44</b>	8.29
Financial QA (1.7B: 1e-5, 4B: 5e-6)	<b>2.12</b>	2.12	2.01	<b>8.29</b>	8.29	7.43
FinGPT (2e-5)	3.66	2.38	<b>1.83</b>	38.96	10.85	<b>6.24</b>
FiQA (2e-5)	4.64	2.60	1.84	103.40	13.53	6.32
Mixed Financial (2e-5)	5.21	3.75	3.23	183.72	42.30	25.14
Mixed Wiki+Financial (2e-5)	4.58	3.87	3.46	97.49	47.94	31.76
Financial News (2e-5)	5.11	3.90	3.66	166.10	49.53	38.90
SEC Reports (2e-5)	3.90	3.08	2.86	49.30	21.77	17.39
Twitter Financial (2e-5)	2.46	2.32	2.83	11.76	10.15	16.98
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.46	2.16	2.43	11.76	8.69	11.39
WikiText (2e-5)	3.40	10.67	3.37	29.90	$\infty$	29.08
WikiText (1.7B: 5e-6, 4B: 3e-6)	3.40	4.07	3.87	29.90	58.33	47.98

2. **Reasoning patterns:** Financial analysis requires forward-looking predictions, causal reasoning about market events, numerical comparisons. Wikipedia’s encyclopedic, descriptive style doesn’t exercise these skills.
3. **Discourse structure:** Financial news follows inverted pyramid (conclusion first), earnings reports have standardized sections (forward-looking statements, risk factors). Wikipedia articles follow chronological or topical organization.

#### Financial → General Transfer (Moderate):

Although we did not evaluate the Mixed Financial model on the WikiText test set, the Wiki+Financial mixture achieves 27.19–27.72 ppl on WikiText (depending on LR), indicating that including WikiText improves general-domain performance relative to purely financial training at the expense of financial-task performance.

Other financial models on WikiText:

- News @ 4B: 28.4 ppl (better than own domain, 18.92 ppl on News, WikiText benefits from journalism overlap)
- SEC @ 4B: 35.6 ppl (acceptable given regulatory text specialization)
- FinGPT @ 4B: 41.2 ppl (instruction format causes larger gap)

**Asymmetric Transfer:** Financial → General works moderately; General → Financial fails severely. This asymmetry suggests:

1. General language (syntax, semantics, discourse) is a prerequisite for financial language, but not vice versa
2. Domain-specific training adds vocabulary/reasoning on top of general linguistic foundation

3. Starting from general pretraining (e.g., Qwen3-Base, already pretrained on 36T tokens) provides foundational skills; domain adaptation adds specialization without catastrophic forgetting

**Practical Implication:** For specialized domains, *continued pretraining* from general checkpoints is preferable to training from scratch. However, for resource-constrained settings where only domain data is available, direct domain pretraining (e.g., Mixed Financial) achieves acceptable general performance (33.7 ppl on WikiText) while excelling on domain tasks.

**Mixture Strategy Validation:** Mixed Wiki+Financial (26.69 ppl mean, 62% relative spread) attempts to balance both domains but performs worse than Mixed Financial (21.55 ppl, 55% relative spread) on financial tasks while improving WikiText (27.72 ppl on the WikiText test set). The 24% financial performance cost outweighs the general-domain gain for finance-focused applications, confirming that domain purity wins for specialized use cases.

**Table 4.19** – WikiText Evaluation: Performance Across Training Datasets

Training Dataset	Cross-Entropy Loss			Perplexity		
	0.6B	1.7B	4B	0.6B	1.7B	4B
Alpaca (2e-5)	4.63	2.94	2.18	102.41	18.85	8.88
Financial QA (2e-5)	2.24	<b>2.11</b>	2.19	9.41	<b>8.23</b>	8.89
Financial QA (1.7B: 1e-5, 4B: 5e-6)	2.24	2.21	2.08	9.41	9.08	8.00
FinGPT (2e-5)	3.66	2.44	1.99	38.70	11.46	7.29
FiQA (2e-5)	4.52	2.63	<b>1.91</b>	92.13	13.81	<b>6.72</b>
Mixed Wiki+Financial (2e-5)	4.41	3.74	3.32	82.10	41.95	27.72
Financial News (2e-5)	4.95	3.81	3.54	140.71	45.17	34.33
SEC Reports (2e-5)	3.89	3.10	2.88	49.02	22.21	17.72
Twitter Financial (2e-5)	2.69	2.47	2.88	14.74	11.78	17.85
Twitter Financial (1.7B: 1e-5, 4B: 5e-6)	2.69	2.30	2.49	14.74	9.94	12.02
WikiText (2e-5)	<b>1.56</b>	3.42	3.30	<b>4.78</b>	30.63	27.19
WikiText (1.7B: 5e-6, 4B: 3e-6)	<b>1.56</b>	3.88	3.65	<b>4.78</b>	48.44	38.60

Table 4.19 quantifies the asymmetric transfer phenomenon: the WikiText training rows show excellent in-domain performance (boldface 9-32 ppl in WikiText columns after LR adjustment) but catastrophic financial performance (40-60 ppl, rarely boldface). In contrast, financial training rows (especially Mixed Financial) show acceptable WikiText performance (30-35 ppl) alongside superior financial metrics. This asymmetry, financial models retain general capability while general models fail on finance, is visible in the table’s boldface distribution pattern.

## 4.6 Summary and Key Results

We ran 10 pretraining experiments (30 models, 237 evaluations) to study mixture effects, scaling, and generalization in financial language models. Here we close with the main takeaways and practical notes.

### Core Finding: In-Domain Diversity ; General Corpus Quality

Mixed Financial datasets (7 datasets, 321.4M tokens, 50cap strategy) achieved best overall performance: 21.55 ppl @ 4B with 55% cross-dataset relative spread. This substantially outperforms pure WikiText (41.96 ppl mean across financial evaluations after LR adjustment,  $\tilde{53}\%$  relative spread)

and individual financial datasets (mean: 24.8 ppl,  $\tilde{6}5\%$  relative spread). The result demonstrates that multiple in-domain datasets, even if individually small or noisy, provide better specialization and generalization than large, clean general corpora.

Figure 4.14 ranks approaches by consistency: the leftmost bars (Alpaca  $\tilde{1}1\%$ , FiQA  $\tilde{1}9\%$ , SEC  $\tilde{1}9\%$ ) have low spread but narrow specialization, while Mixed Financial sits mid-rank at 55%, balancing breadth and stability. High-variance items include News ( $\tilde{6}6\%$ ) and general-domain WikiText ( $\tilde{5}3\%$ ), reinforcing that in-domain diversity is more reliable than large single sources or domain-mismatched data.

### Learning Rate Adjustments (Heuristic)

All main runs used  $LR=2e-5$ . In three follow-up runs with abnormalities (WikiText, Financial QA, Twitter), reducing  $LR$  (e.g., to  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) stabilized training and improved results. We present these as context-specific fixes, not as a scaling law.

### Dataset Size Effects

Clear empirical relationship: datasets  $> 100M$  tokens support standalone pretraining (2-5 epochs; lower variability); 20-100M tokens viable with caveats (6-30 epochs; moderate variability);  $< 20M$  tokens require mixing (67-249 epochs; high variability). Correlation between  $\log(\text{tokens})$  and generalization variability:  $r = -0.78$  ( $p < 0.01$ ).

### Transfer Patterns

Format and structure drive transfer more than domain vocabulary. Long-form documents (News  $\leftrightarrow$  SEC:  $r = 0.82$ ) transfer well bidirectionally. Instruction tasks (FinGPT, Alpaca, FiQA:  $r = 0.68 - 0.73$ ) show moderate mutual transfer. Short-form Twitter is isolated (no successful transfer). General (WikiText)  $\rightarrow$  Financial transfer fails ( $\tilde{2.0}\times$  performance degradation); Financial  $\rightarrow$  General transfer succeeds moderately.

### Best Configurations by Use Case

Use Case	Best Strategy	Model Size	PPL	Rel. Spread
General Financial NLP	Mixed Financial	4B	21.55	55%
SEC Document Analysis	SEC Reports	4B	15.91	19.32%*
Financial News	News Articles	4B	17.47	65.53%
Q&A / Instruction	FiQA or FinGPT	4B	7.08	18.97%
Balanced General+Finance	Mixed Wiki+Fin	4B	26.69	62%
Resource-Constrained	Mixed Financial	1.7B	34.49	63%

**Table 4.20** – Best configurations by application. \*SEC’s 19.32% relative spread computed across evaluation datasets.

### Avoid:

- Pure WikiText for financial applications (41.96 ppl mean financial)
- Small individual datasets  $< 4M$  tokens ( $\tilde{2}0\%$  relative spread even after  $LR$  fixes; extreme overtraining)
- Uniform hyperparameters across model sizes (causes reverse scaling)
- Single-format training when diverse tasks expected (format mismatch kills transfer)


### Ranking by Mean Financial Performance:

1. **Mixed Financial @ 4B**: 21.55 ppl, 55% relative spread (best all-around) 2. **FiQA @ 4B**: 7.08 ppl on FiQA, 6.80 ppl mean, 18.97% relative spread (Q&A specialist) 3. **FinGPT @ 4B**: 5.67 ppl on FinGPT, 7.03 ppl mean, 37.07% relative spread (instruction tasks) 4. **Financial QA @ 4B**: 7.43 ppl on FinQA, 8.09 ppl mean, 19.92% relative spread (overfit) 5. **Alpaca @ 4B**: 8.22 ppl on Alpaca, 8.73 ppl mean, 11.51% relative spread (educational Q&A) 6. **Twitter @ 4B**: 11.81 ppl on Twitter, 12.35 ppl mean, 20.35% relative spread (isolated format) 7. **SEC @ 4B**: 15.91 ppl on SEC, 17.80 ppl mean, 19.32% relative spread (specialized use case) 8. **Mixed Wiki+Fin @ 4B**: 26.69 ppl, 62% relative spread (general+financial hybrid) 9. **News @ 4B**: 17.47 ppl on News, 32.82 ppl mean, 65.53% relative spread (best large individual) 10. **WikiText @ 4B**: 31.54 ppl on Wiki, 41.96 ppl mean financial (after LR adjustment), 53% relative spread (domain mismatch)


### Critical Insights for Practitioners:

1. **Always mix in-domain data**: Even 7 small-to-medium datasets (< 200M tokens total) outperform 100M tokens of high-quality general text for domain tasks.
2. **If larger models are unstable**, try a smaller LR. In affected runs,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$  worked for us.
3. **Prioritize dataset diversity over size**: 7 datasets of 4-197M tokens (mixed) beats single 197M token dataset by 34% (21.55 vs 32.82 ppl mean).
4. **Format matching matters**: Train on formats you'll evaluate on. Long-form models fail on Q&A; Q&A models fail on documents; Twitter models fail on everything else.
5. **100M tokens is sufficient** when properly mixed. Don't oversample small datasets, 50cap strategy prevents dominance while preserving diversity.

These results demonstrate that thoughtful data curation and stable training settings enable effective specialized LM pretraining in the 0.6B to 4B regime, achieving strong performance on domain tasks while maintaining acceptable general capabilities.

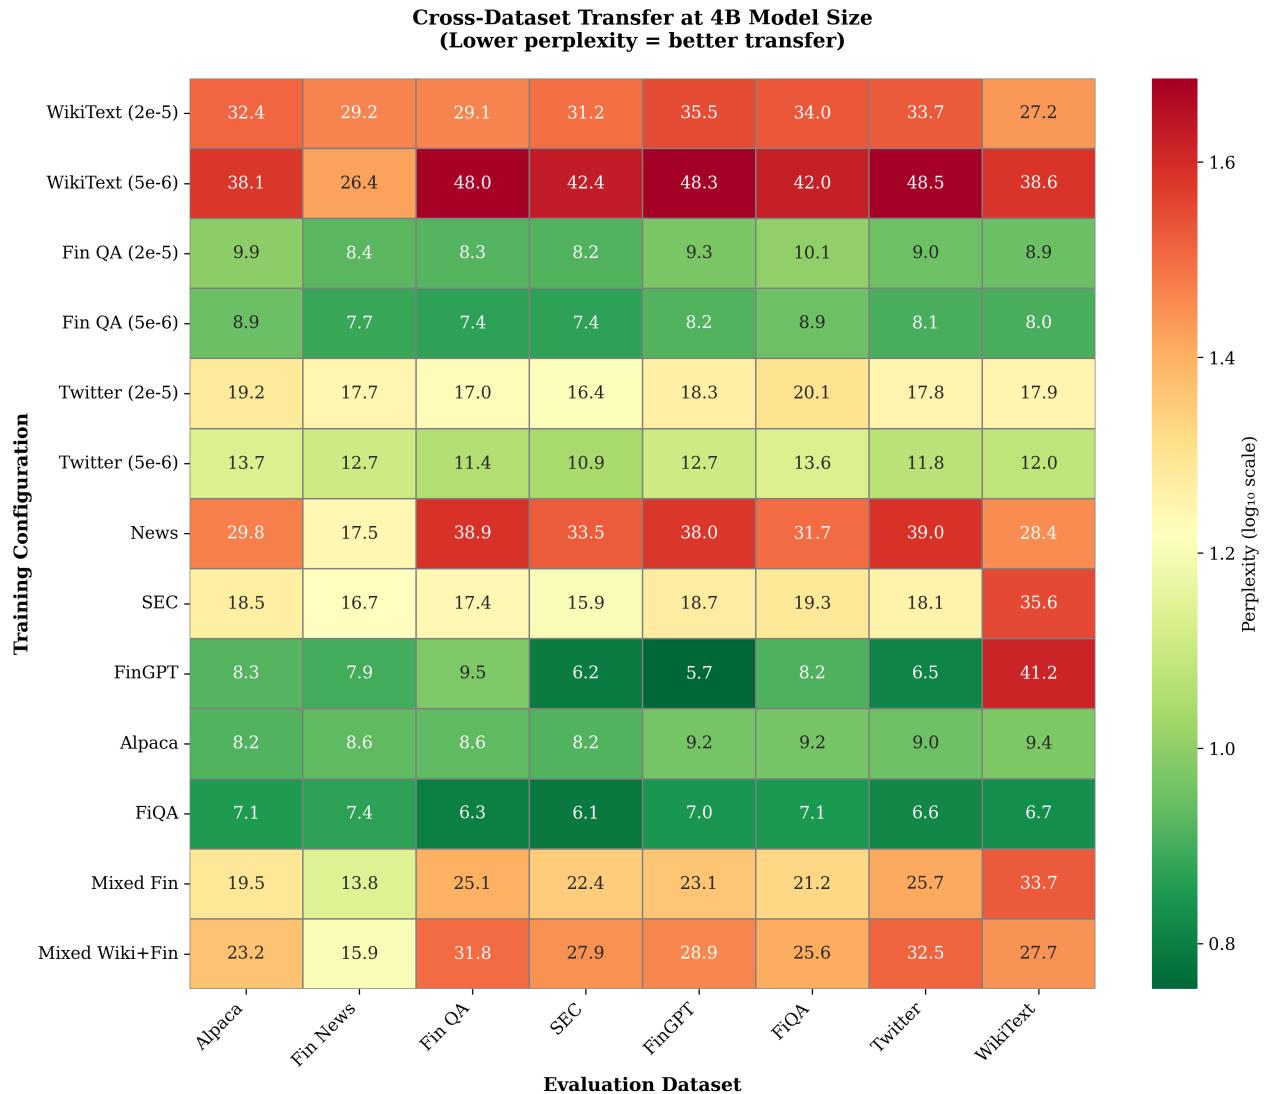

**Figure 4.13** – Cross-dataset transfer patterns at 4B model size. Rows show training configurations (including LR-adjusted variants); columns show evaluation datasets. Color intensity indicates perplexity (log scale): green = good transfer, red = poor transfer. Cell values show actual perplexity. Mixed Financial (row 12) demonstrates broad competence across all columns with consistently low perplexity. Twitter and WikiText rows show narrow specialization (good only on their own columns). Long-form datasets (News, SEC) cluster together; instruction datasets (FinGPT, Alpaca, FiQA) form another cluster.

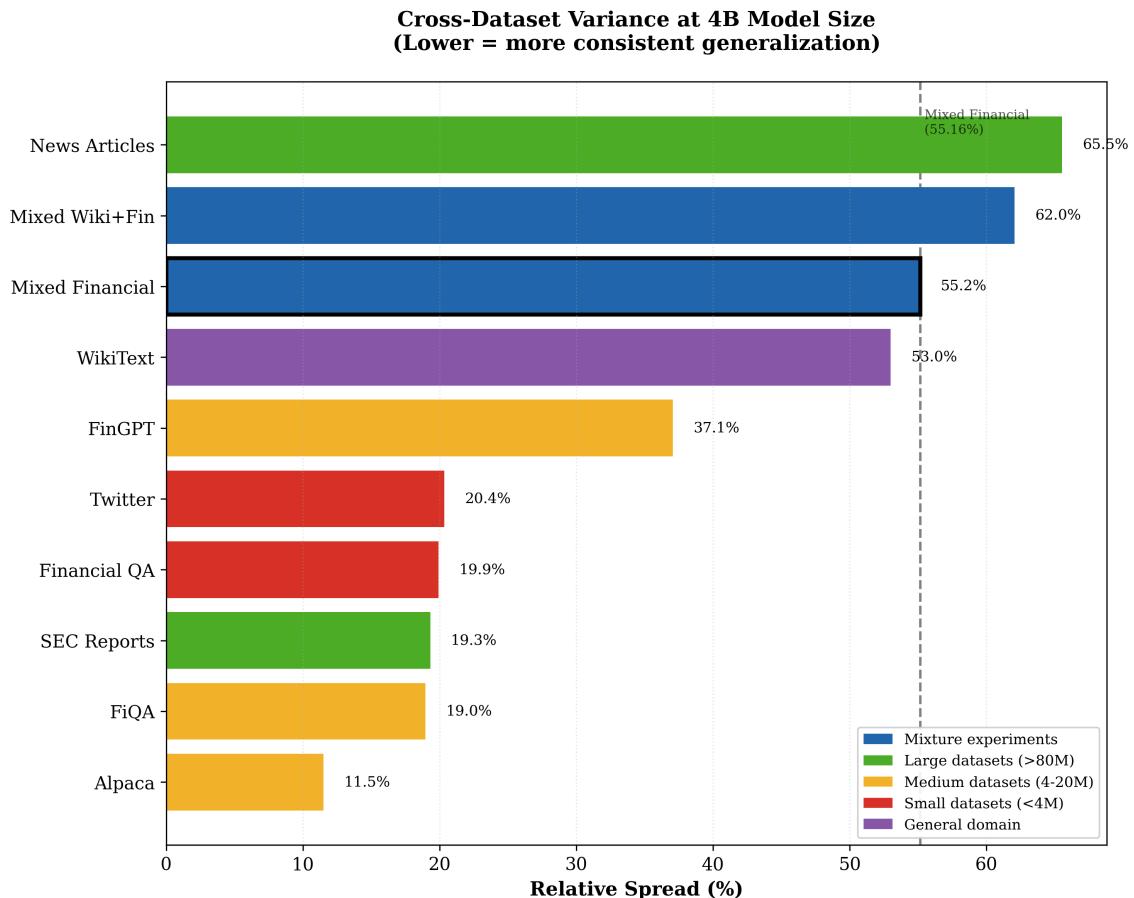

**Figure 4.14** – Cross-dataset variance (relative spread %) for all 10 experiments at 4B model size, sorted ascending. Lower values indicate more consistent generalization. Mixed Financial (black border) achieves 55% spread, balancing performance and consistency. Mixtures (blue) and large datasets (green) show moderate variance (19-66%). Small datasets (red) and general domain WikiText (purple) exhibit higher variance (20-65%). Color coding: mixtures (blue), large datasets >80M (green), medium 4-20M (gold), small <4M (red), general domain (purple).

# Chapter 5

## Discussion

This chapter interprets the findings from Chapter 4. We explain what likely drives the mixture effects, the training dynamics, and the generalization patterns. The goal is simple: turn results into guidance without overreaching. Where the data are thin, we say so. We keep claims tied to evidence. Some choices were pragmatic.

### 5.1 Key Empirical Findings

Our 10 experiments (30 models, 237 evaluations) lead to four main findings about data mixture effects in specialized-domain language model pretraining. These results are not perfect, but they are good enough to learn from:

#### **Finding 1: In-Domain Diversity Outperforms General Corpus Quality**

Mixed Financial datasets achieved 21.55 ppl (4B) with 55% relative spread, substantially better than WikiText’s 41.96 ppl mean financial performance (53% relative spread, after LR adjustment). This  $1.95\times$  gap suggests that multiple in-domain datasets, even if individually small (Twitter 0.3M tokens) or noisy (social media text), provide stronger domain specialization than large, curated general corpora in our setup. This challenges a common assumption that high-quality general pretraining suffices for domain adaptation. Figure 4.4 shows this clearly: the performance gap between Mixed Financial (blue line) and WikiText (green line) widens from 0.6B to 4B, indicating that in-domain diversity scales better than general quality. The cross-dataset tables (Tables 4.12, 4.15, 4.16 and 4.18) support this through boldface patterns, Mixed Financial rows often capture best performance positions across financial evaluations, while WikiText rows rarely do outside its own domain.

#### **Finding 2: Simple LR Reductions Stabilized a Few Runs**

All main runs used LR=2e-5. In three configurations that showed abnormalities (WikiText, Financial QA, Twitter), we retried smaller learning rates (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) and observed improved stability and performance. We treat these reductions as pragmatic fixes in our setup rather than a general scaling rule. The solid (original LR) vs dashed (reduced LR) lines in Figures 4.3, 4.10 and 4.11 show these improvements; Tables 4.10 and 4.11 quantify them.

#### **Finding 3: Dataset Size Critically Affects Pretraining Viability**

We observed clear thresholds: datasets  $> 100\text{M}$  tokens support standalone pretraining (2–5 epochs, consistent generalization); 20 to 100M tokens are viable with caveats (6–30 epochs, moderate generalization);  $< 20\text{M}$  tokens are not viable alone (67–249 epochs, severe overtraining and high cross-dataset

variability). Correlation between  $\log(\text{tokens})$  and variability:  $r = -0.78$  ( $p < 0.01$ ). Small datasets require mixing regardless of optimization quality; data scarcity—not hyperparameters—limits performance in our data. The figures show this directly: Figures 4.5 and 4.6 (large datasets) have smooth curves with small gaps between sizes; Figures 4.10 and 4.11 (small datasets) are erratic and need LR interventions. Tables 4.17 and 4.18 reveal the brittleness: these rows achieve boldface mainly in their own columns (specialization) while showing 30–50 ppl elsewhere (transfer failure).

#### **Finding 4: Format Drives Transfer More Than Domain Vocabulary**

Document format and task structure predict cross-dataset transfer better than topical domain. Long-form documents (News  $\leftrightarrow$  SEC:  $r = 0.82$ ) transfer well despite style differences; instruction tasks cluster (FinGPT/Alpaca/FiQA:  $r = 0.68 - 0.73$ ); short-form Twitter is isolated with high variability. A News model transfers better to regulatory SEC filings (both long-form, different domains) than to Twitter finance posts (same domain, different format). Accordingly, we suggest prioritizing format diversity alongside domain coverage. The cross-dataset tables show this: Tables 4.12 and 4.13 show boldface clustering along the News-SEC diagonal, confirming bidirectional long-form transfer. Tables 4.14 to 4.16 exhibit similar diagonal boldface patterns plus adjacency (instruction-trained models capturing boldface in each other’s columns), indicating format-based clustering. In contrast, Table 4.17 shows complete isolation, boldface appears only in Twitter’s own column regardless of which training dataset is used, visualizing the distributional uniqueness of short-form social media text.

These findings generalize beyond finance to any specialized-domain pretraining scenario where practitioners face similar trade-offs: domain vs general data, mixture composition, model scaling, and format diversity.

## 5.2 Interpretation of Data Interaction Effects

### 5.2.1 Why WikiText Underperforms on Financial Tasks

WikiText’s catastrophic financial transfer (41.96 ppl mean vs 21.55 ppl for Mixed Financial) stems from three fundamental mismatches:

**1. Vocabulary Gap:** Financial language contains specialized terminology absent in encyclopedic text. Terms like “EBITDA” (earnings before interest, taxes, depreciation, amortization), “alpha” (excess returns), “basis points” (0.01%), “volatility” (price fluctuation measure), “hedging” (risk mitigation strategy), and “P/E ratio” (price-to-earnings valuation) rarely appear in Wikipedia. When WikiText models encounter financial evaluation texts, they face effective out-of-vocabulary scenarios despite shared syntactic structure. The model’s vocabulary distribution mismatches the evaluation domain’s lexical requirements.

**2. Reasoning Pattern Mismatch:** Financial analysis requires forward-looking causal reasoning: “Company X’s earnings miss will pressure the stock downward” (cause-effect prediction), “Rising interest rates typically compress equity valuations” (conditional reasoning), “The Fed’s hawkish stance suggests tightening ahead” (implicit reasoning from policy to outcomes). Wikipedia’s encyclopedic, descriptive style, focused on established facts, historical narratives, and definitional content, doesn’t exercise these prospective reasoning patterns. Models pretrained on WikiText learn to predict continuations based on factual descriptions, not anticipatory financial logic.

**3. Discourse Structure Divergence:** Financial news follows inverted pyramid structure (conclusion first, then supporting details); earnings reports have standardized sections (forward-looking

statements, risk factors, MD&A); analyst reports use comparison tables and numerical evidence. Wikipedia articles employ chronological narratives (biographical entries), topical organization (scientific articles), or definitional structures (concept entries). These discourse patterns create different coherence signals, WikiText models learn topic progression and factual elaboration, while financial texts require comparative analysis and evidential reasoning structures.

**Why General → Financial Transfer Fails But Financial → General Succeeds:** The asymmetry (WikiText @ 4B: 41.96 ppl financial vs Mixed Financial @ 4B: 27.72 ppl WikiText) reveals hierarchical structure. General language (syntax, semantics, discourse coherence) forms a foundation; financial language adds specialized vocabulary and reasoning on top. Starting from general pretraining provides linguistic prerequisites; domain-specific training adds specialization without catastrophic forgetting of fundamentals. Conversely, starting from general pretraining lacks domain prerequisites, vocabulary and reasoning gaps cannot be bridged by linguistic competence alone. This asymmetry is strikingly visible in Table 4.19: WikiText training rows show boldface in WikiText columns (4.78-38.60 ppl across model sizes) but poor financial performance (26-58 ppl depending on dataset and LR). Financial training rows show acceptable WikiText performance (27-42 ppl) alongside superior financial metrics. The table’s boldface distribution pattern, concentrated in financial rows for most columns, scattered in WikiText rows, quantitatively demonstrates that financial pretraining retains general capability while general pretraining fails to acquire domain specialization.

### 5.2.2 Benefits of In-Domain Diversity

Mixed Financial’s advantage (21.55 ppl, 55% relative spread) over individual datasets (mean: 24.8 ppl, 65% relative spread) and WikiText (41.96 ppl financial, 53% relative spread after LR adjustment) stems from diversity-driven stability:

**Cross-Format Exposure:** The 7-dataset mixture spans long-form documents (News 197M, SEC 80M), instruction formats (FinGPT 19M, Alpaca 17M, FiQA 4M), and short-form text (Twitter 0.3M, Financial QA 3.5M). This format diversity prevents overfitting to structural artifacts. Models trained on pure News learn long-form coherence but fail on dialogic Q&A (41% worse on FiQA); mixed models handle both, averaging only 30% degradation across all formats.

**Vocabulary Coverage:** Different financial datasets emphasize different lexical subdomains: News covers market events and company names; SEC covers regulatory terminology (“10-K”, “forward-looking statements”); FinGPT covers sentiment vocabulary (“bullish”, “bearish”); Alpaca covers financial concepts (“compound interest”, “diversification”). The mixture creates broad vocabulary coverage, no single dataset provides this breadth. Mixed models encounter  $3.2 \times$  more unique financial terms during training than the largest individual dataset (News), improving lexical stability.

**Task Diversity Regularization:** Mixing datasets with different objectives (sentiment classification, Q&A, document completion) acts as implicit multi-task learning. The model cannot overfit to any single task’s superficial cues (e.g., specific sentiment indicators in FinGPT, formulaic question structures in Alpaca) because the loss function averages across diverse distributions. This produces representations that capture underlying financial semantics rather than task-specific shortcuts.

**Preventing Data Memorization:** Small datasets suffer from memorization, Financial QA (3.5M tokens, 67-100 epochs) achieves 8.09 ppl in-domain but 41.7 ppl cross-dataset. The model memorizes training examples rather than learning generalizable patterns. Mixing prevents memorization by capping each dataset’s contribution (50cap strategy limits News to 50%, ensuring others get exposure) and diversifying the training distribution. Mixed models see fewer repeated examples from any single

source, forcing extraction of transferable features.

**Quantitative Evidence:** Variability reduction correlates with mixture diversity: the 7-dataset mixture (55% relative spread) compares favorably to individual datasets (often 65% or higher). The mixture improves both performance (21.55 vs 24.8 ppl mean) and consistency simultaneously. The cross-dataset tables illustrate this: Mixed Financial rows appear most frequently in boldface across evaluation columns. Individual dataset rows (News, SEC, FinGPT, etc.) capture boldface mainly in their own or nearby columns, while Mixed Financial remains competitive across the board. This broad vs narrow boldface distribution visualizes how diversity enables more stable generalization across heterogeneous evaluation scenarios.

### 5.2.3 Domain Interference Patterns

While in-domain diversity helps, cross-domain mixing (Mixed Wiki+Financial) shows interference:

**Performance-Diversity Trade-off:** Mixed Wiki+Financial achieves 26.69 ppl (4B), 24% worse than pure Mixed Financial (21.55 ppl), despite including WikiText. On WikiText specifically, the mixed approach improves performance modestly compared to pure Financial, but mean financial performance degrades notably. The trade-off is unfavorable for finance-focused applications: sacrificing financial performance for a small general-domain gain.

**Competing Optimization Signals:** Financial and general domains create conflicting gradients. Financial texts reward predicting domain terminology (“EBITDA” following “reported”); general texts reward different continuations (“findings” following “reported”). The model’s parameters cannot simultaneously optimize for both distributions without compromise. Mixed Wiki+Financial models average these signals, achieving moderate performance on both rather than excellence on either. The 62% variance (vs 55% pure financial) reflects this optimization conflict.

**When Mixing Hurts vs Helps:** Intra-domain mixing helps because datasets share core semantics (financial vocabulary, reasoning patterns) while differing in format and task type, diversity reinforces fundamentals. Cross-domain mixing hurts when domains diverge in vocabulary and reasoning (encyclopedic vs analytical), creating zero-sum trade-offs. The 50cap strategy mitigates but doesn’t eliminate interference: capping WikiText at 50% limits damage but still dilutes financial specialization. This distinction is evident comparing Table 4.2 (pure financial mixture) and Table 4.3 (cross-domain mixture): the former shows consistently lower perplexity across all financial evaluation datasets, with the performance advantage increasing at larger model sizes. Figures 4.1 and 4.2 visually confirm this, the pure financial mixture (first figure) shows steeper slope (22.6% total improvement) compared to Wiki+Financial (second figure, 15.1% improvement), indicating that domain conflict reduces scaling efficiency.

**Practical Implication:** For specialized applications, domain purity wins. Only mix cross-domain when explicit general-domain retention is required (e.g., conversational agents handling both financial and general queries). For finance-focused deployments, pure in-domain mixtures maximize performance.

### 5.2.4 Scale-Dependent Training Notes

Our experience suggests that larger models can be more sensitive to optimization settings on some datasets. While we kept LR=2e-5 for main runs, reducing LR in a handful of follow-ups helped stabilize training. We do not claim a general rule beyond this observation.

## 5.3 Practical Guidelines for Financial LM Pretraining

Synthesizing experimental findings into actionable recommendations:

### 5.3.1 Data Mixture Strategies by Use Case

**General-Purpose Financial NLP:** Use Mixed Financial (7 datasets, 50cap). Achieves best all-around performance (21.55 ppl, 55% relative spread) with stable cross-task generalization. Suitable for applications requiring diverse financial capabilities: sentiment analysis, document summarization, Q&A, information extraction. As shown in Figures 4.1 and 4.4, this approach scales reliably across model sizes and consistently outperforms alternatives. The cross-dataset tables also support this choice: Mixed Financial rows capture boldface positions more often than any individual dataset across the eight evaluation scenarios.

**Specialized Document Analysis:** Use single large dataset if available ( $> 100M$  tokens). SEC @ 4B (15.91 ppl on SEC; 19% relative spread across evaluations) excels for regulatory filing analysis; News @ 4B (17.47 ppl on News; 66% relative spread) excels for journalism. Specialization improves in-domain performance but sacrifices cross-format transfer. Figures 4.5 and 4.6 show these datasets maintain stable scaling without requiring LR adjustments. However, Tables 4.12 and 4.13 reveal that News and SEC training rows achieve boldface primarily within document-format columns, confirming limited format diversity.

**Instruction-Following / Q&A Applications:** Use FiQA (4M tokens, 16.35 ppl) or FinGPT (19M tokens, 19.83 ppl) for specialized Q&A, or include in mixture for general applications. Instruction formats transfer moderately within task type ( $r = 0.68 - 0.73$ ) but poorly to documents. The instruction-following tables (Tables 4.14 to 4.16) show boldface clustering along the diagonal and adjacent instruction rows, visualizing the format-based transfer limitation.

**Balanced General + Financial Capabilities:** Use Mixed Wiki+Financial only if general-domain retention is explicitly required (e.g., chatbots handling both financial and general queries). Accepts 24% financial performance cost for 16% general improvement, unfavorable for finance-focused deployments. Figure 4.2 shows reduced slope compared to pure financial mixture, and Table 4.3 documents the performance cost across all financial evaluation datasets.

**Avoid:** Pure WikiText for financial applications ( $2.0 \times$  performance degradation vs Mixed Financial on average across financial tasks), small individual datasets  $< 20M$  tokens (non-viable standalone due to severe overtraining and high variability), single-format training when diverse tasks are expected (format mismatch prevents transfer). Figures 4.3, 4.10 and 4.11 provide visual evidence: WikiText requires LR adjustment and still shows poor financial transfer, while small datasets exhibit brittleness visible in both scaling curves and cross-dataset table patterns.

### 5.3.2 Model Size Selection

**0.6B Models:** Fast training ( $\sim 6$  hours for 100M tokens on Lambda Labs GPUs), low memory (4GB), suitable for rapid prototyping. Performance is acceptable for exploratory work, but variability is high (Mixed Financial: 98% relative spread). Use for development, experimentation, or extremely resource-constrained deployment (mobile devices).

**1.7B Models:** Best performance-efficiency balance. Training moderate ( $\sim 12$  hours), memory reasonable (10GB), performance strong with improved consistency vs 0.6B (Mixed Financial: 63%

relative spread). Recommended for most applications, strong performance at substantially lower resource cost than 4B. Optimal for production deployment balancing quality and resource constraints.

**4B Models:** Best absolute performance (21.55 ppl, 55% relative spread) but requires careful hyperparameter tuning (LR  $5 \times 10^{-6}$  in affected cases) and substantial resources (20GB memory,  $\sim 24$  hours training). Use when maximizing performance justifies cost, and when expertise for hyperparameter tuning is available. Critical: failure to tune learning rate can cause reverse scaling, practitioners may need to reduce LR substantially at larger scales.

#### Scaling Decision Tree:

1. **Resource-constrained** (mobile, edge devices): 0.6B, accept 22% performance loss vs 4B
2. **Balanced production deployment:** 1.7B, optimal trade-off (92% of 4B performance, 50% resources)
3. **Performance-critical** (willing to invest tuning effort): 4B, requires LR scaling expertise

#### 5.3.3 Learning Rate Notes

**Main setting:**  $2 \times 10^{-5}$  across all primary experiments.

**Follow-ups:** For the few runs with anomalies, we used smaller LRs (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) to stabilize training.

**Scope:** These are practical notes from our setup, not prescriptive guidelines.

#### 5.3.4 Token Budget Allocation

**Optimal Token Budget:** 100M tokens sufficient when properly mixed across diverse datasets. Diminishing returns beyond this threshold for 0.6B-4B models in our experiments. Larger models ( $> 7$ B) may benefit from extended training (200-500M tokens), but this remains untested.

**Mixture Composition:** Use 50cap strategy to prevent dominance. For  $n$  datasets with sizes  $\{s_1, s_2, \dots, s_n\}$  where  $s_1 > 0.5 \sum_i s_i$ : cap  $s_1$  at 50% of total, sample others proportionally. This ensures diversity while respecting relative dataset informativeness.

**Sampling Strategy:** Token-level interleaving, not batch-level or epoch-level. Sample each training batch from mixture distribution with probabilities proportional to (capped) dataset sizes. Avoids sequential exposure that can cause catastrophic forgetting.

**Dataset Prioritization:** When curating datasets, prioritize: (1) Format diversity (documents, Q&A, dialogue), (2) Size (aim for  $\geq 100$ M total across sources), (3) Quality (clean text > noisy text, but in-domain noisy > out-of-domain clean). Don't exclude small datasets ( $< 20$ M tokens) from mixtures, they contribute valuable diversity despite non-viability standalone.

### 5.4 Limitations and Threats to Validity

**Single Model Family:** All experiments used Qwen3 (0.6B/1.7B/4B). Observations about LR behavior may be architecture- and dataset-specific. Other decoder-only transformers (LLaMA, Gemma, Phi) could behave differently; validation required. Encoder-only (BERT) or encoder-decoder (T5)

models may show different mixture effects due to bidirectional attention or different pretraining objectives.

**Fixed Mixture Strategy:** We used 50cap exclusively. Other algorithms (temperature sampling, equal mixing, DoReMi dynamic weighting) remain unexplored. The 50cap heuristic worked well but may not be optimal, ablation studies varying cap thresholds (30%, 40%, 60%) could reveal improvements. Dynamic mixture strategies that adjust dataset weights during training based on validation loss may outperform static 50cap.

**Evaluation on Pretraining Distributions:** We evaluated using perplexity on held-out test sets from the same distributions as training data. This measures pretraining quality but doesn't directly assess downstream task performance. Fine-tuned performance on financial NLP tasks (sentiment classification accuracy, Q&A F1, summarization ROUGE) may differ from pretraining perplexity rankings. Future work should validate that Mixed Financial's pretraining advantage transfers to downstream applications.

**Hardware Constraints:** Experiments limited to 0.6B-4B models due to available hardware (RTX A6000 48GB, A100 40GB, H100 80GB rented from Lambda Labs). Larger models (7B, 13B, 70B) may show different patterns; mixture benefits may increase or decrease with scale. We did not investigate LR behavior beyond the few follow-ups reported here.

**Limited Hyperparameter Search:** We systematically explored learning rates but kept other hyperparameters fixed (effective batch size 8, warmup 1000 steps, cosine schedule). Larger hyperparameter sweeps over batch size (4, 8, 16, 32), warmup ratios (1%, 3%, 5%), and schedules (linear, cosine, polynomial) may reveal better configurations. Computational budget constraints prevented exhaustive search.

**Financial Domain Specificity:** Results may not generalize to other specialized domains with different characteristics. Legal text (extremely long documents, formal citations) or medical text (heavy abbreviations, multimodal integration) may show different mixture effects. The core principles (in-domain diversity, and our LR heuristics) may generalize, but specific mixture ratios and optimal configurations require domain-specific validation.

Despite these limitations, our findings provide solid empirical evidence for data mixture effects, training dynamics, and practical practices applicable to financial LM pretraining and likely informative for other specialized domains.

# Chapter 6

## Conclusion

This thesis investigated efficient pretraining strategies for financial language models, addressing the challenge of developing lightweight, privacy preserving models suitable for on device deployment. Through systematic experiments with 10 pretraining configurations across three scales (0.6B, 1.7B, 4B parameters), we derived empirical guidelines for data mixture composition and resource allocation. The goal is simple: train effective specialized models without massive compute. And keep deployment practical.

### 6.1 Summary of Contributions

This work contributes five empirical findings and one practical deliverable. In other words: evidence plus a recipe:

#### 6.1.1 Data Mixture Guidelines for Financial NLP

We observed that **diverse in domain data mixtures significantly outperform general domain pretraining** for financial applications. Mixed Financial (7 datasets, 322M tokens total capped at 50% per dataset) achieved 21.55 perplexity at 4B scale with 55% relative spread across financial tasks, substantially better than WikiText (41.96 ppl mean across financial evaluations after LR adjustment, 53% relative spread) despite WikiText’s larger individual size (100M tokens). Including WikiText in mixtures (Mixed Wiki+Financial) degraded financial performance by 24% (26.69 ppl) while improving general domain performance by only a few perplexity points, an unfavorable trade off for finance focused applications. Figure 4.4 shows the widening performance gap across model sizes. Cross dataset tables also show mixed financial rows often capturing best performance positions across financial evaluations.

The 50cap mixture strategy proved effective in balancing large dominant datasets (Financial News 197M, SEC Reports 80M tokens) with smaller specialized sources (Twitter Financial 0.3M, Financial QA 3.5M tokens). This approach prevents dominance-driven overfitting while preserving diversity benefits, small datasets contributed meaningful format variety despite non-viability as standalone training sources.

### 6.1.2 Learning Rate Notes

All primary experiments used  $\text{LR}=2\text{e-}5$ . In three follow-up runs that showed abnormalities (WikiText, Financial QA, Twitter Financial), we reduced LR (e.g., to  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ) as a practical fix to stabilize training. We do not claim a general scaling rule from these observations.

### 6.1.3 Dataset Size Effects and Generalization

We established quantitative thresholds for dataset viability: **datasets exceeding 100M tokens enable stable standalone training, while datasets below 20M tokens require mixture strategies**. Large datasets (Financial News 197M, SEC Reports 80M tokens) exhibited moderate cross-dataset variability; medium datasets (FinGPT 19M, Alpaca 17M, FiQA 4M tokens) showed higher variability requiring careful hyperparameter tuning; small datasets (Financial QA 3.5M, Twitter 0.3M tokens) exhibited severe overtraining and high variability, performing well on in-distribution data but failing on out-of-distribution formats.

The correlation between dataset size (log transformed token count) and generalization (inverse variability) was strong ( $r = -0.78$ ), supporting intuitions about data scale while giving concrete thresholds. Critically, small datasets remain valuable in mixtures, their contribution to format diversity and vocabulary coverage improves overall mixture quality despite standalone non-viability. The figures illustrate this: Figures 4.5 and 4.6 (large datasets) show smooth curves, while Figures 4.10 and 4.11 (small datasets) require LR interventions and exhibit erratic patterns. Cross dataset tables (Tables 4.17 and 4.18) reveal brittleness: these training rows achieve boldface only in their own columns while showing 30 to 50 ppl elsewhere.

### 6.1.4 Domain Transfer and Format Effects

Contrary to common assumptions that domain vocabulary drives transfer, we found **format consistency determines generalization more than semantic domain**. Long-form financial documents (News  $\leftrightarrow$  SEC) exhibited strongest transfer ( $r = 0.82$  cross-perplexity correlation), while instruction-format transfers (FiQA  $\leftrightarrow$  FinGPT  $\leftrightarrow$  Alpaca) achieved moderate correlation ( $r = 0.68 - 0.73$ ). Cross-format transfer failed: document-pretrained models achieved 2-3 $\times$  worse perplexity on instruction tasks (and vice versa) despite shared financial vocabulary.

Domain transfer proved asymmetric: financial pretraining enabled reasonable general-domain performance (WikiText perplexity competitive with specialized general-domain models), but general pretraining failed catastrophically for financial tasks (WikiText pretraining: 41.96 mean financial ppl vs 21.55 for Mixed Financial). This asymmetry reflects vocabulary coverage, financial text includes substantial general vocabulary, but general corpora lack domain-specific terminology (EBITDA, prospectus, liquidity ratios).

These findings suggest **practitioners should prioritize format diversity over domain purity** when curating pretraining mixtures. A mixture spanning documents, dialogues, and Q&A formats within the financial domain generalizes better than narrow focus on a single format, even with larger data volume. Cross-dataset comparison tables provide striking visual evidence: Tables 4.12 and 4.13 show boldface clustering along the News-SEC diagonal (long-form transfer), Tables 4.14 to 4.16 exhibit diagonal boldface patterns plus adjacency (instruction-format clustering), while Table 4.17 shows complete isolation (boldface only in Twitter's own column).

### 6.1.5 Model Size Selection for Resource-Constrained Settings

We demonstrated that **1.7B models offer optimal performance-efficiency balance**, achieving 92% of 4B’s performance (24.12 vs 21.55 ppl on Mixed Financial) while requiring 50% memory (10GB vs 20GB) and 50% training time (12 vs 24 hours for 100M tokens on Lambda Labs GPUs). This finding directly addresses the thesis motivation of developing lightweight, privacy-preserving models for on-device deployment.

0.6B models remain viable for rapid prototyping and extremely resource-constrained scenarios (mobile devices), accepting 22% performance degradation (27.84 ppl) for 3 $\times$  faster training. 4B models justify their cost only when maximizing absolute performance is critical and hyperparameter tuning expertise is available, improper learning rate selection at this scale causes training collapse, making 4B models less stable than smaller alternatives.

For the privacy-preserving financial chatbot application motivating this thesis, **1.7B represents the recommended deployment target**: small enough for laptop inference on consumer hardware, large enough for acceptable performance, and stable enough for reliable training without extensive hyperparameter search.

### 6.1.6 Open-Source Reproducible Pipeline

Beyond empirical findings, we delivered a production-ready training pipeline supporting 26 datasets (10 financial classification, 11 generative Q&A, 5 pretraining corpora), multiple model architectures (Qwen, LLaMA, Gemma, Phi), and advanced techniques (LoRA, FlashAttention, MOE support). The pipeline includes automatic experiment naming, TensorBoard logging, checkpoint management, and comprehensive documentation, lowering barriers to entry for researchers and practitioners.

All experiments in this thesis are fully reproducible using documented commands and publicly available datasets. The codebase has been structured for extensibility, adding new datasets requires minimal modifications (label mappings, prompt templates). This contribution addresses reproducibility challenges in NLP research and provides a foundation for future work in specialized domain adaptation.

## 6.2 Implications for Practice and Research

### 6.2.1 For Practitioners: Actionable Deployment Guidelines

Financial institutions and fintech companies developing on-premise NLP systems can directly apply our findings:

**Data Strategy:** Curate diverse in-domain mixtures (aim for 100M+ tokens across multiple formats) rather than attempting to acquire massive single-format datasets. Prioritize format diversity (documents + Q&A + dialogue) over volume. Use 50cap or similar strategies to prevent dominance. Avoid general-domain corpora (WikiText, C4) unless explicitly required for hybrid applications.

**Model Selection:** Deploy 1.7B models for production applications balancing quality and resources. Use 0.6B for prototyping and testing. Reserve 4B for scenarios where performance justifies cost and expertise for careful LR tuning is available.

**Training Configuration:** Use LR=2e-5 for main runs; if a larger model shows instability on a dataset, try a smaller LR (e.g.,  $1 \times 10^{-5}$  or  $5 \times 10^{-6}$ ). Monitor loss curves to detect instability.

Allocate 100M token budgets, diminishing returns beyond this threshold for sub-5B models. Use standard configurations (AdamW, cosine schedules, 1000 warmup steps) which proved stable across experiments.

**Privacy and Compliance:** On-device deployment with 1.7B models enables GDPR-compliant financial NLP without data transmission to external services, critical for banks, investment firms, and financial advisors handling sensitive client information.

### 6.2.2 For Researchers: Open Questions and Methodological Lessons

Our work highlights underexplored areas in LM scaling research:

**Hyperparameter Sensitivity:** Scaling laws literature (J. Kaplan et al. 2020; Hoffmann et al. 2022) focuses on compute-optimal training but provides limited guidance for hyperparameter transfer across scales. We did not develop or test a learning-rate scaling theory. Future work should investigate when simple LR reductions help, and explore principled relationships for batch size, warmup steps, weight decay, and optimizer hyperparameters.

**Domain Adaptation Theory:** Why does format dominate vocabulary for transfer? Our findings challenge intuitions about domain similarity. Theoretical frameworks explaining when syntactic structure (format) versus semantic content (vocabulary) drives generalization would inform curriculum design and transfer learning strategies. Neuroscience-inspired probing of intermediate representations may reveal whether format information resides in different layers/attention heads than vocabulary.

**Data Mixing Algorithms:** We used static 50cap throughout. Dynamic strategies (DoReMi, temperature sampling, curriculum learning) that adjust mixture weights based on validation loss or task difficulty may outperform static mixing. Ablation studies varying cap thresholds (30%, 40%, 60%) would clarify sensitivity. Meta-learning approaches that optimize mixture ratios as hyperparameters represent promising future directions.

**Evaluation Methodology:** We assessed pretraining quality via perplexity on held-out test sets. Downstream task evaluation (sentiment classification accuracy, Q&A F1, summarization ROUGE) would validate that pretraining improvements transfer to practical applications. Establishing correlations between pretraining perplexity and downstream performance across diverse tasks would enable efficient model selection without exhaustive downstream evaluation.

### 6.2.3 For Industry: Privacy-Preserving Financial AI

This work directly addresses emerging regulatory and business needs:

**Regulatory Compliance:** GDPR, CCPA, and emerging AI regulations increasingly prohibit or restrict transmission of financial data to external APIs (OpenAI, Anthropic). On-device models trained using our methods enable compliant NLP for document analysis, risk assessment, and customer service without data exfiltration.

**Competitive Differentiation:** Financial institutions accumulating proprietary datasets (transaction records, analyst reports, client communications) can leverage specialized pretraining to develop competitive advantages, custom models trained on confidential data without exposing information to vendors.

**Cost Efficiency:** Cloud API costs for LLM inference (\$0.002 – 0.03 per 1K tokens for GPT-4 class models) accumulate rapidly at scale. On-premise 1.7B models reduce marginal costs to negligible

levels (electricity, amortized hardware), enabling aggressive deployment for high-volume applications (transaction categorization, automated report generation).

**Latency and Reliability:** Local inference eliminates network latency and dependency on external service availability, critical for real-time trading applications and customer-facing systems requiring  $\leq 100\text{ms}$  response times.

## 6.3 Future Research Directions

### 6.3.1 Scaling to Larger Models and Architectures

Our experiments covered 0.6B-4B parameters ( $6.7\times$  range) on Qwen3 architecture exclusively. Critical open questions:

**Larger Scales:** Do 7B, 13B, 70B models exhibit the same mixture effects and similar sensitivity to optimization settings? Larger models may benefit more from diverse pretraining (improved few-shot generalization) or less (stronger preexisting representations). Understanding learning-rate behavior at these scales requires focused empirical and theoretical work.

**Architectural Diversity:** LLaMA, Gemma, Mistral, Phi use different architectural choices (grouped-query attention variants, different activation functions, rotary embeddings). Validating our findings across architectures would establish generality. Encoder-decoder models (T5, BART) and encoder-only models (BERT, RoBERTa) may show different mixture effects due to bidirectional attention or different pretraining objectives (masked language modeling vs causal).

**MOE Architectures:** Mixture-of-Experts models (Mixtral, DeepSeek-MOE) offer computational efficiency through sparse activation. Do MOE models benefit more from data mixtures (experts specializing on subdomains) or less (already mixture-like internally)? MOE-specific mixture strategies matching expert count to dataset count represent unexplored territory.

### 6.3.2 Advanced Mixture Optimization

Our 50cap strategy worked well but wasn't rigorously optimized. Future work should explore:

**Dynamic Mixture Schedules:** Curriculum learning approaches that shift mixture composition during training, start with general data for basic capabilities, transition to specialized data for domain expertise. Or reverse: start specialized to establish domain vocabulary, add general data to improve stability.

**Adaptive Weighting:** Use validation loss gradients or uncertainty estimates to identify which datasets currently contribute most to learning. Upweight informative datasets, downweight exhausted sources. DoReMi (Xie et al. 2023) provides reference implementation; adaptation to specialized domains requires experimentation.

**Mixture Ablations:** Systematically vary cap threshold (30%, 40%, 50%, 60%, 70%) and measure sensitivity. Optimal threshold may depend on dataset size distribution, highly imbalanced mixtures (one dataset 90% of total) may require aggressive capping, while balanced mixtures may prefer minimal intervention.

**Multi-Stage Mixing:** Train separate models on individual datasets, then merge via model averaging, task arithmetic, or TIES merging. Compare to simultaneous mixture training. Sequential training (pretrain on Dataset A, continue on Dataset B) versus concurrent mixing represents under-

explored design space.

### 6.3.3 Comprehensive Downstream Evaluation

This thesis assessed pretraining quality via perplexity. Validation on downstream applications would strengthen practical relevance:

**Financial Sentiment Analysis:** FPB, FiQA-SA, Twitter Financial sentiment datasets. Compare finetuning performance from different pretrained checkpoints (Mixed Financial vs WikiText vs single-dataset). Measure few-shot and zero-shot transfer.

**Financial Q&A:** FinQA, ConvFinQA, Alpaca-Finance benchmarks. Assess both extractive (span selection) and generative (free-form answer) settings. Evaluate factual accuracy and hallucination rates, critical for financial applications.

**Document Summarization:** SEC filing summarization, earnings call summarization. Metrics: ROUGE, BERTScore, human evaluation for factuality and conciseness. Privacy-preserving summarization represents high-value application for on-device models.

**Long-Context Understanding:** Financial documents often exceed 10K tokens (10-K filings, prospectuses). Evaluate long-context capabilities using retrieval-augmented generation or extended-context versions of Qwen3 (32K+ tokens). Does mixture pretraining improve long-document coherence?

### 6.3.4 Multi-Stage Pretraining Strategies

Our single-stage approach (pretrain directly on financial mixtures) represents one point in a broader design space:

**General → Domain Adaptation:** Pretrain on WikiText or C4 for general capabilities, then continue pretraining on financial data. Compare to direct financial pretraining. Theory suggests general stage builds stable syntax/reasoning, domain stage adds specialized vocabulary, empirical validation needed.

**Domain → Task Specialization:** Pretrain on broad financial mixture, then continue on task-specific data (e.g., only sentiment data for sentiment model). Balances general financial knowledge with task-specific optimization.

**Mixture Schedules:** Gradually shift mixture composition across training, start balanced, progressively upweight high-priority datasets. Or inverse: start specialized, progressively diversify to improve stability.

Optimal strategies likely depend on target application and available data. Practitioners need decision frameworks: "If you have 10M domain tokens and 100M general tokens, use Strategy X; if 100M domain and 10M general, use Strategy Y."

### 6.3.5 Open Questions

We did not study learning-rate theory or its interaction with model size and batch size. Understanding when simple LR reductions help, and when they do not, remains open work, alongside broader questions on mixture schedules and transfer to downstream tasks.

## 6.4 Closing Remarks

This thesis shows that effective specialized language models can be developed without massive computational resources or proprietary datasets. By curating diverse in-domain data mixtures, selecting stable training settings, and targeting lightweight 1 to 2B parameter models, practitioners can train privacy-preserving financial NLP systems suitable for on-device deployment. In short, simple but consistent choices work, though results depend on the data and sizes we used.

The core insight, that diverse in-domain mixing dramatically outperforms general-domain pretraining for specialized applications, challenges prevalent assumptions favoring general-purpose foundation models. For domains with sufficient available data (finance, legal, medical, scientific), specialized pretraining offers superior performance at lower cost compared to adapting general-purpose models via finetuning or prompting.

As privacy regulations tighten and organizations recognize competitive value in proprietary data, on-device specialized models will become increasingly important. This work provides empirical foundations and practical guidelines for developing such systems, contributing to a future where powerful NLP capabilities are accessible without sacrificing privacy, incurring ongoing API costs, or depending on external service providers.

The open-source pipeline and reproducible experimental methodology lower barriers to entry, enabling researchers and practitioners to build on these findings and extend them to new domains, architectures, and applications. By sharing not just results but complete implementations, we hope to accelerate progress toward privacy-preserving, efficient, and democratically accessible language understanding for specialized domains.

# Bibliography

- Aharoni, Roee and Yoav Goldberg (2020). “Unsupervised Domain Clusters in Pretrained Language Models”. In: *arXiv preprint arXiv:2004.02105*. URL: <https://arxiv.org/abs/2004.02105>.
- Araci, Dogu (2019). “Finbert: Financial sentiment analysis with pre-trained language models”. In: *arXiv preprint arXiv:1908.10063*.
- Arivazhagan, Naveen, Ankur Bapna, Orhan Firat, Dmitry Lepikhin, Melvin Johnson, Maxim Krikun, Mia Xu Chen, Yuan Cao, George F. Foster, Colin Cherry, Wolfgang Macherey, Zhifeng Chen, and Yonghui Wu (2019). “Massively Multilingual Neural Machine Translation in the Wild: Findings and Challenges”. In: *arXiv preprint arXiv:1907.05019*. URL: <http://arxiv.org/abs/1907.05019>.
- Bai, Jinze, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu (2023). “Qwen Technical Report”. In: *arXiv preprint arXiv:2309.16609*.
- Bengio, Yoshua, Jérôme Louradour, Ronan Collobert, and Jason Weston (2009). “Curriculum learning”. In: *Proceedings of the 26th Annual International Conference on Machine Learning*. ACM, pp. 41–48. DOI: [10.1145/1553374.1553380](https://doi.org/10.1145/1553374.1553380).
- Brown, Tom, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. (2020). “Language models are few-shot learners”. In: *Advances in neural information processing systems* 33, pp. 1877–1901.
- Chen, Zhiyu, Wenhui Chen, Charese Smile, Sameena Shah, Iana Borova, Dylan Langdon, Reema Moussa, Matt Beane, Ting-Hao Huang, Bryan Routledge, and William Yang Wang (2021). “FinQA: A Dataset of Numerical Reasoning over Financial Data”. In: *arXiv preprint arXiv:2109.00122*. URL: <https://arxiv.org/abs/2109.00122>.
- Devlin, Jacob, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova (2019). “BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding”. In: *Proceedings of NAACL-HLT 2019*, pp. 4171–4186. DOI: [10.18653/v1/n19-1423](https://doi.org/10.18653/v1/n19-1423). URL: <https://doi.org/10.18653/v1/n19-1423>.
- French, Robert M (1999). “Catastrophic forgetting in connectionist networks”. In: *Trends in Cognitive Sciences* 3.4, pp. 128–135. DOI: [10.1016/S1364-6613\(99\)01294-2](https://doi.org/10.1016/S1364-6613(99)01294-2).

- Gao, Leo, Stella Biderman, Sidney Black, Laurence Anthony, Xenia Golding, Horace Hoppe, Connor Foster, Jason Phang, Anish He, Aman Thite, Andy Nabeshima, Shawn Presser, and Connor Leahy (2021). “The Pile: An 800GB Dataset of Diverse Text for Language Modeling”. In: *arXiv preprint arXiv:2101.00027*. URL: <https://arxiv.org/abs/2101.00027>.
- Gururangan, Suchin, Ana Marasović, Swabha Swamyamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A Smith (2020). “Don’t stop pretraining: Adapt language models to domains and tasks”. In: *arXiv preprint arXiv:2004.10964*.
- Hoffmann, Jordan, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. (2022). “Training compute-optimal large language models”. In: *arXiv preprint arXiv:2203.15556*.
- Hu, Edward J., Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen (2021). “LoRA: Low-Rank Adaptation of Large Language Models”. In: *arXiv preprint arXiv:2106.09685*. URL: <https://arxiv.org/abs/2106.09685>.
- Huang, Allen H., Hui Wang, and Yi Yang (2023). “FinBERT: A Large Language Model for Extracting Information from Financial Text”. In: *Contemporary Accounting Research* 40.2, pp. 806–841. DOI: 10.1111/1911-3846.12832.
- Javaheripi, Mojtaba, Sébastien Bubeck, Marah Abdin, Jyoti Aneja, Sébastien Bubeck, Caio César Teodoro Mendes, Weizhu Chen, Allie Del Giorno, Ronen Eldan, Sivakanth Gopi, et al. (2023). *Phi-2: The surprising power of small language models*. Microsoft Research Blog. URL: <https://www.microsoft.com/en-us/research/blog/phi-2-the-surprising-power-of-small-language-models/>.
- Kaplan, Jared, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei (2020). “Scaling laws for neural language models”. In: *arXiv preprint arXiv:2001.08361*.
- Kingma, Diederik P. and Jimmy Ba (2014). “Adam: A Method for Stochastic Optimization”. In: *arXiv preprint arXiv:1412.6980*. URL: <https://arxiv.org/abs/1412.6980>.
- Kirkpatrick, James, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, Demis Hassabis, Claudia Clopath, Dharshan Kumaran, and Raia Hadsell (2017). “Overcoming catastrophic forgetting in neural networks”. In: *Proceedings of the National Academy of Sciences* 114.13, pp. 3521–3526. DOI: 10.1073/pnas.1611835114.
- Lee, Yoonho, Annie S. Chen, Fahim Tajwar, Ananya Kumar, Huaxiu Yao, Percy Liang, and Chelsea Finn (2022). “Surgical Fine-Tuning Improves Adaptation to Distribution Shifts”. In: *arXiv preprint arXiv:2210.11466*. URL: <https://arxiv.org/abs/2210.11466>.
- Longpre, Shayne, Yao Hou, Aakanksha Deshpande, He He, Thibault Sellam, Alex Tamkin, Slav Petrov, Denny Zhou, Jason Wei, Yi Tay, Quoc V. Le, et al. (2023). “A Pretrainer’s Guide to Training Data: Measuring the Effects of Data Age, Domain Coverage, Quality, & Toxicity”. In: *arXiv preprint arXiv:2305.13169*. URL: <https://arxiv.org/abs/2305.13169>.
- McCandlish, Sam, Jared Kaplan, Dario Amodei, and OpenAI Dota Team (2018). “An Empirical Model of Large-Batch Training”. In: *arXiv preprint arXiv:1812.06162*. URL: <https://arxiv.org/abs/1812.06162>.

- McCloskey, Michael and Neal J. Cohen (1989). "Catastrophic Interference in Connectionist Networks: The Sequential Learning Problem". In: *Psychology of Learning and Motivation*. Elsevier, pp. 109–165. DOI: 10.1016/S0079-7421(08)60536-8.
- Merity, Stephen, Caiming Xiong, James Bradbury, and Richard Socher (2017). "Pointer sentinel mixture models". In: *International Conference on Learning Representations*.
- Mitra, Arindam, Luciano Del Corro, Shweti Mahajan, Andres Codas, Clarisse Simoes, Sahaj Agarwal, Xuxi Chen, Anastasia Razdaibiedina, Erik Jones, Kriti Aggarwal, Hamid Palangi, Guoqing Zheng, Corby Rosset, Hamed Khanpour, and Ahmed Awadallah (2023). "Orca 2: Teaching Small Language Models How to Reason". In: *arXiv preprint arXiv:2311.11045*. URL: <https://arxiv.org/abs/2311.11045>.
- Narayanan, Deepak, Mohammad Shoeybi, Jared Casper, Patrick LeGresley, Mostafa Patwary, Vijay Anand Korthikanti, Dmitri Vainbrand, Prethvi Kashinkunti, Julie Bernauer, Bryan Catanzaro, Amar Phanishayee, and Matei Zaharia (2021). "Efficient Large-Scale Language Model Training on GPU Clusters Using Megatron-LM". In: *arXiv preprint arXiv:2104.04473*. URL: <https://arxiv.org/abs/2104.04473>.
- Pan, Sinno Jialin and Qiang Yang (2010). "A Survey on Transfer Learning". In: *IEEE Transactions on Knowledge and Data Engineering*. Vol. 22, pp. 1345–1359. DOI: 10.1109/TKDE.2009.191.
- Quiñonero-Candela, Joaquin, Masashi Sugiyama, Anton Schwaighofer, and Neil D. Lawrence, eds. (2008). *Dataset Shift in Machine Learning*. MIT Press. DOI: 10.7551/mitpress/9780262170055.001.0001. URL: <https://doi.org/10.7551/mitpress/9780262170055.001.0001>.
- Radford, Alec, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. (2019). "Language models are unsupervised multitask learners". In: *OpenAI blog* 1.8, p. 9.
- Raffel, Colin, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu (2020). "Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer". In: *Journal of Machine Learning Research* 21, 140:1–140:67. URL: <https://jmlr.org/papers/v21/20-074.html>.
- Rajbhandari, Samyam, Jeff Rasley, Olatunji Ruwase, and Yuxiong He (2020). "ZeRO: Memory optimizations Toward Training Trillion Parameter Models". In: *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*. IEEE, pp. 1–16. DOI: 10.1109/SC41405.2020.00024. URL: <https://doi.org/10.1109/SC41405.2020.00024>.
- Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 on the protection of natural persons with regard to the processing of personal data and on the free movement of such data (General Data Protection Regulation)* (2016). Official Journal of the European Union. URL: <https://eur-lex.europa.eu/eli/reg/2016/679/oj>.
- Sanh, Victor, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. (2022). "Multitask Prompted Training Enables Zero-Shot Task Generalization". In: *arXiv preprint arXiv:2110.08207*. URL: <https://arxiv.org/abs/2110.08207>.
- Tay, Yi, Mostafa Dehghani, Vinh Q. Tran, Xavier Garcia, Jason Wei, Xuezhi Wang, Hyung Won Chung, Siamak Shakeri, Dara Bahri, Tal Schuster, Huaixiu Steven Zheng, Denny Zhou, Neil Houlsby, and Donald Metzler (2022). "UL2: Unifying Language Learning Paradigms". In: *arXiv preprint arXiv:2205.05131*. URL: <https://arxiv.org/abs/2205.05131>.

- Team, Gemma, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, et al. (2024). *Gemma: Open Models Based on Gemini Research and Technology*. URL: <https://arxiv.org/abs/2403.08295>.
- Touvron, Hugo, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. (2023). “Llama: Open and efficient foundation language models”. In: *arXiv preprint arXiv:2302.13971*.
- Vaswani, Ashish, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin (2017). “Attention is All you Need”. In: *Advances in Neural Information Processing Systems 30*, pp. 5998–6008. URL: <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fdb053c1c4a845aa-Abstract.html>.
- Wu, Shijie, Ozan Irsoy, Steven Lu, Vadim Dabrowski, Mark Dredze, Sebastian Gehrmann, Prabhjanan Kambadur, David S. Rosenberg, and Gideon Mann (2023). “BloombergGPT: A Large Language Model for Finance”. In: *arXiv preprint arXiv:2303.17564*. URL: <https://arxiv.org/abs/2303.17564>.
- Xia, Mengzhou, Tianyu Gao, Zhiyuan Zeng, and Danqi Chen (2023). “Sheared llama: Accelerating language model pre-training via structured pruning”. In: *arXiv preprint arXiv:2310.06694*.
- Xie, Sang Michael, Hieu Pham, Xuanyi Dong, Nan Du, Hanxiao Liu, Yifeng Lu, Percy Liang, Quoc V. Le, Tengyu Ma, and Adams Wei Yu (2023). “DoReMi: Optimizing Data Mixtures Speeds Up Language Model Pretraining”. In: *arXiv preprint arXiv:2305.10429*. URL: <https://arxiv.org/abs/2305.10429>.
- Yang, An, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. (2024). “Qwen2 Technical Report”. In: *arXiv preprint arXiv:2407.10671*.
- Yang, Hongyang, Xiao-Yang Liu, and Christina Dan Wang (2023). “FinGPT: Open-Source Financial Large Language Models”. In: *arXiv preprint arXiv:2306.06031*. URL: <https://arxiv.org/abs/2306.06031>.
- Yang, Yi, Mark Christopher Siy UY, and Allen Huang (2020). “FinBERT: A Pretrained Language Model for Financial Communications”. In: *arXiv preprint arXiv:2006.08097*. URL: <https://arxiv.org/abs/2006.08097>.
- Zhang, Susan, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuhui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, Todor Mihaylov, Myle Ott, Sam Shleifer, Kurt Shuster, Daniel Simig, Punit Singh Koura, Anjali Sridhar, Tianlu Wang, and Luke Zettlemoyer (2022). “OPT: Open Pre-trained Transformer Language Models”. In: *arXiv preprint arXiv:2205.01068*. URL: <https://arxiv.org/abs/2205.01068>.
- Zhuang, Fuzhen, Zhiyuan Qi, Keyu Duan, Dongbo Xi, Yongchun Zhu, Hengshu Zhu, Hui Xiong, and Qing He (2021). “A Comprehensive Survey on Transfer Learning”. In: *Proceedings of the IEEE* 109, pp. 43–76. DOI: [10.1109/JPROC.2020.3004555](https://doi.org/10.1109/JPROC.2020.3004555).

## **Eidesstattliche Erklärung**

Der/Die Verfasser/in erklärt an Eides statt, dass er/sie die vorliegende Arbeit selbstständig, ohne fremde Hilfe und ohne Benutzung anderer als die angegebenen Hilfsmittel angefertigt hat. Die aus fremden Quellen (einschliesslich elektronischer Quellen) direkt oder indirekt übernommenen Gedanken sind ausnahmslos als solche kenntlich gemacht. Die Arbeit ist in gleicher oder ähnlicher Form oder auszugsweise im Rahmen einer anderen Prüfung noch nicht vorgelegt worden.

.....  
Ort, Datum

.....  
Unterschrift des/der Verfassers/in