


CoMem: persistent Write – bounded Select – depth-reused Read

Write each context chunk once; every query touches only a fixed top-k pack.

1 WRITE


once / context

Independent chunk writes ($c = 512$; chunk-local positions)

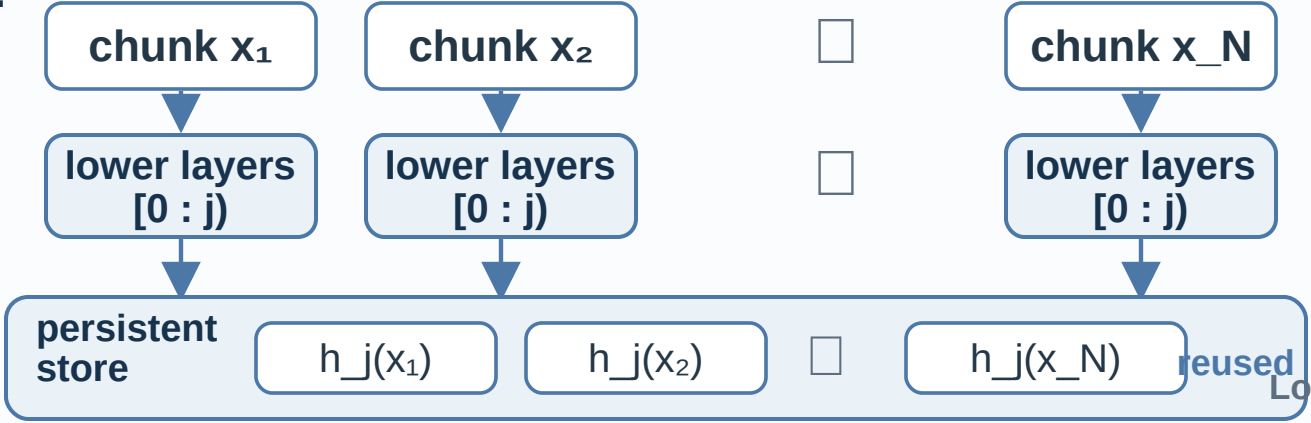

Overlap-Write context variant


prepend document-left context; cache only the target

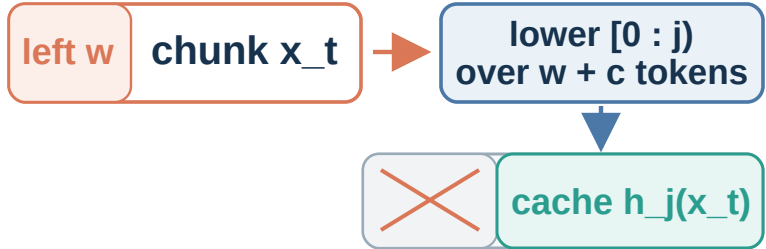

discard prefix


Longer one-time Write; identical store bytes and Read path

Split j controls reuse

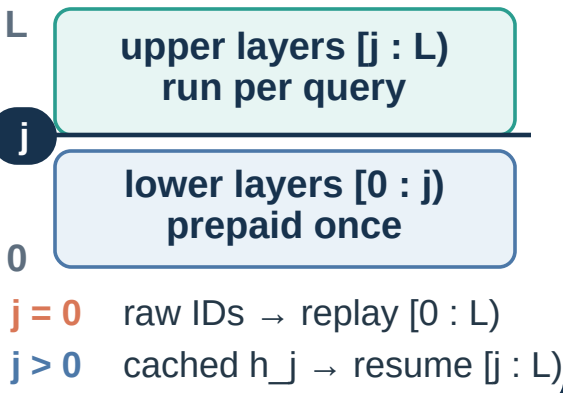

2 SELECT

per query

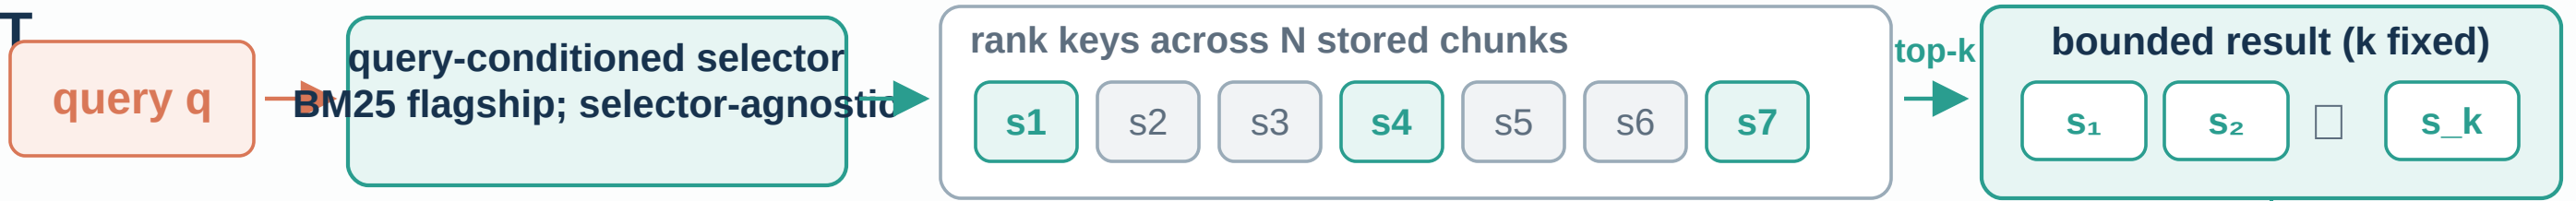

Read length = sink + $k \cdot c$ + query — independent of stored-context length N

3 READ

per query

Same selected chunk IDs and causal pack; only the split endpoint changes

