

WHAT'S NEW

Week 20 · May 11–15, 2026

Manage every Claude Code session from one screen with agent view, keep Claude working toward a goal until a condition holds, and run fast mode on Opus 4.7 by default.

Releases [v2.1.139](#) → [v2.1.142](#)

3 features · May 11–15

Agent view research preview

`claude agents` opens one screen for every Claude Code session: what's running, what's blocked on your input, and what's done. Dispatch a bug fix, a pull request review, and a flaky-test investigation as three rows, keep working in another window, and step in only when a row needs you. Attach to any row to drop into its full conversation, then press `←` to return to the list. Each background session keeps running without a terminal attached.



Open the dashboard from your shell:


```
terminal
```

```
claude agents
```

[Agent view →](#)

/goal v2.1.139

Set a completion condition and Claude keeps working toward it across turns without you prompting each step. After every turn, a fast model checks whether the condition holds; if not, Claude starts another turn instead of handing control back. Useful for substantial work with a verifiable end state, like migrating a module until every call site compiles and tests pass. The goal clears once the condition is met, and works in interactive, `-p`, and Remote Control.



Claude Code

/goal

Set a goal and let Claude run until it holds:

Claude Code


```
> /goal all tests in test/auth pass and the lint step is clean
```

Goals →

Fast mode on Opus 4.7

research preview

`/fast` now runs on Opus 4.7 by default instead of Opus 4.6. Fast mode is a high-speed Opus configuration: the same model quality at about 2.5x the speed for a higher per-token cost, useful for rapid iteration and live debugging. Pricing is unchanged at \$30/\$150 per MTok, the same as Opus 4.6 fast mode. To pin fast mode to Opus 4.6, set `CLAUDE_CODE_OPUS_4_6_FAST_MODE_OVERRIDE=1`.

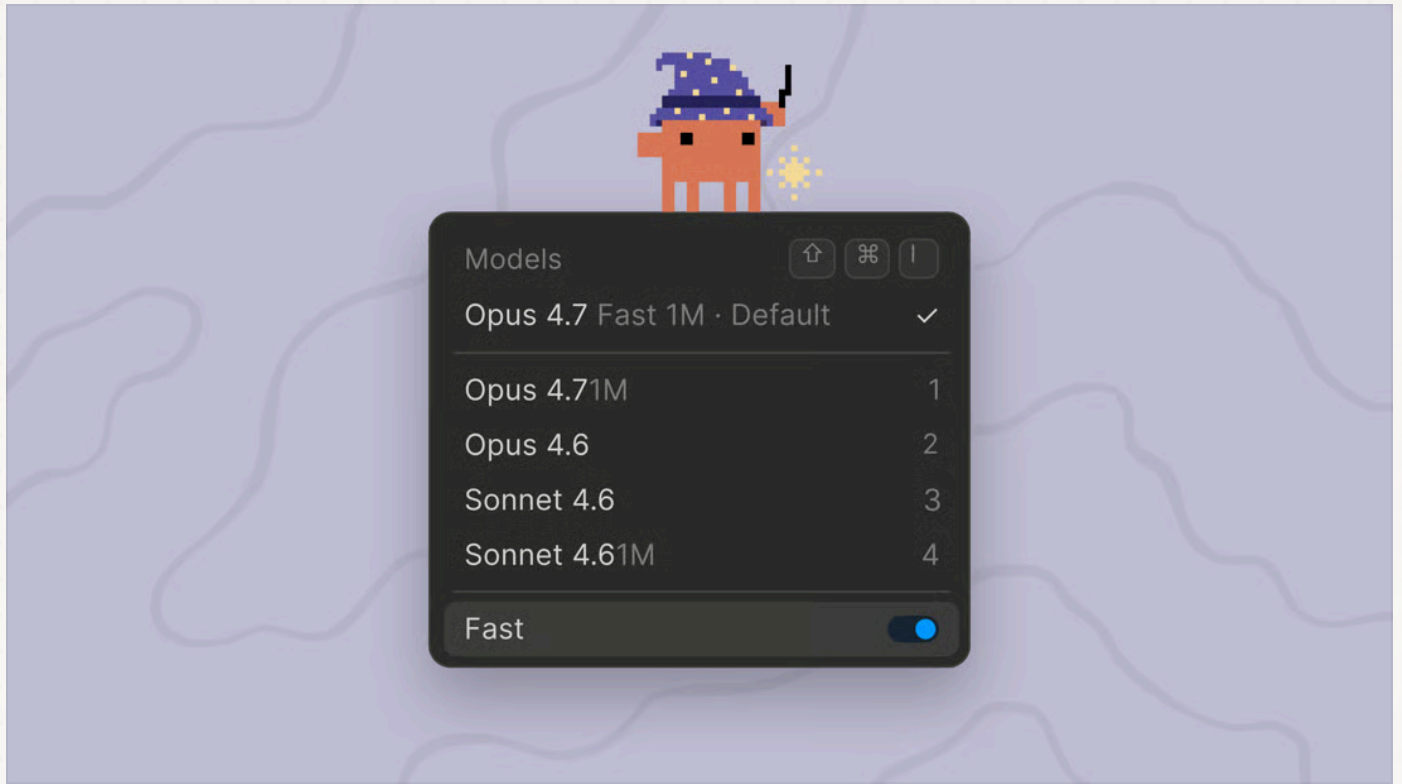

Toggle fast mode, now running on Opus 4.7:

Claude Code

```
> /fast
```

[Fast mode on Opus 4.7 →](#)

Other wins

- + `claude agents` gained dispatch flags (`-add-dir`, `-settings`, `-mcp-config`, `-plugin-dir`, `-permission-mode`, `-model`, `-effort`, `-dangerously-skip-permissions`) to configure background sessions, and `claude agents -cwd <path>` scopes the session list to a directory
- + New hook `args: string[]` `exec` form spawns the command directly without a shell, so path placeholders never need quoting

- | | |
|--|---|
| <ul style="list-style-type: none">+ New <code>continueOnBlock</code> config option for <code>PostToolUse</code> hooks feeds the hook's rejection reason back to Claude and continues the turn instead of ending it <hr/> <ul style="list-style-type: none">+ The Rewind menu added "Summarize up to here" to compress earlier context while keeping recent turns intact <hr/> <ul style="list-style-type: none">+ MCP stdio servers now receive <code>CLAUDE_PROJECT_DIR</code> in their environment, matching hooks, and plugin configs can reference <code>\${CLAUDE_PROJECT_DIR}</code> in commands <hr/> <ul style="list-style-type: none">+ Plugins with a root-level <code>SKILL.md</code> and no <code>skills/</code> subdirectory are now surfaced as a skill <hr/> <ul style="list-style-type: none">+ Agent tool <code>subagent_type</code> now matches case- and separator-insensitively, so "Code Reviewer" resolves to <code>code-reviewer</code> | <ul style="list-style-type: none">+ New <code>terminalSequence</code> field in hook JSON output lets hooks emit desktop notifications, window titles, and bells without a controlling terminal <hr/> <ul style="list-style-type: none">+ Remote Control, <code>/schedule</code>, Claude.ai MCP connectors, and notification preferences are now disabled when <code>ANTHROPIC_API_KEY</code>, <code>apiKeyHelper</code>, or <code>ANTHROPIC_AUTH_TOKEN</code> is set, even alongside a Claude.ai login; unset the API key to use these features <hr/> <ul style="list-style-type: none">+ <code>claude plugin details <name></code> shows a plugin's component inventory and projected per-session token cost, and the <code>/plugin details</code> pane now also lists the LSP servers a plugin provides <hr/> <ul style="list-style-type: none">+ <code>/feedback</code> can now include recent sessions from the last 24 hours or 7 days for issues spanning more than the current session |
|--|---|

[Full changelog for v2.1.139-v2.1.142 →](#)