


Problem Set #1

Due: 1:00pm on Friday, July 5th

For each problem, briefly explain/justify how you obtained your answer. Brief explanations of your answer are necessary to get full credit for a problem even if you have the correct numerical answer. The explanations help us determine your understanding of the problem whether or not you got the correct answer. Moreover, in the event of an incorrect answer, we can still try to give you partial credit based on the explanation you provide. **It is fine for your answers to include summations, products, factorials, exponentials, or combinations; you don't need to calculate those all out to get a single numeric answer.**

Note: all assignment submissions will be made online. If you handwrite your solutions, you are responsible for making sure that you can produce clearly legible scans of them for submission. You may optionally use any word processing software you like for writing up your solutions. On the CS109 webpage we provide a template file and tutorial for the LaTeX system.

1. A substitution cypher is derived from an ordering of the letters in the alphabet. How many ways can the 26 letters be ordered if each letter appears exactly once and:
 - a. There are no other restrictions?
 - b. The letters Q and U must be next to each other (but in any order)?
2. You are counting cards in a card game that uses **four** standard decks of cards. There are 208 cards total. Each deck has 52 cards (13 values each with 4 suits). Cards are only distinguishable based on their suit and value, not which deck they came from.
 - a. In how many distinct ways can the cards be ordered?
 - b. You are dealt two cards. How many distinct pairs of cards can you be dealt? Note: the order of the two cards you are dealt does not matter.
3. Imagine you have a robot (Θ) that lives on an $n \times m$ grid (it has n rows and m columns):

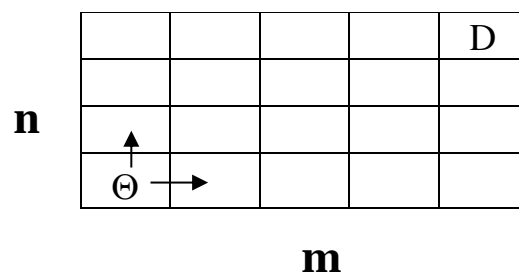

The robot starts in cell (1, 1) and can take steps either to the right or up (no left or down steps). How many distinct paths can the robot take to the destination in cell (n, m):

- a. If there are no additional constraints?
- b. The robot must start by moving to the right?
- c. If the robot changes direction exactly 3 times? As an example: moving up two times in a row is not changing directions but switching from moving up to moving right is. Moving [Up, Right, Right, Up] would count as having two direction switches.

4. Given all the start-up activity going on in high-tech, you realize that applying combinatorics to investment strategies might be an interesting idea to pursue. Say you have \$20 million that must be invested among 4 possible companies. Each investment must be in integral units of \$1 million, and there are minimal investments that need to be made if one is to invest in these companies. The minimal investments are \$1, \$2, \$3, and \$4 million dollars, respectively for company 1, 2, 3, and 4. How many different investment strategies are available if
 - a. an investment must be made in each company?
 - b. investments must be made in at least 3 of the 4 companies?
 - c. an investment must be made in each company, but not all of the money needs to be invested? (Hint: see example 8 on lecture notes 2.)
5. If we assume that all possible poker hands (comprised of 5 cards from a standard 52 card deck) are equally likely, what is the probability of being dealt:
 - a. a flush? (A hand is said to be a flush if all 5 cards are of the same suit. Note that this definition means that *straight flushes* (five cards of the same suit in numeric sequence) are also considered flushes.)
 - b. one pair? (This occurs when the cards have numeric values a, a, b, c, d , where a, b, c , and d are all distinct.)
 - c. two pairs? (This occurs when the cards have numeric values a, a, b, b, c , where a, b and c are all distinct.)
 - d. three of a kind? (This occurs when the cards have numeric values a, a, a, b, c , where a, b and c are all distinct.)
 - e. four of a kind? (This occurs when the cards have numeric values a, a, a, a, b .)
6. Say we roll a fair 6-sided die six times, what is the probability that:
 - a. we will roll three different numbers, *twice* each?
 - b. we will roll some number *exactly* 4 times?
7. To get good performance when working binary search trees (BST), we must consider the probability of producing completely degenerate BSTs (where each node in the BST has at most one child).
 - a. If the integers 1 through n are inserted in arbitrary order into a BST (where each possible order is equally likely), what is the probability (as an expression in terms of n) that the resulting BST will have completely degenerate structure?
 - b. Using your expression from part (a), determine the smallest value of n for which the probability of forming a completely degenerate BST is less than 0.01 (i.e., 1%). Feel free to just plug increasing/decreasing numbers into your expression from part a.
8. Say a hacker has a list of n distinct password candidates, only one of which will successfully log her into a secure system.
 - a. If she tries passwords from the list at random, deleting those passwords that do not work, what is the probability that her first successful login will be (exactly) on her k -th try?
 - b. Now say the hacker tries passwords from the list at random, but does **not** delete previously tried passwords from the list. She stops after her first successful login attempt. What is the probability that her first successful login will be (exactly) on her k -th try?

9. Say a university is offering 3 programming classes: one in Java, one in C++, and one in Python. The classes are open to any of the 100 students at the university. There are:
- a total of 27 students in the Java class
 - a total of 26 students in the C++ class
 - a total of 18 students in the Python class
 - 12 students in both the Java and C++ classes
 - 5 students in both the Java and Python classes
 - 7 students in both the C++ and Python classes
 - 3 students in all three classes (note: these students are also counted as being in each pair of classes in the numbers above).
- a. If a student is chosen randomly at the university, what is the probability that he or she is not in any of the 3 programming classes?
- b. If a student is chosen randomly at the university, what is the probability that he or she is taking *exactly one* of the three programming classes?
- c. If two students are chosen randomly at the university, what is the probability that at least one of the chosen students is taking at least one programming class?
10. A binary string containing M 0's and N 1's (in arbitrary order, where all orderings are equally likely) is sent over a network. What is the probability that the first r bits of the received message contain exactly k 1's?
11. Suppose that m strings are hashed (randomly) into N buckets, assuming that all N^m arrangements are equally likely. Find the probability that exactly k strings are hashed to the first bucket.
12. **[Coding]** Consider a game that uses a generator which produces independent random integers between 1 and 100 inclusive. The game starts with a sum $S = 0$. The first player adds random numbers from the generator to S until $S > 100$ and records her last random number 'x'. The second player, *continues adding* random numbers from the generator to S until $S > 200$ and records her last random number 'y'. The player with the highest number wins, i.e. if $y > x$ the second player wins. Is this game fair? Write a program to simulate 100,000 games. What is the probability estimate, based on your simulations, that the second player wins? Give your answer rounded to 3 places behind the decimal. For an extra credit challenge, give an expression for the exact probability (without sampling).

Please include any code that you wrote. If you're using Latex, we recommend the “verbatim” environment (or any environment designed to display code). Screenshots are another common method.