



Advanced Combustion

—Chapter 4. Pollutant Formation and Control in Combustion

Lei Li (李磊) , Fei Qi (齐飞)

Outline



1. Introduction


2. NO_x Formation

3. PAH and Soot Formation

Combustion Pollutants




❑ Pollutant Formation During Combustion

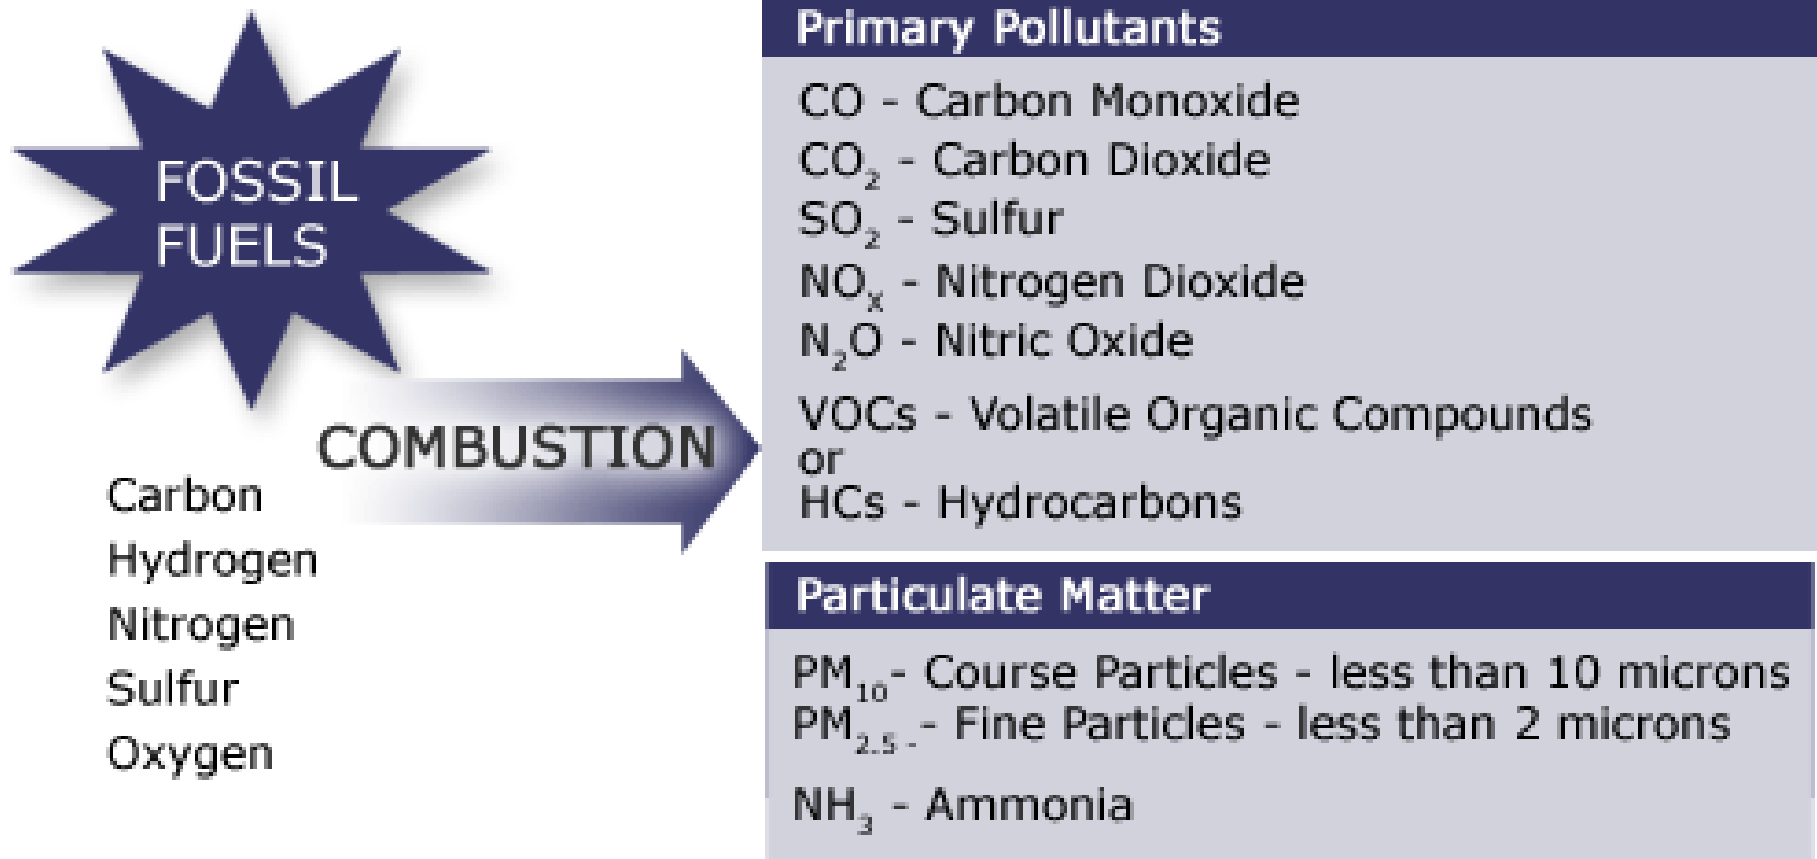

Combustion Pollutants



□ Pollutant Formation During Combustion

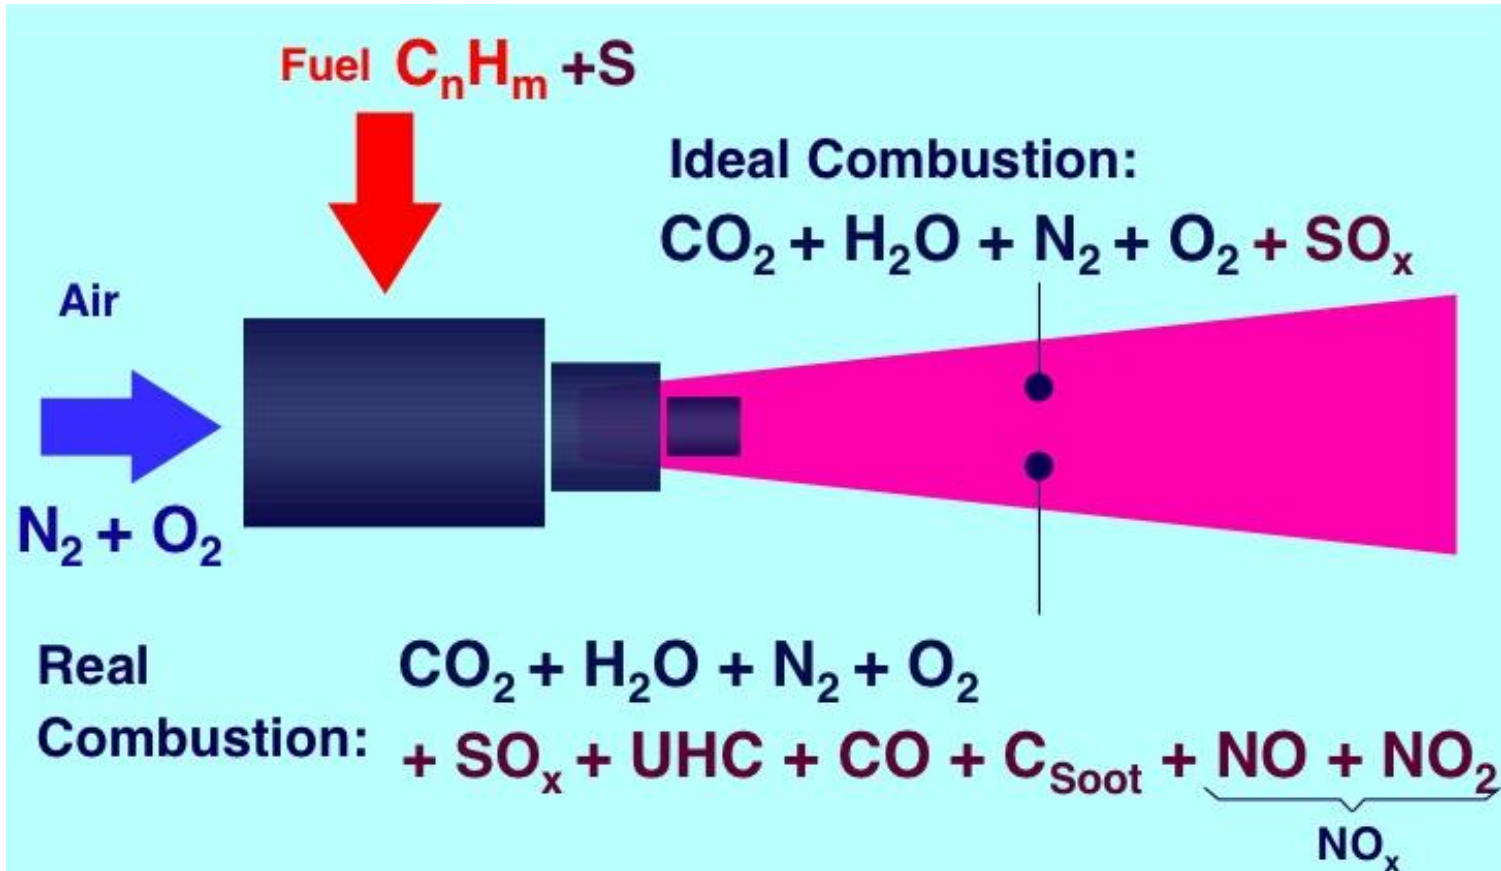

□ Water is the only environmentally friendly combustion product

Combustion Pollutants




❑ Pollutant Formation During Combustion

- NO_x – Reactions with nitrogen in air and/or fuel
- CO – Incomplete or rich combustion
- UHC – Incomplete combustion
- SO_x – Sulfur in fuels
- Particulates (soot, smoke) – Incomplete combustion
- CO_2 – Major product of hydrocarbon combustion



❑ Source

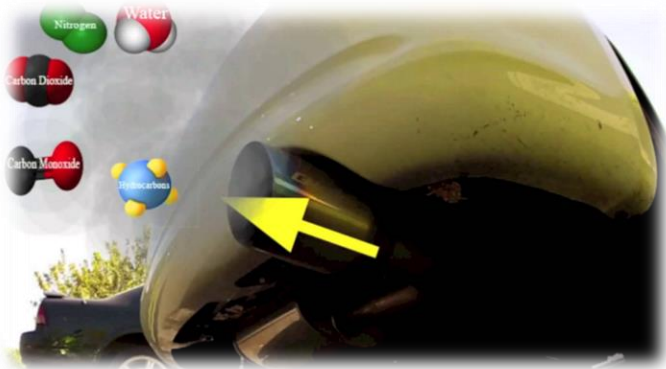



Combustion Pollutants



❑ Pollutant Formation During Combustion

- NO , NO_2 – Causing photochemical smog and acid rain in the troposphere
- N_2O – Greenhouse gas
- CO – Poisoning
- SO_x – Acid rain
- Particulates (soot, smoke) – Haze
- CO_2 – Greenhouse gas

❑ Source

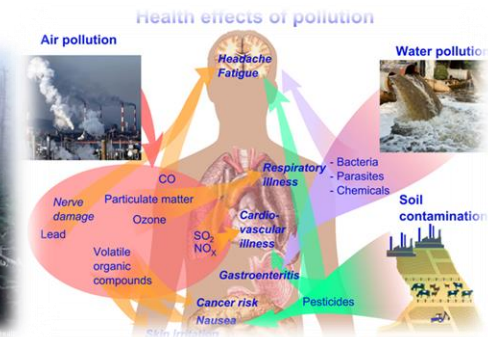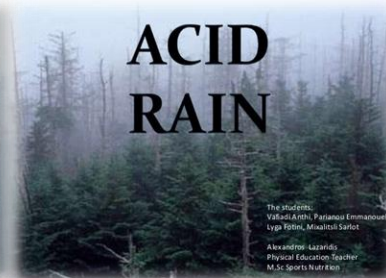


Combustion Pollutants



❑ Pollutant Formation During Combustion

EU Emissions Standards

Exhaust emissions Euro 1–6

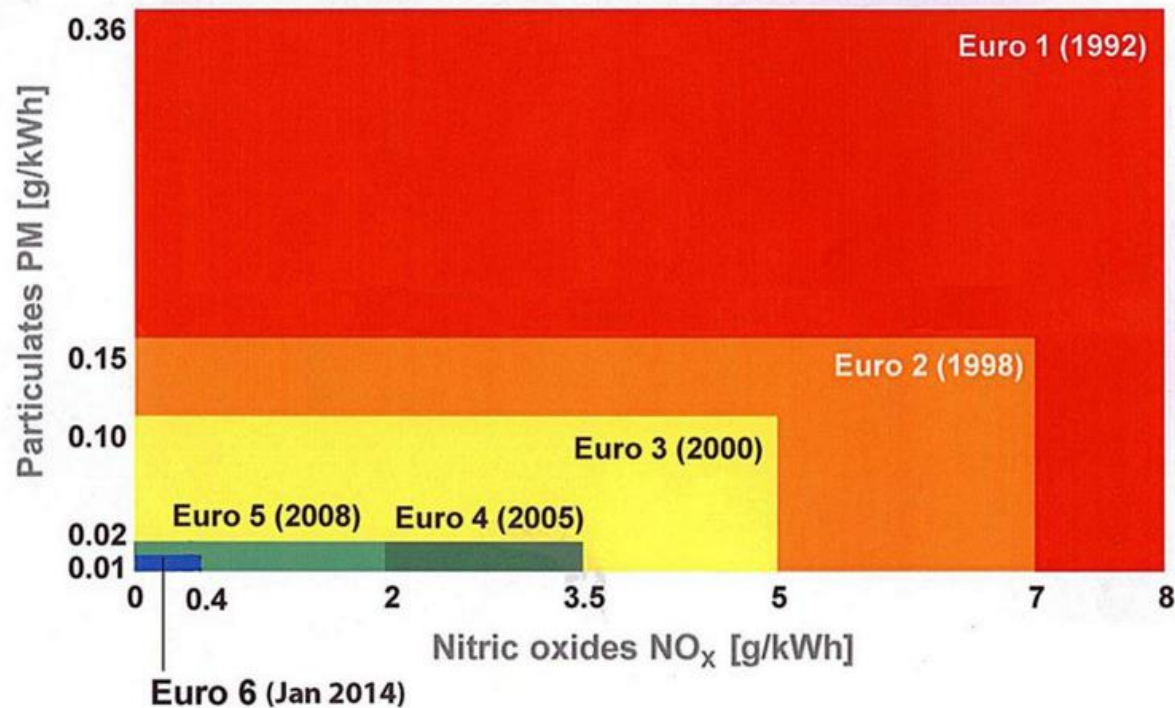


- ❖ Among all the pollutants, NO_x and soot are the two most important pollutants that are need strictly controlled.

Combustion Pollutants



❑ Pollutant Formation During Combustion

❑ China emission standards

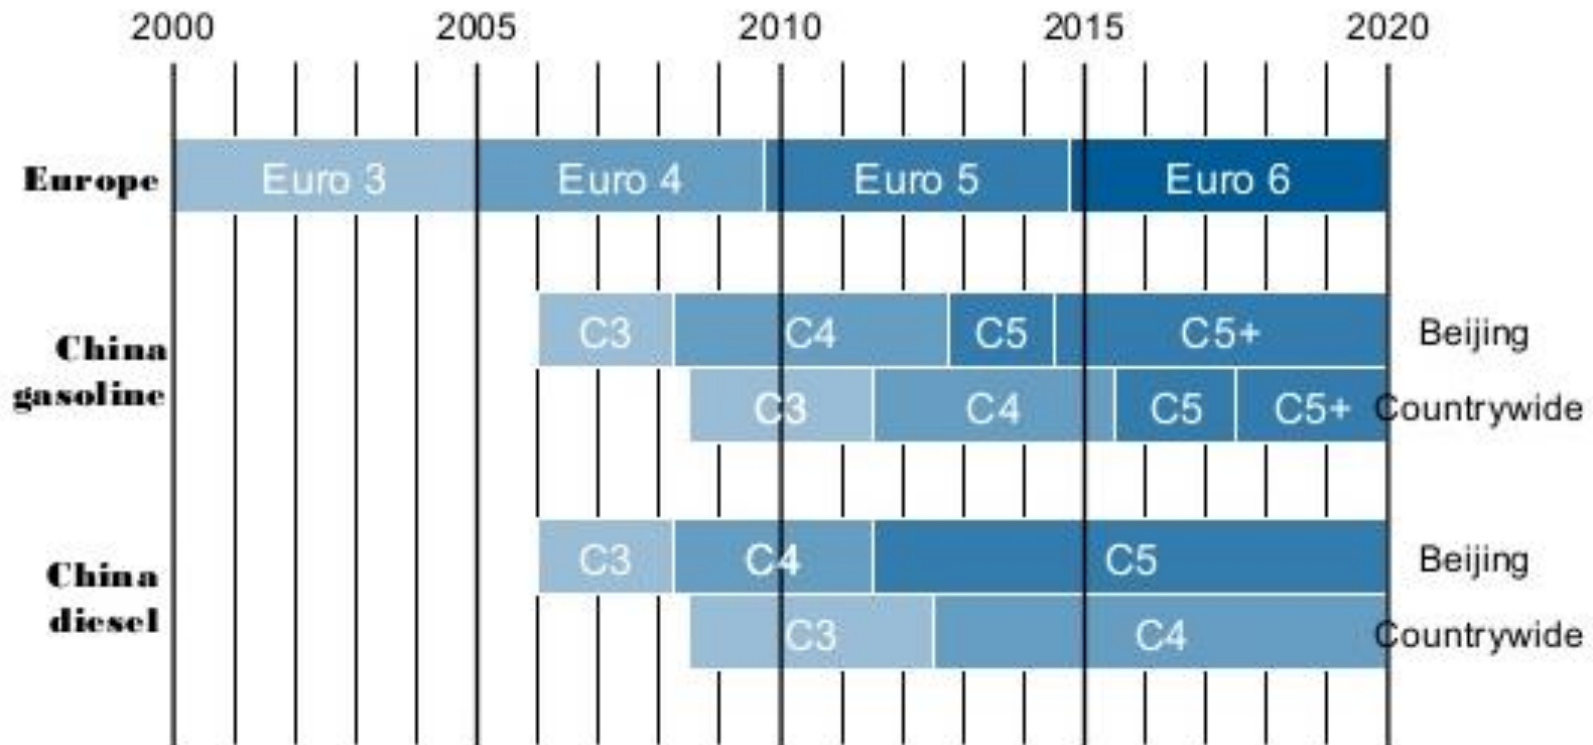

❖ More and more strict emission regulations have been made worldwide.

Combustion Pollutants



☐ Solving Methods

- ☐ Catalytic converter
 - ☐ New combustion devices
 - ☐ New combustion technology
 - ☐
-
- ☐ Knowing the combustion kinetics is the first and the most important step
 - ☐ Need detailed chemistry while not reduced or global chemistry
 - ☐ Gas-solid interaction kinetics



1. Introduction

2. NO_x Formation

3. PAH and Soot Formation



KNOW YOUR NITROGEN OXIDES

Air pollution has been in the news with the recent Volkswagen scandal, which has included a lot of talk of nitrogen oxides. Here's a guide to which is which!



NITROGEN OXIDES

The x represents a number: either 1 (for nitric oxide) or 2 (for nitrogen dioxide). Both are produced by vehicles. Nitrous oxide isn't included in this generic term.



NITRIC OXIDE

Air pollutant formed by high temperature oxidation of nitrogen in air. It reacts with atmospheric oxygen to form nitrogen dioxide, and can also deplete ozone.



NITROGEN DIOXIDE

Prominent air pollutant. It helps generate ground-level ozone, which affects human health, causes crop damage, and acts as a potent greenhouse gas.



NITROUS OXIDE

Also known as 'laughing gas', and used as an anaesthetic. It's used in racing engines to increase power, and is also produced by catalytic converter processes.



© COMPOUND INTEREST 2015 - WWW.COMPOUNDCHEM.COM | @COMPOUNDCHEM
Shared under a Creative Commons Attribution-NonCommercial-NoDerivatives licence.



❖ NO and NO₂ are important NO_x pollutants.

NO_x Formation Mechanism





- ❑ Nitrogen oxides are mainly formed from atmospheric N₂ through mechanisms:
 - ❖ Thermal NO or Zeldovich-NO
 - ❖ Prompt NO or Fenimore-NO
 - ❖ NO generated via N₂O
 - ❖ NO generated via NNH
 - ❖ NO generated from fuel-bounded nitrogen
- ❑ Thermal, prompt and fuel N are the most important three sources
- ❑ Detailed chemical modeling plays a major role in the implementation of such mechanisms

Thermal/Zeldovich NO_x



□ Suggested by Y. B. Zeldovich, 1946, consists of three major reactions:




□ N atom reacts extremely fast, therefore the quasi-steady-state approximation (QSSA) is applicable:

$$\frac{d[\text{NO}]}{dt} = 2k_1 [\text{N}_2] [\text{O}]$$

□ The first reaction is the rate controlling step

□ High [O] combustion condition is favored


Thermal/Zeldovich NO_x

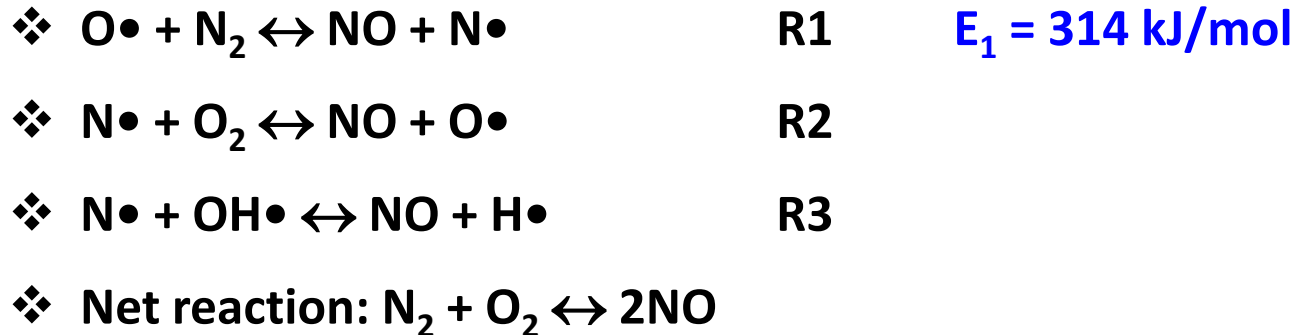

❑ Thermal NO production requires:



- ❖ High temperature $T > 1900 \text{ K}$, because the activation energy of reaction R1 is high, it requires the breaking of the tight N-N triple bond
- ❖ Long residence time (slow reaction, post-flame gases)
- ❖ High [O], the concentration of oxygen atoms in flames increases rapidly with increasing temperature
- ❖ These conditions are present in the post-flame region

Thermal/Zeldovich NO_x

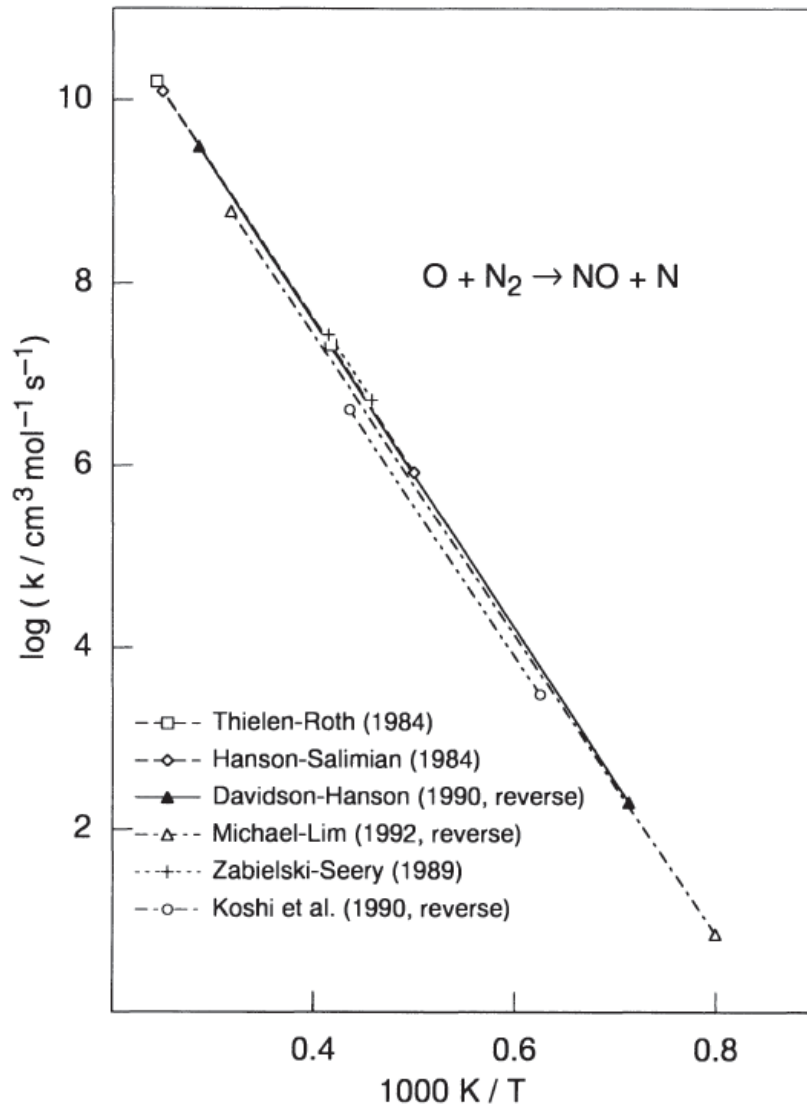

- ❖ Since the rate coefficient for reaction R1 is well established, computation of the thermal NO production rate is straightforward if the oxygen atom concentration is known
- ❖ Thermal NO is sensitive to both T and [O]
- ❖ One must describe the kinetics of flame front chemistry properly in order to predict Zeldovich NO production accurately, even in the post-flame region
- ❖ Assuming that the [O] corresponds to the thermodynamic equilibrium may get wrong (higher) NO value

Thermal/Zeldovich NO_x

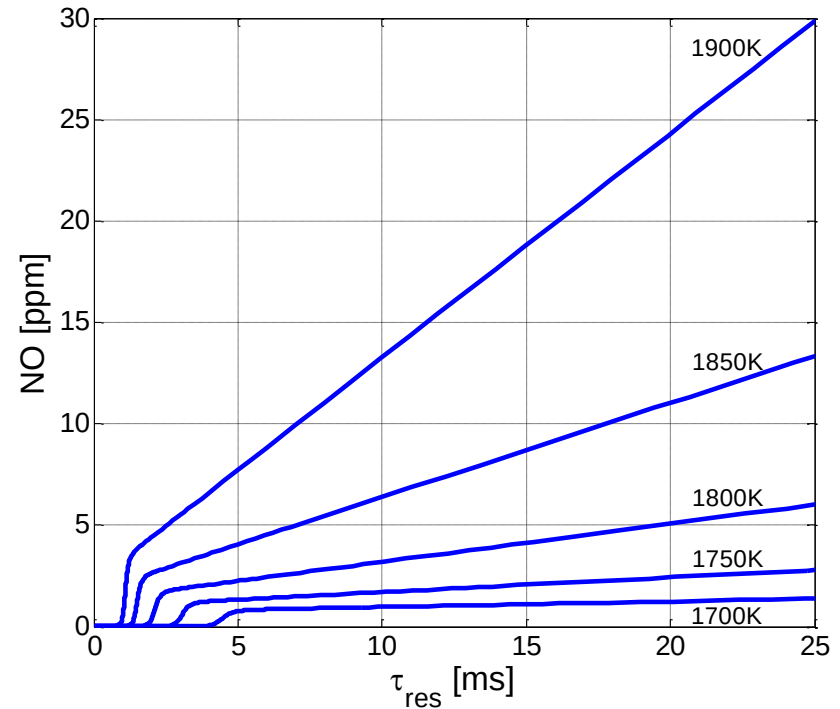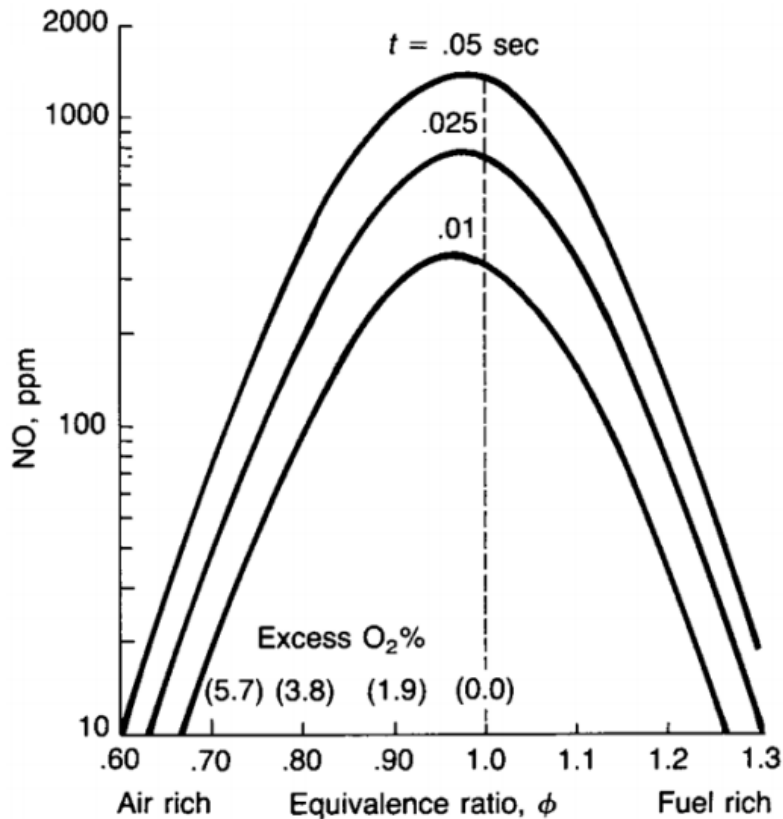

- ❖ Two strategies may be used to reduce thermal NO_x: Reduce peak temperatures of the flame zone; Reduce gas residence time in the flame zone

Prompt/Fenimore NO_x




- Discovered by C.P. Fenimore, 1976
- Observations:
 - ❖ NO formed earlier in HC combustion than possible from thermal mechanism
- Rate limiting step: $\text{N}_2 \rightarrow \text{NO}$ catalyzed by radical CH and CH_2
 - ❖ $\text{CH}\cdot + \text{N}_2 \leftrightarrow \text{HCN} + \text{N}\cdot$
 - ❖ $\text{CH}_2\cdot + \text{N}_2 \leftrightarrow \text{HCN} + \text{NH}\cdot$
- Conversion to NO:
 - ❖ $\text{HCN} + \text{O} \leftrightarrow \text{NCO} + \text{H}$
 - ❖ $\text{NCO} + \text{H} \leftrightarrow \text{NH} + \text{CO}$
 - ❖ $\text{NH} + \text{R} \leftrightarrow \text{N} + \text{RH}$ $\text{HCN} + \text{R} \leftrightarrow \text{CN} + \text{RH}$ $\text{CN} + \text{O} \leftrightarrow \text{N} + \text{CO}$
 - ❖ $\text{N} + \text{OH} \leftrightarrow \text{NO} + \text{H}$


Prompt/Fenimore NOx



□ New reaction proposed by Moskaleva and Lin, 2000

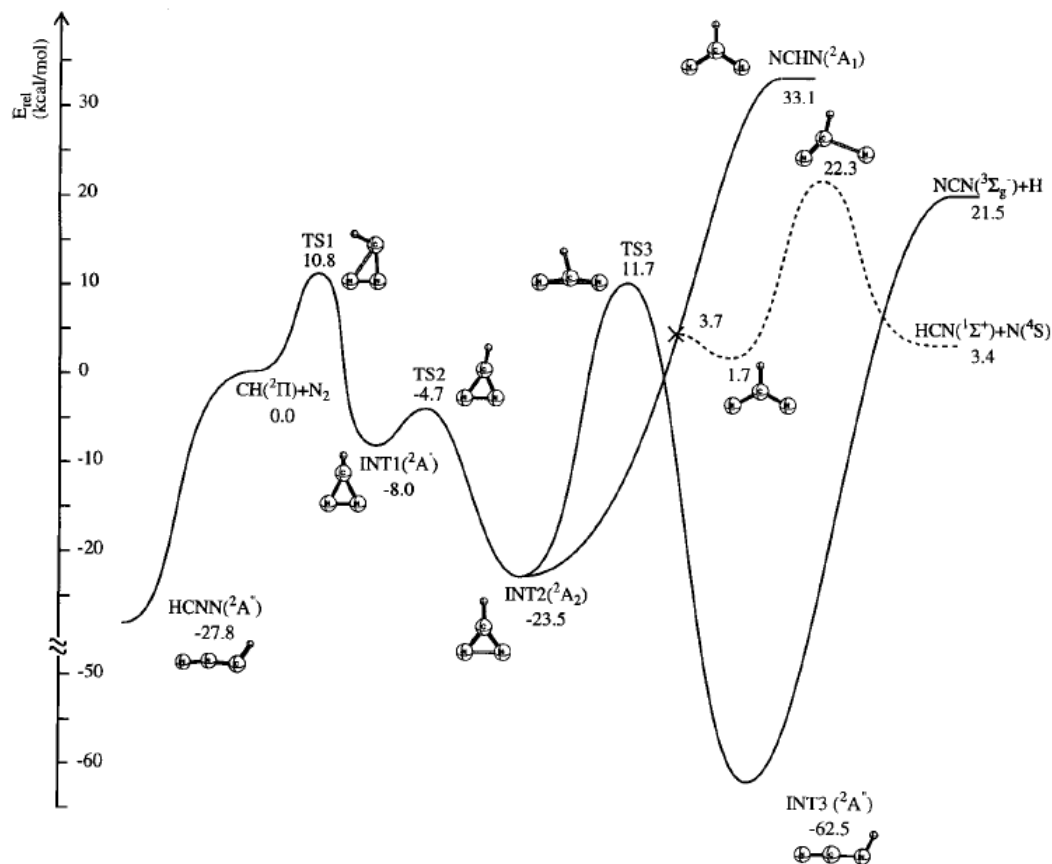

□ Most important reaction:



□ Conversion to NO:



Prompt/Fenimore NO_x




□ Origin of CH

- ❖ $\text{CH}_3 + \text{OH} \leftrightarrow \text{CH}_2 + \text{H}_2\text{O}$
- ❖ $\text{CH}_3 + \text{H} \leftrightarrow \text{CH}_2 + \text{H}_2$
- ❖ $\text{CH}_2 + \text{OH} \leftrightarrow \text{CH} + \text{H}_2\text{O}$
- ❖ $\text{CH}_2 + \text{H} \leftrightarrow \text{CH} + \text{H}_2$

□ Features of prompt NO_x:

- ❖ Important in fuel rich flames, due to the high [CH]
- ❖ Important only at not very high temperatures ($T < 2000\text{K}$), because at high temperature thermal NO production is faster

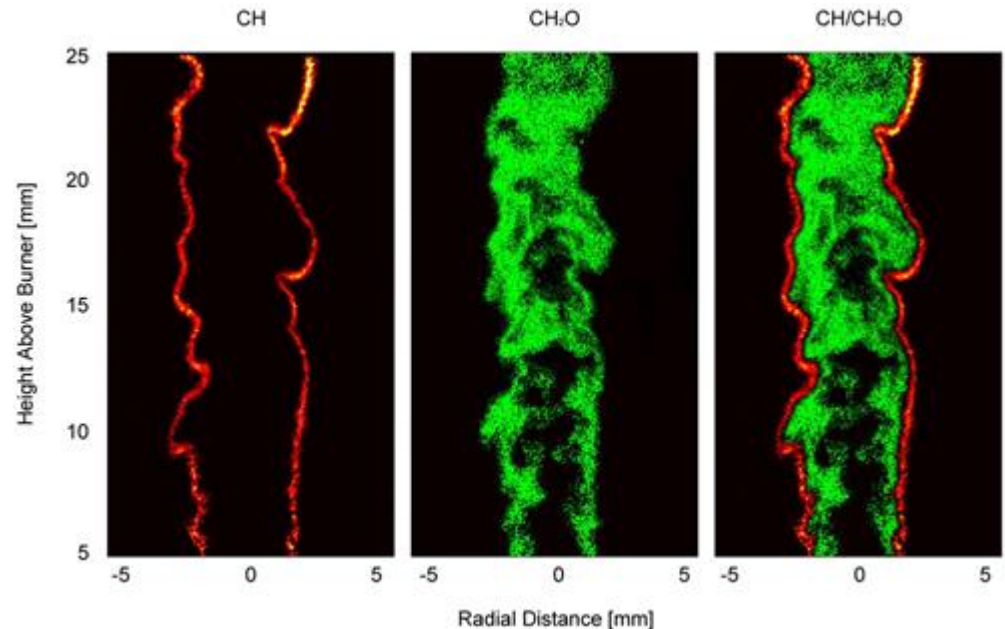

NO_x Production Via N₂O



□ Important reactions:

N₂O production from N₂

- ❖ $\text{N}_2 + \text{O} + \text{M} \leftrightarrow \text{N}_2\text{O} + \text{M}$
- ❖ $\text{N}_2 + \text{OH} (+\text{M}) \leftrightarrow \text{N}_2\text{O} + \text{H} (+\text{M})$
- ❖ $\text{N}_2 + \text{HO}_2 (+\text{M}) \leftrightarrow \text{N}_2\text{O} + \text{OH} (+\text{M})$
- ❖ $\text{N}_2 + \text{O}_2 (+\text{M}) \leftrightarrow \text{N}_2\text{O} + \text{O} (+\text{M})$

NO production from N₂O

- ❖ $\text{N}_2\text{O} + \text{O} \leftrightarrow 2\text{NO}$
- ❖ $\text{N}_2\text{O} + \text{H} \leftrightarrow \text{NO} + \text{NH}$

□ Features:


- ❖ Important in lean combustion in gas turbines
- ❖ The lifetime of N₂O is less than 10 ms at 1500 K, then the mechanism is active only at low temperature
- ❖ Termolecular reactions (三分子反应): rate increases with pressure increases

NO_x Production Via NNH



□ Important reactions:

In the first reaction steps, NH and NNH are produced from N₂



NO production from NH and NNH



□ Features:


- ❖ Important in lean and low-temperature flames, where thermal NO and prompt NO routes are slow
- ❖ Important at low pressure (at high pressure the “via N₂O” route is fast)

NO_x Production From Fuel-N



- ❑ The nitrogen of NO may also come from the fuel. It is especially important at coal, biomass or oil sand combustion
- ❑ The formation processes of NO_x are very complex

● Model of bituminous coal

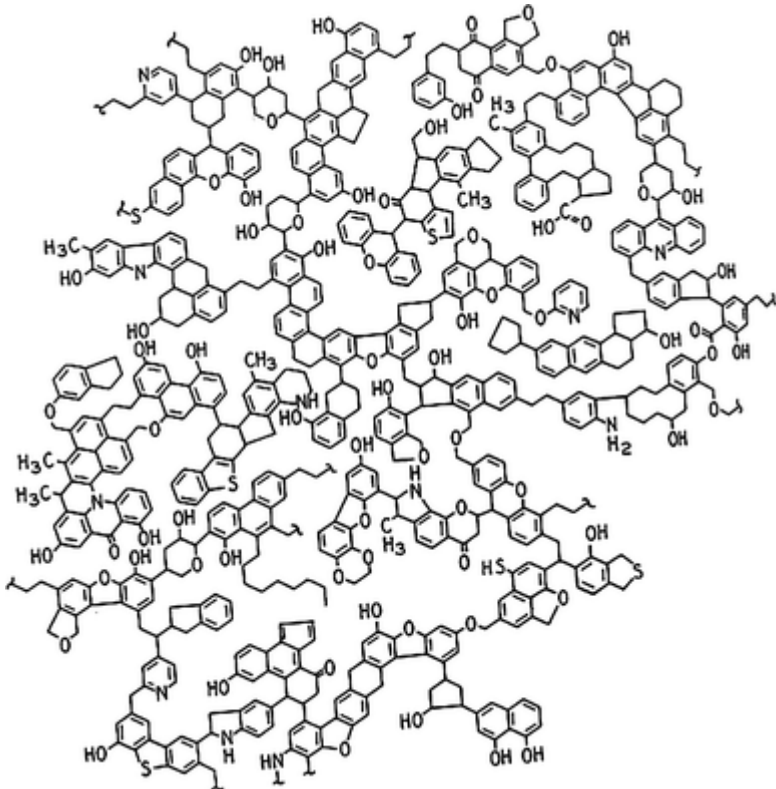

Fuel	C	H	O	N
Wood	49.65	6.23	43.20	0.92
Peat	55.44	6.28	35.56	1.72
Lignite	72.95	5.24	20.50	1.31
Bituminous	84.24	5.55	8.69	1.52
Anthracite	93.50	2.81	2.72	0.97

❖ Around 80% of NO_x emission is from the fuel N routes

NOx Production From Fuel-N




□ Important source: Fuel N, maybe different for different coal or biomass

Table 1
Typical nitrogen content in selected fuels [3,12,20,21,29]

Fuel	N content (wt%)
Straw	0.3–1.5
Other agricultural residues	0.4–3.5
Wood	0.03–1.0
Peat	0.5–2.5
Coal	0.5–2.5
Paper	0.1–0.2
RDF	0.8
Tires	0.3
Household waste	0.5–1.0
Plastic waste	0.0
Sewage sludge	2.5–6.5

World Anthropogenic NOx Emissions, 2010
(Million Tons/Yr)


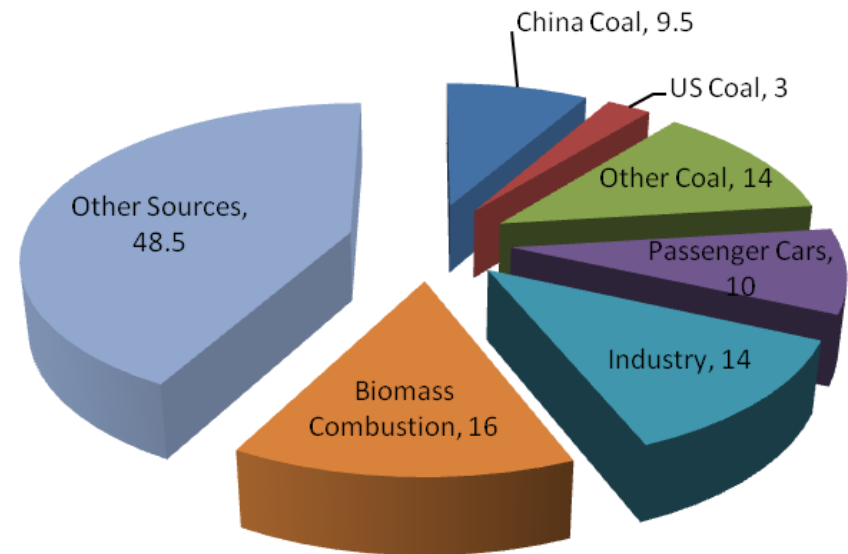


□ Coal-fired power plant

□ Biomass combustion



NO_x Production From Fuel-N

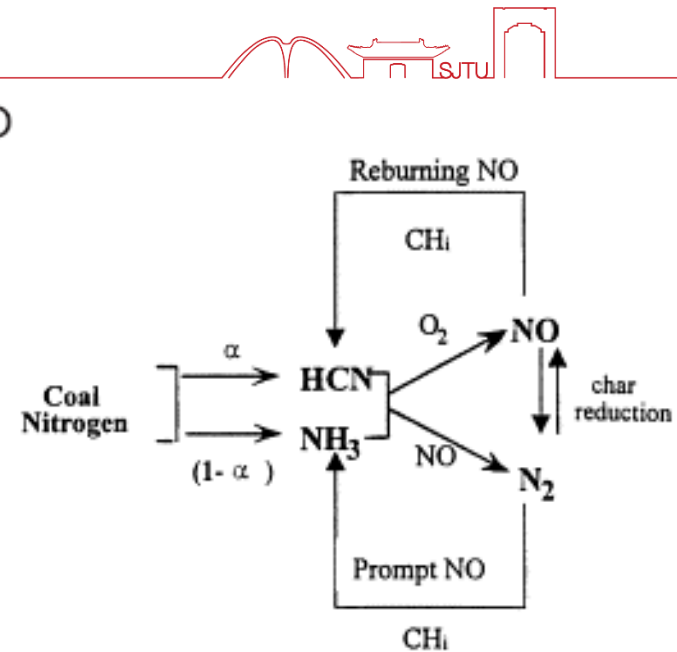
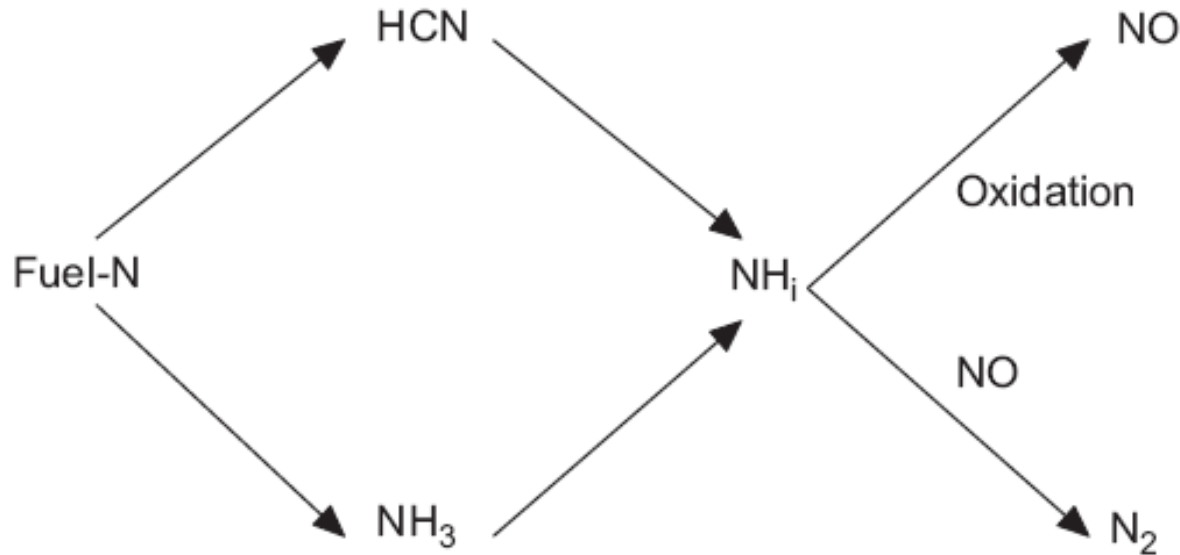


- ❑ Heterocyclic compounds → HCN → NO
- ❑ Amines (胺) → NH₃ → NH_i → NO
- ❑ Branching ratio towards NO or N₂ is influenced via NH_i species, addition of ammonia or urea
- ❑ The transformation of fuel N to NO_x depends on conditions of combustion (temperature and stoichiometry) and the concentration of N-compound

NO_x Production From Fuel-N



□ Model compounds

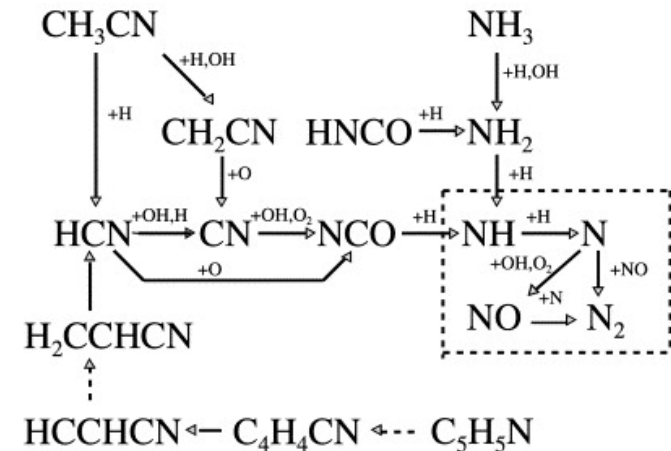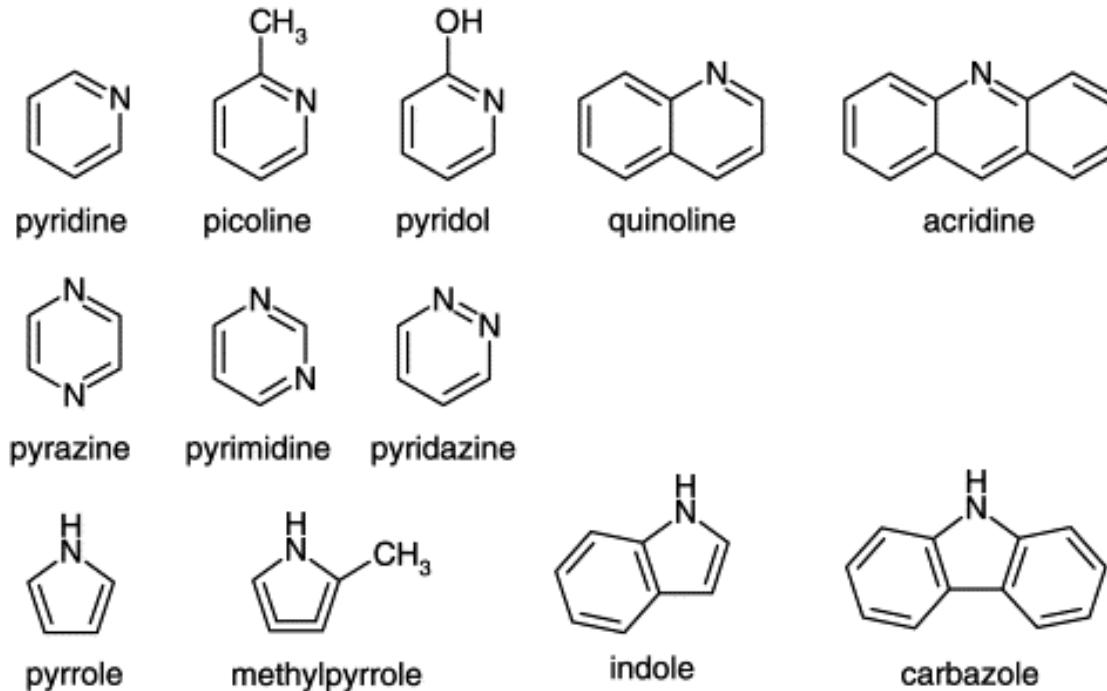


□ Usually, model compounds are chosen for combustion kinetic researches

Thermodynamics vs Kinetics




Thermodynamics

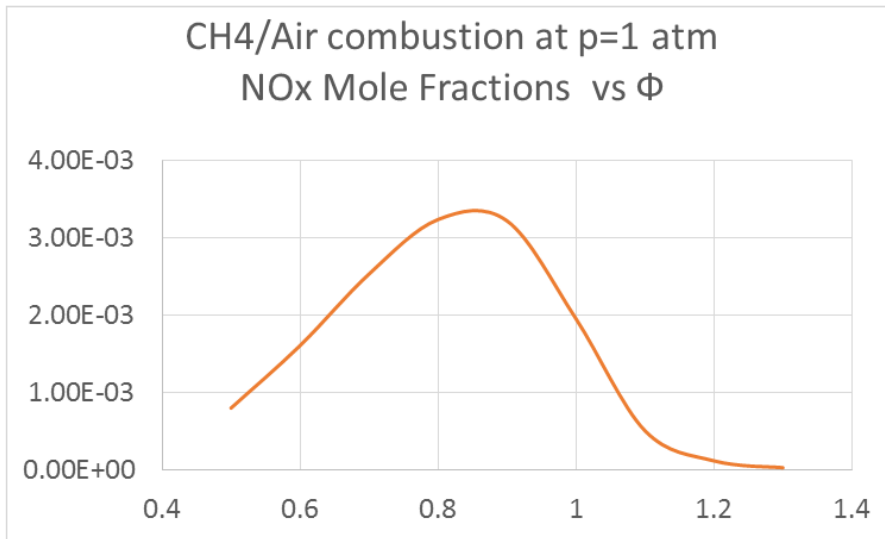

NO at equilibrium




Chemical Kinetics

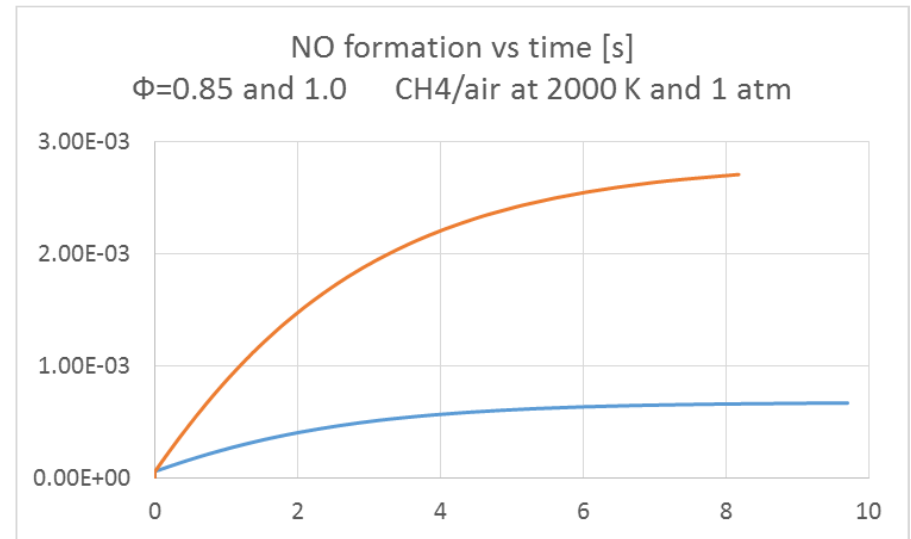

Rate of NO formation

- Equilibrium concentration is the maximum concentration
- As time increases, the concentration approaches the equilibrium

Thermodynamics vs Kinetics

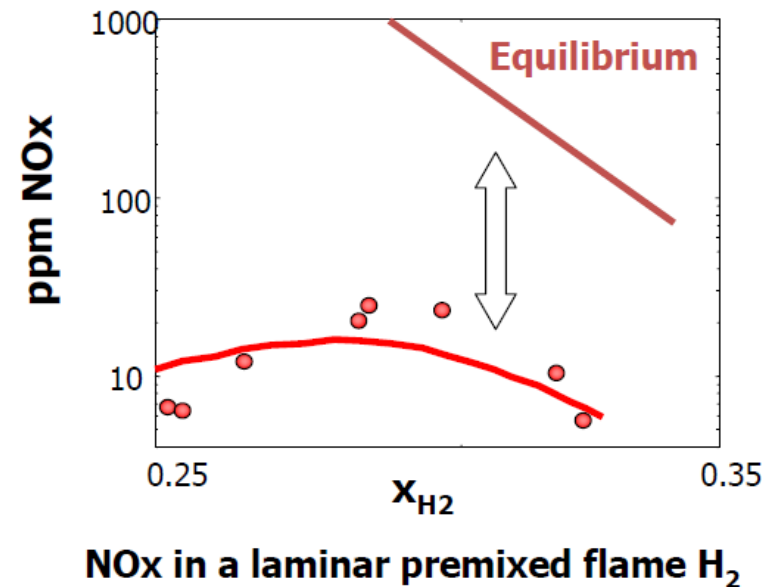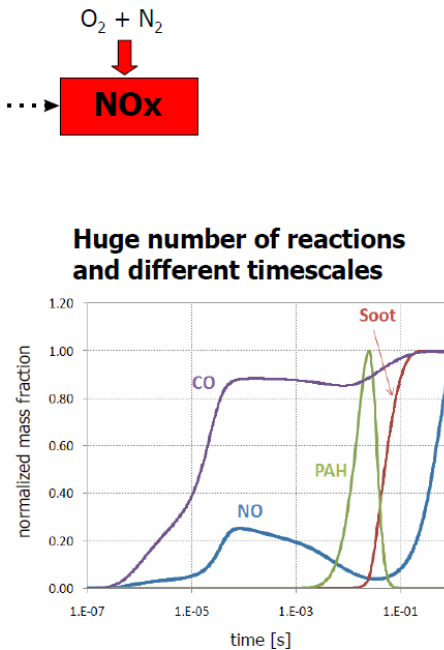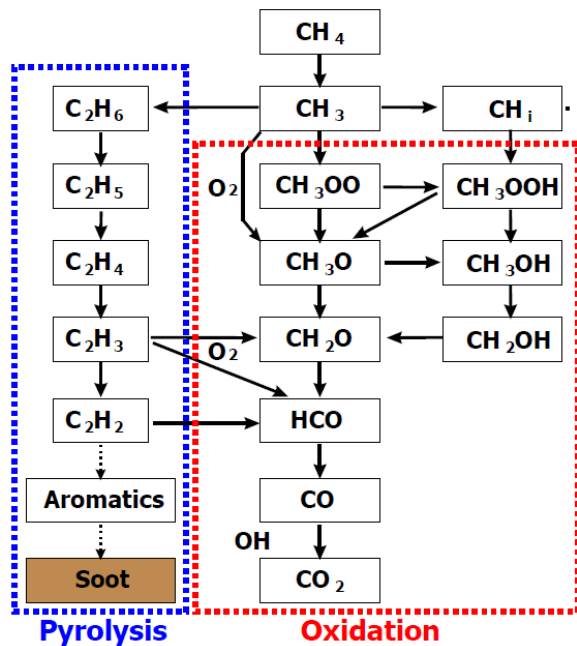


□ NO_x formation is chemically controlled

Thermodynamics vs Kinetics




□ NO_x formation is influenced by:

- ❖ Flame temperature
- ❖ Air excess
- ❖ Amount of nitrogen chemically bound in the fuel (Fuel NO_x)
- ❖ Residence times (at high temperatures)

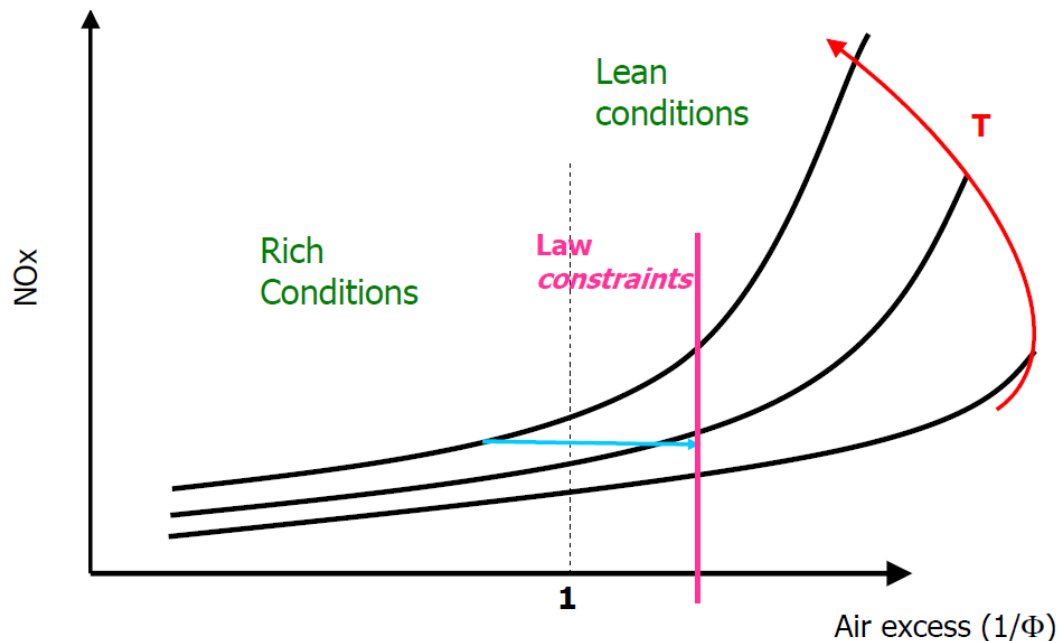


□ T and ϕ effect on NO_x formation

Time Scales

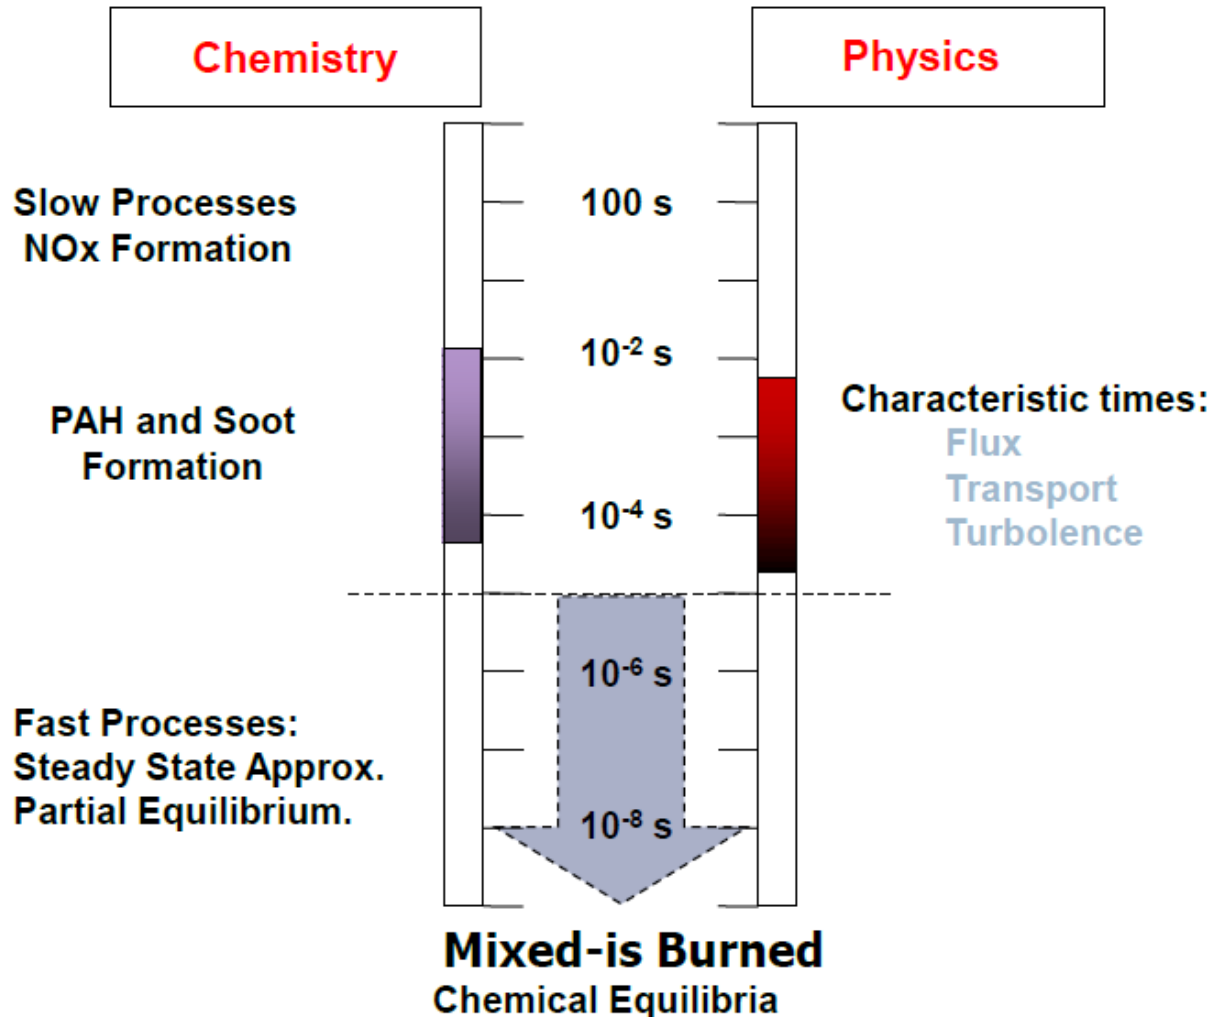

- The NO_x formation processes is a slow chemical processes

Time Scales

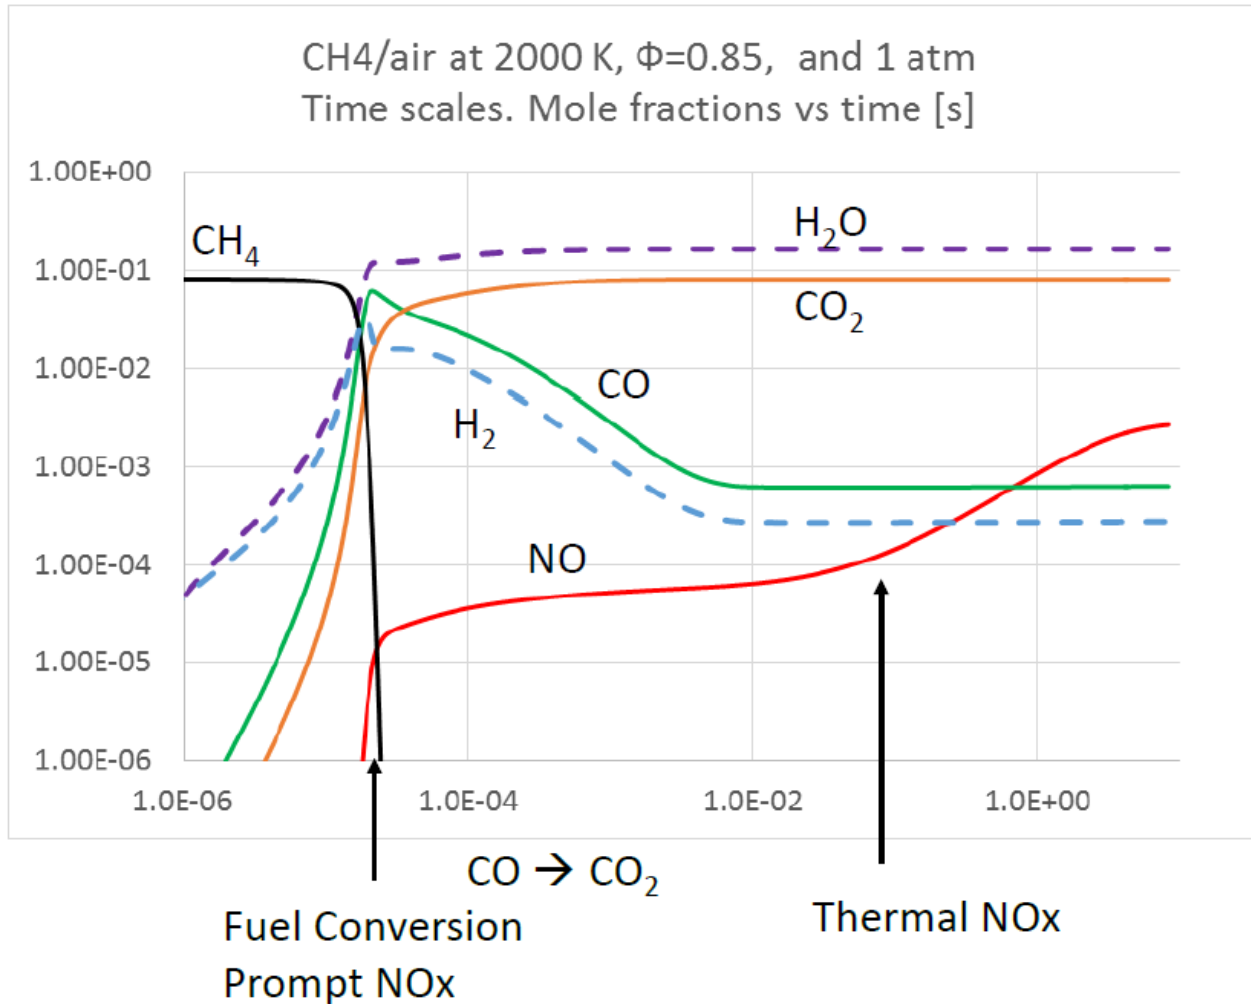

□ Prompt important in reaction zone; thermal important in downstream

Methods for Decreasing NO Emission



Abatement or Emission Control Principle or Method	Successful Technologies	Pollution Prevention Method (P2) or Add-on Technology (A)
1. Reducing peak temperature	Flue Gas Recirculation (FGR)	P2
	Natural Gas Reburning	P2
	Low NO _x Burners (LNB)	P2
	Combustion Optimization	P2
	Burners Out Of Service (BOOS)	P2
	Less Excess Air (LEA)	P2
	Inject Water or Steam	P2
	Over Fire Air (OFA)	P2
	Air Staging	P2
	Reduced Air Preheat	P2
	Catalytic Combustion	P2
2.Reducing residence time at peak temperature	Inject Air	P2
	Inject Fuel	P2
	Inject Steam	P2

□ Many technologies are used to control NO_x emission

Methods for Decreasing NO Emission



3. Chemical reduction of NO _x	Fuel Reburning (FR)	P2
	Low NO _x Burners (LNB)	P2
	Selective Catalytic Reduction (SCR)	A
	Selective Non-Catalytic Reduction (SNCR)	A
4. Oxidation of NO _x with subsequent absorption	Non-Thermal Plasma Reactor	A
	Inject Oxidant	A
5. Removal of nitrogen	Oxygen Instead Of Air	P2
	Ultra-Low Nitrogen Fuel	P2
6. Using a sorbent	Sorbent In Combustion Chambers	A
	Sorbent In Ducts	A
7. Combinations of these Methods	All Commercial Products	P2 and A

Methods for Decreasing NO Emission




- **Primary methods: combustion modification-low NO_x combustion**
 - ❖ Staged combustion (分级燃烧): fuel staging; air staging
 - ❖ Reburning
 - ❖ Exhaust Gas Recirculation
 - ❖
 - ❖ Usually extensive modification of the furnace is needed, these principles are mainly used at the design of new furnaces
- **NO removal without the modification of the furnace**
 - ❖ Aftertreatment of the exhaust gas
 - ❖ Selective heterogeneous catalytic reduction
 - ❖ Selective catalytic reduction: Thermal De NO_x; AdBlue
 - ❖ Selective non-catalytic reduction


Methods for Decreasing NO Emission



□ Staged combustion

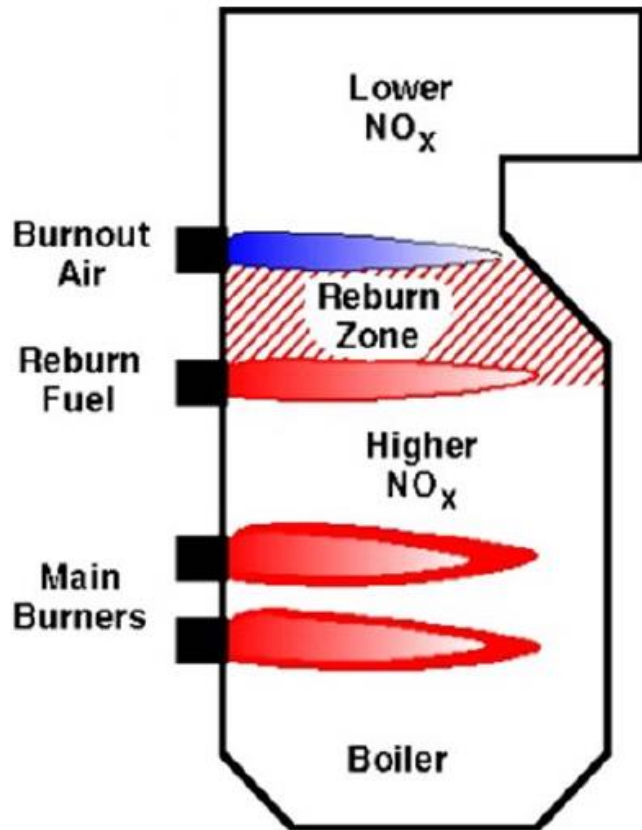


□ Staged Combustion Thermal Power Plant

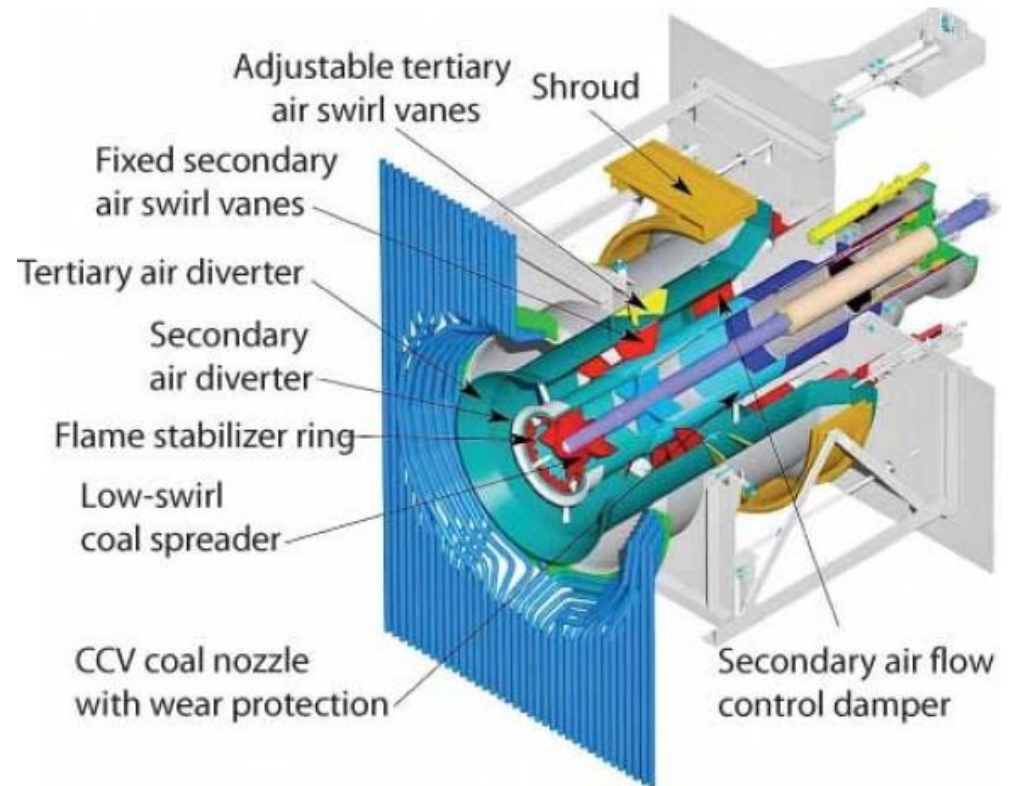


□ Low-NO_x Staged Burner of pulverized Coal

Methods for Decreasing NO Emission





❑ Chemistry of staged combustion

- ❑ The fuel rich flame has a reduction capacity → NO is reduced to N_2 , main reactions:



- ❑ And then, $CN \rightarrow N_2$:

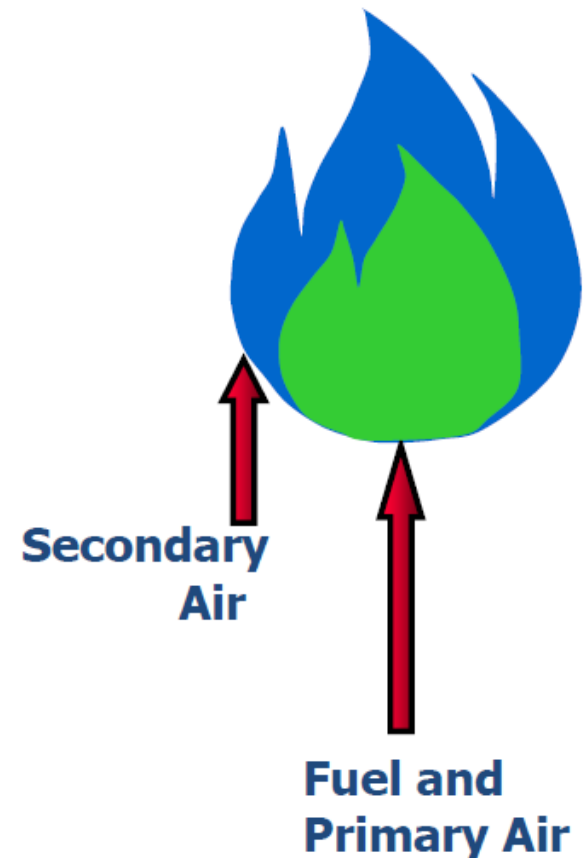

Methods for Decreasing NO Emission




❑ Chemistry of staged combustion

❖ Problem: if $\phi \gg 1 \rightarrow$ the furnace has a low efficiency



❑ Solution:

- ❖ First phase: fuel rich stage $\phi = 1.4$, NO reduction to N_2 (including the NO of fuel origin)
- ❖ Second phase: air stage (complete fuel conversion, high efficiency, but here the temperature is low)

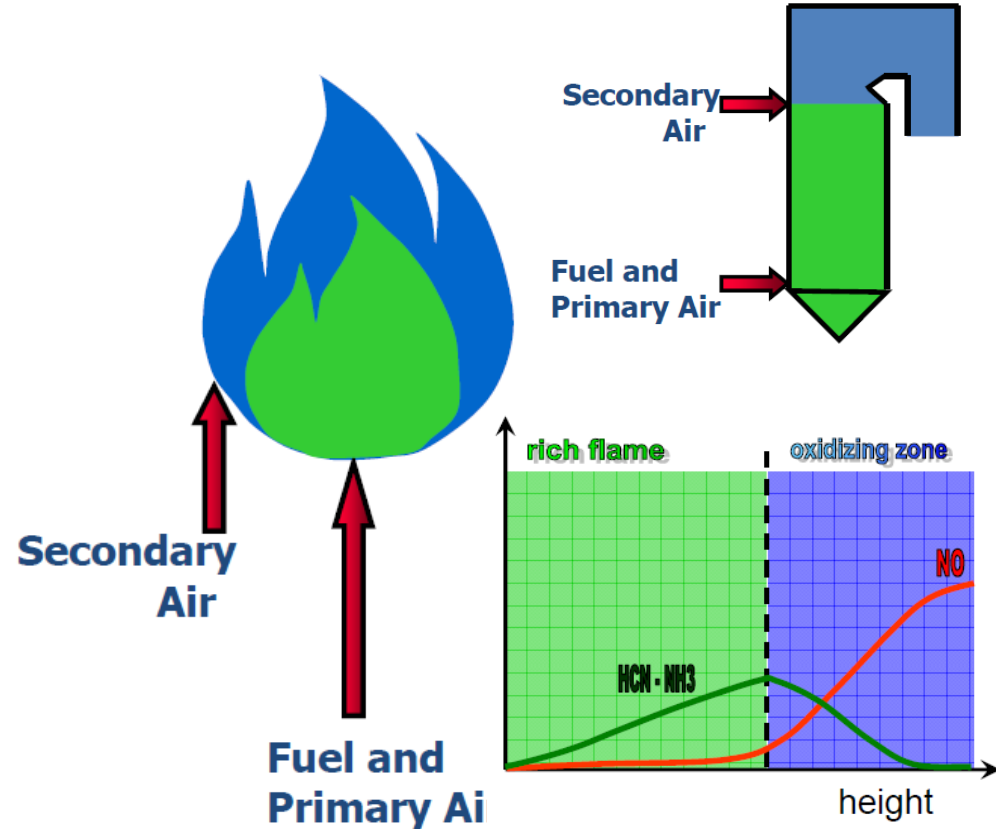

Methods for Decreasing NO Emission


□ Reburning Technique

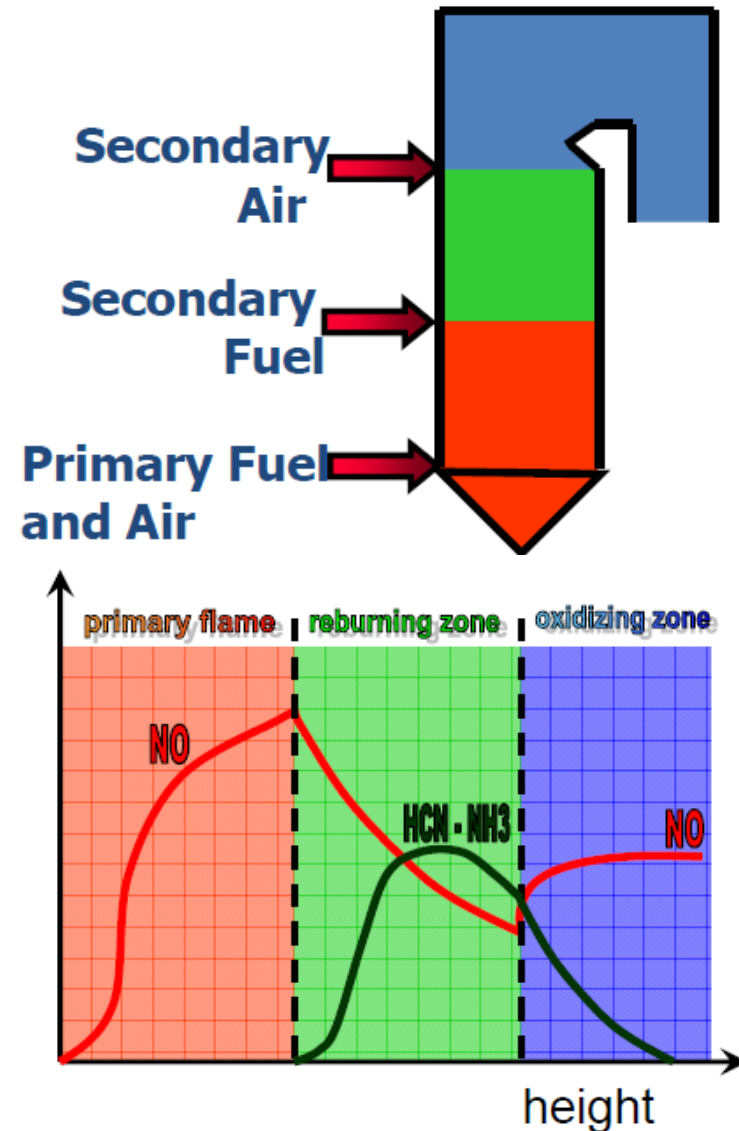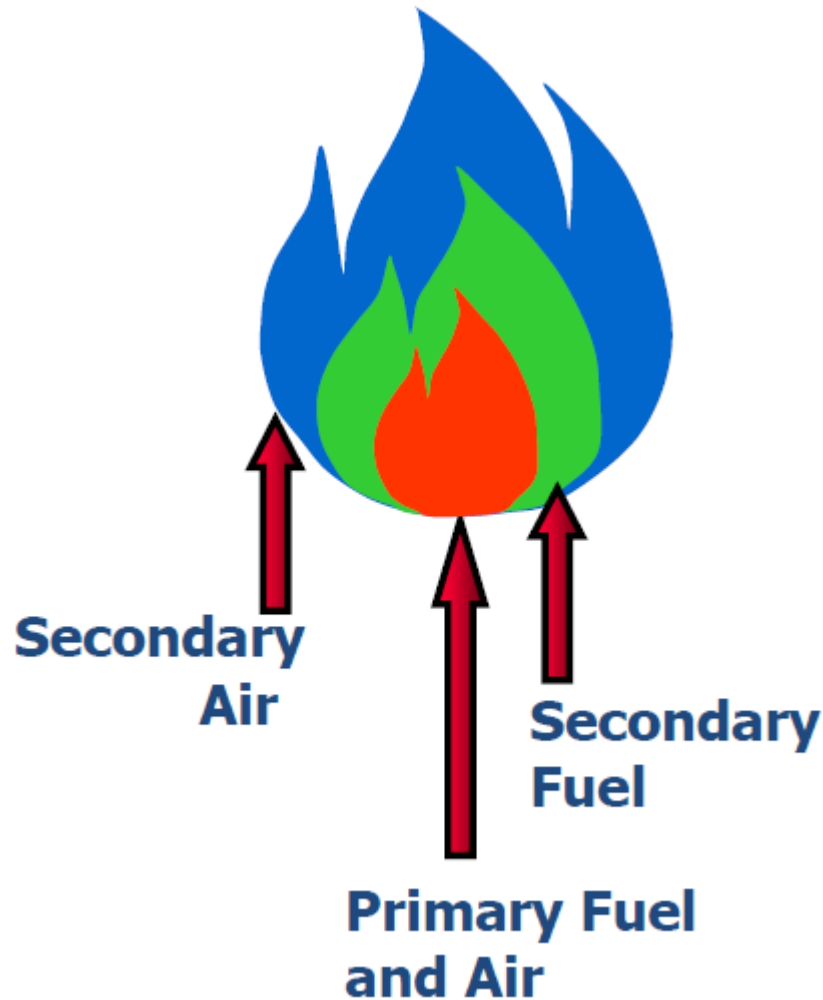

Methods for Decreasing NO Emission




Chemistry of Reburning

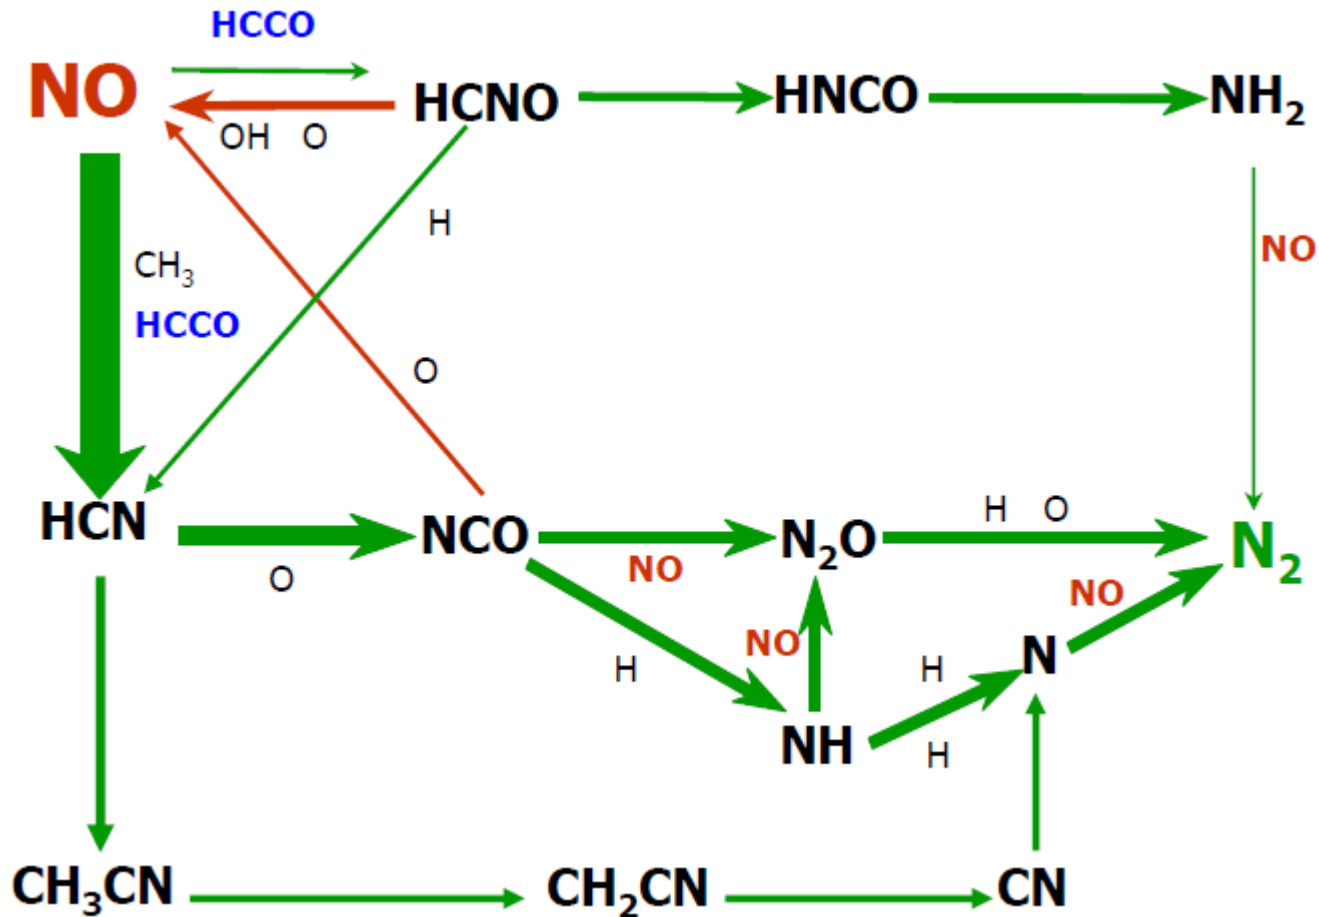


Methods for Decreasing NO Emission

❑ Selective Non-Catalytic Reduction (SNCR)

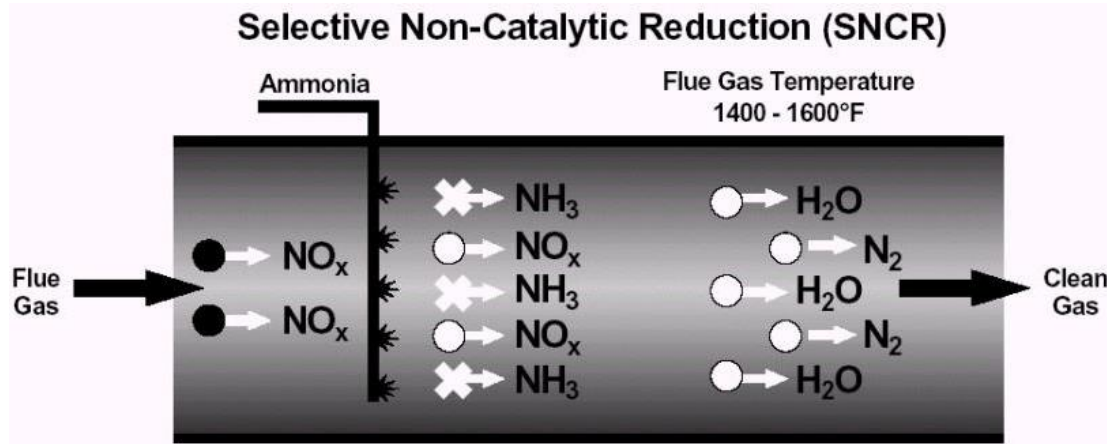



- ❖ In SNCR ammonia or urea is injected within a boiler or in ducts in a region where temperature is between 900 °C and 1100 °C
- ❖ This technology is based on temperature ionizing the ammonia or urea instead of using a catalyst or non-thermal plasma

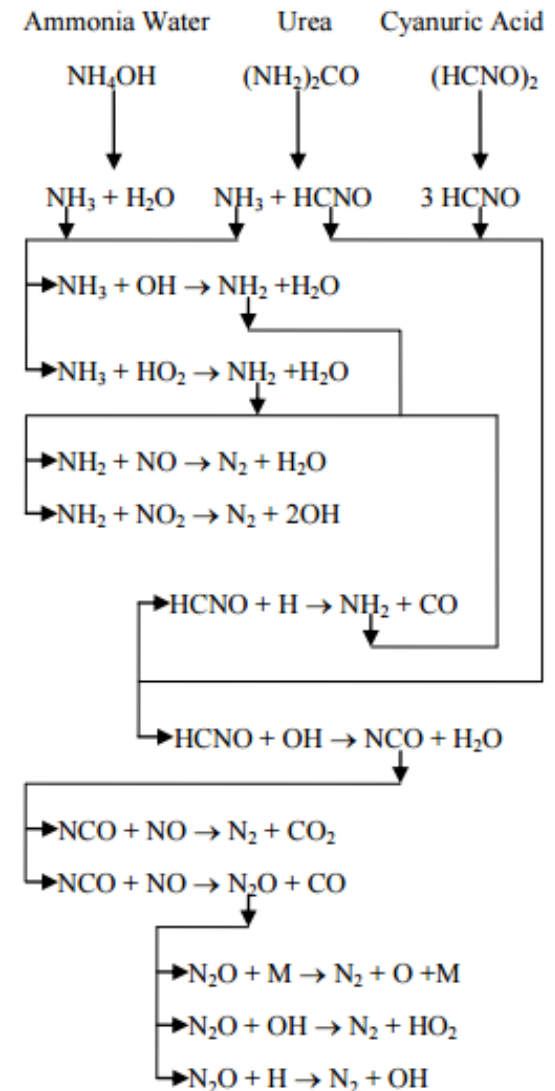

Methods for Decreasing NO Emission



❑ Selective Non-Catalytic Reduction (SNCR)



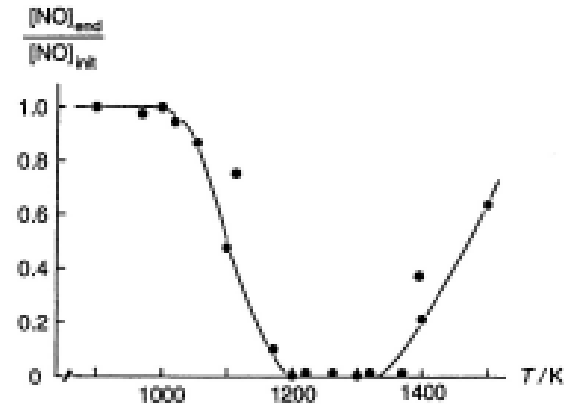
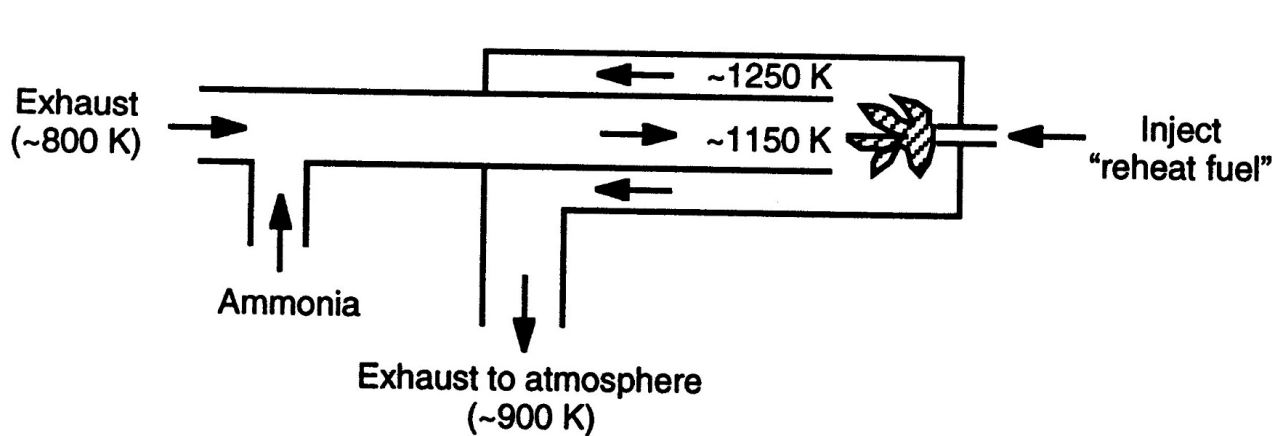


- ❖ The most practical exhaust gas treating method, relatively cheap
- ❖ Works in a narrow temperature window around $T=1250\text{ K}$ ($1100\text{ K} < T < 1400\text{ K}$), The temperature of the exhaust gas should be in the good temperature interval
- ❖ $+ \text{H}_2$ or $+ \text{H}_2\text{O}_2$: temperature window moves downwards, its width remains identical; $+ \text{H}_2\text{O}$: temperature window moves upwards, its width remains identical

Methods for Decreasing NO Emission



❑ Chemistry of SNCR





Chain termination reactions



- ❖ Low temperature ($T < 1100 \text{ K}$): the chain terminating reactions above are fast;
high temperature ($T > 1400 \text{ K}$): oxidation of NH_3 to NO
- ❖ without water: $\text{NH}_3 + \text{O} = \text{NH}_2 + \text{OH}$ instead $\text{H}_2\text{O} + \text{O} = 2\text{OH}$ (chain branching reaction), less OH is produced
- ❖ Much ammonia is present: $\text{NH}_3 + \text{H} = \text{NH}_2 + \text{H}_2$ instead $\text{O}_2 + \text{H} = \text{OH} + \text{O}$ chain branching

Methods for Decreasing NO Emission

❑ Selective Catalytic Reduction (SCR)

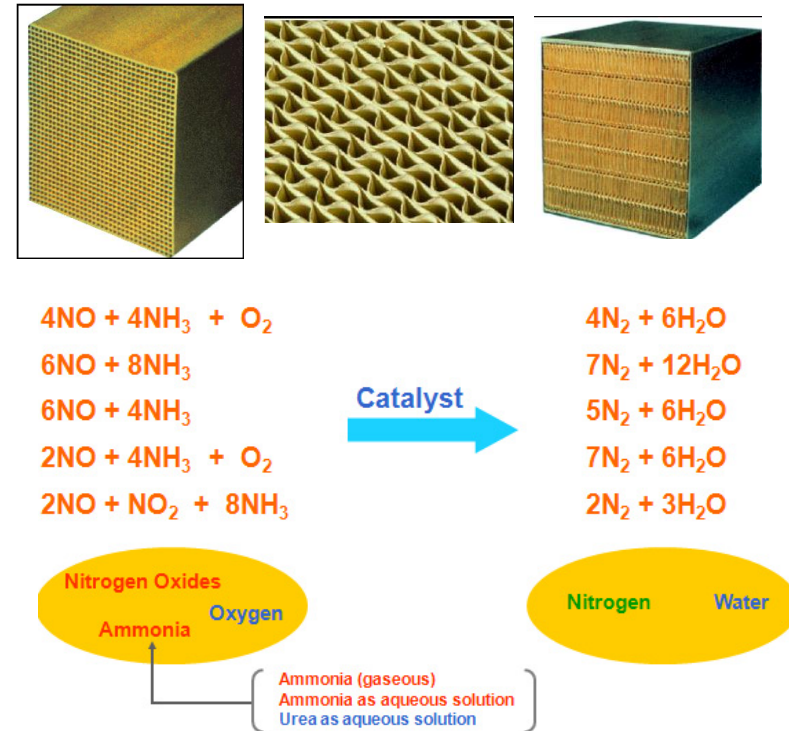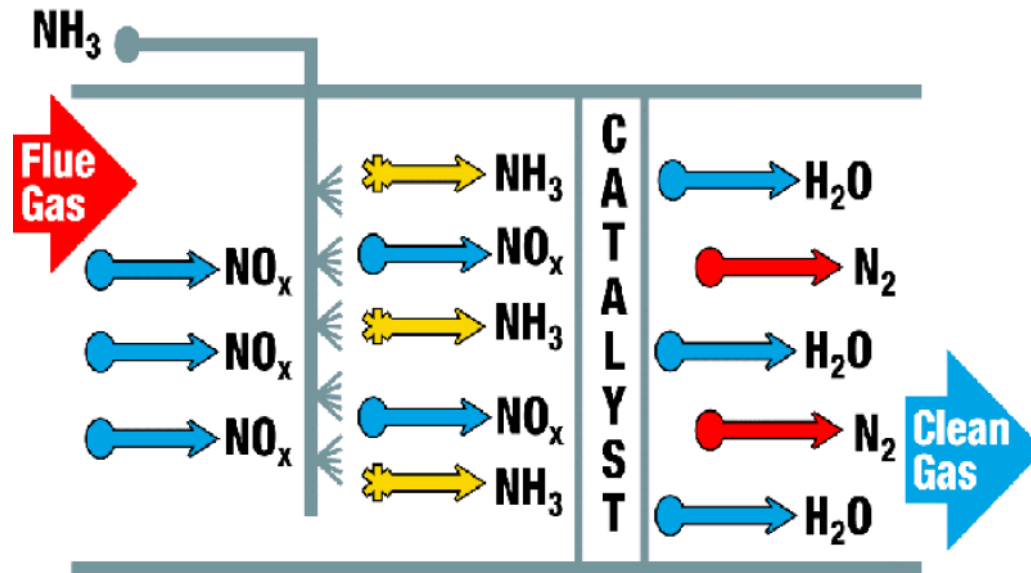



- ❖ Uses urea solution (ammonia) as a reductant to convert NO_x into nitrogen and water
- ❖ In SCR process, a catalyst facilitates a chemical reaction between NO_x and ammonia to produce nitrogen and water

Methods for Decreasing NO Emission






Chemistry of SCR

No.	Reaction	s_0 (unitless) ^a or A/s^{-1}	$E_a/(kJ\ mol^{-1})$
R1	$O_2 + 2\ Pt \rightarrow 2\ Pt-O$	5.42×10^{-2}	0
R2	$2\ Pt-O \rightarrow O_2 + 2\ Pt$	8.41×10^{12}	$207 - 134\theta_O$
R3	$NO + Pt \rightarrow Pt-NO$	8.80×10^{-1}	0
R4	$Pt-NO \rightarrow NO + Pt$	1.00×10^{16}	$138 - 300\theta_O - 330\theta_{NO}$ ($138 - 670\theta_O - 330\theta_{NO}$) ^b
R5	$NO_2 + Pt \rightarrow Pt-NO_2$	9.70×10^{-1}	0
R6	$Pt-NO_2 \rightarrow NO_2 + Pt$	1.00×10^{16}	$119 - 450\theta_O$
R7	$Pt-NO + Pt-O \rightarrow Pt-NO_2 + Pt$	1.00×10^{11}	$120 - 340\theta_O - 260\theta_{NO}$ ($82 - 650\theta_O - 260\theta_{NO}$) ^b
R8	$Pt-NO_2 + Pt \rightarrow Pt-NO + Pt-O$	9.65×10^{11c}	$56 + 190\theta_O + 70\theta_{NO}^c$ ($17 + 230\theta_O + 70\theta_{NO}$) ^b

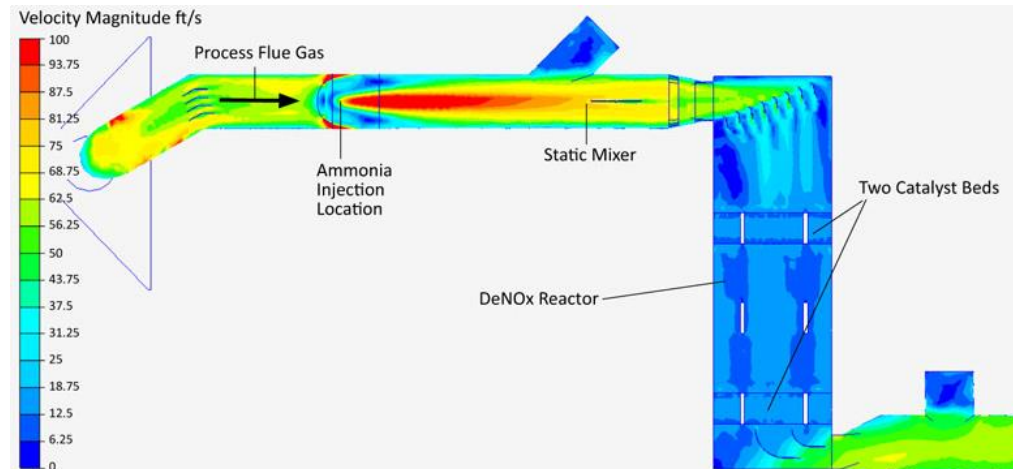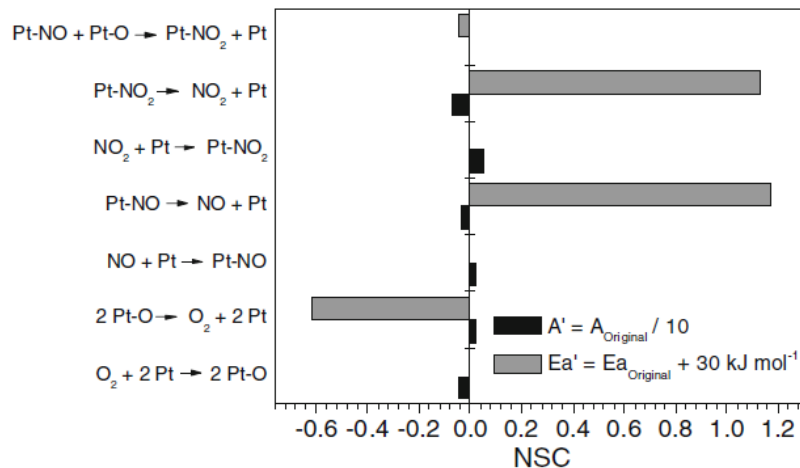

Low-NO_x Design and Combustion Instabilities

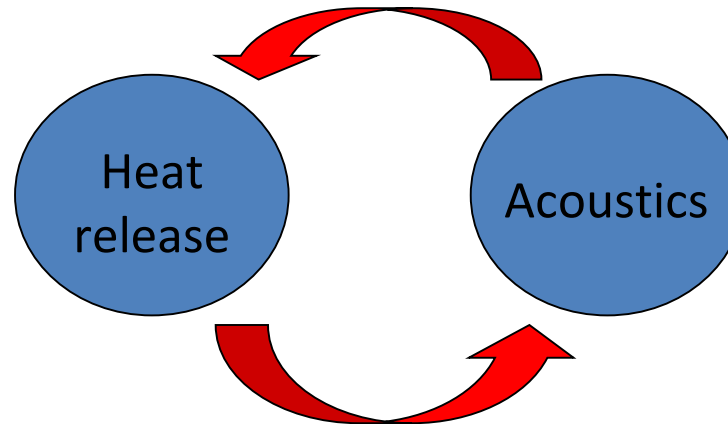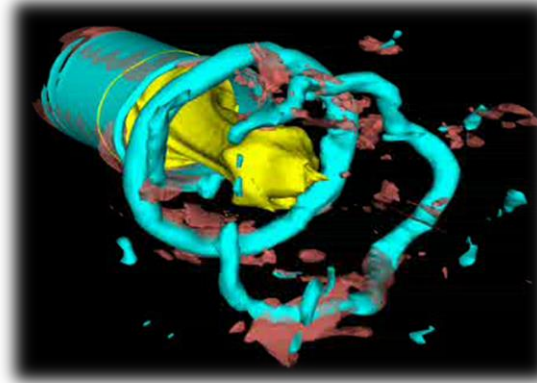


- ❖ Low NO_x Designs make systems susceptible to large amplitude acoustic pulsations
- ❖ Low NO_x designs make flame stabilization more problematic


Approaches to Modeling

□ Turbulence-kinetics interactions


□ Pollutant formation in turbulent flames

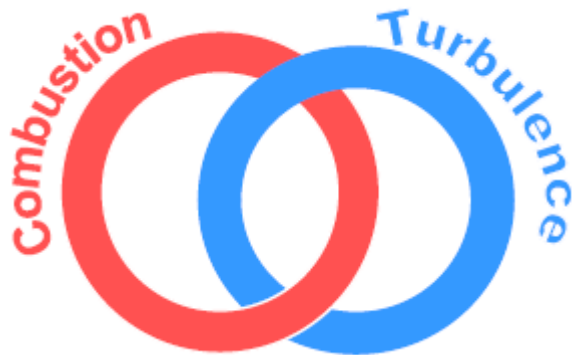

- ❖ For PAH and soot the decoupling between chemistry and fluid dynamics is not possible

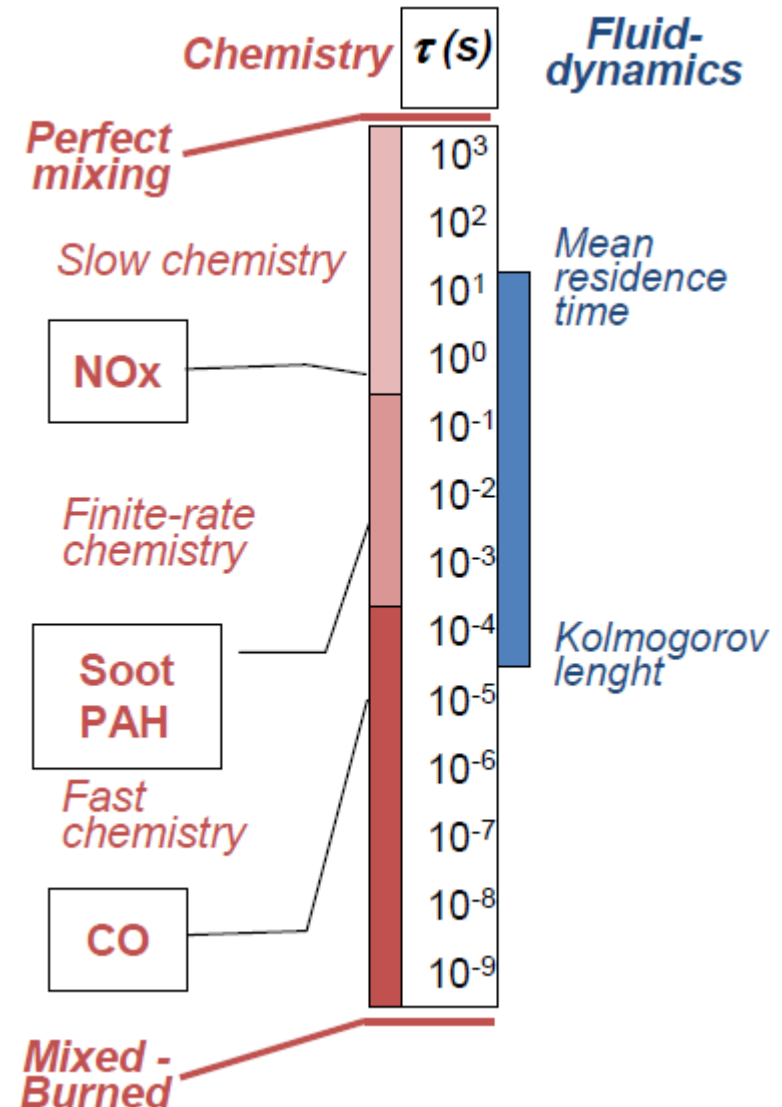

Approaches to Modeling

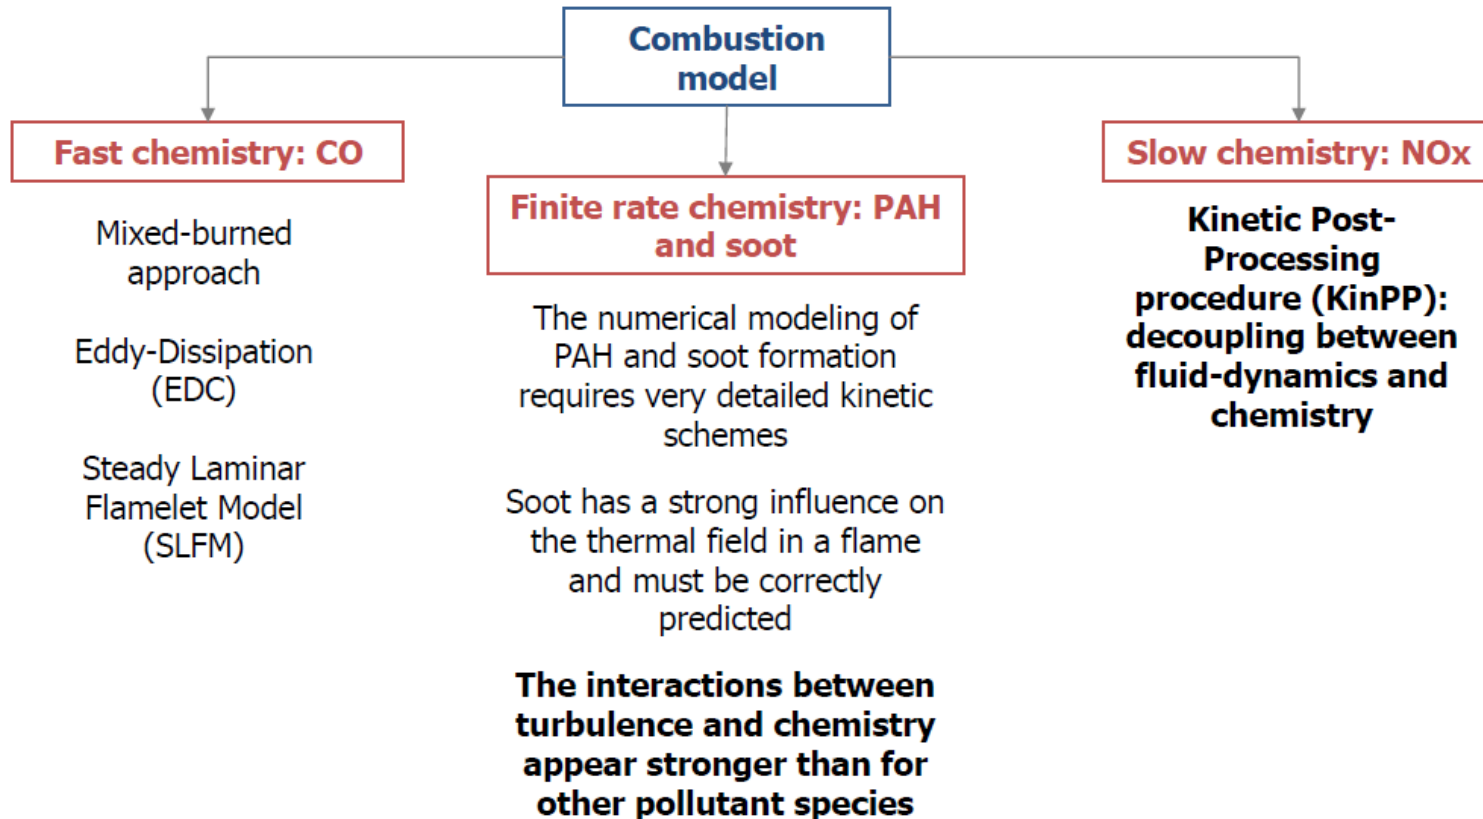

- ❖ Accurate predictions of pollutant emissions from turbulent flames require simplified approaches, specifically conceived for each class of pollutant species, according to the characteristic times of its chemistry

Approaches to Modeling






□ Main Methods

□ Different levels of detail are possible:

- ❖ Empirical and semi-empirical models
- ❖ Simplified physics-based models
- ❖ Detailed models

□ There are currently several techniques used in practice to predict the emissions from real combustors

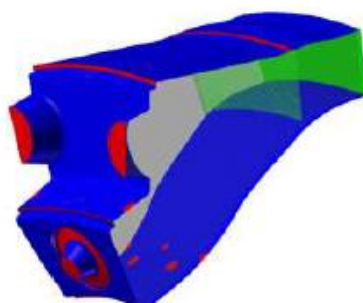

Approaches to Modeling



□ Empirical models

Equations 1.3 and 1.4 are examples of typical empirical NO_x models.

$$\text{EINO}_x = 0.0042 \left(\frac{P_3}{439} \right)^{.37} \exp \left(\frac{T_3 - 1471}{345} \right) T_4, \quad (1.3)$$

where P_3 is the total pressure at the combustor inlet in psia, T_3 is the total temperature at the combustor inlet in $^{\circ}\text{R}$, and T_4 is the total temperature at the combustor exit in $^{\circ}\text{R}$ [11].

[D.L. Allaire – Thesis, MIT, 2006]

- ❖ Empirical models are very simple and the least computationally intensive
- ❖ Require empirically determined constants and are useful for correlating known historical NO_x emissions for a specific combustor
- ❖ are generated from fitting a certain number of constants using historical data, they cannot be expected to perform well when the combustor undergoes a design change

Approaches to Modeling

□ Simplified Physics-based models


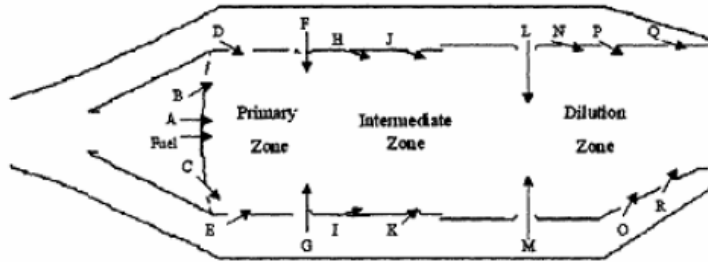


Figure 2-9: Typical Combustor Flow Splits

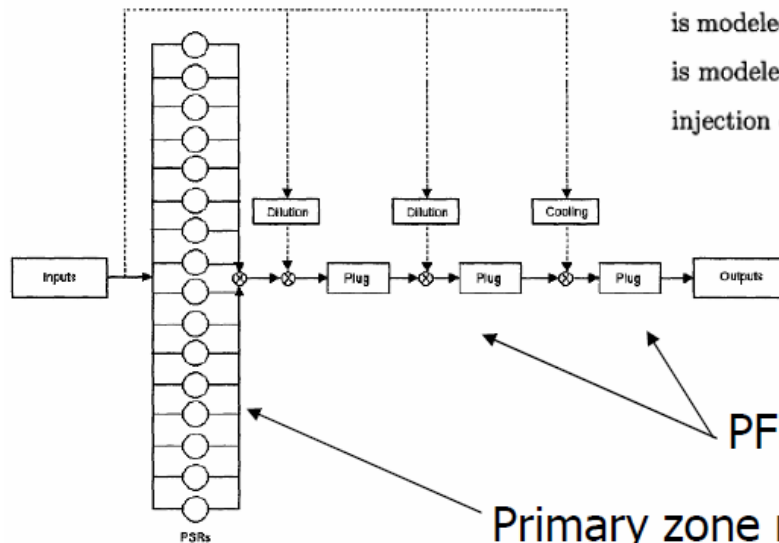


The primary zone is modeled as a network of 16 parallel PSRs, the intermediate zone is modeled as an injection of air followed by a plug flow reactor, and the dilution zone is modeled as an injection of air followed by a plug flow reactor, followed by another injection of air and another plug flow reactor.

PFR for other zones


Primary zone modeled using 16 parallel PSRs

A Physics-Based Emissions Model for Aircraft Gas Turbine Combustors
by
Douglas L. Allaire
Submitted to the Department of Aeronautics and Astronautics
in partial fulfillment of the requirements for the degree of
Master of Science in Aerospace Engineering
at the
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
May 2006
© Massachusetts Institute of Technology 2006. All rights reserved.

Approaches to Modeling



❑ Simplified Physics-based models

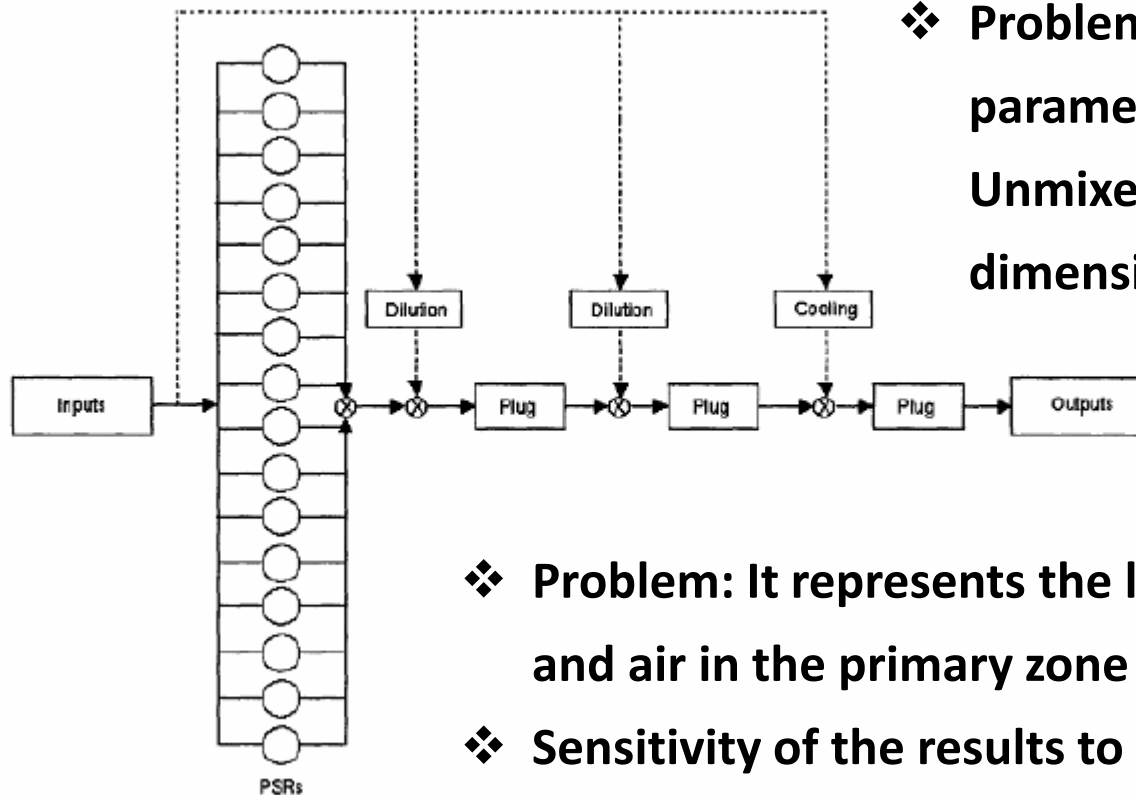



❖ Problem: it is necessary to define parameters: Primary zone Unmixedness, temperature and dimensions of the PFRs

- ❖ Problem: It represents the level of mixing between fuel and air in the primary zone
- ❖ Sensitivity of the results to this parameter -> tuned using experimental data obtained in some operating conditions

Approaches to Modeling



□ Detailed Models

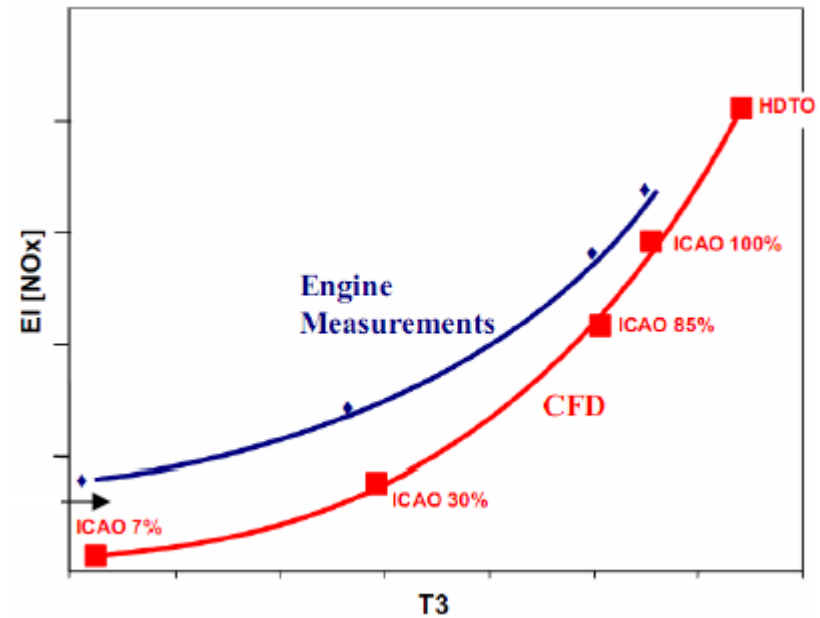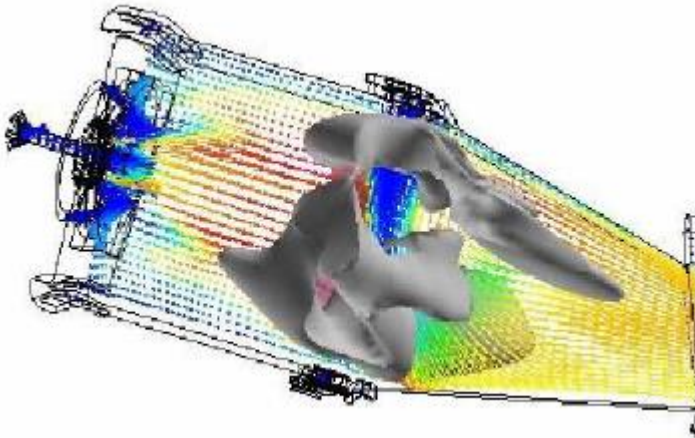

- ❖ CFD model but simplified kinetics
- ❖ Only Thermal NOx formation is considered
- ❖ NOx underestimated due to the exclusion of the N_2O and prompt NOx mechanism




Approaches to Modeling

□ Kinetic Post Processor Methods

Pollutant species (such as NO_x) affect only marginally the main combustion process and consequently do not influence the overall temperature and flow field

The prediction of pollutant species (NO_x) can be **decoupled** from the CFD simulation

Kinetic Post Processor (KinPP)

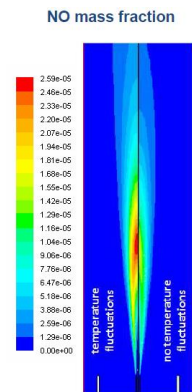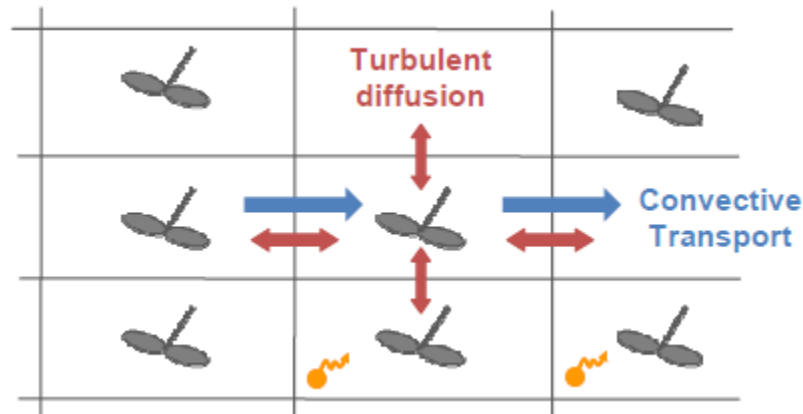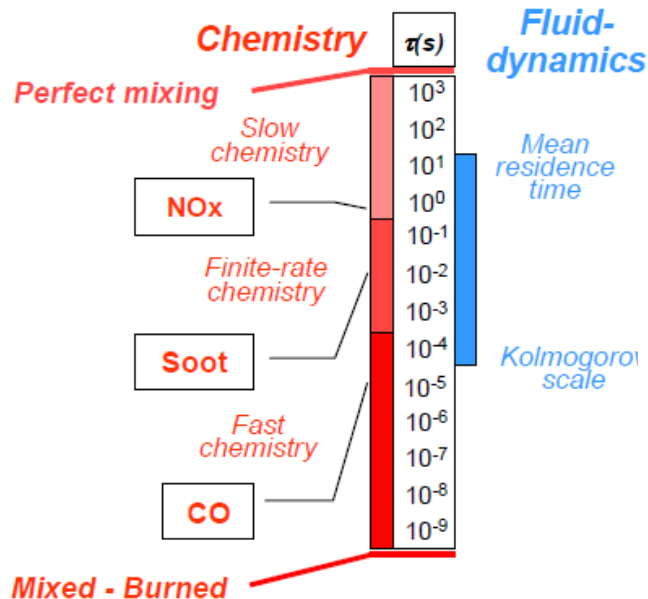

Approaches to Modeling



❑ Kinetic Post Processor Methods

❑ Advantages:

- ❖ Assumes the temperature and flow fields as predicted by the CFD
- ❖ Solves mass balances in the cells with detailed chemistry at fixed temperature. Each cell is a PSR reactor
- ❖ Possibility to group several cells. Clustering equivalent cells reduces the dimensions of the problem
- ❖ Fix the temperature inside the cells. This reduces the high non linearity of the system, mainly related to the reaction rates and to the coupling between mass and energy balances

❑ The most popular methods!



1. Introduction

2. NO_x Formation


3. PAH and Soot Formation

Soot Emissions





- ❖ Combustion is the main source of PAH and Soot or PM
- ❖ On-road and non-road diesel engines are leading emitters (about 70%) in Europe, North America, and Latin America; In China, the combustion of coal is the major source
- ❖ Soot forms at high temperatures and rich conditions

Global BC Emissions in 2000
by region and source

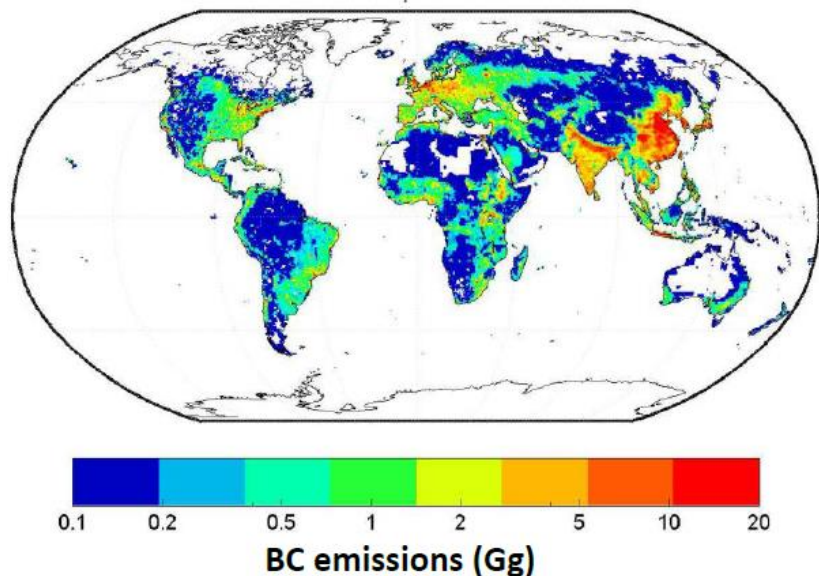


Soot Impact on Human Health

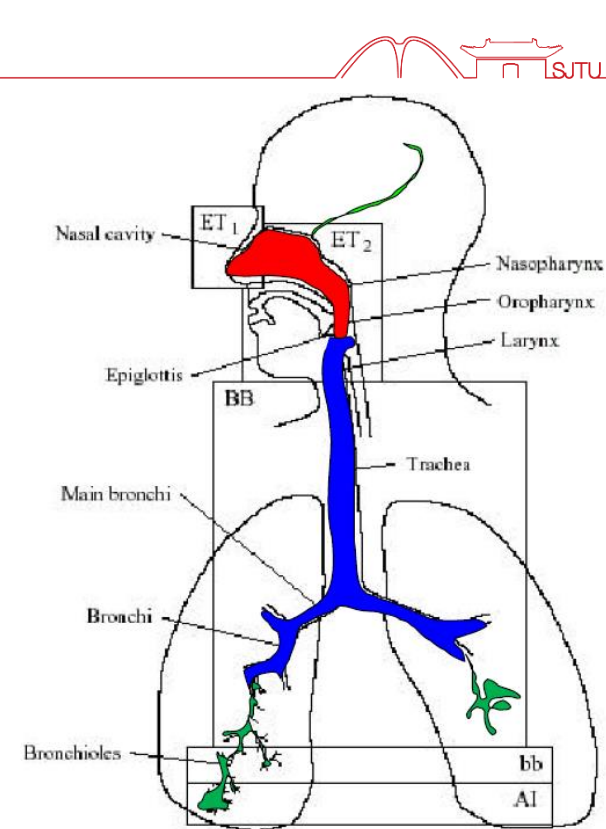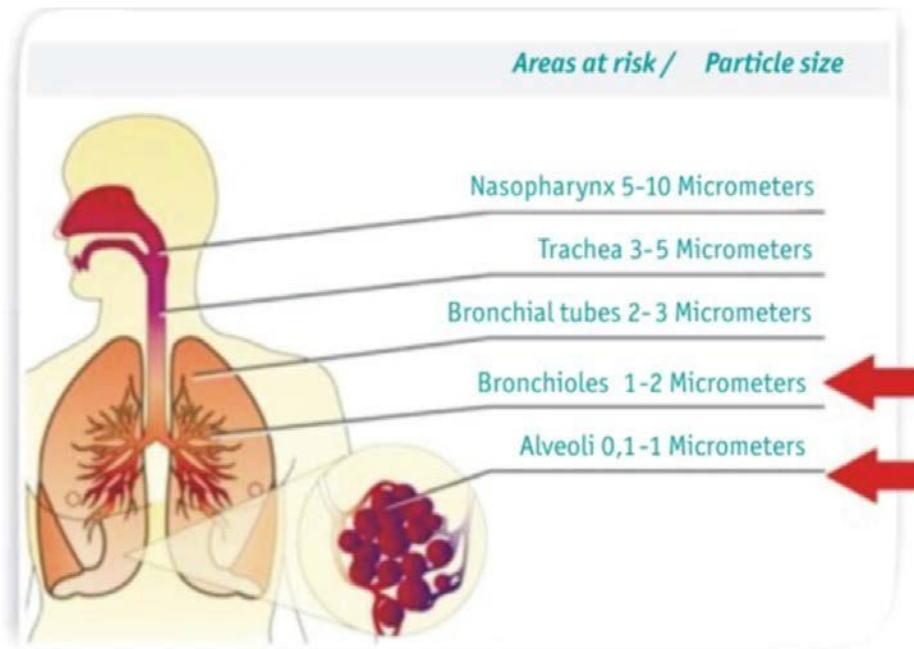




- ❖ Particle dimension is the critical issue: PM 10 (coarse particles): 10 μm ; PM 1.0 (fine particles): 1 μm ; PM 0.1 (ultrafine particles): 100 nm
- ❖ Ultrafine Particles are more dangerous than larger ones
- ❖ Ultrafine Particles are more numerous and with larger surface areas

Soot Formation in Combustion

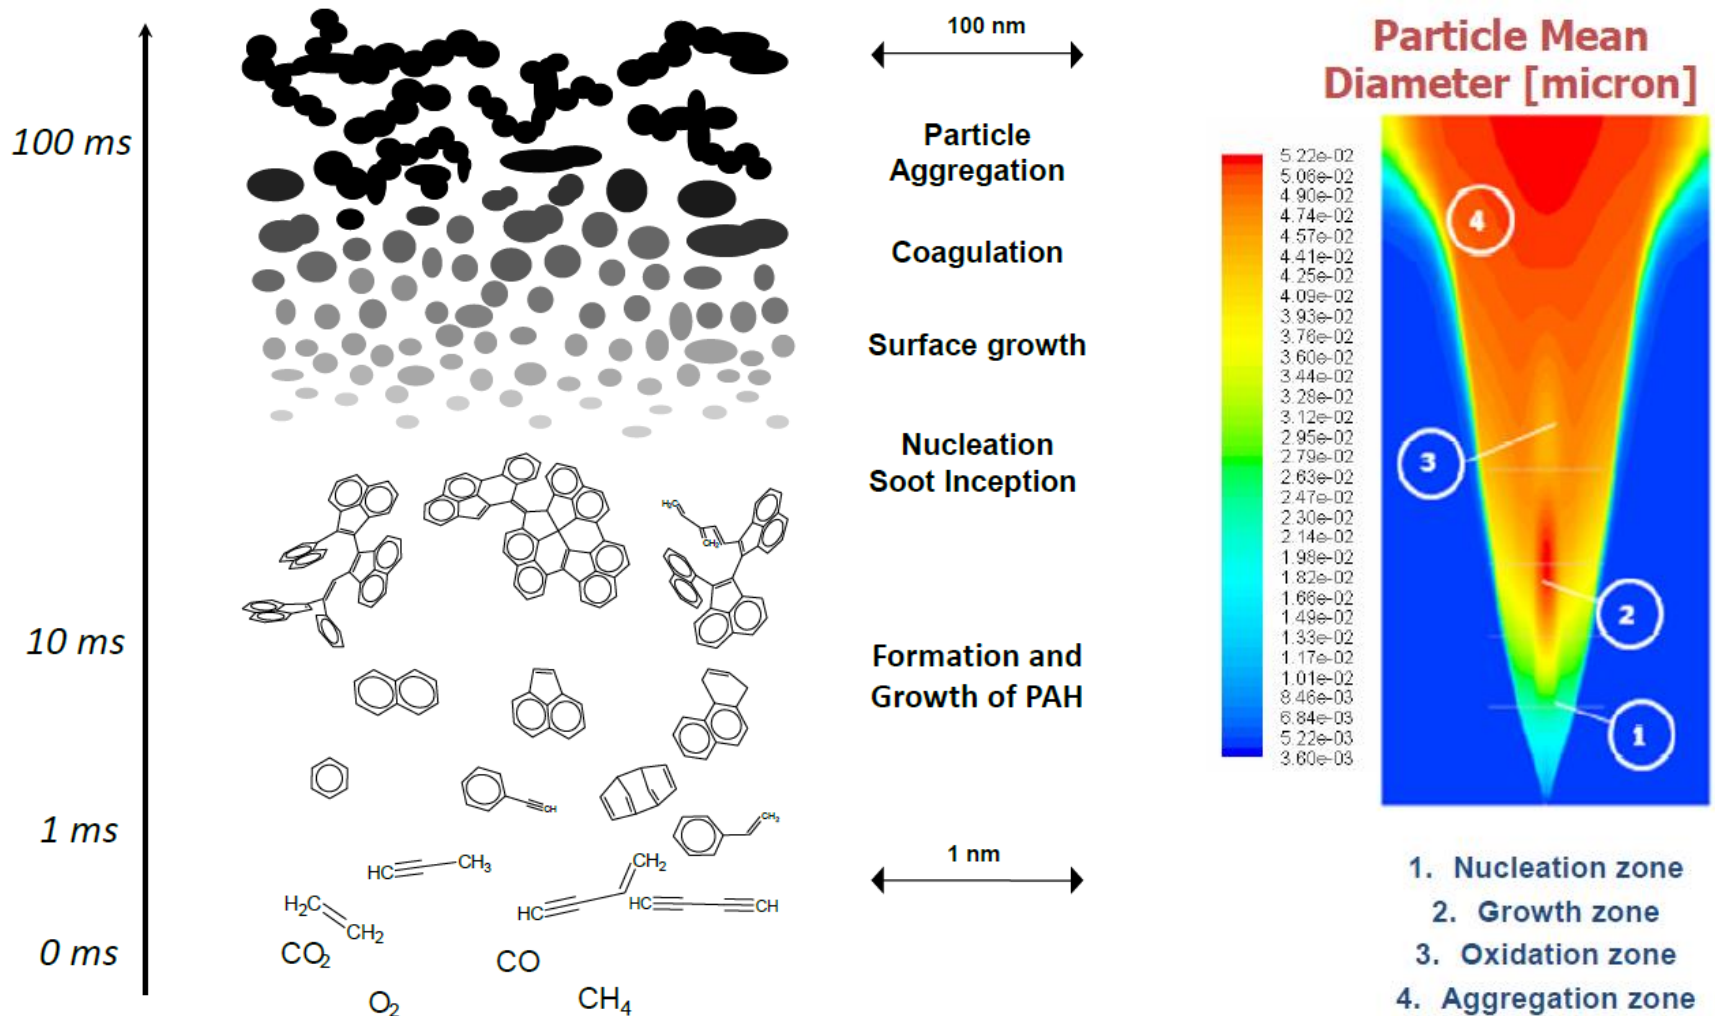

❖ Steady growth in molecular size leads to visible soot

Soot Formation in Combustion

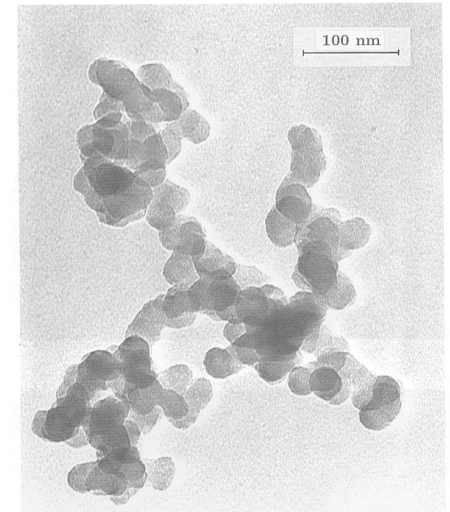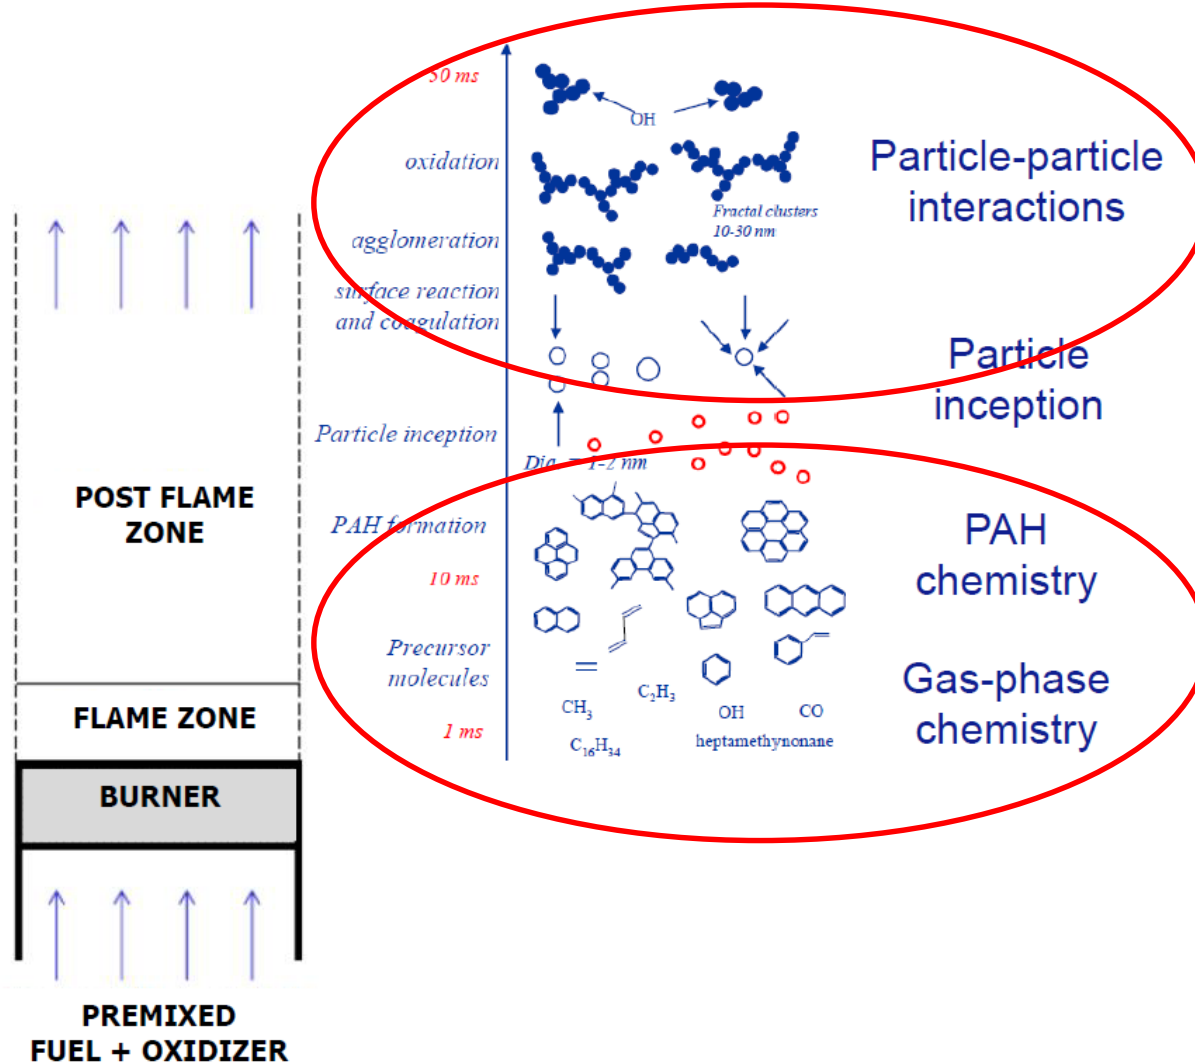


❖ PAH




benzene




naphthalene



phenanthrene



pyrene




benzo[e]pyrene



coronene

❖ Steady growth in molecular size leads to visible soot

PAH

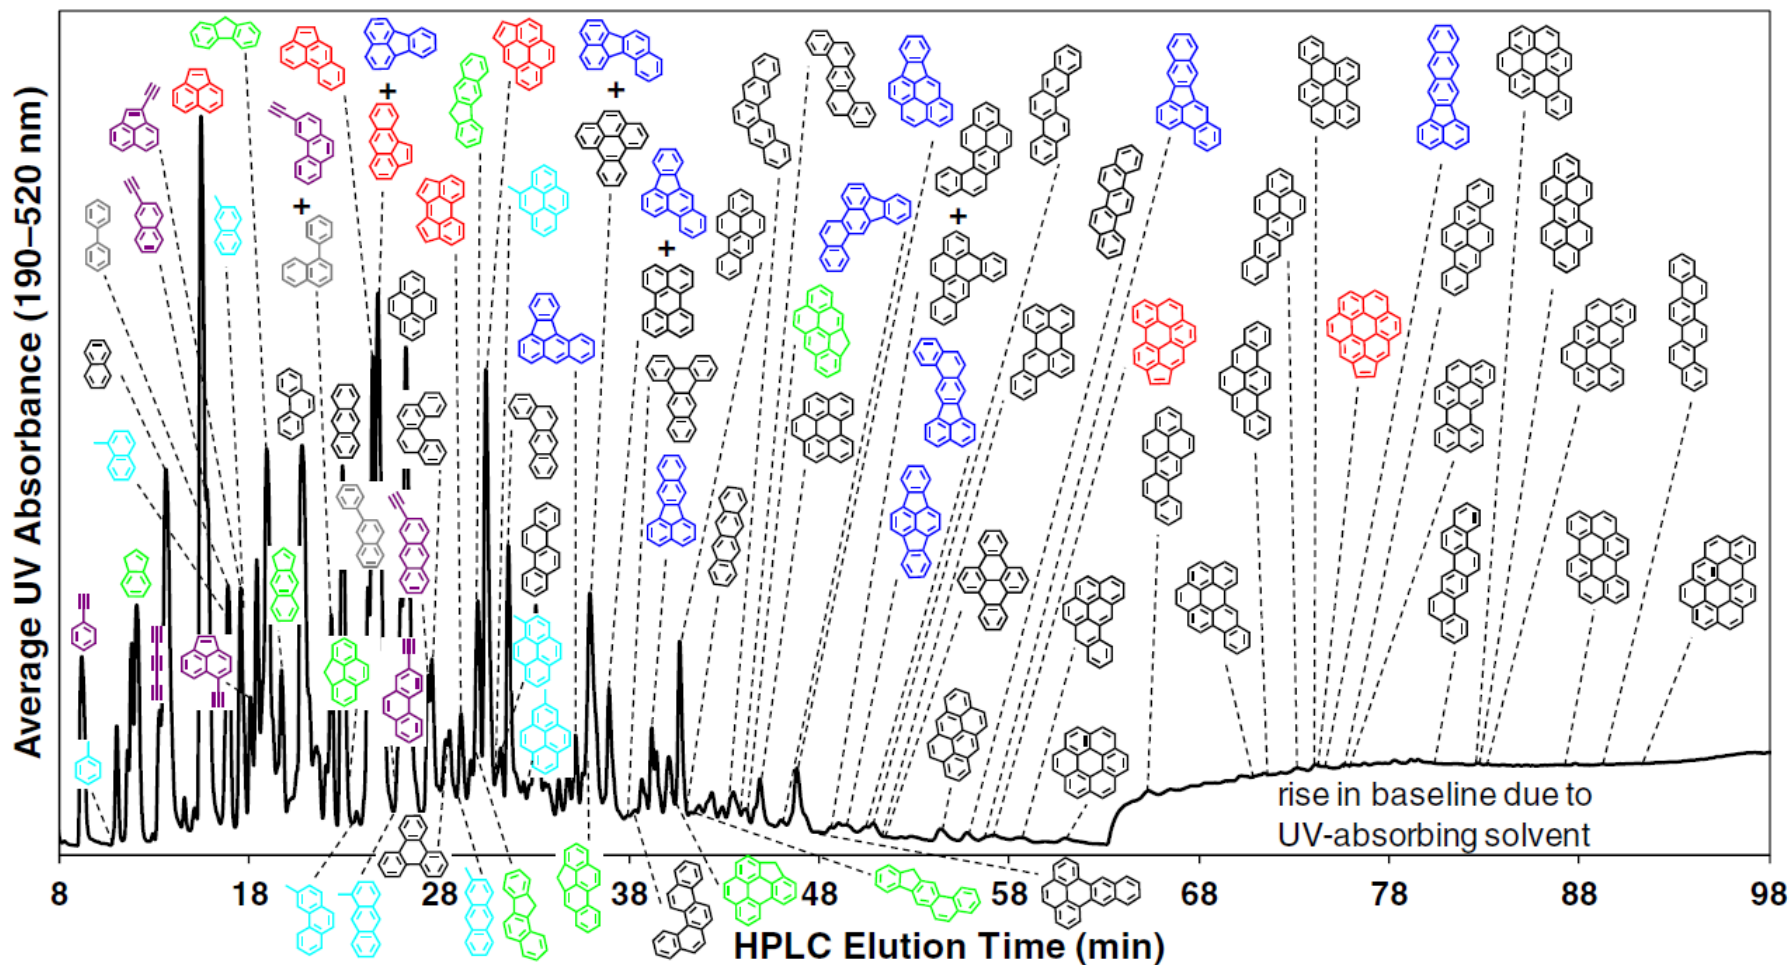


□ HPLC chromatogram of the PAH products of 1,3-butadiene/propyne co-pyrolysis



Tradeoff Relation Between Soot and NOx



□ Soot and NOx relation, ϕ , T map


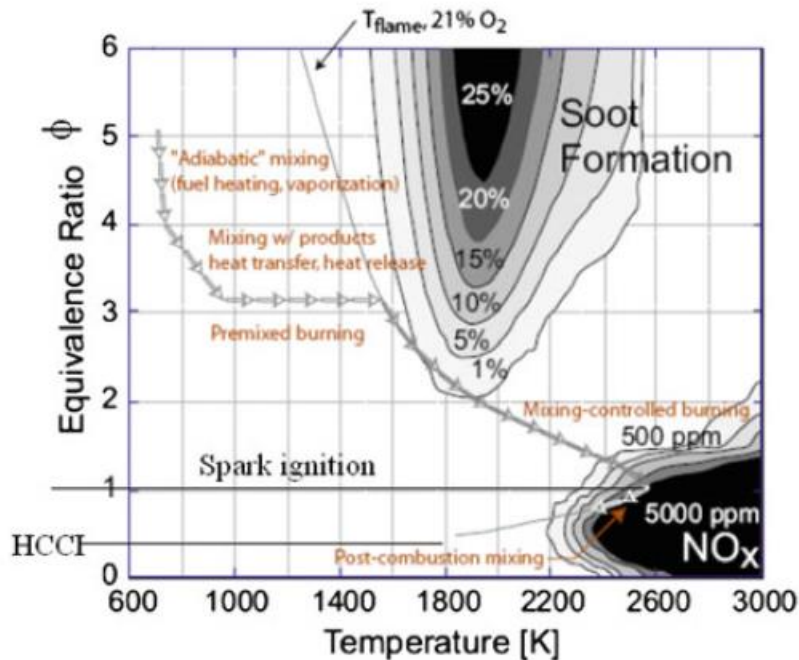


□ Tradeoff between NOx and soot as function of injection timing

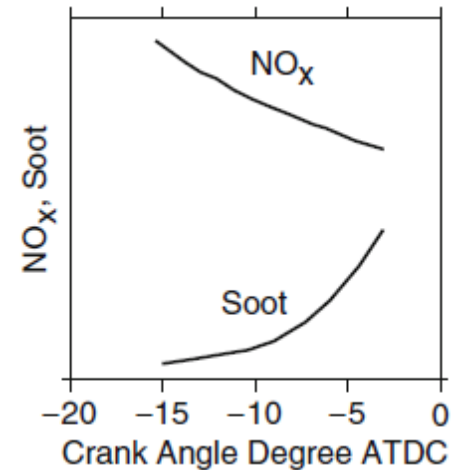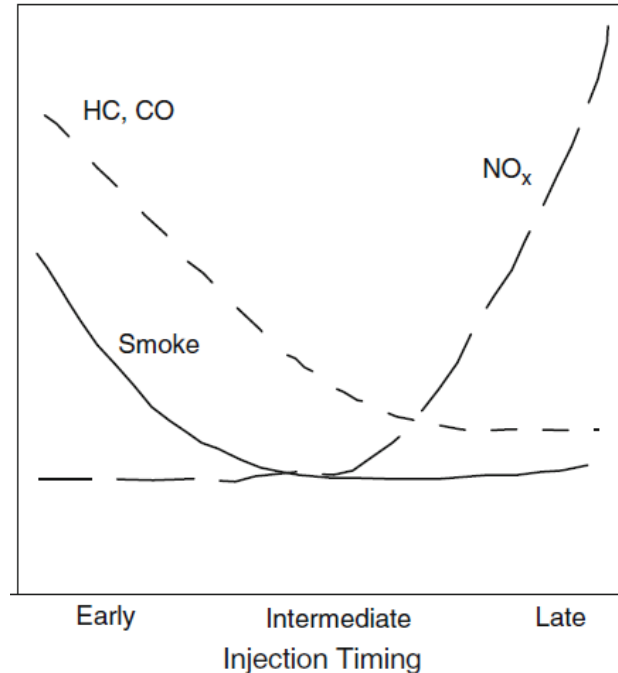


- ❖ In SI engine, NOx and soot are formed in different regions in the (ϕ , T) map; NOx and soot often exhibit a trade-off relation
- ❖ Soot oxidation is heavily dependent on radicals, such as OH, and the temperature must be high enough. In addition, soot oxidation requires sufficient residence time. NOx is formed primarily at the diffusion flame front

Tradeoff Relation Between Soot and NOx

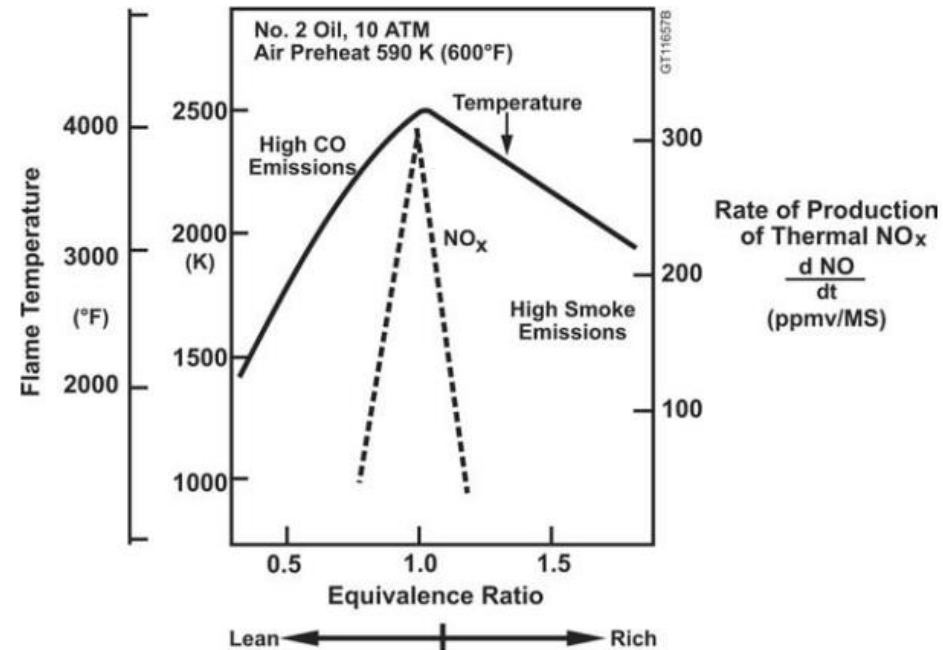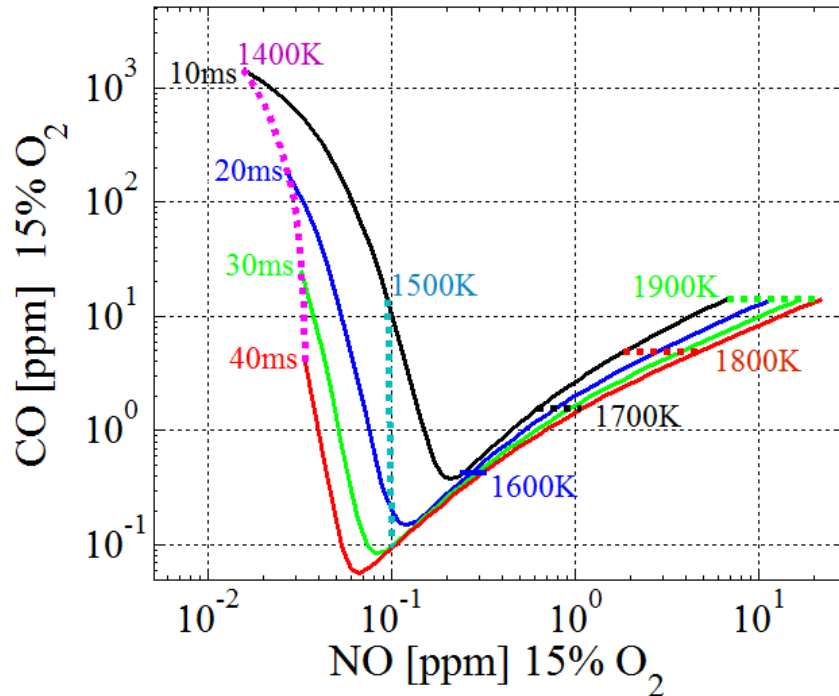


- ❖ A reduction in temperature tends to increase CO emissions due to incomplete combustion; Conversely, an increase in temperature will increase thermal NO_x formation
- ❖ For low temperature combustion technology, always the NO_x emission is decreased while CO emission is increased

Tradeoff Relation Between Soot and NOx

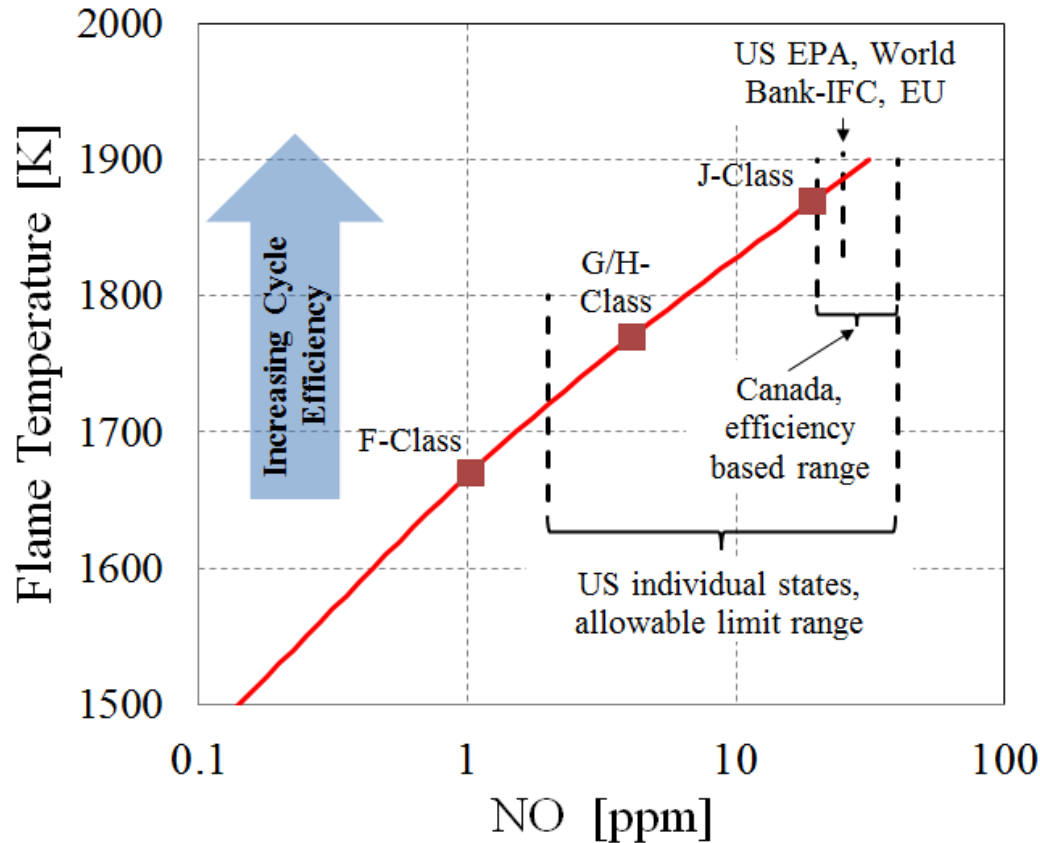

- ❖ Higher engine pressure ratio and bypass ratio reduce CO_2 , improve fuel efficiency and facilitate noise reduction
- ❖ Higher pressure ratio requires higher flame temperature, increasing NO_x formation rate

Driving Force for Soot Formation



Gas-to-Solid Transformation

- Type 1: enthalpy driven (heat release)

metal oxides


carbides, nitrides

- Type 2: entropy driven

soot



Driving Force for Soot Formation

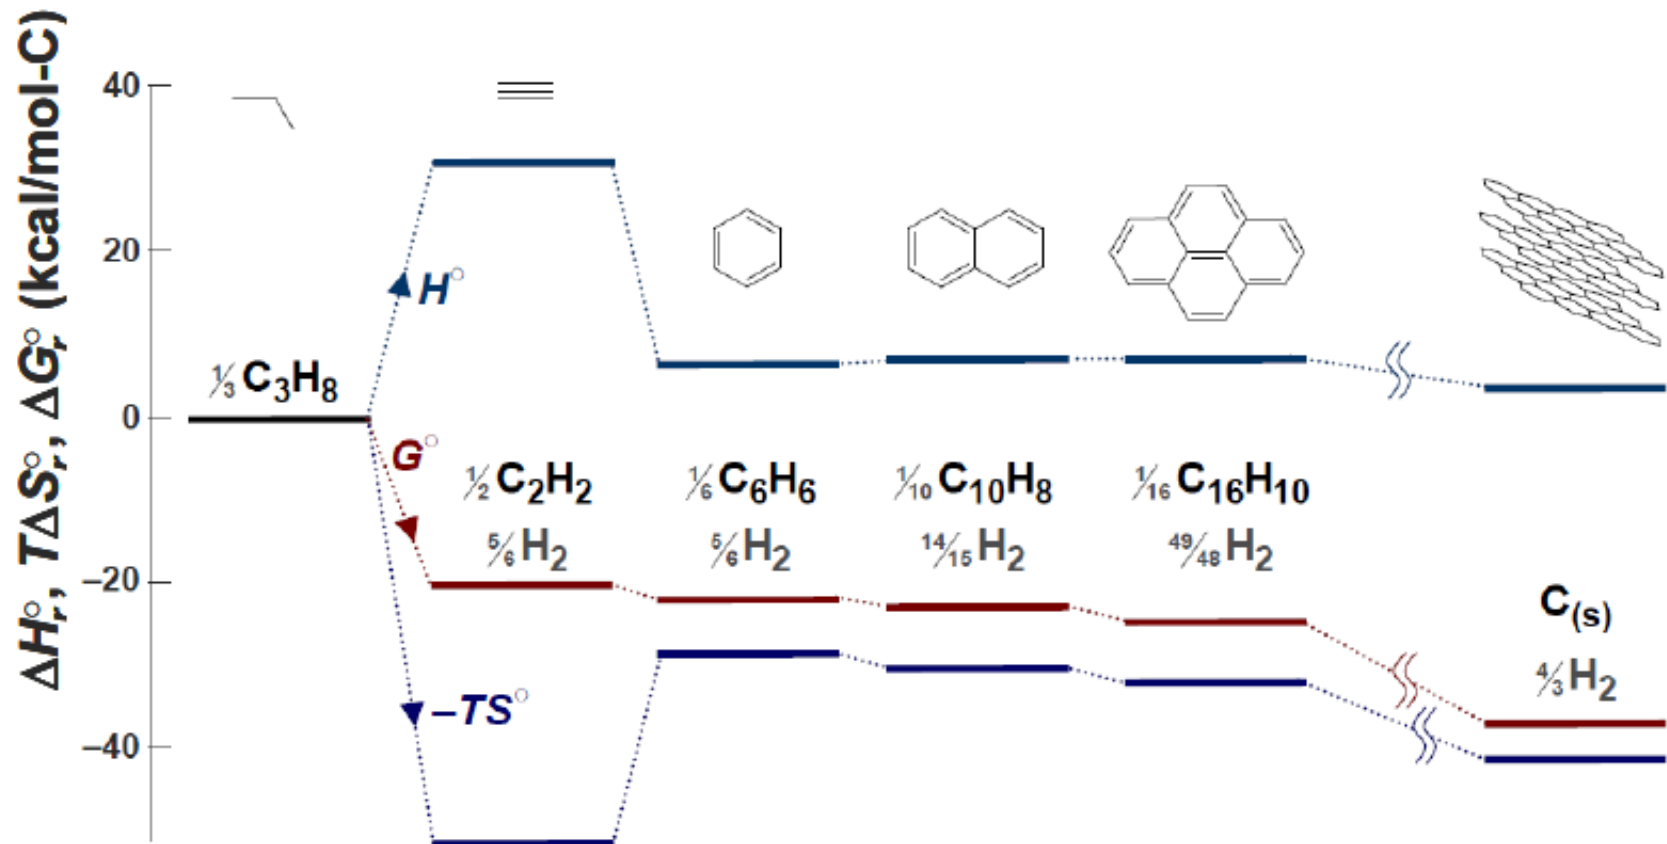


- ❖ Soot formation is entropy driven (H_2 goes free)
- ❖ Condensed-phase carbon forms as an aerosol (kinetics driven)

First Aromatic Ring Formation

Major Benzene Formation Pathways

Class 1: Acetylene addition

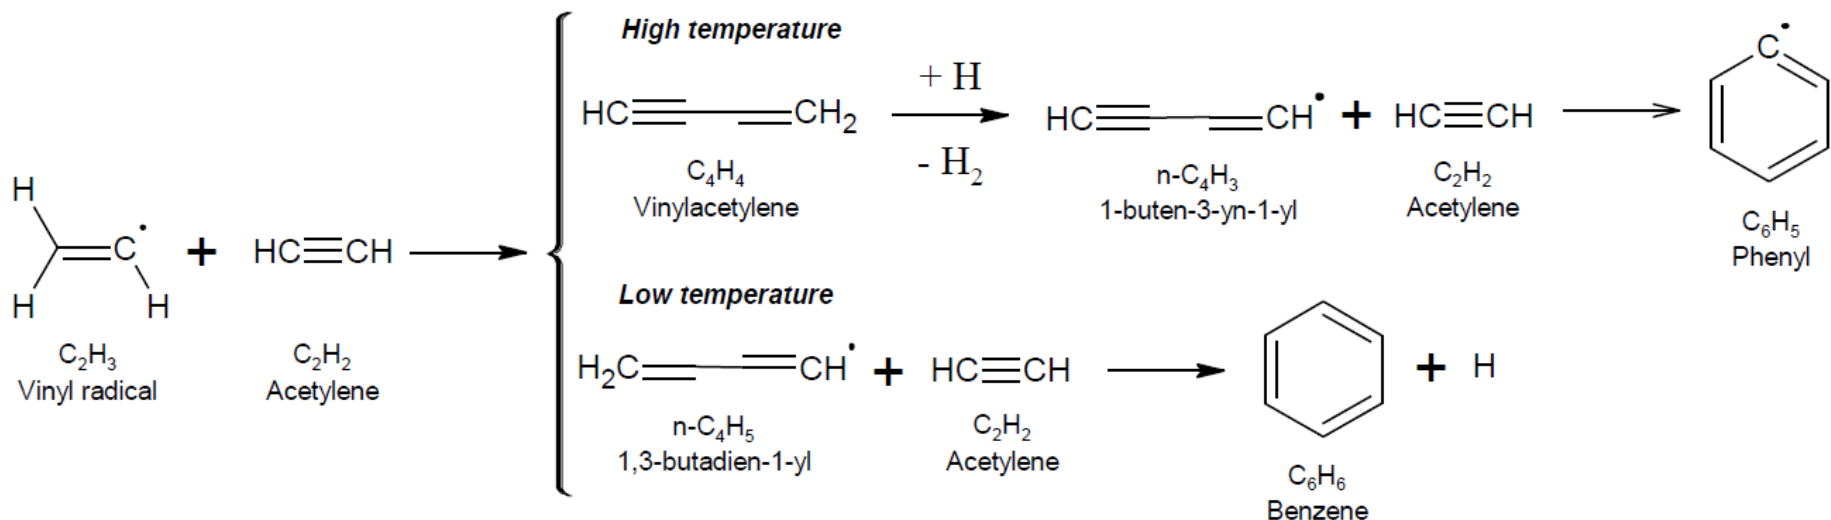



This sub-mechanism is considered favorable in forming the first aromatic ring since it includes acetylene, which is always present in fuel-rich oxidation of hydrocarbons

First Aromatic Ring Formation

□ Major Benzene Formation Pathways

□ Class 2: C_3 combination $C_3 + C_3$


- ❖ $C_3H_3 + C_3H_3 = C_6H_6$
- ❖ $C_3H_3 + aC_3H_4 = C_6H_6 + H$
- ❖ $C_3H_3 + pC_3H_4 = C_6H_5 + H$
- ❖ $C_3H_3 + aC_3H_5 = \text{fulvene} + 2H$

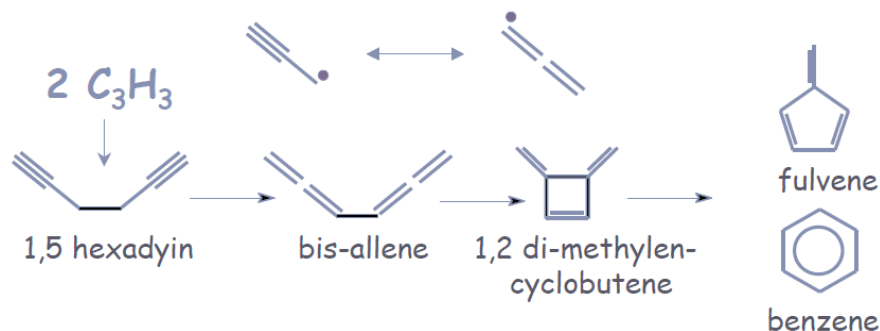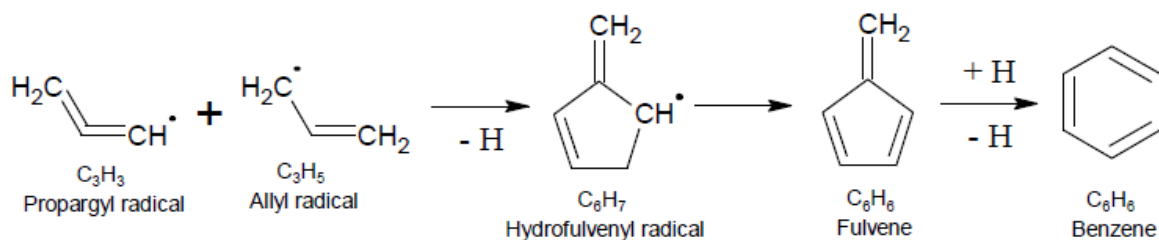

First Aromatic Ring Formation



□ Major Benzene Formation Pathways

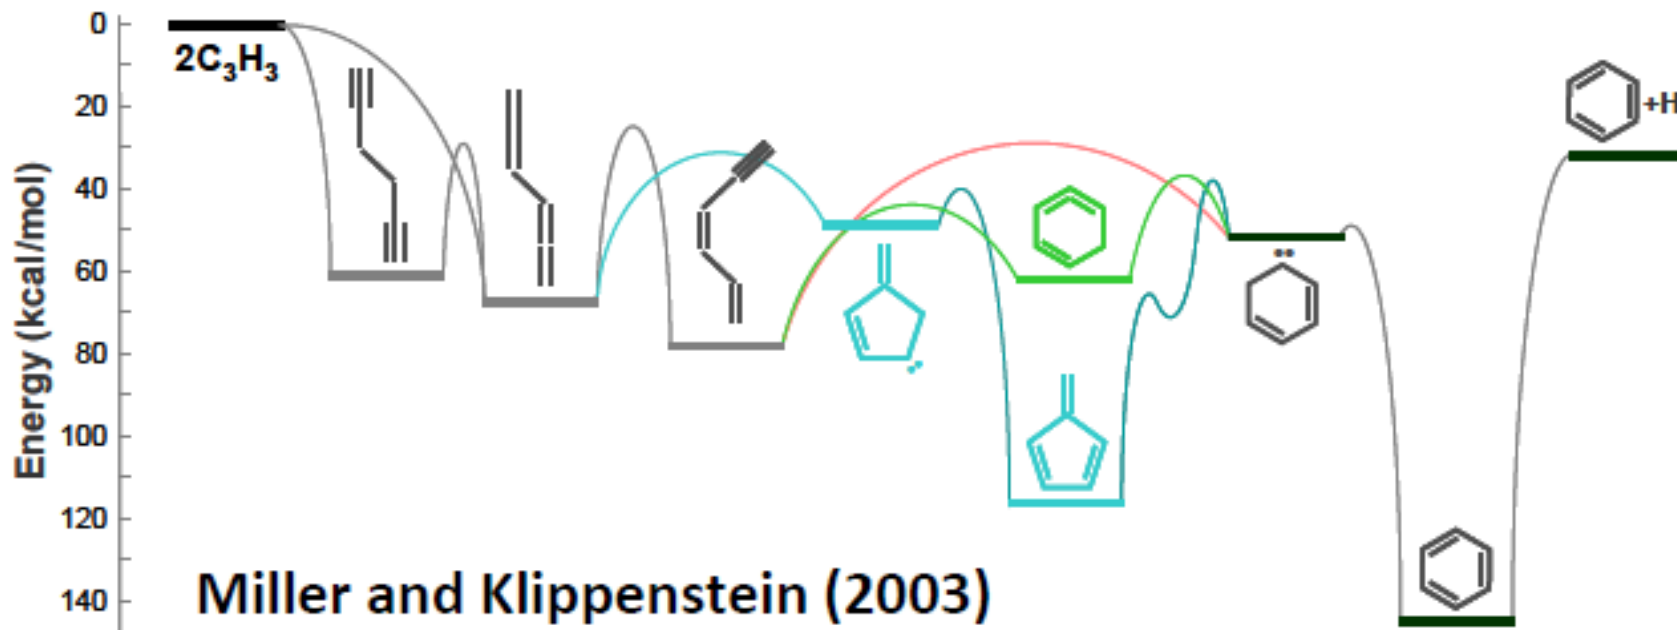


- Resonantly-stabilized free radicals are present in combustion processes at high concentrations and play a crucial role in the chemical reactions of soot formation

First Aromatic Ring Formation



□ Major Benzene Formation Pathways

□ Class 3: Combination of CH_3 and C_5H_5


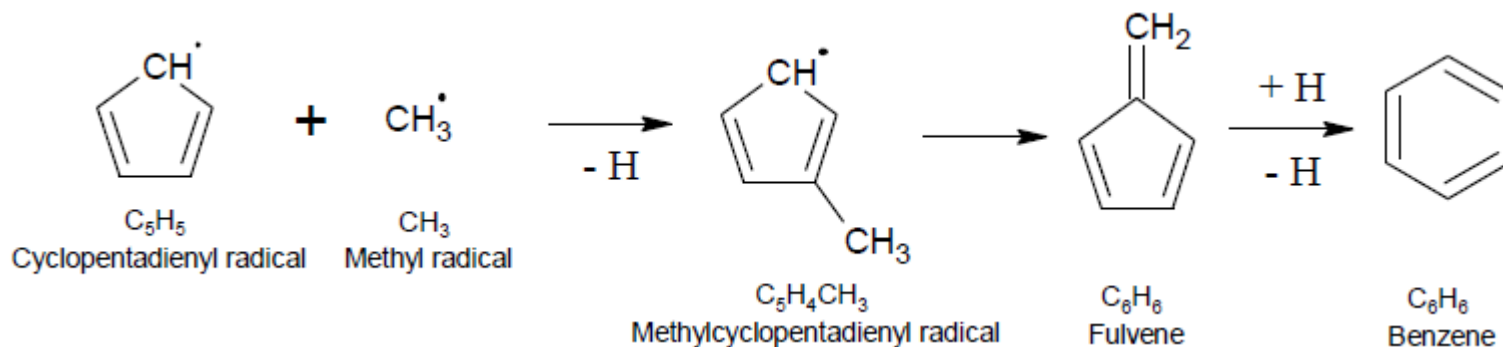


- ❖ The initial formation of methylcyclopentadienyl radical followed by its isomerization and dissociation into fulvene radical and H-atom
- ❖ Catalyzed isomerization of fulvene into benzene and atomic hydrogen


First Aromatic Ring Formation

Major Benzene Formation Pathways


Class 4: Cascading dehydrogenation

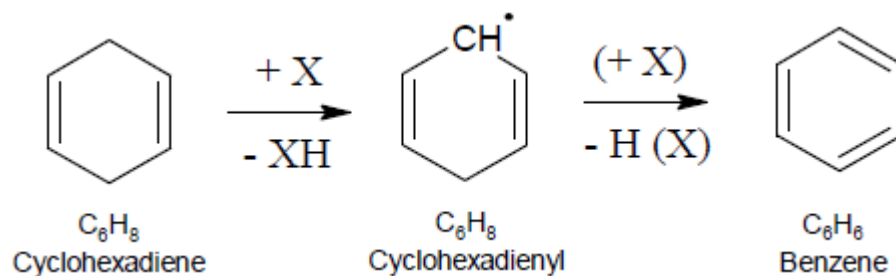


Class 5: De-alkylation



(a) Fuel-Rich Flame

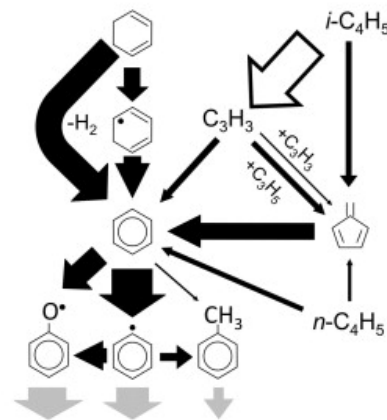


(b) Stoichiometric Flame

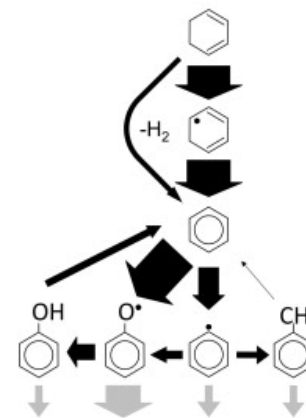

Aromatic Growth



□ The Hydrogen-Abstraction—Carbon Addition (HACA) Mechanism

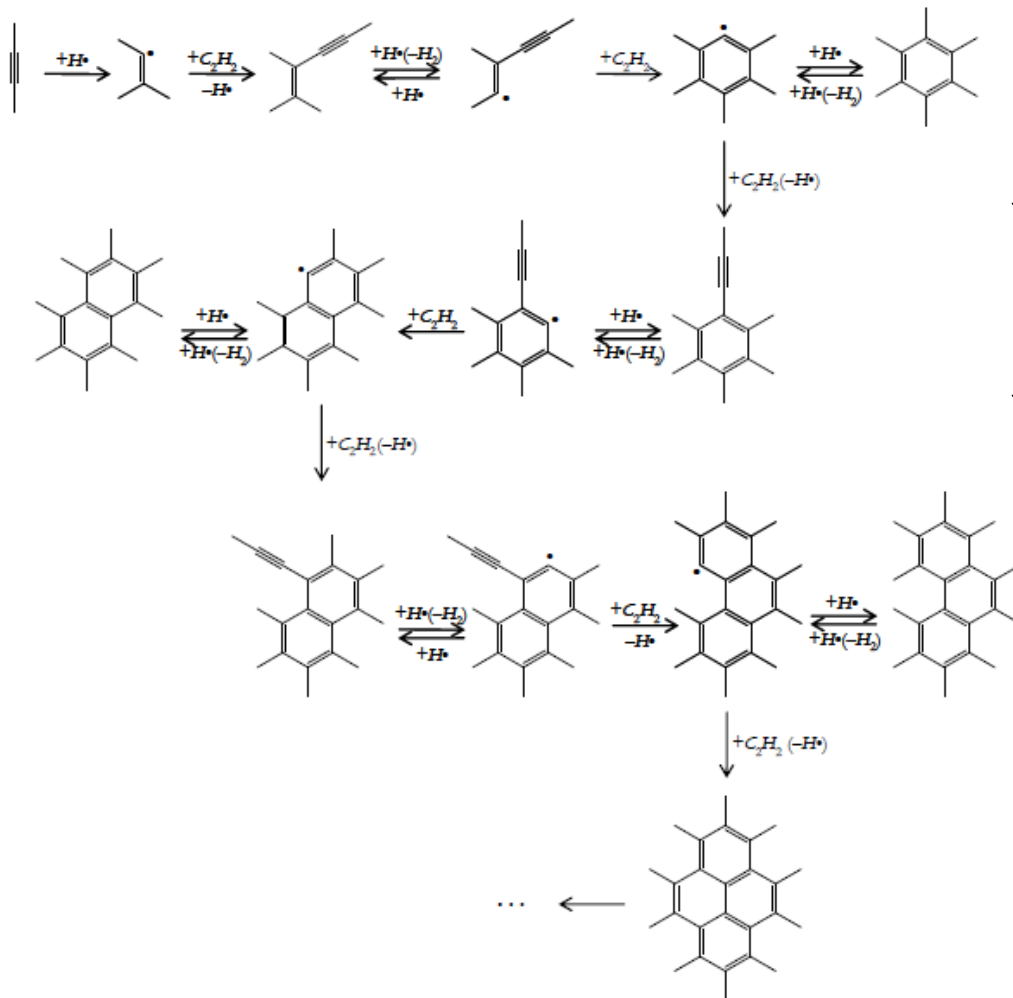


- ❖ Addition of acetylene to the formed radical site
- ❖ This pathway includes two repetitive elementary steps: H-atom abstraction from aromatic species producing an aryl radical and additional aromatics.

Aromatic Growth




□ The Hydrogen-Abstraction—Carbon Addition (HACA) Mechanism

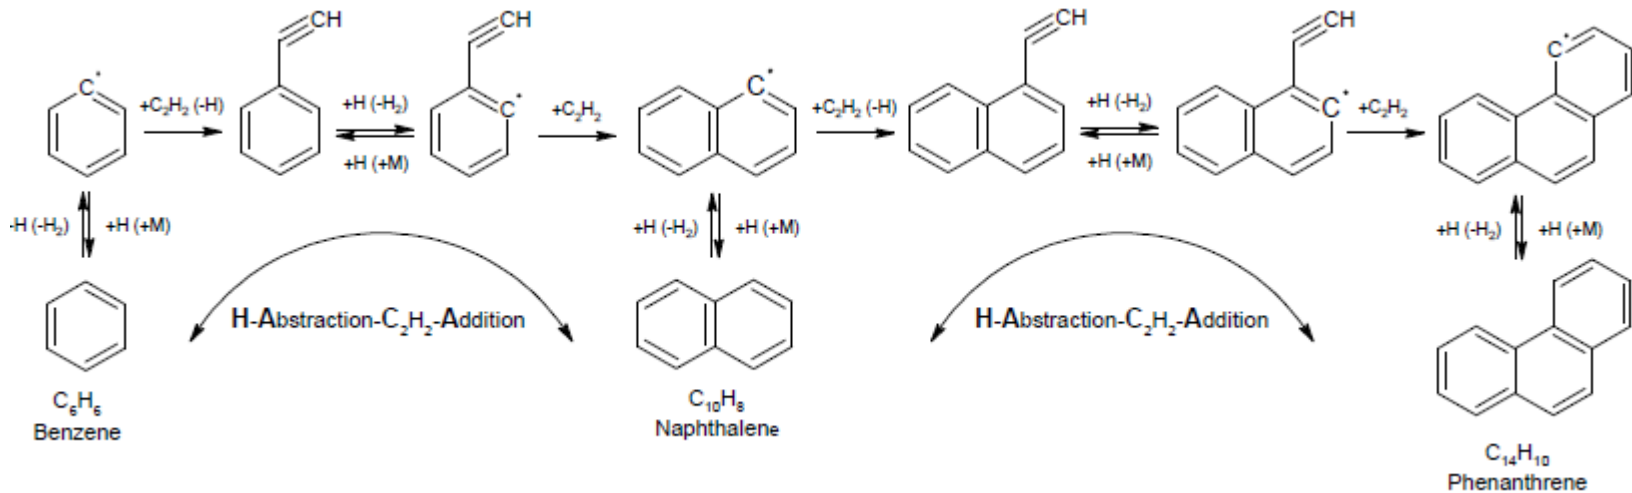

- ❖ The abundance of acetylene produced during rich-fuel combustion of hydrocarbons
- ❖ The presence of H-atoms acting as "catalytic" species during chain branching and propagation reactions
- ❖ The high temperatures that facilitate the chemistry but limits mass growth due to fragmentation make PAHs attractive soot precursors species

Aromatic Growth

□ The Hydrogen-Abstraction—Carbon Addition (HACA) Mechanism

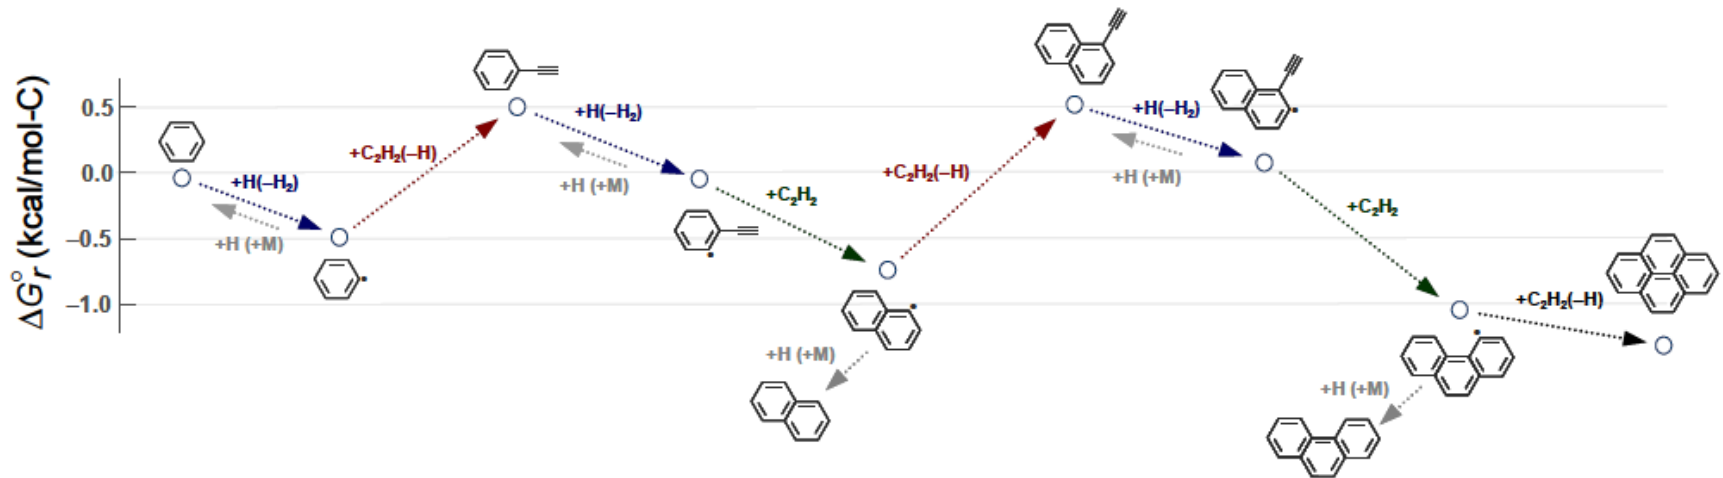


- ❖ The aromatic growth process and subsequent particle inception are characterized by high reversibility due to a modest gradual reduction in global Gibbs free energy resulting from a mild exothermicity and relatively small entropy release
- ❖ The high degree of reversibility in the HACA mechanism does not reproduce the typical timings for soot formation process, its reversibility opens it to competitions from other pathways

Aromatic Growth


□ The Hydrogen-Abstraction—Carbon Addition (HACA) Mechanism



□ 1-naphthyl radicals with C₂H₂

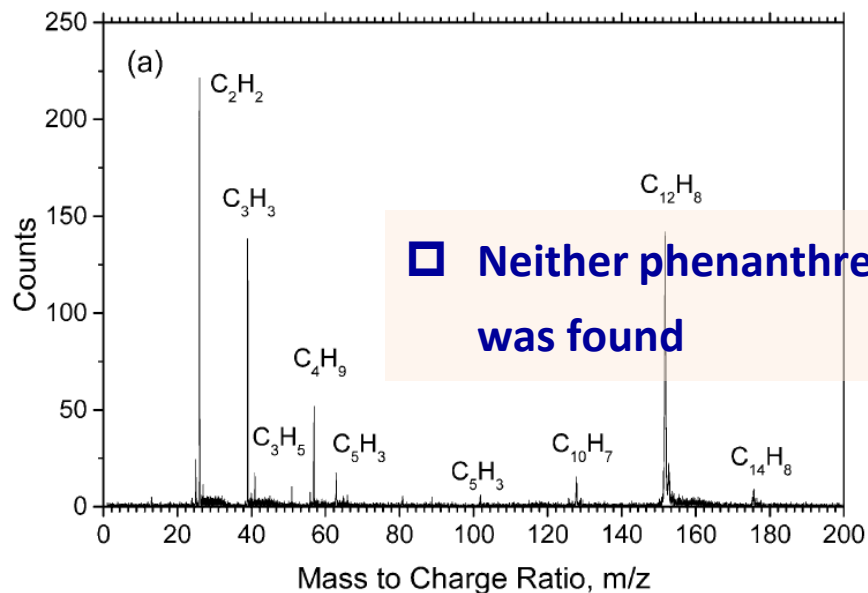

□ 2-naphthyl radicals with C₂H₂

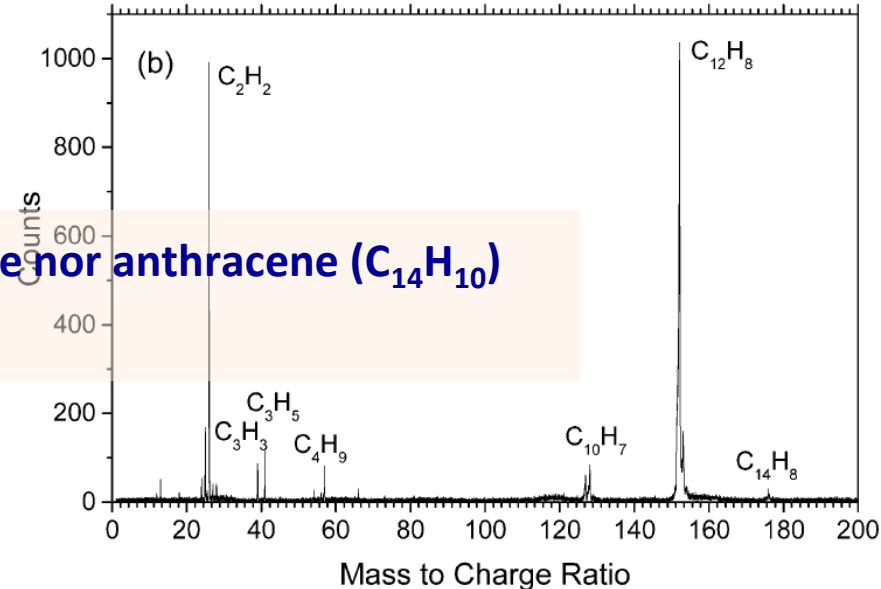


- ❖ The HACA alone appeared to be too slow to account for the formation efficiency of heavy PAH and soot nuclei
- ❖ HACA mechanism is not the most significant mechanism in mass growth to high-mass PAHs opening the door to other competing mechanisms

Aromatic Growth



□ The phenyl-addition/cyclization (PAC) mechanism

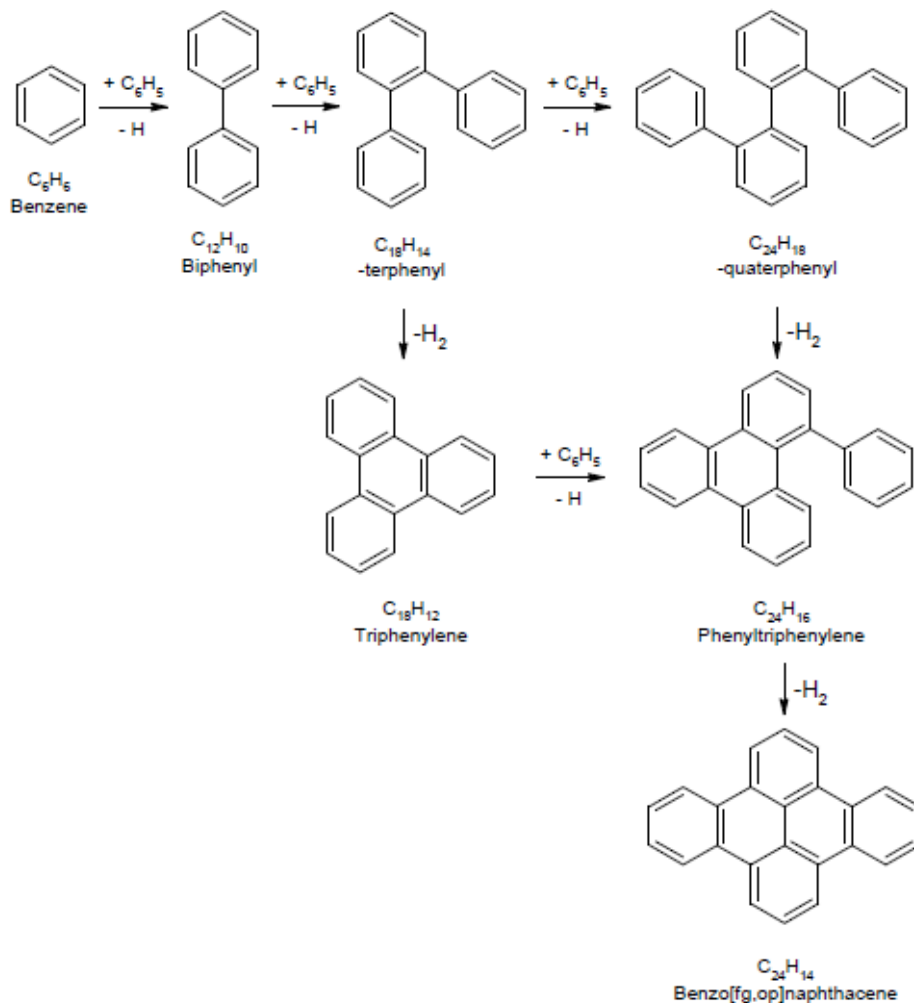


- ❖ Phenyl radical addition with an H-atom elimination to produce a phenyl-PAH, which is followed by transformation into a stable PAH by dehydrocyclization
- ❖ The kinetics of PAC pathways appear to be highly efficient for the growth of large PAHs while the HACA mechanism is better suited to form symmetrical PAHs


Aromatic Growth



□ The Hydrogen-Abstraction—Vinyl Addition (HAVA) mechanism

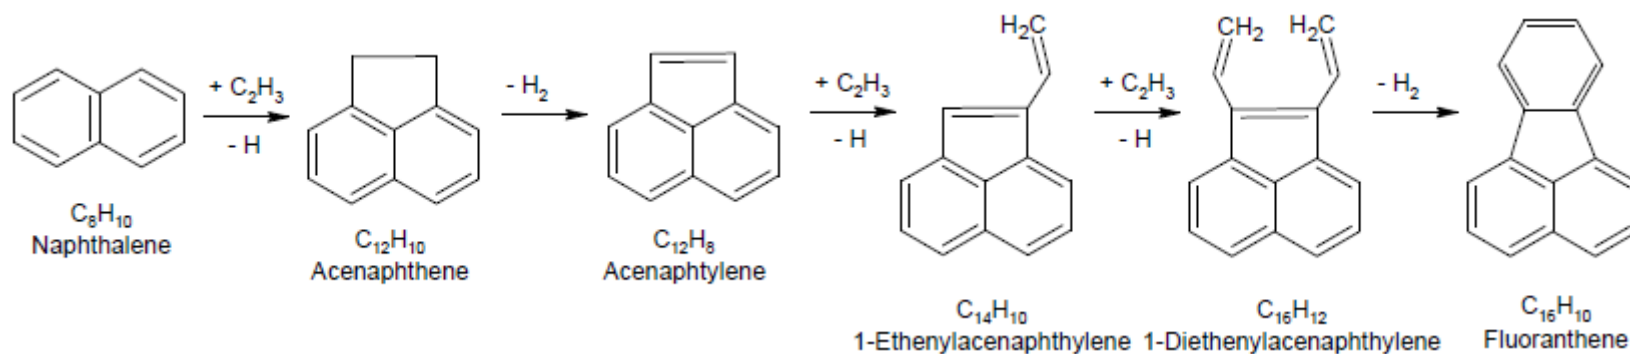


□ The addition of propargyl radical to benzyl radical

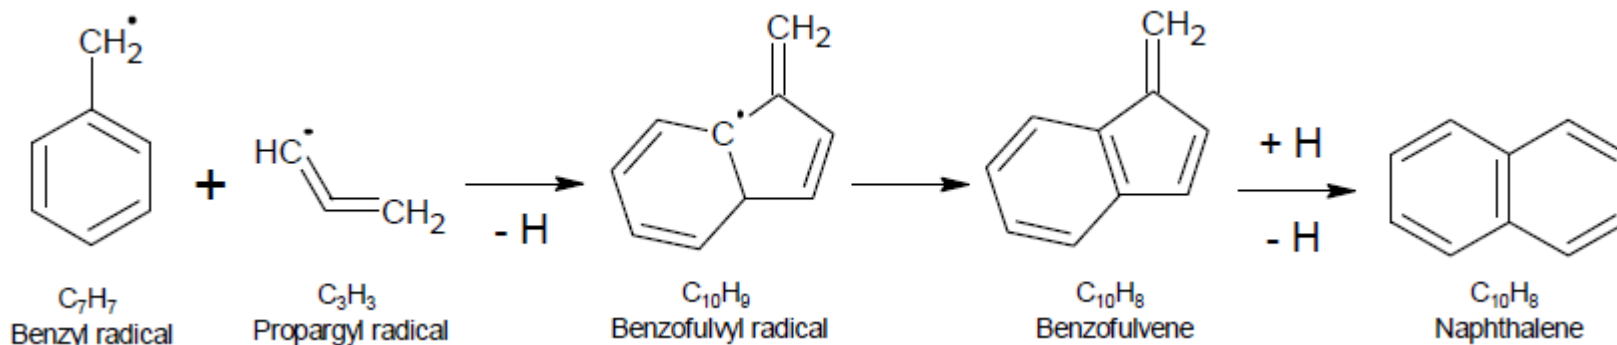

Aromatic Growth




□ The recombination of two cyclopentadienyl radicals

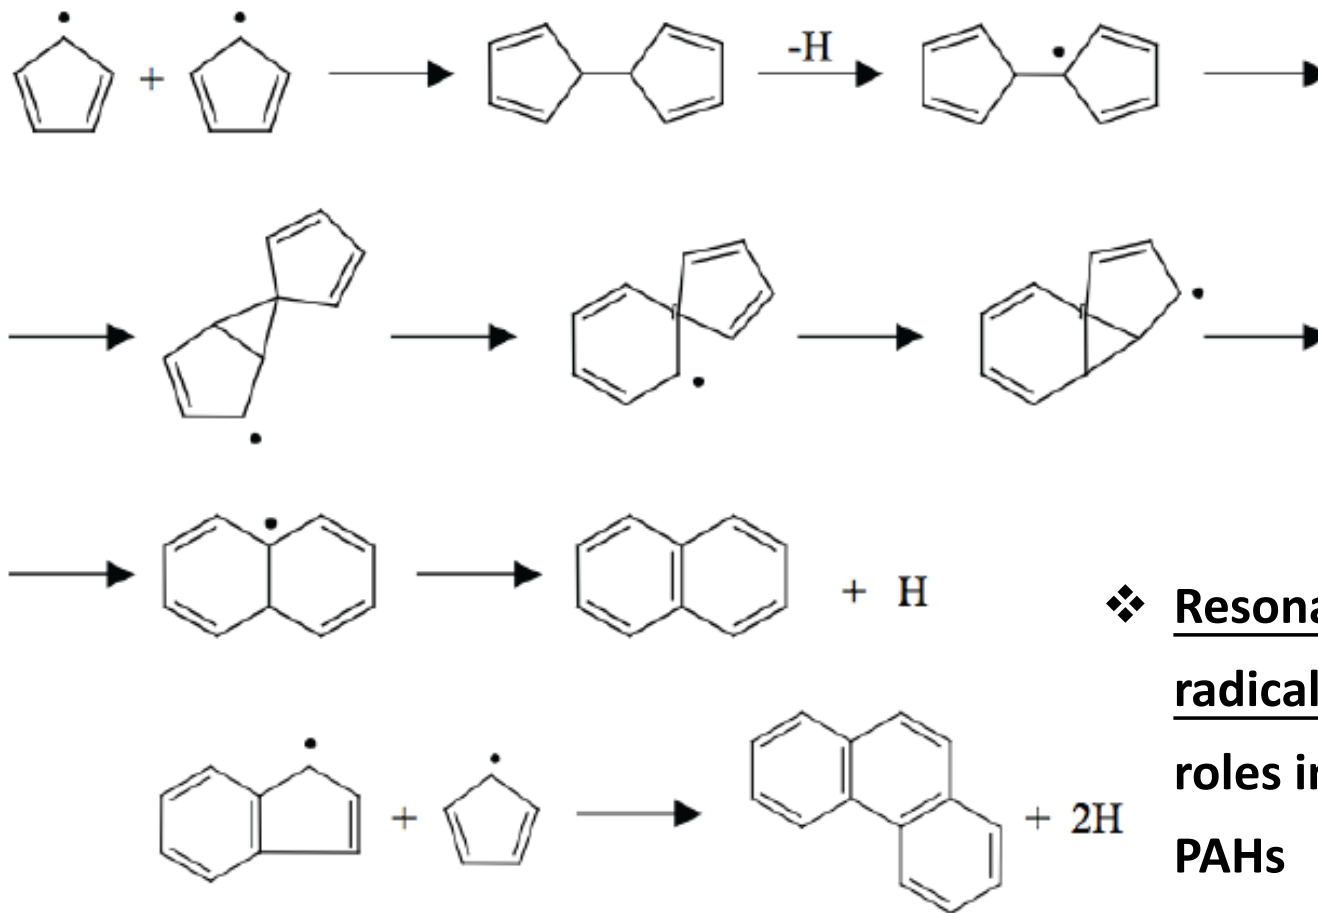

❖ Resonantly stabilized radicals play important roles in the growth of PAHs


Aromatic Growth

□ The dehydrocyclization of diphenylalkanes (二苯烷)


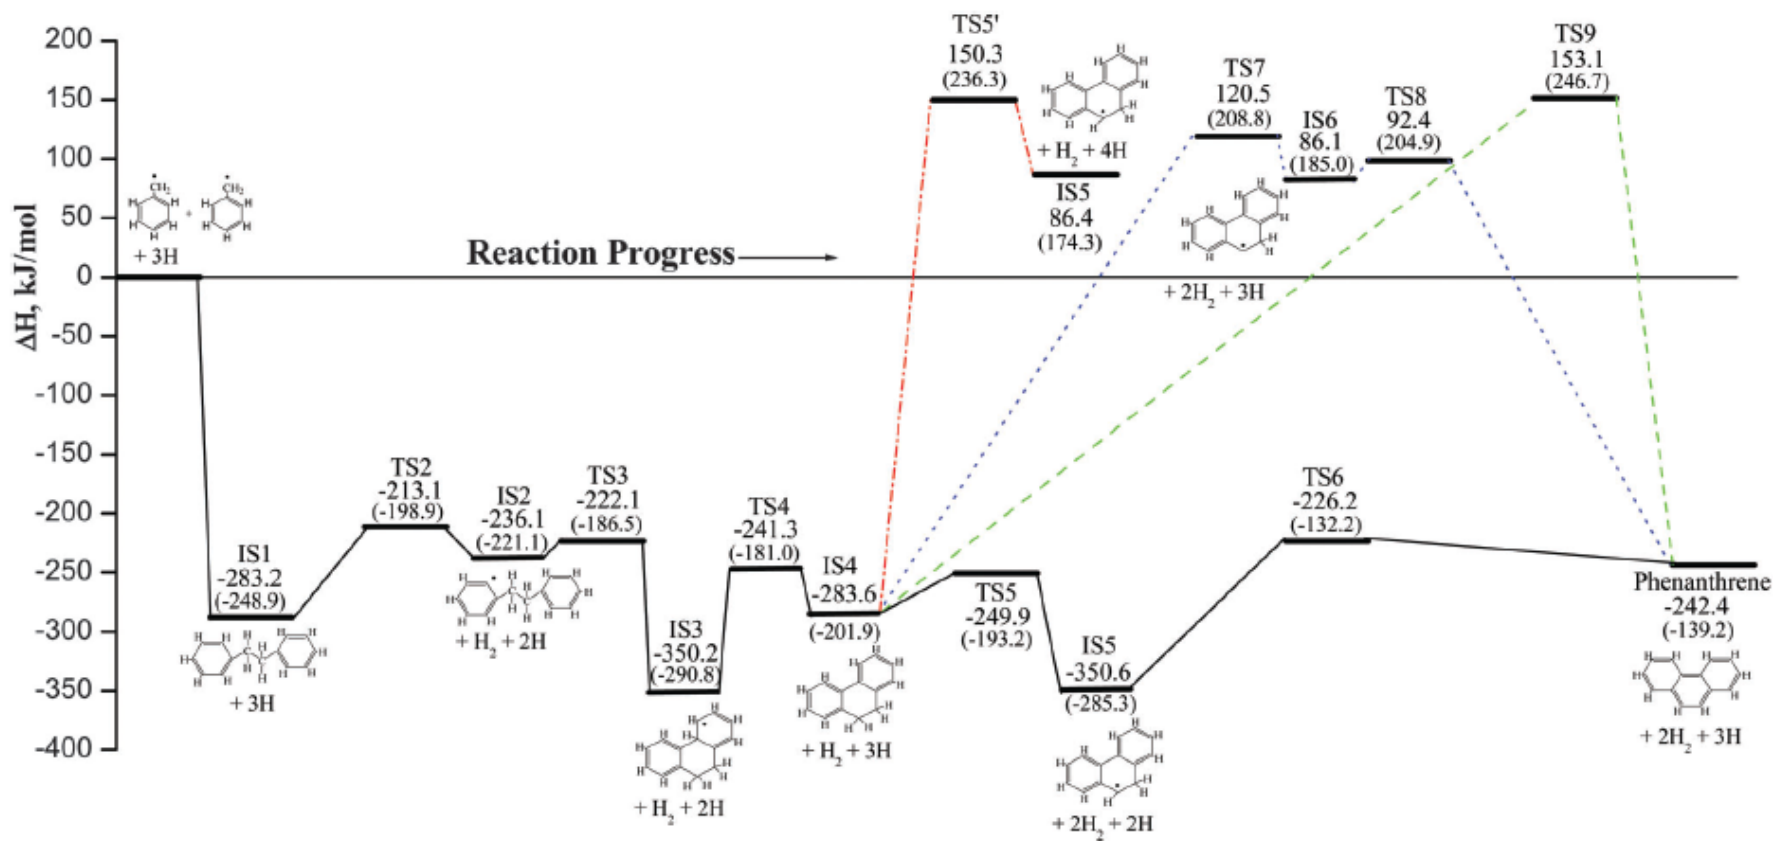


Aromatic Growth



Other many pathways.....

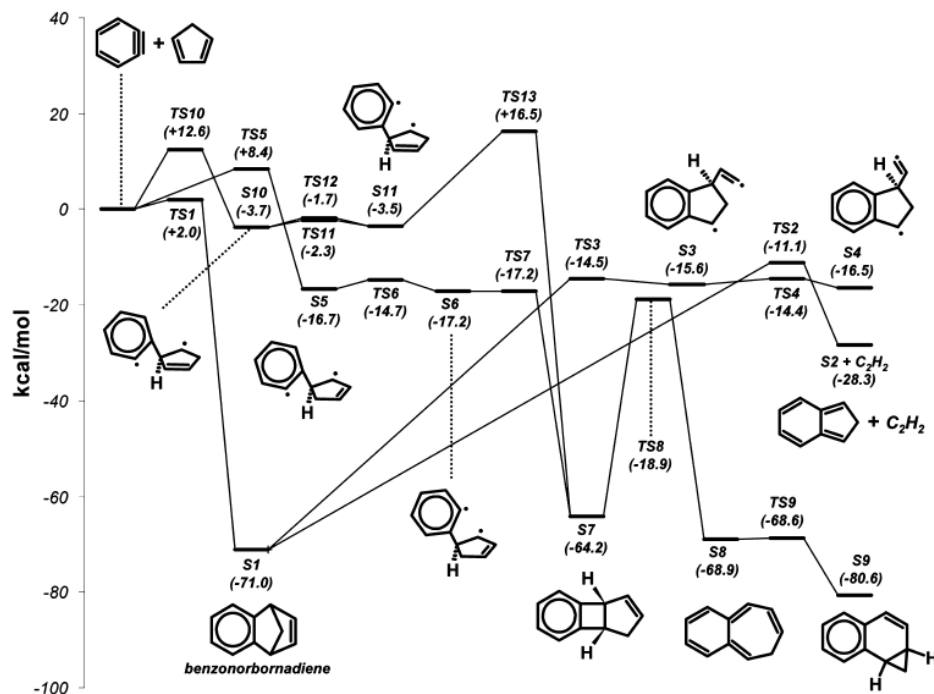


A large number of pathways to PAHs have yet been considered, and will continue increase in the future

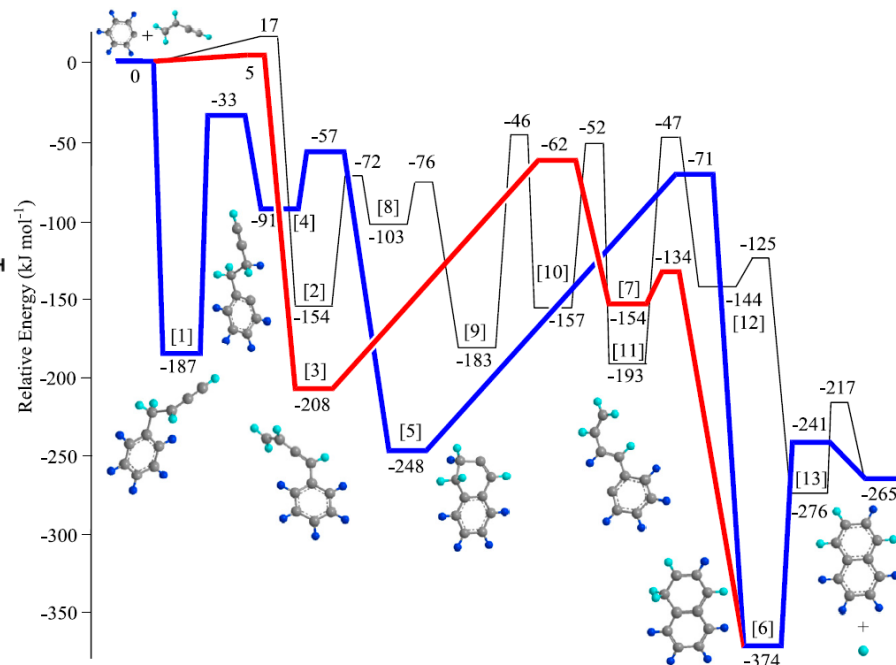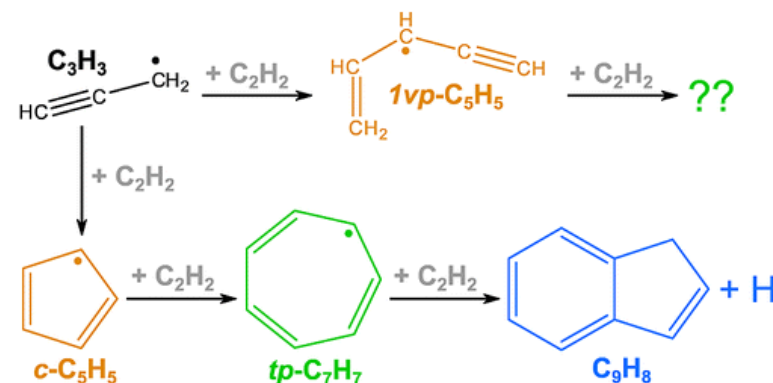

Aromatic Growth

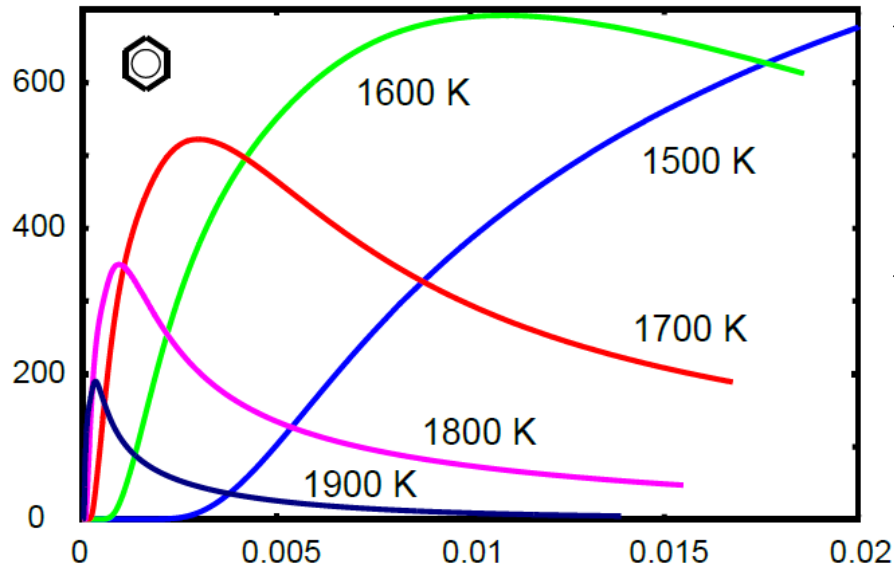



- ❖ PAH formation is sensitive to main flame chemistry, local flame conditions, fuel structure and composition
- ❖ For real fuels and their surrogate, the number of pathways to aromatics is currently undefined; and it remains to be seen whether this number is finite

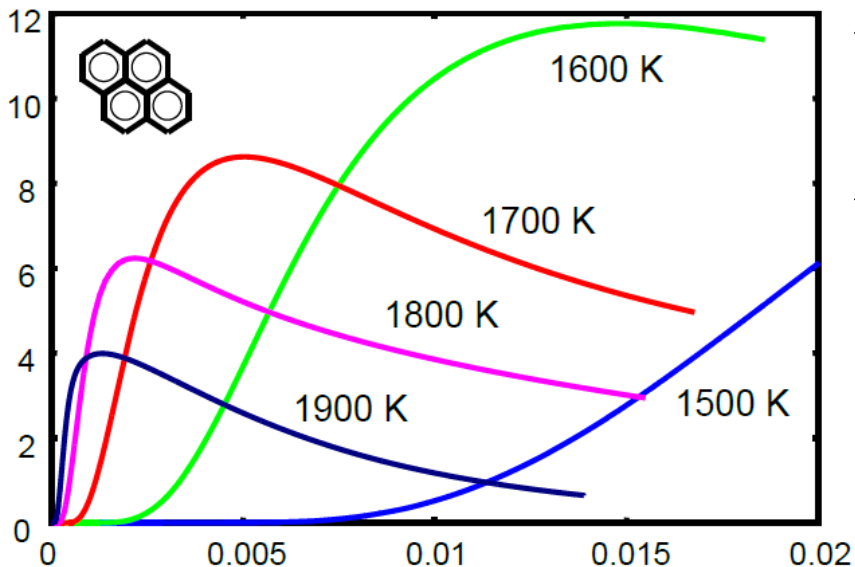

- ❖ Theoretical approaches beyond one reaction-at-a-time type calculations
- ❖ Need to account for the formation of aromatic π radicals

Soot Nucleation


Soot: Primary particle ~ 20nm

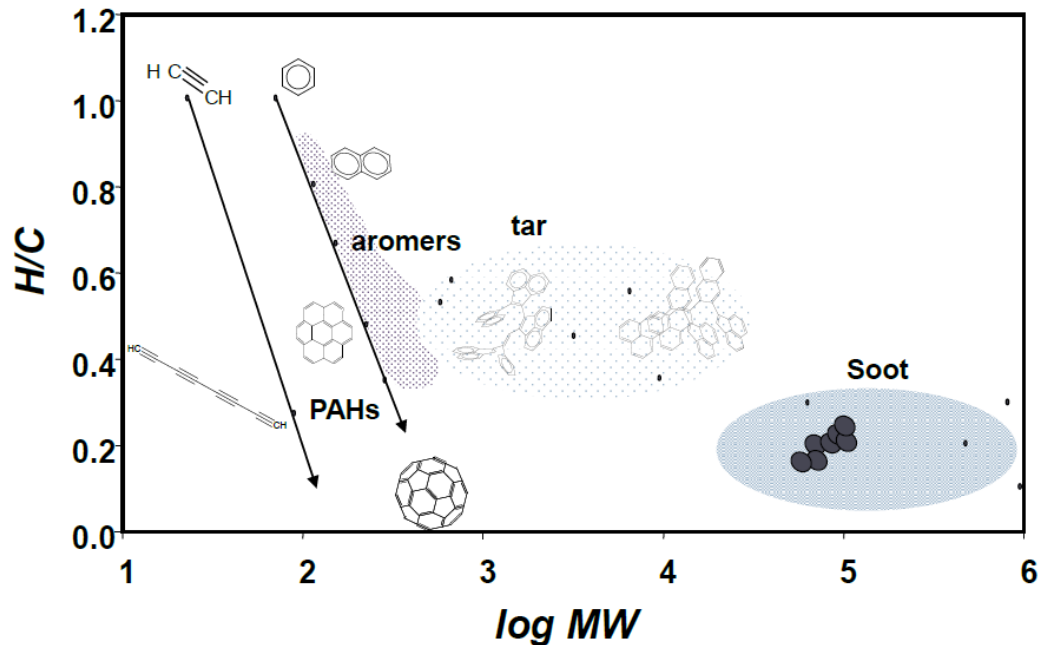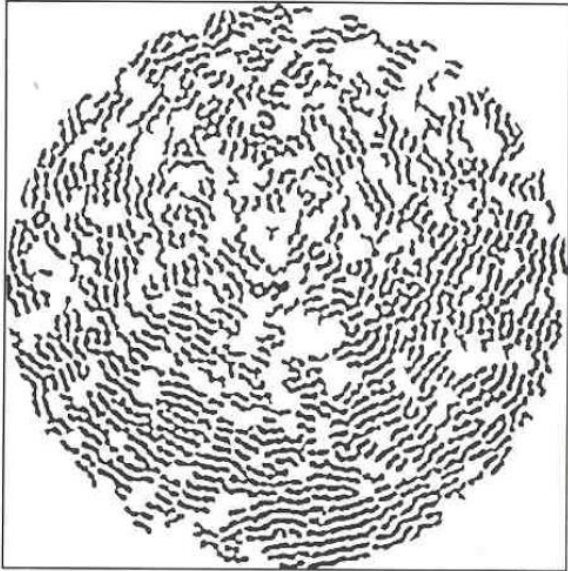

- ❖ The mechanism of soot nucleation (or particle inception) that represents the transition of gas-phase species to solid particles
- ❖ The mass of the molecules and radicals is continuously increasing above about 2000 Dalton
- ❖ The size of the solid particles is increasing by chemical reactions till about size 20 nm

Soot Nucleation

□ The mechanism of soot nucleation still remains elusive

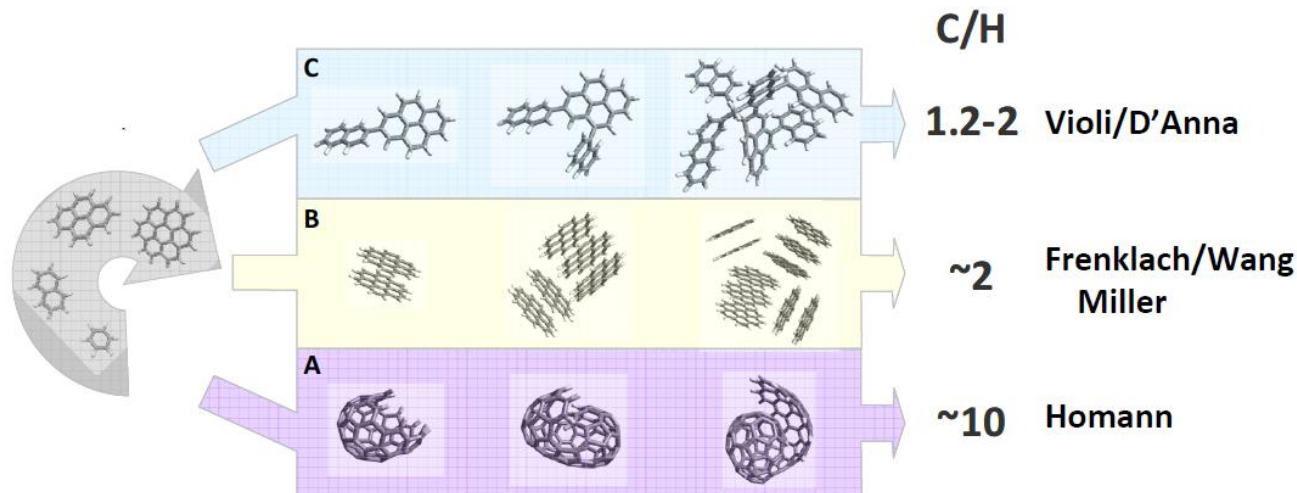


- ❖ Path A considers the growth of two-dimensional PAHs into curved, fullerene-like structures that are the nucleus of spherical particles. These particles cannot close into a layer of carbon, but develop in successive layers
- ❖ Path A is too slow to explain the time scale of soot inception phenomena, also considering the concentrations of PAHs with growing number of rings

Soot Nucleation




□ The mechanism of soot nucleation still remains elusive

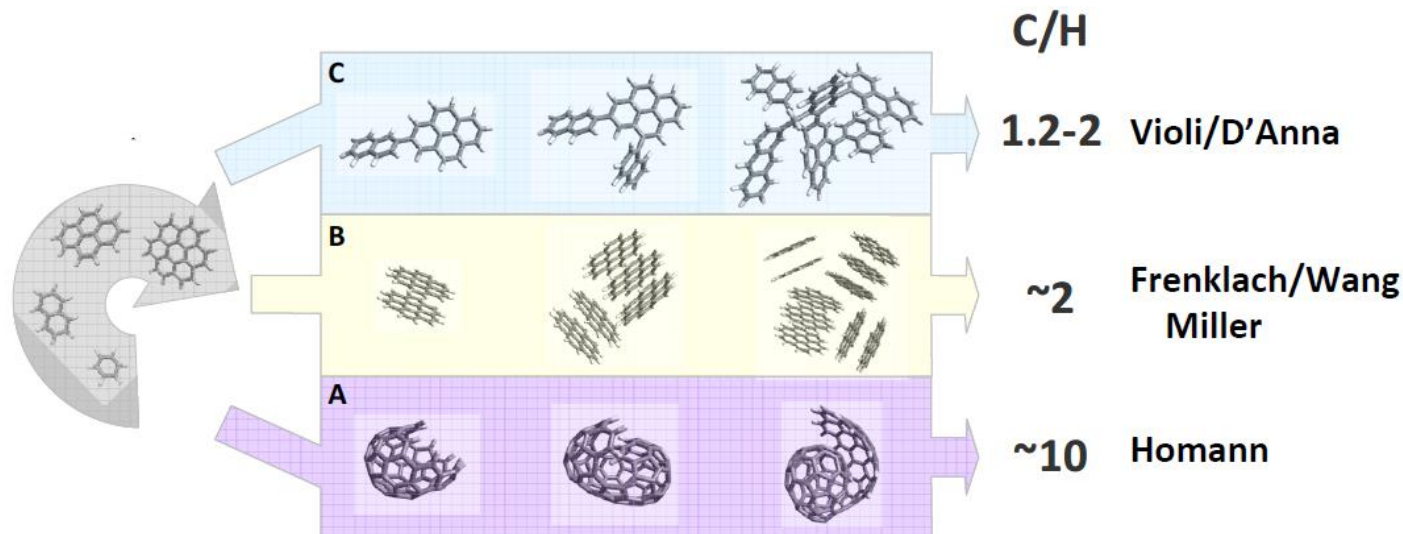

- ❖ Path B represents the nucleation as physical coalescence of moderate-sized PAHs into stacked clusters
- ❖ Path B seems to be able to describe soot formation in high-temperature combustion, when the chemical growth is limited by an high degree of reaction reversibility

Soot Nucleation

□ The mechanism of soot nucleation still remains elusive



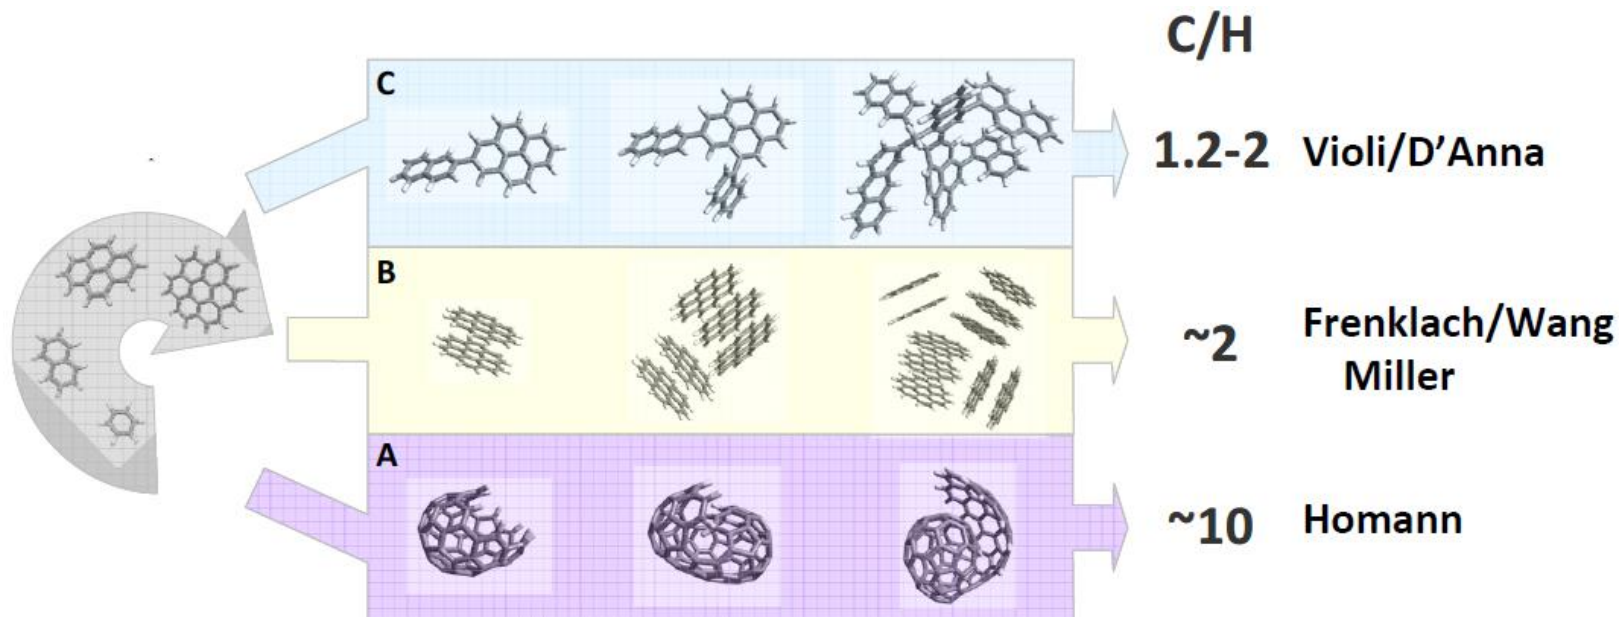


- ❖ Path C consists in the reaction or chemical coalescence of PAHs into cross-linked three-dimensional structures
- ❖ Path C becomes predominant when the formation of chemical bonds is not heavily counterbalanced by fragmentation, leading to the formation of a network of aromatic-aliphatic-linked structures


Soot Surface Growth



HACA Mechanism





$$\omega_s \left(\frac{\text{mol C-atom}}{\text{cm}^3 \text{s}} \right) \approx 2k_3 \frac{k_{1f}}{k_{1b}} \frac{[H\bullet]}{[H_2]} [S_i-H] [C_2H_2]$$

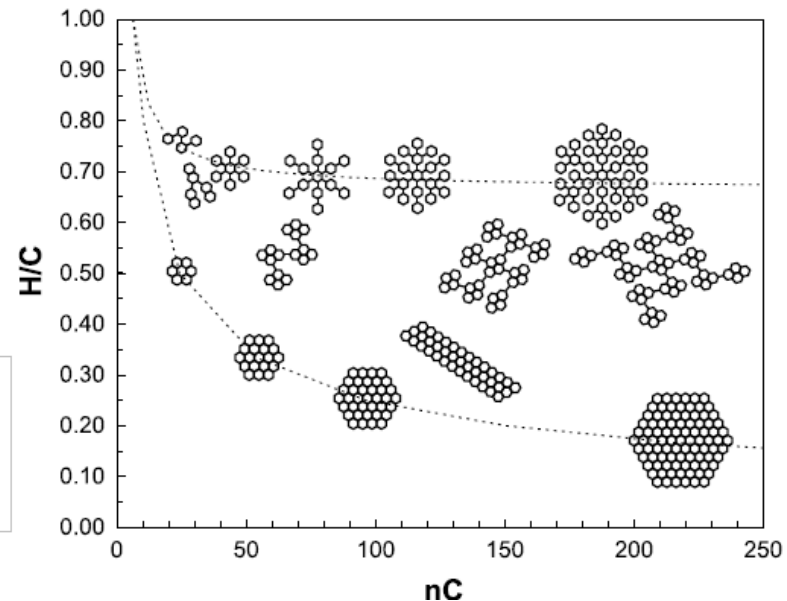


- ❖ The formed particles' nuclei acquire mass by means of surface growth induced by acetylene addition, by reactions with small resonant radicals or aromatic radicals and PAHs (through biaryl formation)
- ❖ Nucleation controls the number of particles, surface growth determines their mass



Soot Surface Growth

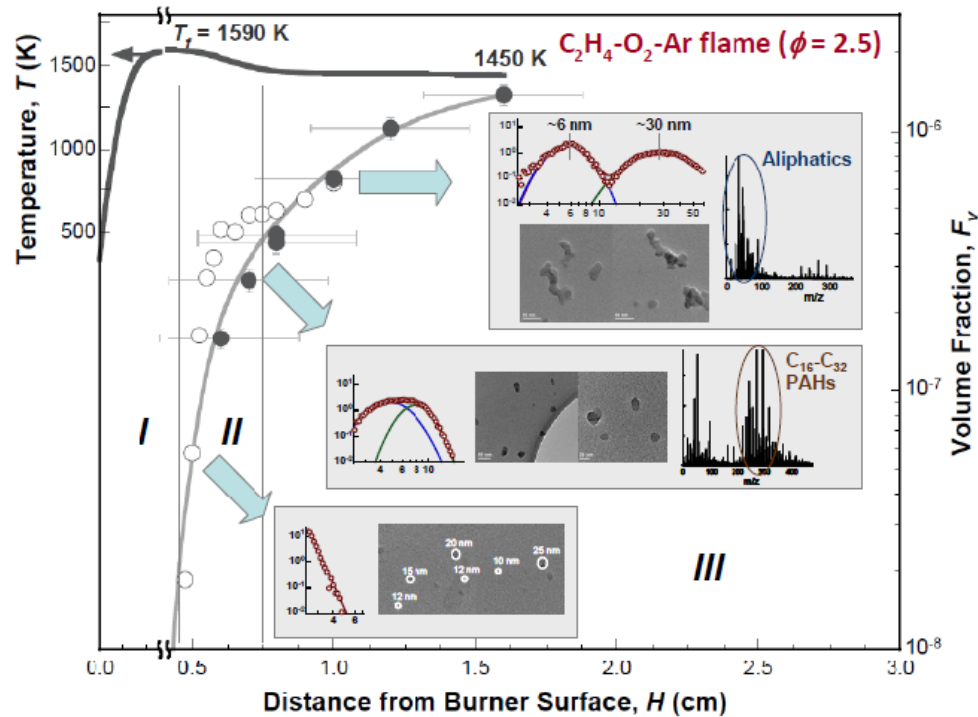

- ❖ Baby soot is entirely unlike mature soot
- ❖ Nascent soot is liquid-like rather than being carbonized and rigid
- ❖ Nascent soot has $C/H \sim 1$ and $\rho = 1.5$ g/cc
- ❖ Nascent soot is rich in aliphatics (in addition aromatics)

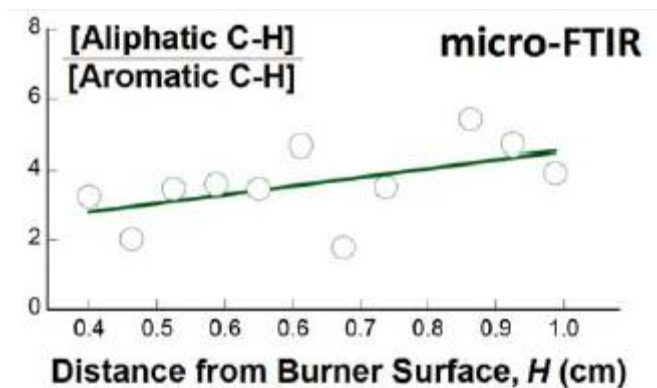


Soot Surface Growth

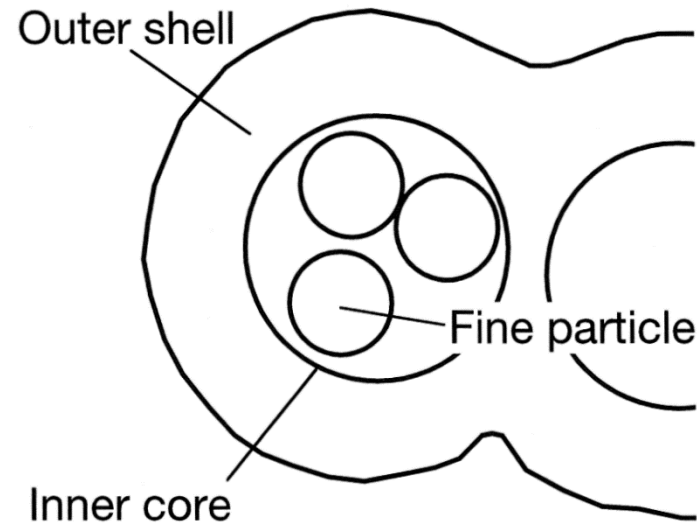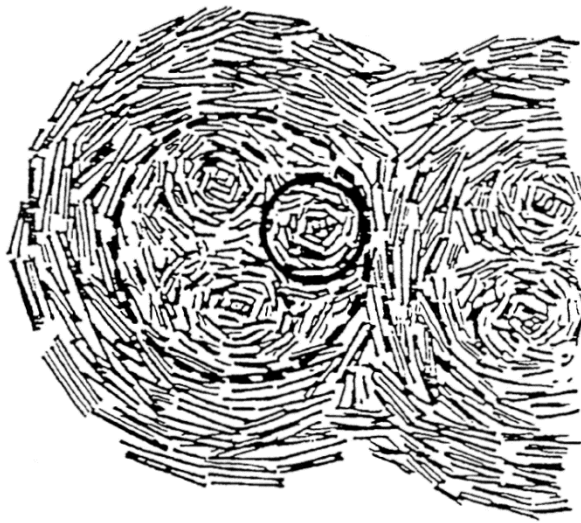



- ❖ The ultimate size of soot particles is governed by simultaneous particle-particle coagulation
- ❖ The chain-like structure of soot arises due to coagulation process
- ❖ The continuous surface growth after particle coagulation leads to a structure where the fine particles constitute the inner core and PAHs form the outer shell

Coagulation

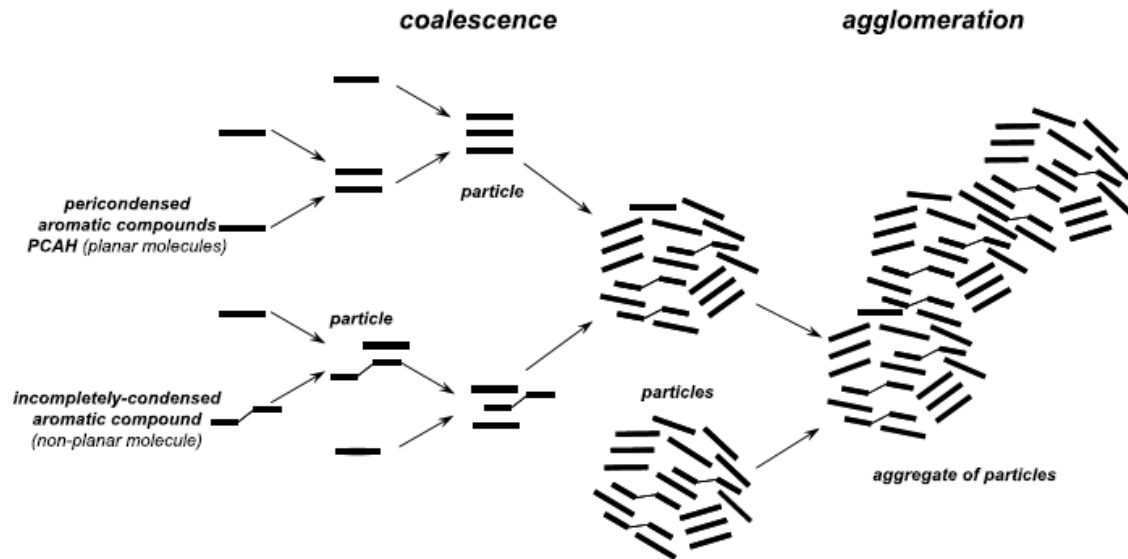

- ❖ There are two different types of coagulation (凝结): coalescence (聚结) and agglomeration (成团)
- ❖ *Coalescence* happens when a gas-phase molecule or a small particle collides against another particle to form a structure that, to minimize the free energy, tends to reduce its surface
- ❖ When bigger particles collide the interacting species maintain their own structure and *aggregate* into chain-like fractal structures

Soot Oxidation

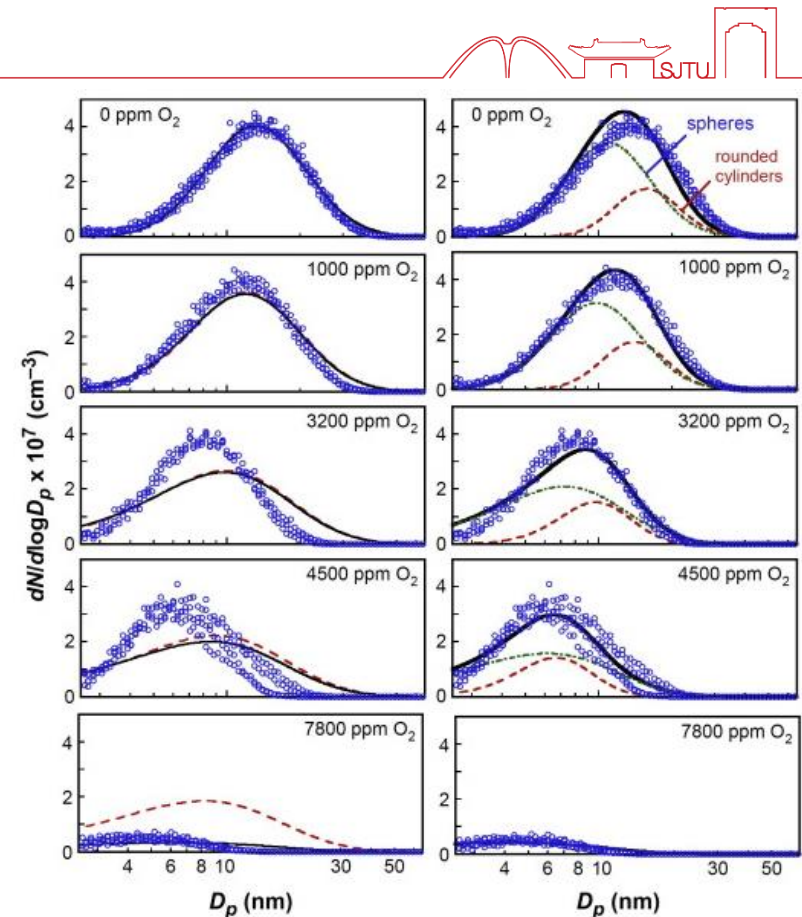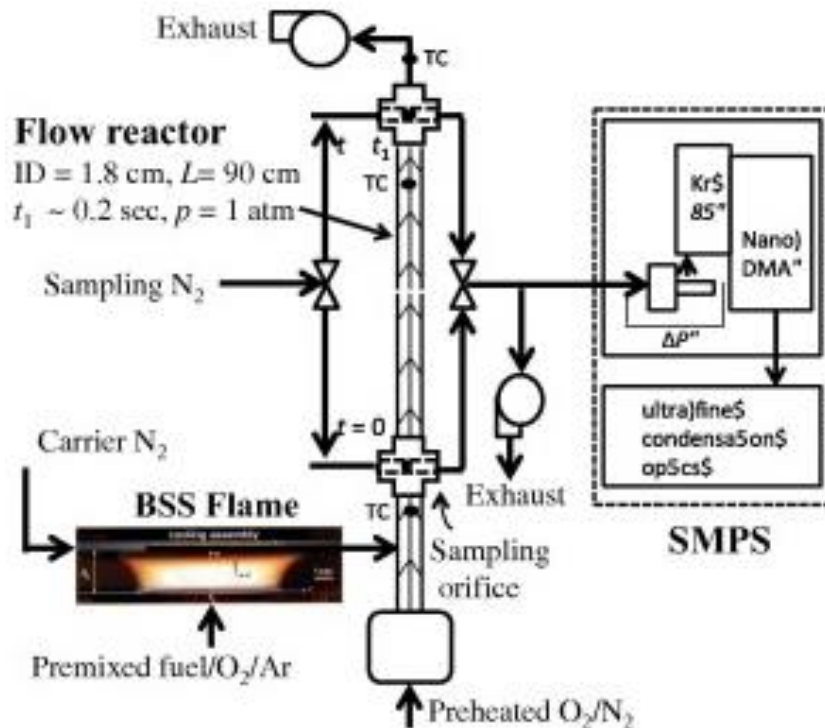


- ❖ Soot formation and growth processes are in competition with soot depletion due to oxidation reactions by OH, O and O₂
- ❖ The dominant radical in the process of soot oxidation is OH because of its higher concentration



Sooting Tendency



With alkyl chain length

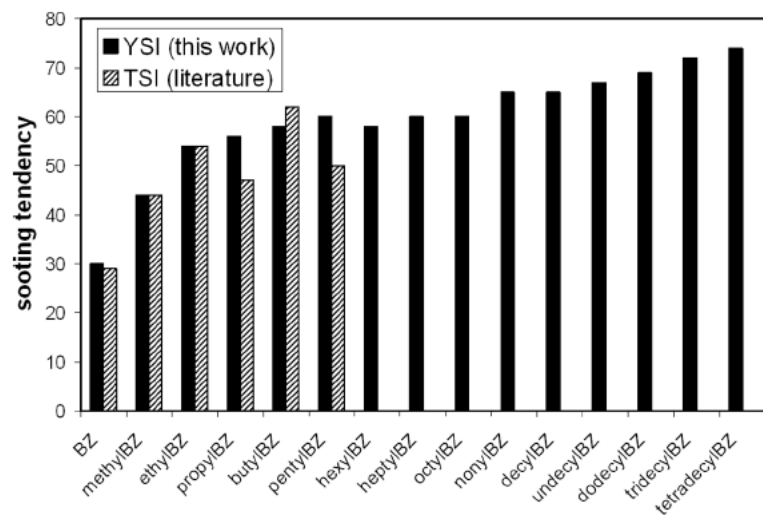

Aromatics

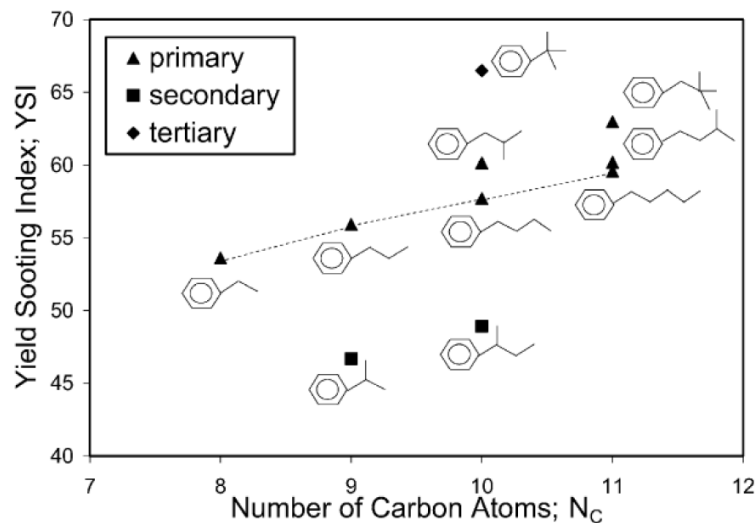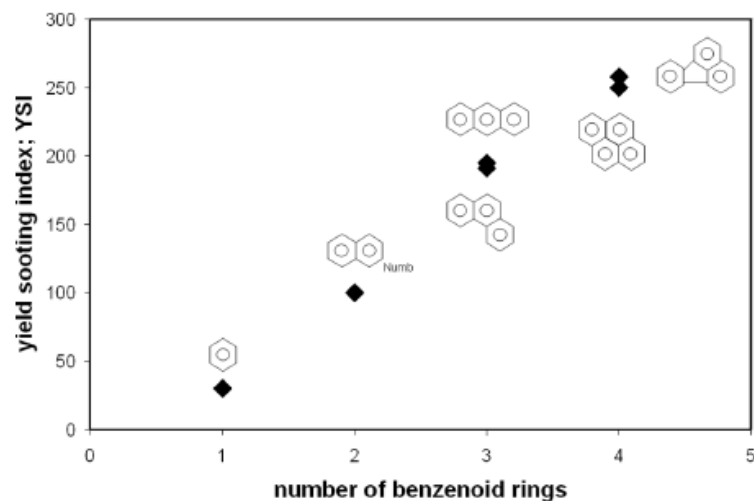


Approaches to Modeling



- ❑ The gas and solid phase kinetics of the system must be coupled with transport equations
- ❑ It is not possible to write an equation for every species, since particles' dimension, molecular weight and chemical composition span over a wide range
- ❑ An accurate description of soot is also numerically very complex and demanding in terms of computational cost
- ❑ The main parameters are considered to describe soot: soot volume fraction, number density and particle size distribution
- ❑ There have been mainly three approaches proposed in literature: the method of moments, the discrete sectional method and the stochastic approach

Approaches to Modeling



□ Discrete sectional method

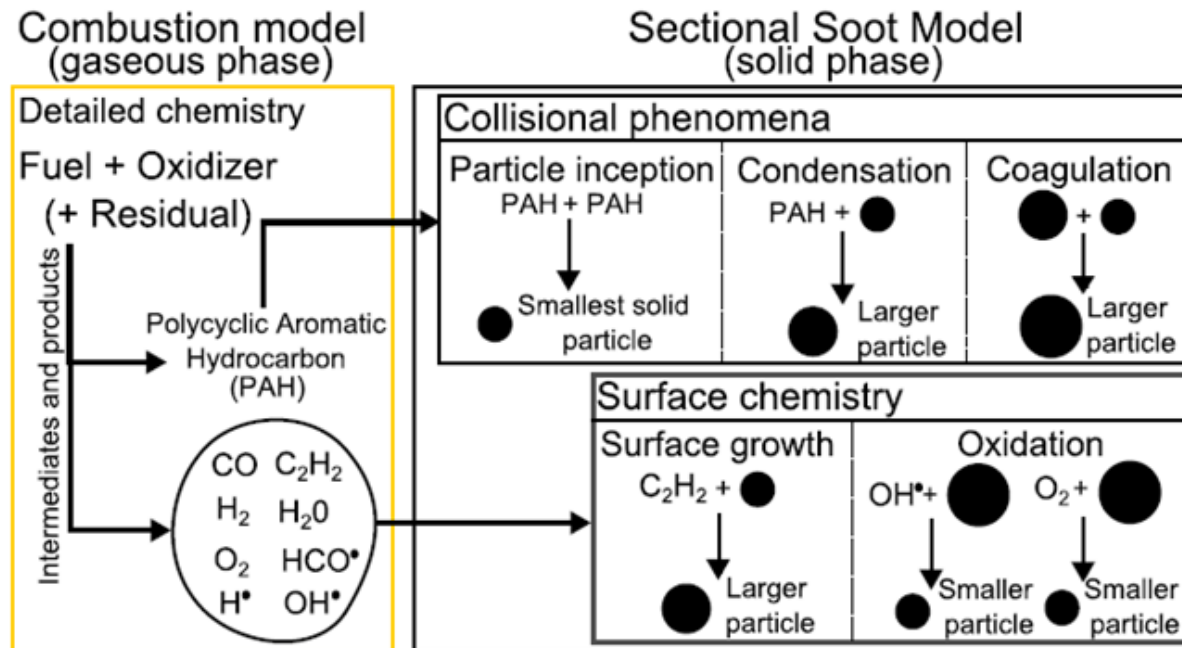

- ❖ The discrete sectional methods are based on the separation of the particle size spectrum into a set of size classes
- ❖ A transport equation is written for each of the classes
- ❖ Very high computational cost, but accurate and gives detailed information

Approaches to Modeling

□ Discrete sectional method

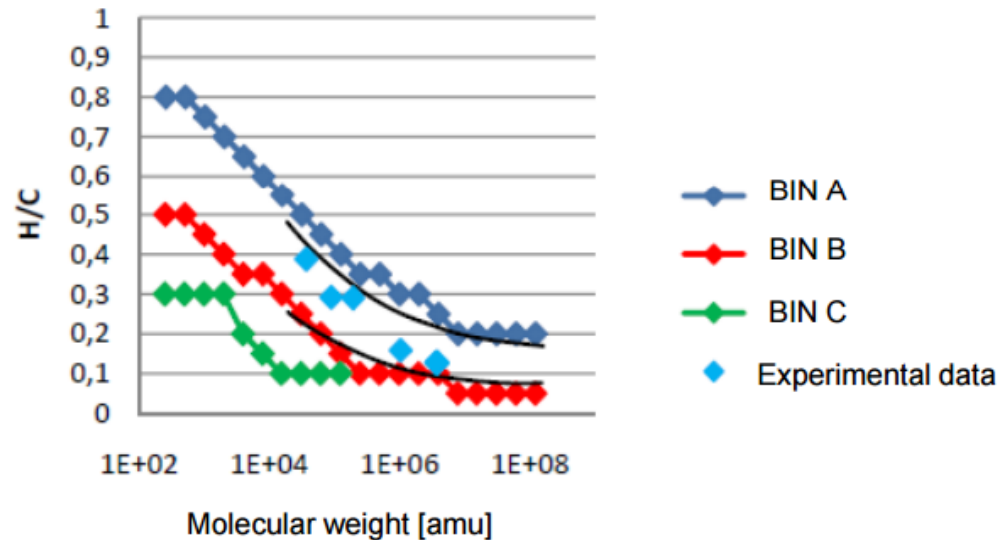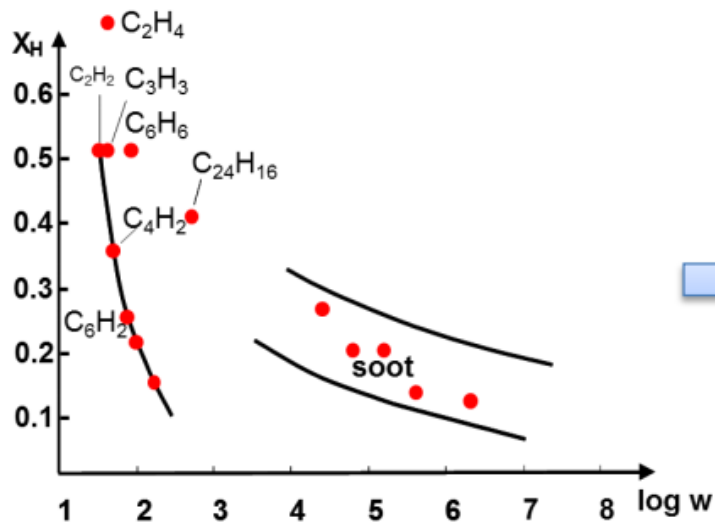

- ❖ Heavy PAHs and soot particles are divided in classes of pseudo-species (BINs)
- ❖ Molecular mass increases from a class to the next one

Approaches to Modeling



□ Discrete sectional method

Different H/C ratios
for particles of the same class



- the **dehydrogenation** reactions
- the **aging** of the soot particles
- the different **degree of methylation** of the pericondensed aromatic species

First
soot
particle

BIN	Mass [amu]	C _x H _y	Mean Diameter σ [nm]	H/C		
				A	B	C
1	~ 250	C ₂₀ H ₁₆ -C ₂₀ H ₁₀ -C ₂₀ H ₆	0.76	0.8	0.5	0.3
2	~ 500	C ₄₀ H ₃₂ -C ₄₀ H ₂₀ -C ₄₀ H ₁₂	0.96	0.8	0.5	0.3
3	~ 1000	C ₈₀ H ₆₀ -C ₈₀ H ₃₆ -C ₈₀ H ₂₄	1.21	0.75	0.45	0.3
4	~ 2000	C ₁₆₀ H ₁₁₂ -C ₁₆₀ H ₆₄ -C ₁₆₀ H ₄₈	1.52	0.7	0.4	0.3
5	~ 4000	C ₃₂₀ H ₂₀₈ -C ₃₂₀ H ₆₄ -C ₃₂₀ H ₆₄	1.91	0.65	0.35	0.20
6	~ 8000	C ₆₄₀ H ₃₈₄ -C ₆₄₀ H ₂₂₄ -C ₆₄₀ H ₉₆	2.41	0.6	0.35	0.15
7	~ 15500	C ₁₂₅₀ H ₆₈₈ -C ₁₂₅₀ H ₃₇₅ -C ₁₂₅₀ H ₁₂₅	3.01	0.55	0.3	0.1
8	~ 30000	C ₂₅₀₀ H ₁₂₅₀ -C ₂₅₀₀ H ₆₂₅ -C ₂₅₀₀ H ₂₅₀	3.78	0.5	0.25	0.1
9	~ 61000	C ₅₀₀₀ H ₂₂₅₀ -C ₅₀₀₀ H ₁₀₀₀ -C ₅₀₀₀ H ₅₀₀	4.76	0.45	0.2	0.1
10	~ 121000	C ₁₀₀₀₀ H ₄₀₀₀ -C ₁₀₀₀₀ H ₁₅₀₀ -C ₁₀₀₀₀ H ₁₀₀₀	5.99	0.4	0.15	0.1

Approaches to Modeling

□ Discrete Sectional Method

❖ Reaction classes

Reactions and their classes	$k = A T^n \exp(-E/RT)^a$			Reference Reaction
	A	n	E	
1. HACA mechanism				
1a. H-abstraction				
$H + BIN_i \rightarrow H_2 + BIN_i^\bullet$	$5.4 \cdot 10^5$	2	10.5	$H + BIN_3 \rightarrow H_2 + BIN_3^\bullet$
1b. Acetylene addition				
$C_2H_2 + BIN_i^\bullet \rightarrow \text{products}$	$1.0 \cdot 10^9$	0	5	$C_2H_2 + C_{10}H_7 \rightarrow C_{12}H_9^\bullet$
2. Soot inception ($i, n < 5$)				
$BIN_i^\bullet + BIN_n^\bullet \rightarrow \text{products}$	$1.0 \cdot 10^9$	0	6*	$C_5H_3^\bullet + C_5H_3^\bullet \rightarrow C_{10}H_6 + 2H^\bullet$
$BIN_i + BIN_n^\bullet \rightarrow \text{products}$	$1.0 \cdot 10^9$	0	8*	$C_6H_3^\bullet + C_8H_6 \rightarrow C_{14}H_{10} + H^\bullet$
$BIN_i + BIN_n \rightarrow \text{products}$	$1.0 \cdot 10^6$	0.5	0	$C_{16}H_{10} + C_{16}H_{10} \rightarrow \text{products}$
3. Surface growth				
3a. Small RR• addition				
$RR^\bullet + BIN_i \rightarrow \text{products}$	$2.0 \cdot 10^9$	0	19*	$C_3H_3^\bullet + C_6H_6 \rightarrow C_9H_8 + H^\bullet$
$RR^\bullet + BIN_i^\bullet \rightarrow \text{products}$	$2.5 \cdot 10^9$	0	3*	$C_3H_3^\bullet + C_6H_5^\bullet \rightarrow C_9H_8$
3b. PAH condensation				
$i \geq 5$				
$PAH^\bullet + BIN_i^\bullet \rightarrow \text{products}$	$5.0 \cdot 10^{11}$	0.5	0	see text
$PAH^\bullet + BIN_i \rightarrow \text{products}$				
$i < 5$ and $n \geq 5$				
$BIN_i^\bullet + BIN_n^\bullet \rightarrow \text{products}$	$3.0 \cdot 10^{11}$	0.5	0	see text
$BIN_i + BIN_n \rightarrow \text{products}$				


4. Dehydrogenation reactions				
4a. Dehydrogenation				
$BIN_i^\bullet \rightarrow H^\bullet + BIN_i$	$1.0 \cdot 10^{11}$	0	12	$C_{13}H_{11}^\bullet \rightarrow C_{13}H_{10} + H^\bullet$
$BIN_i \rightarrow H_2 + BIN_i$	$1.0 \cdot 10^8$	0	32	$C_{13}H_{12} \rightarrow C_{13}H_{10} + H_2$
4b. Demethylation (for $H/C > 0.3$)				
$H^\bullet + BIN_i \rightarrow CH_3^\bullet + \text{products}$	$1.2 \cdot 10^{10}$	0	5	$C_{11}H_{10} + H^\bullet \rightarrow C_{10}H_8 + CH_3^\bullet$
4c. C-H fission/recombination				
$BIN_i \rightarrow H^\bullet + BIN_i^\bullet$	$1.5 \cdot 10^{17}$	0	114	$C_6H_6 \rightarrow C_6H_5^\bullet + H^\bullet$
$H^\bullet + BIN_i^\bullet \rightarrow BIN_i$	$1.0 \cdot 10^{11}$	0	0	$C_6H_5^\bullet + H^\bullet \rightarrow C_6H_6$
5. Particle coalescence and aggregation				
5a. Particle coalescence ($5 \leq i, n < 13$)				
$BIN_i + BIN_n \rightarrow \text{products}$	$2.0 \cdot 10^{11}$	0.5	0	see text
5b. Particle coalescence on aggregates ($5 \leq i < 13$ and $n \geq 13$)				
$BIN_i + BIN_n \rightarrow \text{products}$	$1.5 \cdot 10^{11}$	0.5	0	see text
5c. Particle aggregation ($i, n \geq 13$)				
$BIN_i + BIN_n \rightarrow \text{products}$	$1.5 \cdot 10^{11}$	0.5	0	see text
6. Oxidation				
6a. Oxidation with $OH^\bullet$				
$OH^\bullet + BIN_i \rightarrow \text{products} + CH_2CO$	$1.0 \cdot 10^{10}$	0	10	$OH^\bullet + C_{16}H_{10} \rightarrow C_{14}H_8^\bullet + CH_2CO$
$OH^\bullet + BIN_i \rightarrow \text{products} + CO + CH_3^\bullet$	$1.0 \cdot 10^{10}$	0	4	$OH^\bullet + C_{11}H_{10} \rightarrow C_9H_8^\bullet + CO + CH_3^\bullet$
$OH^\bullet + BIN_i^\bullet \rightarrow \text{products} + CO + H^\bullet$	$2.0 \cdot 10^{11}$	0	0	$OH^\bullet + C_{10}H_7^\bullet \rightarrow C_9H_7^\bullet + CO + H^\bullet$
$OH^\bullet + BIN_i \rightarrow \text{products} + HCO^\bullet$	$3.0 \cdot 10^9$	0.5	10.6	$OH^\bullet + C_{10}H_8 \rightarrow C_9H_8^\bullet + HCO^\bullet$
6b. Oxidation with $O^\bullet$				
$O^\bullet + BIN_i \rightarrow \text{products} + HCCO^\bullet$	$2.0 \cdot 10^{10}$	0	4	$O^\bullet + C_{16}H_{10} \rightarrow C_{14}H_8^\bullet + HCCO^\bullet$
$O^\bullet + BIN_i^\bullet \rightarrow \text{products} + CO$	$5.0 \cdot 10^{10}$	0	0	$O^\bullet + C_{10}H_7^\bullet \rightarrow C_9H_7^\bullet + CO$
6c. Oxidation with O_2				
$O_2 + BIN_i^\bullet \rightarrow \text{products} + CO + HCO^\bullet$	$2.1 \cdot 10^9$	0	7.4	$O_2 + C_{10}H_7^\bullet \rightarrow C_8H_6^\bullet + CO + HCO^\bullet$
$O_2 + BIN_i^\bullet \rightarrow \text{products} + O^\bullet + CO$	$2.6 \cdot 10^{10}$	0	6.12	$O_2 + C_{10}H_7^\bullet \rightarrow C_9H_7^\bullet + O^\bullet + CO$
$O_2 + BIN_i^\bullet \rightarrow \text{products} + 2CO$	$4.2 \cdot 10^8$	0.5	8	$O_2 + C_{16}H_{10}^\bullet \rightarrow C_{14}H_8^\bullet + 2CO$

❖ HACA mechanism; soot inception; surface growth; dehydrogenation; particle coalescence and aggregation; oxidation

Approaches to Modeling

Discrete Sectional Method

Particle coalescence and aggregation

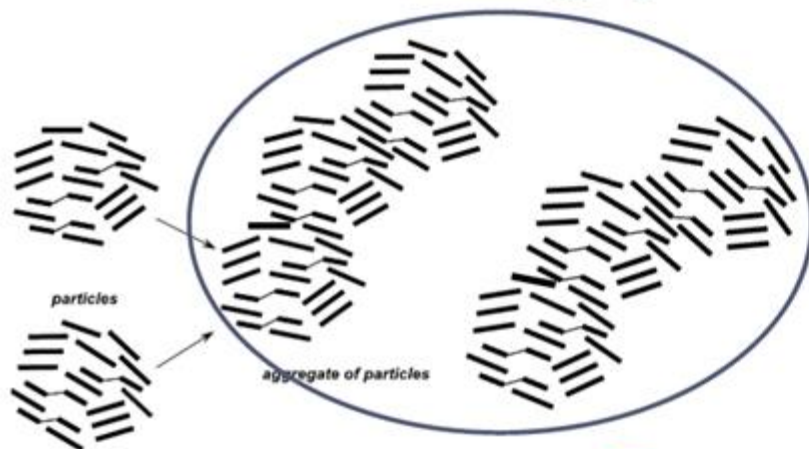


Particle aggregation occurs between

BINs from BIN₁₃ to BIN₂₀

Reactions and their classes	$k = A T^n \exp(-E/RT)^b$			Reference Reaction
	A	n	E	
1. HACA mechanism				
1a. H-abstraction				
$H + BIN_n \rightarrow H_2 + BIN_n^*$	$5.4 \cdot 10^3$	2	10.5	$H + BIN_n \rightarrow H_2 + BIN_n^*$
1b. Acetylene addition				
$C_2H_2 + BIN_n^* \rightarrow products$	$1.0 \cdot 10^9$	0	5	$C_2H_2 + C_{16}H_7 \rightarrow C_{18}H_9$
2. Soot inception ($i, n < 5$)				
$BIN_i^* + BIN_n^* \rightarrow products$	$1.0 \cdot 10^9$	0	6*	$C_3H_3^* + C_3H_3^* \rightarrow C_{10}H_7 + 2H^*$
$BIN_i + BIN_n^* \rightarrow products$	$1.0 \cdot 10^9$	0	8*	$C_6H_5^* + C_3H_3^* \rightarrow C_{14}H_{10} + H^*$
$BIN_i + BIN_n \rightarrow products$	$1.0 \cdot 10^9$	0.5	0	$C_{16}H_{15} + C_{14}H_{10} \rightarrow products$
3. Surface growth				
3a. Small RR* addition				
$RR^* + BIN_n \rightarrow products$	$2.0 \cdot 10^8$	0	19*	$C_6H_5^* + C_6H_5 \rightarrow C_{12}H_9 + H^*$
$RR^* + BIN_n^* \rightarrow products$	$2.5 \cdot 10^8$	0	3*	$C_3H_3^* + C_6H_5^* \rightarrow C_9H_7$
3b. PAH condensation				
$i \geq 5$				
$PAH_i^* + BIN_n \rightarrow products$	$5.0 \cdot 10^{11}$	0.5	0	see text
$PAH_i^* + BIN_n^* \rightarrow products$				
$i < 5$ and $n \geq 5$				
$BIN_i^* + BIN_n^* \rightarrow products$	$3.0 \cdot 10^{11}$	0.5	0	see text
$BIN_i + BIN_n^* \rightarrow products$				
4. Dehydrogenation reactions				
4a. Dehydrogenation				
$BIN_i^* \rightarrow H^* + BIN_i$	$1.0 \cdot 10^{11}$	0	12	$C_{11}H_{11}^* \rightarrow C_{11}H_{10} + H^*$
$BIN_i \rightarrow H_2 + BIN_i$	$1.0 \cdot 10^8$	0	32	$C_{11}H_{10} \rightarrow C_{11}H_8 + H_2$
4b. Demethylation (for $H/C > 0.3$)				
$H^* + BIN_i \rightarrow CH_3^* + products$	$1.2 \cdot 10^{10}$	0	5	$C_{14}H_{10} + H^* \rightarrow C_{14}H_9 + CH_3^*$
4c. C-H fission/recombination				
$BIN_i \rightarrow H^* + BIN_i^*$	$1.5 \cdot 10^{17}$	0	114	$C_6H_6 \rightarrow C_6H_5^* + H^*$
$H^* + BIN_i^* \rightarrow BIN_i$	$1.0 \cdot 10^{22}$	0	0	$C_6H_5^* + H^* \rightarrow C_6H_6$
5. Particle coalescence and aggregation				
5a. Particle coalescence ($5 \leq i, n < 13$)				
$BIN_i + BIN_n \rightarrow products$	$2.0 \cdot 10^{11}$	0.5	0	see text
5b. Particle coalescence on aggregates ($5 \leq i < 13$ and $n \geq 13$)				
$BIN_i + BIN_n \rightarrow products$	$1.5 \cdot 10^{11}$	0.5	0	see text
5c. Particle aggregation ($i, n \geq 13$)				
$BIN_i + BIN_n \rightarrow products$	$1.5 \cdot 10^{11}$	0.5	0	see text
6. Oxidation				
6b. Oxidation with O^*				
$O^* + BIN_i \rightarrow products + HCCO^*$	$2.0 \cdot 10^{10}$	0	4	$O^* + C_{14}H_{10} \rightarrow C_{14}H_9 + HCCO^*$
$O^* + BIN_i^* \rightarrow products + CO$	$5.0 \cdot 10^{10}$	0	0	$O^* + C_{12}H_7^* \rightarrow C_{12}H_6 + CO$
6c. Oxidation with O_2				
$O_2 + BIN_i^* \rightarrow products + CO + HCO^*$	$2.1 \cdot 10^8$	0	7.4	$O_2 + C_{10}H_7^* \rightarrow C_{10}H_6 + CO + HCO^*$
$O_2 + BIN_i^* \rightarrow products + O^* + CO$	$2.6 \cdot 10^{10}$	0	6.12	$O_2 + C_{10}H_7^* \rightarrow C_{10}H_6 + O^* + CO$
$O_2 + BIN_i^* \rightarrow products + 2CO$	$4.2 \cdot 10^8$	0.5	8	$O_2 + C_{13}H_9^* \rightarrow C_{13}H_8 + 2CO$

Approaches to Modeling

□ Soot modeling in turbulent flames

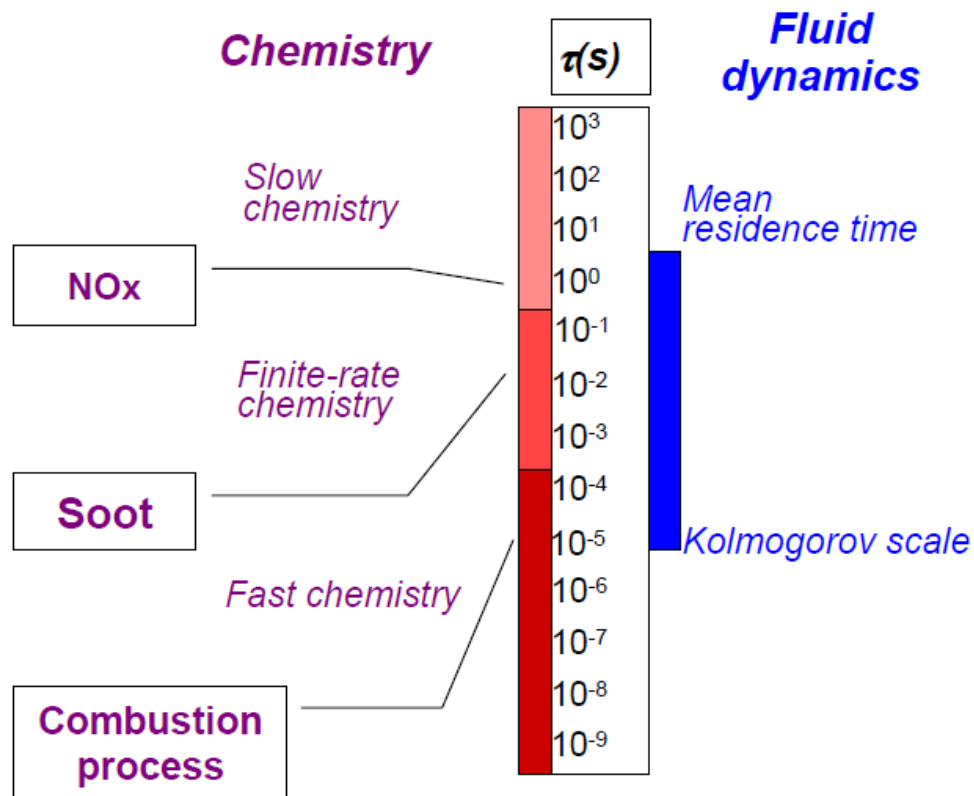

- ❖ The soot characteristic time is of the same order of the fluid dynamics times
- ❖ Combustion process: Thermal field and species can be successfully modeled using the flamelets approach
- ❖ Soot: strong interactions between fluid mixing and chemical reactions
- ❖ Specific approaches need to be used to model soot in turbulent flames

Thanks for your attention



fqi@sjtu.edu.cn
lilei81@sjtu.edu.cn