

## A Appendix

### A.1 Details of Grayscale representation in preliminary study



Figure 1: Grayscale representation of all variables (Window 5: 128s~159s)

## A.2 Time-varying features in Example 1 (Window 6: 160s~191s)



Figure 2: Original Observed Window

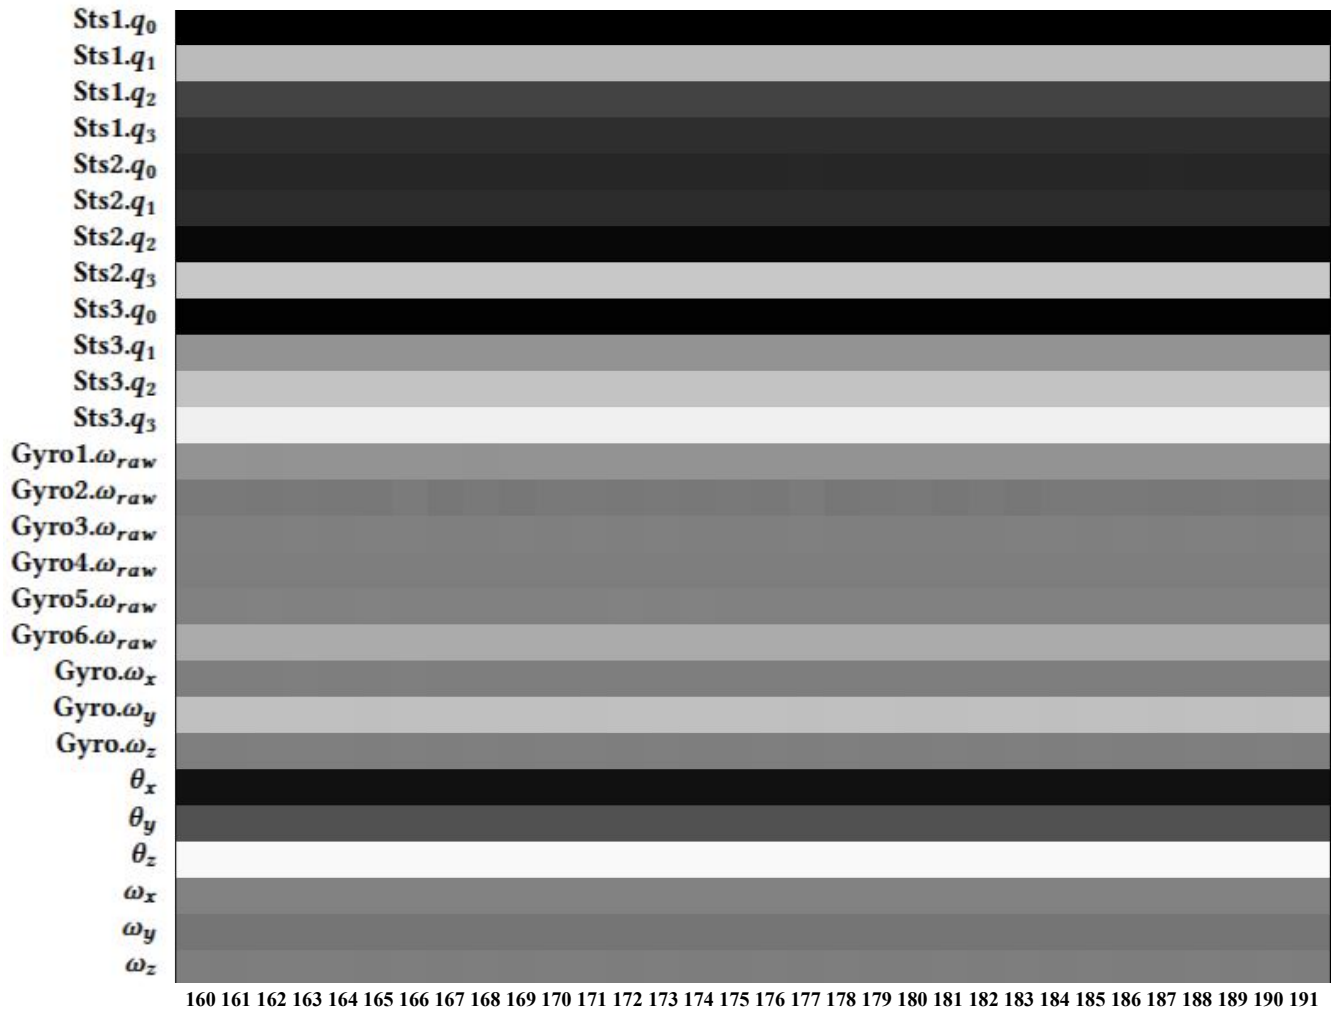


Figure 3: First-order Difference Window

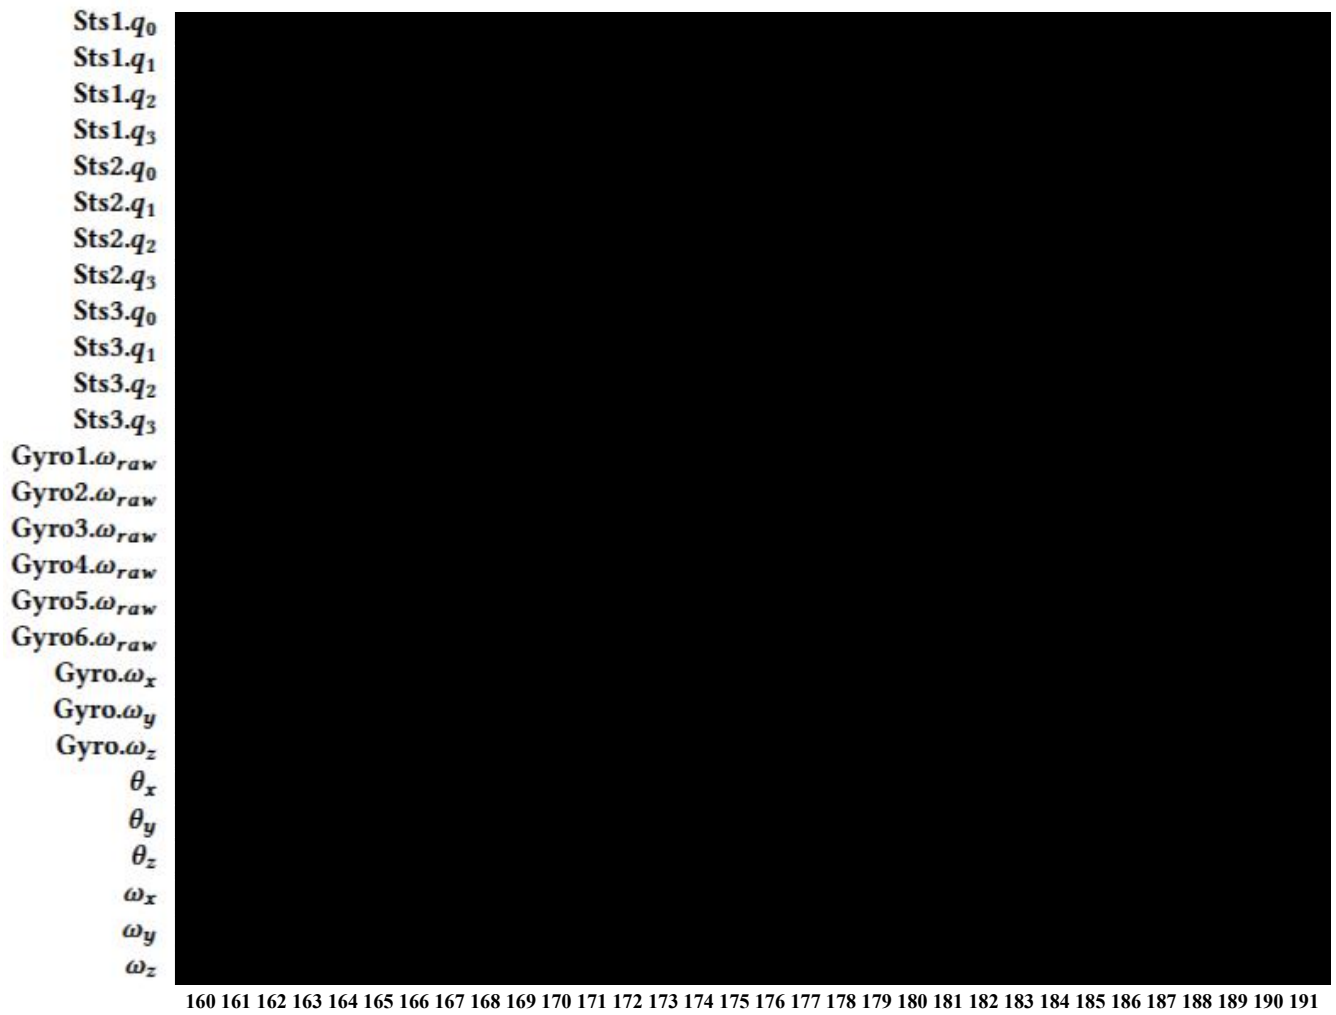


Figure 4: Rolling Variance Window

### A.3 residual graph before and after soft-thresholding in Example 2 (Window 6: 160s~191s)

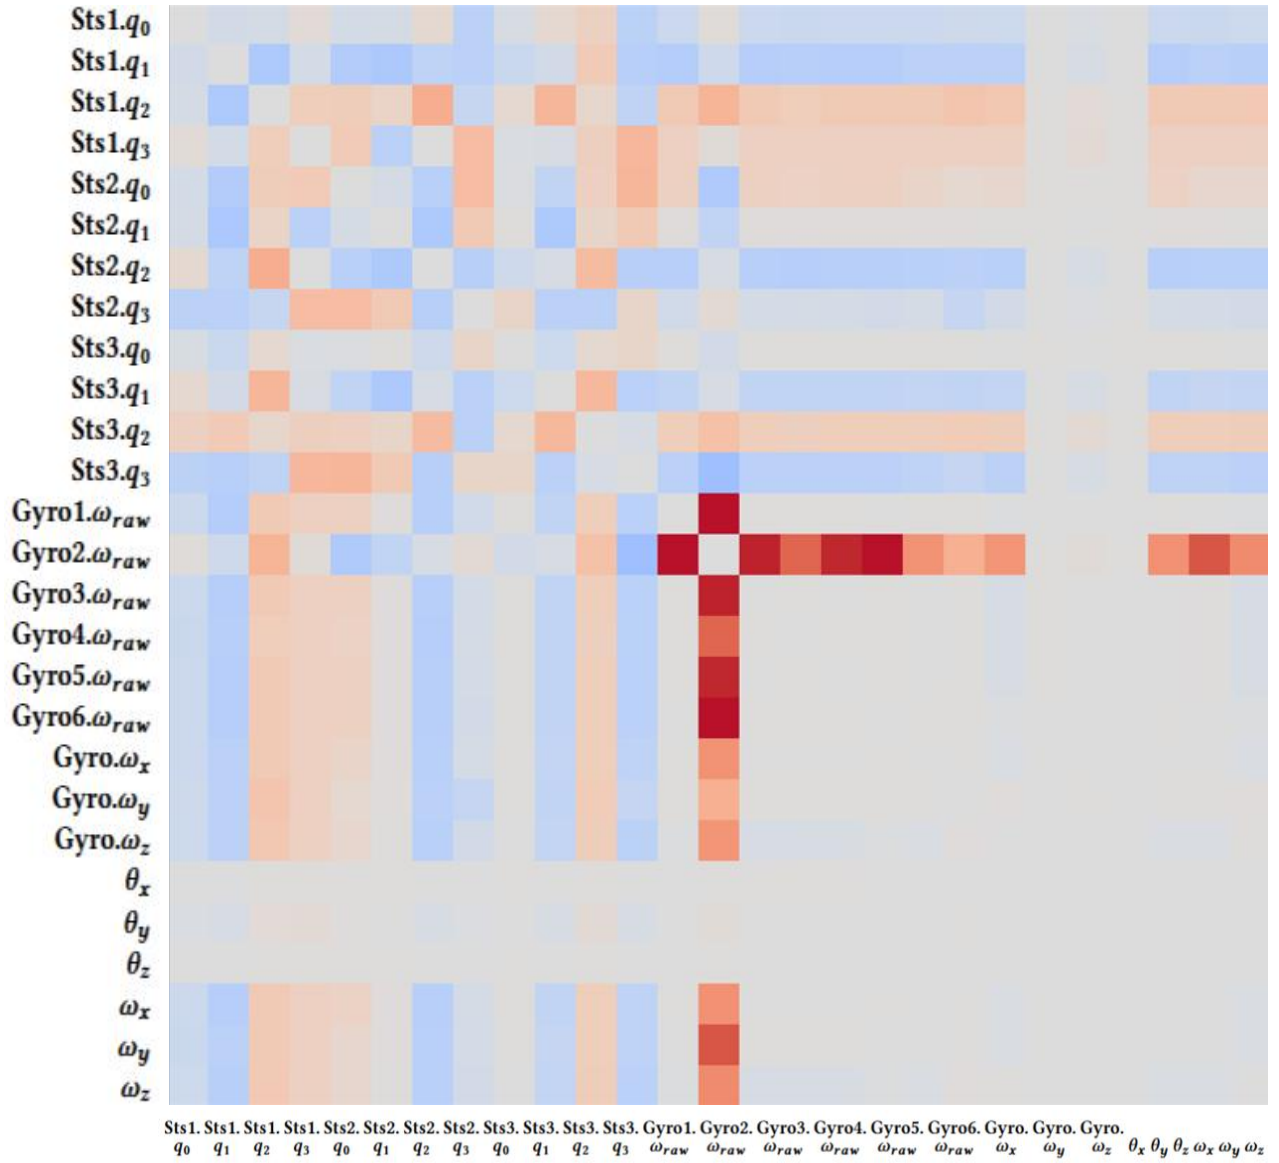


Figure 5: Before soft-thresholding

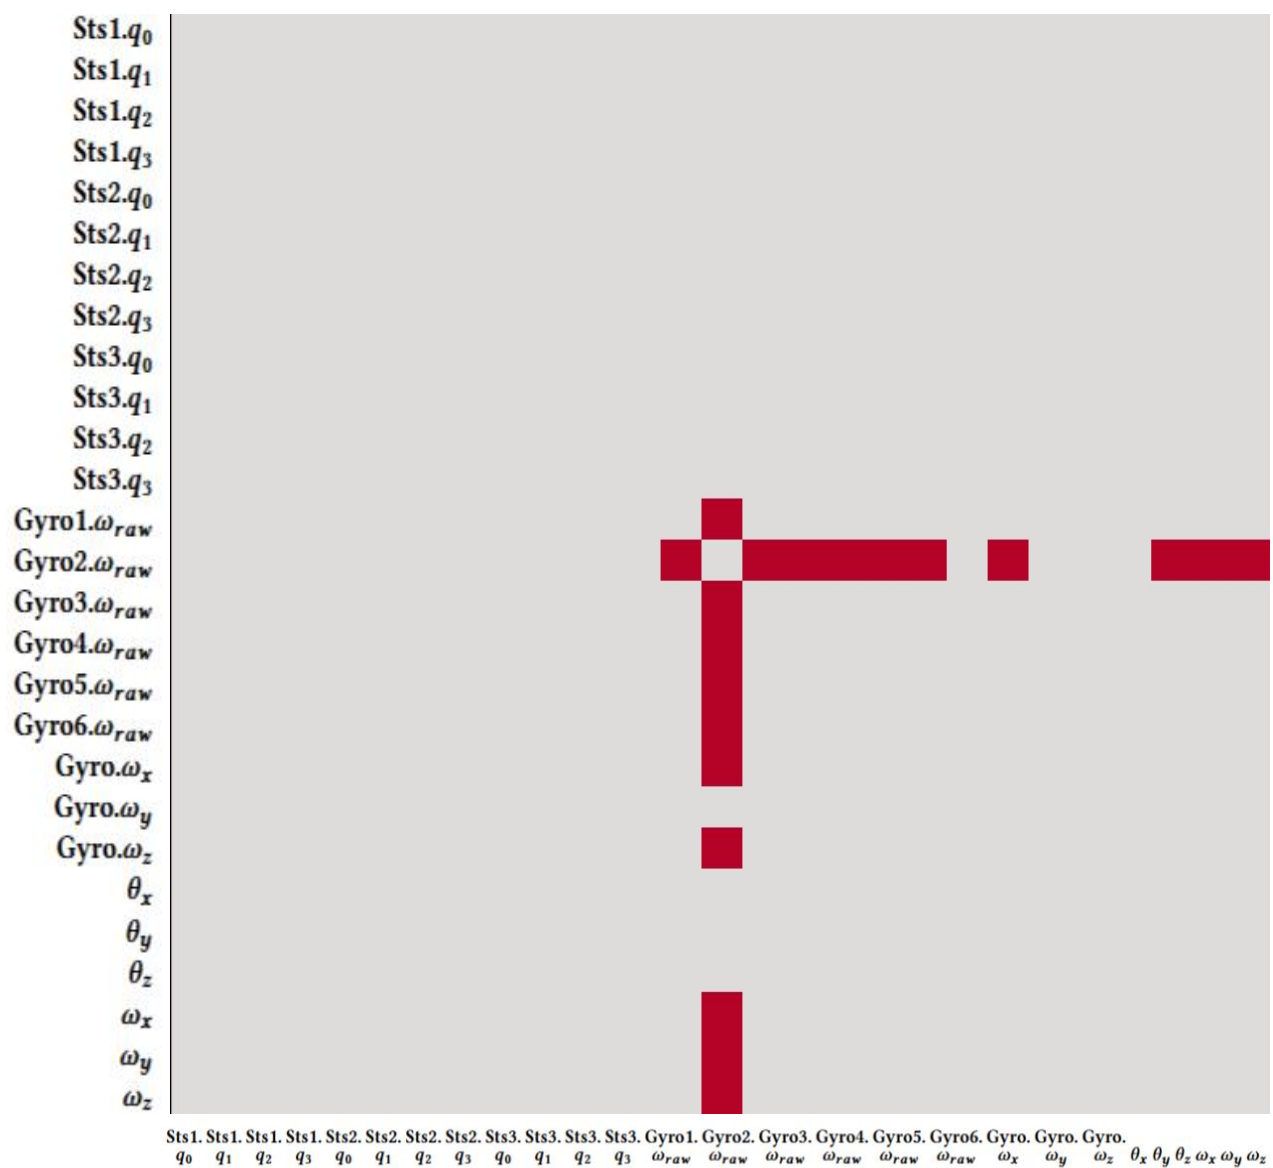


Figure 6: After soft-thresholding

#### A.4 Detailed Hyperparameter Configurations

**Table 1: Detailed Hyperparameter Configurations for ViSTSAD.**  $L$  denotes the window size,  $\tau$  the step size, and  $\ell$  the sub-window length. The thresholds  $\delta_1$  and  $\delta_2$  correspond to the residual augmentation thresholds for the six types of relationship matrices.

Dataset	$L$	$\tau$	$\ell$	Group O Matrices						Group C Matrices					
				$\overline{G}_O^o$		$\overline{G}_O^d$		$\overline{G}_O^v$		$\overline{G}_C^o$		$\overline{G}_C^d$		$\overline{G}_C^v$	
				$\delta_1$	$\delta_2$	$\delta_1$	$\delta_2$	$\delta_1$	$\delta_2$	$\delta_1$	$\delta_2$	$\delta_1$	$\delta_2$	$\delta_1$	$\delta_2$
<b>ATSADBench</b>	32	32	7	0.45	0.50	0.45	0.50	0.45	0.50	0.75	0.80	0.75	0.80	0.75	0.80
<i>SKAB Sub-datasets</i>															
SKAB (1.csv)	64	64	16	1.0	1.0	0.56835	0.56836	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (3.csv)	64	64	16	1.0	1.0	1.0	1.0	0.51963	0.51964	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (8.csv)	64	64	16	1.0	1.0	1.0	1.0	1.0	1.0	0.80475	0.80476	1.0	1.0	1.0	1.0
SKAB (other-2.csv)	64	64	16	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.44818	0.44819
SKAB (other-5.csv)	64	64	16	0.90947	0.90948	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-6.csv)	64	64	16	0.64159	0.64160	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-7.csv)	64	64	16	0.70263	0.70264	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-9.csv)	64	64	16	0.80081	0.80082	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-10.csv)	64	64	16	0.39950	0.39951	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-12.csv)	64	64	16	0.70021	0.70022	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
SKAB (other-14.csv)	64	64	16	0.73588	0.73589	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

**Table 2: Hyperparameter configurations for the three baseline methods: Direct, Prediction-based, and Anomllm.**

Method	Dataset	window size ( $L$ )	step size ( $\tau$ )	prediction horizon ( $H$ )
Direct	ATSADBench	10	10	-
	SKAB	64	64	-
Prediction-based	ATSADBench	20	5	5
	SKAB	64	64	64
Anomllm	ATSADBench	32	32	-
	SKAB	64	64	-