

RDS 冷拷贝

概述

实施方案

获取数据库UUID

容器节点设置华尔兹干涉

查询主备库的trove id

查询方法:

旧数据库操作

新数据库操作

关闭主库VIP

关闭主、从数据库

新库主从远程传输数据

新环境主库启动处理

新环境从库启动处理

从库主从拉齐

启动新数据库VIP

容器管理节点重置主从状态

binlog处理

问题故障

阶段	步骤	工作安排	实施内容	负责人
准备阶段	1	和客户及省分沟通 了解项目情况、需求、客户的时间安排、云池信息、人员信息等	源端联通云RDS 由于磁盘性能达不到业务要求，需要更换云盘类型，将原来的“高效云盘”换为“超高I/O”。 由于源端数据库备份时I/O提高影响业务系统，无法进行备份，采用停库进行复制的方式到新的RDS数据库中，并且在晚上10点于早上5点前完成	客户 云事业部 迁移工程师
	2	给客户发调研表，指导客户填写调研表 注意：应用系统名称和版本为必填列	协调省同时和客户填写风险书/委托书/调研表	客户 分公司 迁移工程师
	3	二次调研，迁移工程师登录源端客户控制台做调研及确认数据	登录云平台进行确认信息 基本信息：实例ID、同步类型、存储类型 配置信息：版本、同步方式、私网地址、安全组 数据使用空间	云事业部 迁移工程师
	4	在源RDS基础上开通同等规格资源和配置的新RDS，且只更换了存储类型为“超高I/O”。 并且修改Binlog日志备份时常	协调省同时将旧RDS的配置模板进行导出，将导出的配置模板开通新RDS时进行使用，从而保证新的配置和旧的一直。 需要客户或省同事修改控制台日志保留时长，待8点时修改备份时常为12个小时进行保留	客户 分公司 云事业部 迁移工程师
	5	需要客户和省份提前处理好备份问题 1. 省同事需要提前和虚拟化同事沟通好，确保支撑保障。 2. 客户需要提工单	1. 省公司同事提前和虚拟化同事进行沟通联系对接了一下 2. 客户通过工单的方式进行保证数据安全 保障问题。 工单中主要包函：晚上22点进行原来RDS数据盘和系统盘打快照 其内容。 工单号 179809	客户 分公司 云事业部 迁移工程师

RDS 冷拷贝

概述

问题分类	RDS数据库问题
涉及云池	长沙二区
底层环境	Centos 7.7 mysql5.7.34
问题描述	RDS进行磁盘更换，进行冷拷贝

实施方案

获取数据库UUID

联系相关底层人员，查询出数据库UUID

主库：0a7601f2-acb6-461a-95ce-f840a2e5cdf0

从库：1790aa05-0a7b-4af6-97c5-e27dd7b46929

容器节点设置华尔兹干涉

1. 获取该区域的容器管理节点号：2879

```
1 本地Shell × 2 172.29.3.154 × 3 172.29.3.154 × 4 172.29.3.154 × +
├── 2834.管理节点(3)
├── 2835.计算节点(20)
├── 2836.湖南湘西骨干云(湘西一区)(63)
│   ├── 2837.AZ01(20)
│   ├── 2838.a集群ARM全闪存储节点(10)
│   ├── 2839.a集群ARM高效存储节点(24)
│   ├── 2840.容器管理节点(3)
│   ├── 2841.监控节点(3)
│   └── 2842.管理节点(3)
├── 2843.湖南益阳骨干云(益阳一区)(63)
│   ├── 2844.AZ01(20)
│   ├── 2845.全闪存储节点(10)
│   ├── 2846.容器管理节点(3)
│   ├── 2847.监控节点(3)
│   ├── 2848.管理节点(3)
│   └── 2849.高效存储节点(24)
├── 2850.湖南邵阳骨干云(邵阳一区)(46)
│   ├── 2851.AZ01(20)
│   ├── 2852.CELL节点(3)
│   ├── 2853.全闪节点(10)
│   ├── 2854.监控节点(3)
│   ├── 2855.管理节点(3)
│   └── 2856.高效存储节点(24)
├── 2857.湖南郴州骨干云(郴州一区)(63)
│   ├── 2858.AZ01(20)
│   ├── 2859.a集群ARM高效存储节点(24)
│   ├── 2860.b集群ARM全闪存储节点(10)
│   ├── 2861.容器管理节点(3)
│   ├── 2862.监控节点(3)
│   └── 2863.管理节点(3)
├── 2864.湖南长沙骨干云(长沙二区)(336)
│   ├── 2865.AZ05 ARM计算节点(4)
│   ├── 2866.CRD控制节点(3)
│   ├── 2867.GPU节点(14)
│   ├── 2868.NAS管理节点(2)
│   ├── 2869.a集群高效存储节点(36)
│   ├── 2870.cell节点(5)
│   ├── 2871.c集群高效存储节点(5)
│   ├── 2872.d集群高效存储节点(36)
│   ├── 2873.e集群arm增强高效存储节点(6)
│   ├── 2874.f集群nvme超高IO全闪存储节点(5)
│   ├── 2875.nas高效块存储(5)
│   ├── 2876.ssd全闪(20)
│   ├── 2877.vpp节点(2)
│   ├── 2878.元数据节点(3)
│   ├── 2879.容器管理节点(3)
│   ├── 2880.容器计算节点(3)
│   ├── 2881.容器镜像节点(3)
│   ├── 2882.对象存储节点(31)
│   ├── 2883.接入节点(2)
│   ├── 2884.监控节点(3)
│   ├── 2885.管理节点(3)
│   ├── 2886.网络增强型计算节点(3)
│   ├── 2887.虚拟网络节点(6)
│   ├── 2888.裸金属节点(3)
│   ├── 2889.计算节点(160)
│   │   ├── 2890.AZ01(116)
│   │   ├── 2891.AZ03(40)
│   │   └── 2892.AZ04(4)
├── 2893.湖南骨干云(长沙一区)(321)
```


ssh://lix321@172.29.3.154:2222

2. 进入节点 1 并进入数据库节点

```
# 1
# kubectl exec -it mariadb-server-control-0 -n openstack -- bash
$ mysql --defaults-file=/etc/mysql/admin_user.cnf
```

命令解释:

通过 Kubernetes 进入 `openstack` 命名空间中的 `mariadb-server-control-0` Pod, 并在 Pod 内使用 `/etc/mysql/admin_user.cnf` 配置文件连接到 MySQL 数据库。

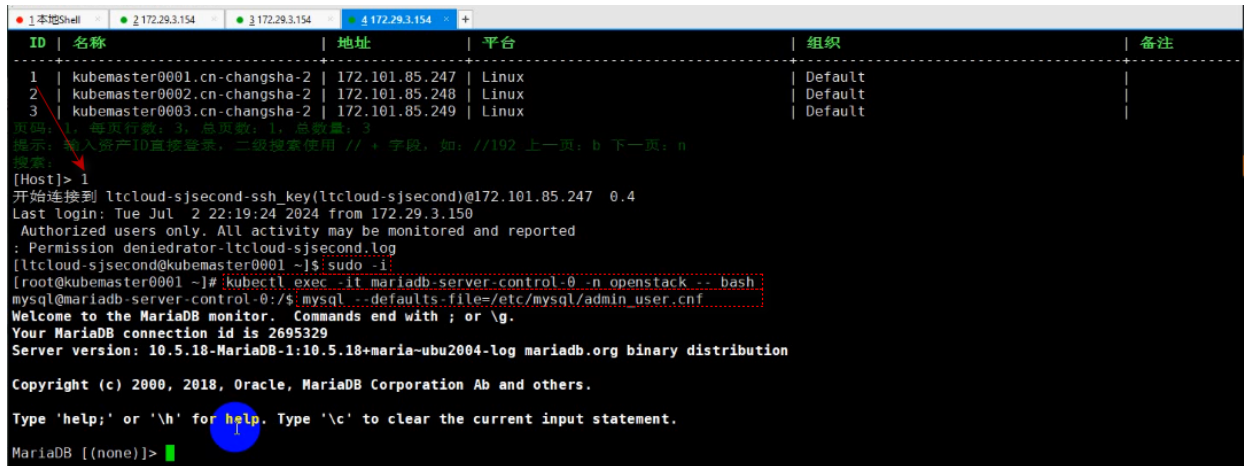

```

ID | 名称 | 地址 | 平台 | 组织 | 备注
---|---|---|---|---|---
1 | kubemaster0001.cn-changsha-2 | 172.101.85.247 | Linux | Default |
2 | kubemaster0002.cn-changsha-2 | 172.101.85.248 | Linux | Default |
3 | kubemaster0003.cn-changsha-2 | 172.101.85.249 | Linux | Default |

页码: 1, 每页行数: 3, 总页数: 1, 总行数: 3
提示: 输入资产ID直接登录, 二级搜索使用 // + 字段, 如: //192 上一页; b 下一页; n 搜索

[Host]> 1
开始连接到 ltcloud-sjsecond-ssh_key(ltcloud-sjsecond)@172.101.85.247 0.4
Last login: Tue Jul 2 22:19:24 2024 from 172.29.3.150
Authorized users only. All activity may be monitored and reported
: Permission deniedrator-ltcloud-sjsecond.log
[ltcloud-sjsecond@kubemaster0001 ~]$ sudo -i
[root@kubemaster0001 ~]# kubectl exec -it mariadb-server-control-0 -n openstack -- bash
mysql@mariadb-server-control-0:/$ mysql --defaults-file=/etc/mysql/admin_user.cnf
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 2695329
Server version: 10.5.18-MariaDB-1:10.5.18+maria-ubu2004-log mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

3. 关闭主备自动切换功能

```
update trove.groups set status='START' where id='0a7601f2-acb6-461a-95ce-f840a2e5cdf0';
```

```
update trove.groups set status='START' where id='1790aa05-0a7b-4af6-97c5-e27dd7b46929';
```

命令解释:

将 `trove.groups` 表中指定 ID 的记录的 `status` 字段更新为 `START`。

#核对下, 如果结果反馈为START则已关闭主备自动切换

```
trove group-reset-status 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
status=START
```

```
trove group-reset-status 1790aa05-0a7b-4af6-97c5-e27dd7b46929
status=START
```

命令解释:

`Trove` 命令用于检查之前更新的组的状态, 如果结果反馈为 `status=START`, 则表示这些组的主备自动切换功能已关闭。

查询主备库的trove_id

查询方法:

1. 通过UUID查询trove_id

```
trove group-show 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
trove group-show 1790aa05-0a7b-4af6-97c5-e27dd7b46929

#将查询出的master_id, 并再次查询master_id对应内容。主从都执行
trove show (master_id)

#再次将查询出的server_id, 再次查询server_id对应内容。主从都执行
trove show (server_id)
```

通过如上方法查询出环境对应的trove_id信息

```
#####旧环境信息#####
#主
56cc1609-8e2a-4458-b2bc-460c24529ddf
| OS-EXT-SRV-ATTR:hypervisor_hostname | ecm0043.a.cn-changsha-2
| OS-EXT-SRV-ATTR:instance_name      | instance-00001c9c
#从
d9e2cf81-3dd0-4fe7-9419-9f18e26c675b
| OS-EXT-SRV-ATTR:hypervisor_hostname | ecm0006.a.cn-changsha-2
| OS-EXT-SRV-ATTR:instance_name      | instance-00001c9f

#####旧环境信息#####
50d4929f-8275-4005-965f-a507d4243e3a
| OS-EXT-SRV-ATTR:hypervisor_hostname | ecm0034.a.cn-changsha-2
| OS-EXT-SRV-ATTR:instance_name      | instance-00002bca

e8ef980d-9142-4d19-bc78-744d5653a7f0
| OS-EXT-SRV-ATTR:hypervisor_hostname | ecm0007.a.cn-changsha-2
| OS-EXT-SRV-ATTR:instance_name      | instance-00002bcd
```

命令解释

- 旧数据库

- ****主****
 - ID: `56cc1609-8e2a-4458-b2bc-460c24529ddf`
 - Hypervisor 主机名: `ecm0043.a.cn-changsha-2`
 - 实例名: `instance-00001c9c`
- **从****
 - ID: `d9e2cf81-3dd0-4fe7-9419-9f18e26c675b`
 - Hypervisor 主机名: `ecm0006.a.cn-changsha-2`
 - 实例名: `instance-00001c9f`

- **新数据库**

- **主**
ID: 50d4929f-8275-4005-965f-a507d4243e3a
Hypervisor 主机名: ecm0034.a.cn-changsha-2
实例名: instance-00002bca
- 从**
ID: e8ef980d-9142-4d19-bc78-744d5653a7f0
Hypervisor 主机名: ecm0007.a.cn-changsha-2
实例名: instance-00002bcd

旧数据库操作

1. 进入旧trove节点

```
\# crictl exec -it 37f09c976283a bash  
  
\# virsh console instance-00001c9f
```

命令解释:

通过这两条命令，可以分别进入指定的容器和虚拟机环境

2. 停止VIP

```
cd /usr/local/bin  
cat ipset.sh  
ifconfig eth0:1 192.168.0.122 netmask 255.255.255.0 down
```

```
[root@mysql-vbqv bin]# cat ipset.sh  
ifconfig eth0:1 192.168.0.122 netmask 255.255.255.0 up  
[root@mysql-vbqv bin]# ifconfig eth0:1 192.168.0.122 netmask 255.255.255.0 down
```

命令解释:

切换到 `/usr/local/bin` 目录，查看 `ipset.sh` 脚本内容，并配置 `eth0:1` 网络接口的 IP 地址和子网掩码为 `192.168.0.122` 和 `255.255.255.0`，同时将其关闭

3. 停止主数据库

```
systemctl stop mysqld
```

```
[root@mysql-vbqv bin]# systemctl stop mysqld
```

4. 停止从库

```
systemctl stop mysqld
```

```
[root@mysql-vbqv-slave-1 ~]# systemctl stop mysqld
```

新数据库操作

关闭主库VIP

1. 连接主库，并进行关闭数据库

```
Opt>ecm0034.a.cn-changsha-2
```

```
sudo -i
```

```
[root@ocm0034 ~]# crictl ps | grep lib
```

```
d491743c7cf56          77d4061ef048e
```

```
[root@ocm0034 ~]# crictl exec -it d491743c7cf56 bash
```

```
[root@ocm0034 ~]# virsh console instance-00002bca
```

```
root
```

```
[root@mysql-5710 ~]# cd /usr/local/bin
```

```
[root@mysql-5710 ~]# cat ipset.sh
```

```
[root@mysql-5710 ~]# ifconfig eth0:1 192.168.0.49 netmask 255.255.255.0 down
```

```
[ltcloud-sjsecond@ecm0034 ~]$ exit
logout
[Host]>.ecm0034.a.cn-changsha-2
开始连接到 ltcloud-sjsecond-ssh_key[ltcloud-sjsecond]@172.101.84.34 0.4
Last login: Tue Jul 2 15:24:27 2024 from 172.29.3.150
Authorized users only. All activity may be monitored and reported
: Permission deniedrator-ltcloud-sjsecond.log
[ltcloud-sjsecond@ecm0034 ~]$ sudo -i
[root@ecm0034 ~]# crictl ps | grep lib
d491743c7cf56          77d4061ef048e          10 days ago          Running          Libvirt          0          69f9eae908d
40
[root@ecm0034 ~]# crictl exec -it d491743c7cf56 bash
[root@ecm0034 /]# ps -ef | grep virsh
root      30582  29147  0 15:27 pts/16      00:00:00 virsh console instance-00002bca
root      74570  60218  0 22:19 pts/18      00:00:00 grep --color=auto virsh
[root@ecm0034 /]# kill -9 30582
[root@ecm0034 /]# ps -ef | grep virsh
root      75264  69218  0 22:19 pts/18      00:00:00 grep --color=auto virsh
[root@ecm0034 /]#
```

```
mysql-5710 login: root
Password:
Last login: Tue Jul 2 21:22:01 on
[root@mysql-5710 ~]# cd /usr/local/
[root@mysql-5710 local]# cd bin/
[root@mysql-5710 bin]# cat ipset.sh
ifconfig eth0:1 192.168.0.49 netmask 255.255.255.0 up
[root@mysql-5710 bin]# ifconfig eth0:1 192.168.0.49 netmask 255.255.255.0 down
[root@mysql-5710 bin]#
```


命令解释:

命令用于在 `ecm0034.a.cn-changsha-2` 主机上, 以 `root` 身份进入特定容器和虚拟机, 查看并编辑 `ipset.sh` 脚本, 然后配置 `eth0:1` 网络接口的 IP 地址为 `192.168.0.49` 并将其关闭。

关闭主、从数据库

1. 关闭主数据库并且查看数据库状态

```
[root@mysql-5710 ~]# systemctl stop mysqld
```

```
[root@mysql-5710 bin]# systemctl stop mysqld
[root@mysql-5710 bin]#
[root@mysql-5710 mysql]# systemctl status mysqld
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; vendor preset: disabled)
   Active: inactive (dead) since Tue 2024-07-02 22:23:50 CST; 46s ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
   Process: 2730 ExecStart=/usr/sbin/mysqld --daemonize --pid-file=/var/run/mysqld/mysqld.pid $MYSQLD_OPTS (code=exited, status=0/SUCCESS)
   Process: 2708 ExecStartPre=/usr/bin/mysqld_pre_systemd (code=exited, status=0/SUCCESS)
    Main PID: 2733 (code=exited, status=0/SUCCESS)

Jul 02 11:43:31 mysql-5710.novalocal systemd[1]: Starting MySQL Server...
Jul 02 11:43:36 mysql-5710.novalocal systemd[1]: Started MySQL Server.
Jul 02 22:23:38 mysql-5710.novalocal systemd[1]: Stopping MySQL Server...
Jul 02 22:23:50 mysql-5710.novalocal systemd[1]: Stopped MySQL Server.
[root@mysql-5710 mysql]#
[root@mysql-5710 bin]# cd /var/lib/mysql
[root@mysql-5710 mysql]# ls
data
```

2. 连接并关闭从数据库并且查看数据库状态

```
Opt>ecm0007.a.cn-changsha-2
sudo -i
```

```
[root@ocm0034 ~]# crictl ps|grep lib
c6f63cefcdc6e
```

```
[root@ocm0034 ~]# crictl exec -it c6f63cefcdc6e bash
```

```
[root@ocm0034 ~]# virsh console instance-00002bcd
root
```

```
[root@mysql-5710-slave-1 ~] systemctl stop mysqld
[root@mysql-5710-slave-1 ~] systemctl status mysqld
```



```
运维-李李星, JumpServer 开源堡垒机

1) 输入 部分IP、主机名、备注 进行搜索登录(如果唯一)。
2) 输入 / + IP、主机名、备注 进行搜索, 如: /192.168.
3) 输入 p 进行显示您有权限的资产。
4) 输入 g 进行显示您有权限的节点。
5) 输入 h 进行显示您有权限的主机。
6) 输入 d 进行显示您有权限的数据库。
7) 输入 k 进行显示您有权限的Kubernetes。
8) 输入 r 进行刷新最新的机器和节点信息。
9) 输入 s 进行中文-English-日本語语言切换。
10) 输入 ? 进行显示帮助。
11) 输入 q 进行退出。

公告: 欢迎使用骨干云审计!

web 访问地址: 172.29.3.154:9080
xshell 访问地址: 172.29.3.154:2222

---软件运维审计组

Opt> ecm0007.a.cn-changsha-2
开始连接到 ltcloud-sjsecond-ssh_key(ltcloud-sjsecond)@172.101.04.7 0.4
Last login: Tue Jul 2 16:24:38 2024 from 172.29.3.150
Authorized users only. All activity may be monitored and reported
: Permission denied-rator-ltcloud-sjsecond.log
[ltcloud-sjsecond@ecm0007 ~]$ sudo -i
[root@ecm0007 ~]#

[root@ecm0007 ~]# crictl ps |grep lib
c6f63cefedc6e 77d4061ef048e 10 days ago Running Libvirt 0 88181f90b43
f6
[root@ecm0007 ~]# crictl exec -it c6f63cefedc6e bash
[root@ecm0007 /]# virsh console instance-00002bcd
Connected to domain instance-00002bcd
Escape character is ^]
error: operation failed: Active console session exists for this domain

[root@ecm0007 /]# ps -ef|grep virsh
root 73210 72445 0 22:22 pts/16 00:00:00 grep --color=auto virsh
root 170508 170266 0 16:25 pts/15 00:00:00 virsh console instance-00002bcd
[root@ecm0007 /]# kill -9 170508
[root@ecm0007 /]# virsh console instance-00002bcd
Connected to domain instance-00002bcd
Escape character is ^]

mysql-5710-slave-1 login: root
Password:
Last login: Tue Jul 2 21:32:02 on
[root@mysql-5710-slave-1 ~]# systemctl stop mysqld
[root@mysql-5710-slave-1 ~]#

[root@mysql-5710-slave-1 mysql]# systemctl status mysqld
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; vendor preset: disabled)
   Active: inactive (dead) since Tue 2024-07-02 22:23:32 CST; 1min 41s ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
   Process: 2692 ExecStart=/usr/sbin/mysqld --daemonize --pid-file=/var/run/mysqld/mysqld.pid $MYSQLD_OPTS (code=exited, status=0/SUCCESS)
   Process: 2670 ExecStartPre=/usr/bin/mysqld_pre_systemd (code=exited, status=0/SUCCESS)
   Main PID: 2695 (code=exited, status=0/SUCCESS)

Jul 02 11:43:44 mysql-5710-slave-1.novalocal systemd[1]: Starting MySQL Serve...
Jul 02 11:43:51 mysql-5710-slave-1.novalocal systemd[1]: Started MySQL Server.
Jul 02 22:23:28 mysql-5710-slave-1.novalocal systemd[1]: Stopping MySQL Serve...
Jul 02 22:23:32 mysql-5710-slave-1.novalocal systemd[1]: Stopped MySQL Server.
Hint: Some lines were ellipsized, use -l to show in full.
[root@mysql-5710-slave-1 mysql]#
[root@mysql-5710-slave-1 ~]# cd /var/lib/mysql
[root@mysql-5710-slave-1 mysql]# ls
data
[root@mysql-5710-slave-1 mysql]# mv
[root@mysql-5710-slave-1 mysql]# mv data data.bak
[root@mysql-5710-slave-1 mysql]# ls
data.bak
[root@mysql-5710-slave-1 mysql]#
```

命令解释:

命令用于在 ecm0007.a.cn-changsha-2 主机上, 以 root 身份进入特定容器和虚拟机, 停止 MySQL 服务并检查其状态。

新库主从远程传输数据

1. 新主库拷贝旧主库数据目录

```
cd /tmp
vi scp_slave.sh
rsync -av -e "ssh -p 59599" root@100.126.0.231:/var/lib/mysql/data /var/lib/mysql/

cat scp_slave.sh
rsync -av -e "ssh -p 59599" root@100.126.0.231:/var/lib/mysql/data /var/lib/mysql/

cd /tmp
nohup sh scp_master.sh >nohup_master 2>&1 &
du -sh /var/lib/mysql/data
```

```
[root@mysql-5710 mysql]# cat /tmp/scp_master.sh
rsync -av -e "ssh -p 59599" root@100.126.0.231:/var/lib/mysql/data /var/lib/mysql/
[root@mysql-5710 mysql]# cd /tmp/
[root@mysql-5710 tmp]# nohup sh scp_master.sh >nohup_master 2>&1 &
[1] 7945
[root@mysql-5710 tmp]# ls /var/lib/mysql/
data data.bak
[root@mysql-5710 tmp]# ls /var/lib/mysql/data
[root@mysql-5710 tmp]# du -sh /var/lib/mysql/
2.6G /var/lib/mysql/
[root@mysql-5710 tmp]# du -sh /var/lib/mysql/data
1.6G /var/lib/mysql/data
[root@mysql-5710 tmp]#
```

命令解释：

命令用于在 `/tmp` 目录中创建并运行脚本，通过 `rsync` 复制旧数据库上的 `主MySQL` 数据，然后检查目标目录的大小

2. 新从库拷贝旧从库数据目录

```
cd /tmp
vi scp_master.sh
rsync -av -e "ssh -p 59599" root@100.126.1.112:/var/lib/mysql/data /var/lib/mysql/

cat scp_master.sh
rsync -av -e "ssh -p 59599" root@100.126.1.112:/var/lib/mysql/data /var/lib/mysql/

cd /tmp
nohup sh scp_slave.sh >nohup_slave 2>&1 &
du -sh /var/lib/mysql/data
```

```
[root@mysql-5710-slave-1 mysql]# cat /tmp/scp_slave.sh
rsync -av -e "ssh -p 59599" root@100.126.1.112:/var/lib/mysql/data /var/lib/mysql/
[root@mysql-5710-slave-1 mysql]#
[root@mysql-5710-slave-1 tmp]# nohup sh scp_slave.sh >nohup_slave 2>&1 &
[1] 7816
[root@mysql-5710-slave-1 tmp]# du -sh /var/lib/mysql/
1.6G /var/lib/mysql/
[root@mysql-5710-slave-1 tmp]# du -sh /var/lib/mysql/data
776M /var/lib/mysql/data
[root@mysql-5710-slave-1 tmp]# ls /var/lib/mysql/
data data.bak
```

命令解释：

命令用于在 `/tmp` 目录中创建并运行脚本，通过 `rsync` 复制旧数据库上的 `MySQL` 数据，然后检查目标目录的大小

新环境主库启动处理

1. 启动mysql服务

```
systemctl start mysqld
```

2. 进入mysql进行配置

```
mysql -uroot -p'TJKudk0x0dZpYxmd83bwKyAXoPIGAdgTLALq'  
#####配置参数#####  
set sql_log_bin=0;  
//临时关闭二进制日志记录，以免接下来的操作记录到二进制日志中  
  
alter user 'root'@'localhost' identified by '4pfvGwUeBFLybvBsxGKh65DRaGR6NBgfKGRo';  
//修改 root 用户在本地主机上的密码  
  
alter user 'os_admin'@'localhost' identified by 'S3qiFXMW5BLHXG5w1CFXF90nL0LkKDTANX7F';  
alter user 'os_admin'@'127.0.0.1' identified by 'S3qiFXMW5BLHXG5w1CFXF90nL0LkKDTANX7F';  
//修改 os_admin 用户在本地主机上的密码。  
//修改 os_admin 用户在 127.0.0.1 地址上的密码  
  
GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, SHUTDOWN, PROCESS, FILE,  
REFERENCES, INDEX, ALTER, SHOW DATABASES, SUPER, CREATE TEMPORARY TABLES, LOCK TABLES,  
EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE,  
ALTER ROUTINE, CREATE USER, EVENT, TRIGGER ON *.* TO 'slave_d7b39984'@'%' identified by  
'30Xp2YJeyQXwLSoZ';  
//GRANT ... TO 'slave_d7b39984'@'%': 授予 slave_d7b39984 用户在所有主机上对所有数据库和表的各种权  
限,identified by '30Xp2YJeyQXwLSoZ': 设置用户密码。  
  
GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES, INDEX,  
ALTER, CREATE TEMPORARY TABLES, LOCK TABLES, EXECUTE, REPLICATION SLAVE, REPLICATION  
CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER  
ON *.* TO 'superuser'@'%' identified by 'eBuv_^P^UFwuvf(p~U$0j8' WITH GRANT OPTION;  
//GRANT ... TO 'superuser'@'%': 授予 superuser 用户在所有主机上对所有数据库和表的各种权  
限,identified by 'eBuv_^P^UFwuvf(p~U$0j8': 设置用户密码。  
  
flush privileges;  
//新 MySQL 的权限系统，使权限变更立即生效。
```

```
[root@mysql-5710 ~]# mysql -uroot -p'TJKudk0x0dzpYxmd83bwKyAXoPIGAdgTLALq'
mysql: [Warning] Using a password on the command line interface can be insecure.
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 5.7.34-log MySQL Community Server (GPL)

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> set sql_log_bin=0;
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'root'@'localhost' identified by '4pfvGwUe8FLybvBsxGKh65DRaGR6NBgfKGRo';
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'os_admin'@'localhost' identified by 'S3qiFXMM5BLHXG5w1CFXF90nL0LkKDTANX7F';
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'os_admin'@'127.0.0.1' identified by 'S3qiFXMM5BLHXG5w1CFXF90nL0LkKDTANX7F';
Query OK, 0 rows affected (0.00 sec)

mysql> GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES, INDEX, ALTER, CREATE TEMPORARY TABLES, LOCK TABLES, EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER ON *.* TO 'slave_d7b39984'@'%' identified by '30Xp2YJeyQXwLSoZ' WITH GRANT OPTION;
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql> GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES, INDEX, ALTER, CREATE TEMPORARY TABLES, LOCK TABLES, EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER ON *.* TO 'superuser'@'%' identified by '30Xp2YJeyQXwLSoZ' WITH GRANT OPTION;
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql> flush privileges;
Query OK, 0 rows affected (0.00 sec)

mysql>
```

新环境从库启动处理

1. 启动mysql服务

```
tail /tmp/nohup_salve
```

```
systemctl start mysqld
```

```
[root@mysql-5710-slave-1 ~]# ps -elf | grep rsync
0 S root    17939 17904  0 80  0 - 28203 pipe_w 03:43 ttyS0    00:00:00 grep --color=auto rsync
[root@mysql-5710-slave-1 ~]# ps -elf | grep
[root@mysql-5710-slave-1 ~]# ls /tmp/scp_slave.sh
[root@mysql-5710-slave-1 ~]# ps -elf | grep scp_slave
0 S root    17941 17904  0 80  0 - 28203 pipe_w 03:43 ttyS0    00:00:00 grep --color=auto scp_slave
[root@mysql-5710-slave-1 ~]# tail /tmp/nohup_salve
data/yearning/core_total_tickets.frm
data/yearning/core_total_tickets.ibd
data/yearning/core_workflow_details.frm
data/yearning/core_workflow_details.ibd
data/yearning/core_workflow_tpls.frm
data/yearning/core_workflow_tpls.ibd
data/yearning/db.opt
sent 77,066 bytes   received 378,076,041,927 bytes   20,273,808.56 bytes/sec
total size is 377,983,492,250   speedup is 1.00
[root@mysql-5710-slave-1 ~]# systemctl start mysqld
[root@mysql-5710-slave-1 ~]#
```

2. 进入mysql进行配置

```
mysql -uroot -p'yH5kmgz0ppr83XvQm3egZypar0rLKQcNcWvL'
```

```
#####配置参数#####
```

```
set sql_log_bin=0;
```

```
//临时关闭二进制日志记录，以免接下来的操作记录到二进制日志中
```

```
alter user 'root'@'localhost' identified by 'a98VzqugpgAvGLaT9wPI7EpAJCaTB1jhWaB8';
```

```
//修改 root 用户在本地主机上的密码
```



```

alter user 'os_admin'@'localhost' identified by
'TWKCLMxcxChOMAEUcQUo7LJyJiOpT9aQIWJp';
alter user 'os_admin'@'127.0.0.1' identified by
'TWKCLMxcxChOMAEUcQUo7LJyJiOpT9aQIWJp';
//修改 os_admin 用户在本地主机上的密码。
//修改 os_admin 用户在 127.0.0.1 地址上的密码

```

```

GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, SHUTDOWN, PROCESS, FILE,
REFERENCES, INDEX, ALTER, SHOW DATABASES, SUPER, CREATE TEMPORARY TABLES, LOCK
TABLES, EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW,
CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER ON *.* TO
'slave_d7b39984'@'%' identified by '30Xp2YJeyQXwLSoZ';
//GRANT ... TO 'slave_d7b39984'@'%': 授予 slave_d7b39984 用户在所有主机上对所有数据库和表的
各种权限,identified by '30Xp2YJeyQXwLSoZ': 设置用户密码。

```

```

GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES,
INDEX, ALTER, CREATE TEMPORARY TABLES, LOCK TABLES, EXECUTE, REPLICATION SLAVE,
REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE
USER, EVENT, TRIGGER ON *.* TO 'superuser'@'%' identified by
'eBuv_^P^UFwuvf(p~U$0j8' WITH GRANT OPTION;
//GRANT ... TO 'superuser'@'%': 授予 superuser 用户在所有主机上对所有数据库和表的各种权
限,identified by 'eBuv_^P^UFwuvf(p~U$0j8': 设置用户密码。

```

```

flush privileges;
//新 MySQL 的权限系统,使权限变更立即生效。

```

```

Opt> .ecm0007.a.cn-changsha-2
开始连接到 ltcloud-sjsecond-ssh_key(ltcloud-sjsecond)@172.101.84.7 0.4
Last login: Tue Jul 2 23:41:38 2024 from 172.29.3.150
Authorized users only. All activity may be monitored and reported
: Permission deniedrator-ltcloud-sjsecond.log
[ltcloud-sjsecond@ecm0007 ~]$ sudo -i
[root@ecm0007 ~]# crictl exec -it c6f63cefcd6e bash
[root@ecm0007 /]# virsh console instance-00002bcd
Connected to domain instance-00002bcd
Escape character is ^]
error: operation failed: Active console session exists for this domain

[root@ecm0007 /]# ps -elf | grep virsh
0 S root      196592 191368  0 80   0 - 2676 pipe_w 03:41 pts/17    00:00:00 grep --color=auto virsh
0 S root      252811 251794  0 80   0 - 52963 futex_ Jul02 pts/18    00:00:00 virsh console instance-00002bcd
[root@ecm0007 /]# kill -9 252811
[root@ecm0007 /]# virsh console instance-00002bcd
Connected to domain instance-00002bcd
Escape character is ^]

```

```

mysql> set sql log bin=0;
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'root'@'localhost' identified by 'a98VzquggpAvGLaT9wPI7EpAJCaTB1jhWaB8';
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'os_admin'@'localhost' identified by 'TWKCLMxcxChOMAEUcQUo7LJyJiOpT9aQIWJp';
Query OK, 0 rows affected (0.00 sec)

mysql> alter user 'os_admin'@'127.0.0.1' identified by 'TWKCLMxcxChOMAEUcQUo7LJyJiOpT9aQIWJp';
Query OK, 0 rows affected (0.00 sec)

mysql> GRANT SELECT, INSERT, UPDATE, DELETE, CREATE, DROP, RELOAD, PROCESS, REFERENCES, INDEX, ALTER, CREATE TEMPORARY TABLES, LOCK TABL
ES, EXECUTE, REPLICATION SLAVE, REPLICATION CLIENT, CREATE VIEW, SHOW VIEW, CREATE ROUTINE, ALTER ROUTINE, CREATE USER, EVENT, TRIGGER O
N *.* TO 'superuser'@'%' identified by '30Xp2YJeyQXwLSoZ' WITH GRANT OPTION;
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql> flush privileges;
Query OK, 0 rows affected (0.01 sec)

```

从库主从拉齐

进入从库

```
Mysql
stop slave;
reset slave all;

CHANGE MASTER TO MASTER_HOST='100.126.0.211', MASTER_PORT=3306,
MASTER_USER='slave_d7b39984', MASTER_PASSWORD='30Xp2YJeyQXwLSoZ', MASTER_AUTO_POSITION=1,
MASTER_CONNECT_RETRY=15
//配置主从复制
-MASTER_HOST='100.126.0.211': 主服务器的 IP 地址。
-MASTER_PORT=3306: 主服务器的端口号。
-MASTER_USER='slave_d7b39984': 用于复制的从服务器用户。
-MASTER_PASSWORD='30Xp2YJeyQXwLSoZ': 从服务器用户的密码。
-MASTER_AUTO_POSITION=1: 启用 GTID 自动定位。
-MASTER_CONNECT_RETRY=15: 连接重试间隔时间。

start slave;

Show slave status \G;
```

```
mysql> exit
[root@mysql-5710-slave-1 ~]# mysql
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 68
Server version: 5.7.34-log MySQL Community Server (GPL)

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> stop slave ;
Query OK, 0 rows affected (0.01 sec)

mysql> reset slave all;
Query OK, 0 rows affected (0.02 sec)

mysql> CHANGE MASTER TO MASTER_HOST='100.126.0.211', MASTER_PORT=3306, MASTER_USER='slave_d7b39984', MASTER_PASSWORD='30Xp2YJeyQXwLSoZ',
MASTER_AUTO_POSITION=1, MASTER_CONNECT_RETRY=15;
Query OK, 0 rows affected, 2 warnings (0.03 sec)

mysql> start slave;
Query OK, 0 rows affected (0.04 sec)

mysql> show slave status \G;
***** 1. row *****
Slave_IO_State: Waiting for master to send event
Master_Host: 100.126.0.211
Master_User: slave_d7b39984
Master_Port: 3306
Connect_Retry: 15
Master_Log_File: mysql-bin.000601
Read_Master_Log_Pos: 498
Relay_Log_File: mysql-relay-bin.000002
Relay_Log_Pos: 414
Relay_Master_Log_File: mysql-bin.000601
Slave_IO_Running: Yes
Slave_SQL_Running: Yes
Replicate_Do_DB:
Replicate_Ignore_DB:
Replicate_Do_Table:
Replicate_Ignore_Table:
Replicate_Wild_Do_Table:
Replicate_Wild_Ignore_Table:
Last_Errno: 0
Last_Error:
Skip_Counter: 0
Exec_Master_Log_Pos: 498
Relay_Log_Space: 621
Until_Condition: None
Until_Log_File:
```

启动新数据库VIP

```
sh /usr/local/bin/ipset.sh
```

```
[root@mysql-5710 ~]# sh /usr/local/bin/ipset.sh
[root@mysql-5710 ~]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
  link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
  inet 127.0.0.1/8 scope host lo
    valid_lft forever preferred_lft forever
  inet6 ::1/128 scope host
    valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
  link/ether fa:16:3e:89:8a:b9 brd ff:ff:ff:ff:ff:ff
  inet 192.168.0.123/24 brd 192.168.0.255 scope global eth0
    valid_lft forever preferred_lft forever
  inet 192.168.0.49/24 brd 192.168.0.255 scope global secondary eth0:1
    valid_lft forever preferred_lft forever
  inet6 fe80::f816:3eff:fe89:8ab9/64 scope link
    valid_lft forever preferred_lft forever
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
  link/ether fa:16:3e:c6:8b:4f brd ff:ff:ff:ff:ff:ff
  inet 100.126.0.211/22 brd 100.126.3.255 scope global eth1
    valid_lft forever preferred_lft forever
  inet6 fe80::f816:3eff:fec6:8b4f/64 scope link
    valid_lft forever preferred_lft forever
[root@mysql-5710 ~]#
```

容器管理节点重置主从状态

```
####重置实例华尔兹状态
trove group-reset-status 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
trove group-reset-status 1790aa05-0a7b-4af6-97c5-e27dd7b46929

####查看实例华尔兹状态
trove group-show 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
trove group-show 1790aa05-0a7b-4af6-97c5-e27dd7b46929
```

```
[root@kubemaster0001 ~]# trove group-reset-status 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
[root@kubemaster0001 ~]# trove group-reset-status 1790aa05-0a7b-4af6-97c5-e27dd7b46929
[root@kubemaster0001 ~]# trove group-show 0a7601f2-acb6-461a-95ce-f840a2e5cdf0
+-----+-----+
| Property | Value |
+-----+-----+
| created | 2023-12-21 02:10:47 |
| datastore_version_id | ef1d904e-3e84-4baf-8a5e-59eecbd7c80c |
| deleted | 0 |
| error | |
| id | 0a7601f2-acb6-461a-95ce-f840a2e5cdf0 |
| master_id | 6523ab80-931c-4df1-a2cf-36b7c809cc81 |
| members | [u'6523ab80-931c-4df1-a2cf-36b7c809cc81', u'723c74f7-18dd-4ae2-b57c-46b7717983e8'] |
| meta | {u'server_group_id': u'al4da59e-35c9-4f58-b839-70df7e7fe367', u'availability_zone': u'az01-cell01-cn-changsha-2'} |
| name | mysql-public |
| network | {u'subnet_id': u'81b21fc9-4163-4bc9-97f4-df33b80a7064', u'net_id': u'84852c48-eacc-48c2-8bc4-0efb51bbefa4'} |
| proxy_master_id | None |
| proxy_members | None |
| proxy_vip_ip | None |
| proxy_vip_port_id | None |
| readonly_members | None |
| repl_account | slave_lc7c5476 |
| repl_password | crypto_utils:zSS7pFmqUUCm/nerAXHetCAlfBFfiQ6Un4t+tcaHPgXmfi8PvguUaF47jYXNNp23 |
| replica_net_sec_group_id | 03fdec32-c8d3-48e5-8ed6-682427f221de |
| replica_sync_mode | None |
| status | COMPLETED |
| tenant_id | 6038c99eb43d4a4cacf95435a40348b2 |
| type | MYSQL_MS |
| vip_ip | 192.168.0.122 |
| vip_net_id | 84852c48-eacc-48c2-8bc4-0efb51bbefa4 |
| vip_port_id | 21151f32-03de-43b5-8e46-0b69f51d16be |
+-----+-----+
[root@kubemaster0001 ~]#
```

命令解释：

查看实例状态：查看两个实例（ID 分别为 0a7601f2-acb6-461a-95ce-f840a2e5cdf0 和 1790aa05-0a7b-4af6-97c5-e27dd7b46929 ）的当前状态。

主库处理

- ```
[root@mysql-5710 ~]# cat /var/lib/mysql/data/mysql-bin.index
/var/lib/mysql/data/mysql-bin.000599
/var/lib/mysql/data/mysql-bin.000600
/var/lib/mysql/data/mysql-bin.000601
```

- ```
[root@mysql-5710 ~]#cat/etc/trove/conf.d/binlog.conf
[DEFAULT]
name = mysql-bin.000002
status = COMPLETED

!!将"name = mysql-bin.000002"更改为 name = "mysql-bin.000598"
```

```
[root@mysql-5710 ~]# cat /var/lib/mysql/data/mysql-bin.index  
/var/lib/mysql/data/mysql-bin.000599  
/var/lib/mysql/data/mysql-bin.000600  
/var/lib/mysql/data/mysql-bin.000601  
[root@mysql-5710 ~]# vi /etc/trove/conf.d/binlog.conf
```

[DEFAULT]
name = mysql-bin.000598
status = COMPLETED

I

:wq!

1. 查看当前binlog位置进行填写

!! 注意binglog修改, 根据旧主机查询出来的主从binlog进行修改如: mysql-bin.000598

2. 将查询到的binlog最小的一条进行填写到对应位置

```
[root@mysql-5710-slave-1 ~]# cat /var/lib/mysql/data/mysql-bin.index
/var/lib/mysql/data/mysql-bin.000599
/var/lib/mysql/data/mysql-bin.000600
/var/lib/mysql/data/mysql-bin.000601
[root@mysql-5710-slave-1 ~]# vi /etc/trove/conf.d/binlog.conf
[DEFAULT]
name = mysql-bin.000598
status = COMPLETED
```

为了保障客户的业务，立马联系了二线 底层人员进行对磁盘进行解除QOS网络流量限制，从而有所缓解，并于5点半顺利交接给客户进行业务验证。

[illegible]

