
## 启动路由配置

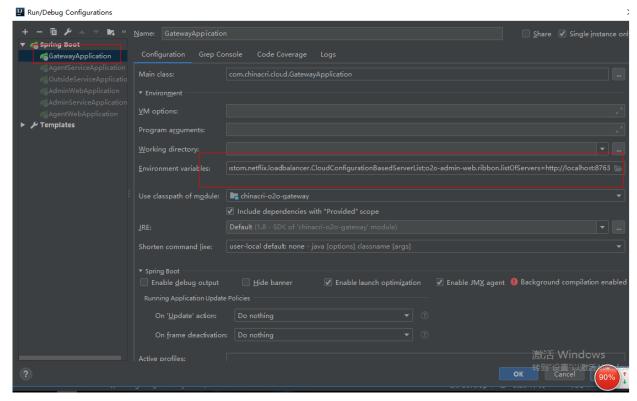

#### gateway

o2o-admin-web.ribbon.NIWSServerListClassName

com. chinacri. cloud. custom. netflix. loadbalancer. CloudConfigurationBasedServerList o2o-admin-web. ribbon. listOfServers

## http://localhost:8763

o2o-agent-web.ribbon.NIWSServerListClassName

com. chinacri. cloud. custom. netflix. loadbalancer. CloudConfigurationBasedServerList o2o-agent-web. ribbon. listOfServers

### http://localhost:8783

#### agent-web

o2o-agent.ribbon.NIWSServerListClassName

com. chinacri. cloud. custom. netflix. loadbalancer. CloudConfigurationBasedServerList o2o-agent.ribbon.listOfServers

## http://localhost:8782

#### agent-service

o2o-outside.ribbon.NIWSServerListClassName

com. chinacri. cloud. custom. netflix. loadbalancer. CloudConfigurationBasedServerList

## http://localhost:5500

## outside 配置

## SDKVechileToPpspRpcService

```
inBizImpljava × ② VechileToPpspRpcClientjava × ② VechileToPpspRpcService.java × ② VechileToPpspRpcServiceImpljava × ② SDKVechileToPpspRpcServiceImpljava × ② SDKVechileToPpspRpcServiceImpljava × ② SDKVechileToPpspRpcServiceImpljava × ② SDKVechileToPpspRpcServiceImpljava × ③ SDKVechileToPpspRpcServiceImpljava × ③ SDKVechileToPpspRpcService;

### 

| Package com. chinacri. cloud. sdk. service;

| Pack
```

# cfg文件

