

print

1、测试修复缺陷 20190516



缺陷清单.xlsx
20.36KB

2、平台接口 demo 20190517

- http --优先

-dubbo

3、平台接口迁移

梳理公共模块 20190523

平台接口迁移（17个） 5, 6, 6

接口调用 carpcip 调用 微服务

ID	CODE	URI	METHOD	SECRET	NAME	HOST	LOCKED	REMARK	CREA
32	o2o-agent	/agent-wb/*	POST	123456	代理人服务	172.16.222.59	(Null)	(Null)	(Null)
33	o2o-agent	/agent-wb/*	PUT	123456	代理人服务	172.16.222.59	(Null)	(Null)	(Null)
34	o2o-agent	/agent-wb/*	PUT	123456	代理人	172.16.222.101	(Null)	(Null)	(Null)
35	o2o-agent	/agent-wb/*	POST	123456	代理人	172.16.222.101	(Null)	(Null)	(Null)
36	o2o-agent	/agent-wb/*	GET	123456	代理人	172.16.222.101	(Null)	(Null)	(Null)
37	o2o-agent	/agent-wb/*	POST	123456	代理人	172.16.222.39	(Null)	(Null)	(Null)
38	o2o-agent	/agent-wb/*	PUT	123456	代理人	172.16.222.39	(Null)	(Null)	(Null)
39	o2o-agent	/agent-wb/*	GET	123456	代理人	172.16.222.39	(Null)	(Null)	(Null)
51	o2o-agent	/agent-wb/*	POST	123456	代理人服务	172.16.222.73	(Null)	(Null)	(Null)
53	o2o-agent	/agent-wb/*	PUT	123456	代理人服务	172.16.222.73	(Null)	(Null)	(Null)
52	o2o-agent	/agent-wb/*	GET	123456	代理人服务	172.16.222.73	(Null)	(Null)	(Null)
56	o2o-agent	/agent-wb/*	PUT	123456	代理人服务	172.16.222.130	(Null)	(Null)	(Null)
55	o2o-agent	/agent-wb/*	POST	123456	代理人服务	172.16.222.130	(Null)	(Null)	(Null)
54	o2o-agent	/agent-wb/*	GET	123456	代理人服务	172.16.222.130	(Null)	(Null)	(Null)

1、营销支持管理系统（chinacri-pagent）（chinacri-pmsms）

--后续项目

- 2、微信公众号优化项目（chinacri-pweixin）
- 3、富德e管理优化项目（chinacri-pbpm）
- 4、O2O优化项目（chinacri-po2o）

010812201911

```
ssh-keygen -t rsa -C "zhiwei.liu003@china-cri.com" -b 4096
```

🚩	C	chinacri-po2o / chinacri-po2o-vehicle 车险出单微服务	钟志强
🚩	C	chinacri-po2o / chinacri-po2o-underwrite 承保微服务	
🚩	C	chinacri-po2o / chinacri-po2o-platform 平台对接接口微服务	刘志伟
🚩	C	chinacri-po2o / chinacri-po2o-policytrans 承保数据传送	
🚩	C	chinacri-pbase / chinacri-pbase-common	
🚩	C	chinacri-po2o / chinacri-po2o-web 前端界面	钟志强
🚩	C	chinacri-po2o / chinacri-po2o-coreservice 核心业务接口	尹光辉

大家把手里要做的事情 分阶段列个里程碑 排个期周五下班前发给我

carpcip 调用微服务

```
npm config set registry http://192.168.13.60:8081/nexus/content/groups/npm-group/
```

<dependency>

```
<groupId>com.chinacri.cloud.pagent</groupId>
```

```
<artifactId>chinacri-pagent-print-spi</artifactId>
```

```
<version>${b2b.print.spi.version}</version>
```

```
</dependency>
```


b2b-print-web.ribbon.NIWSServerListClassName

com.chinacri.cloud.custom.netflix.loadbalancer.CloudConfigurationBasedServerList

b2b-print-web.ribbon.listOfServers

<http://localhost:8884>

SINCE. 1899

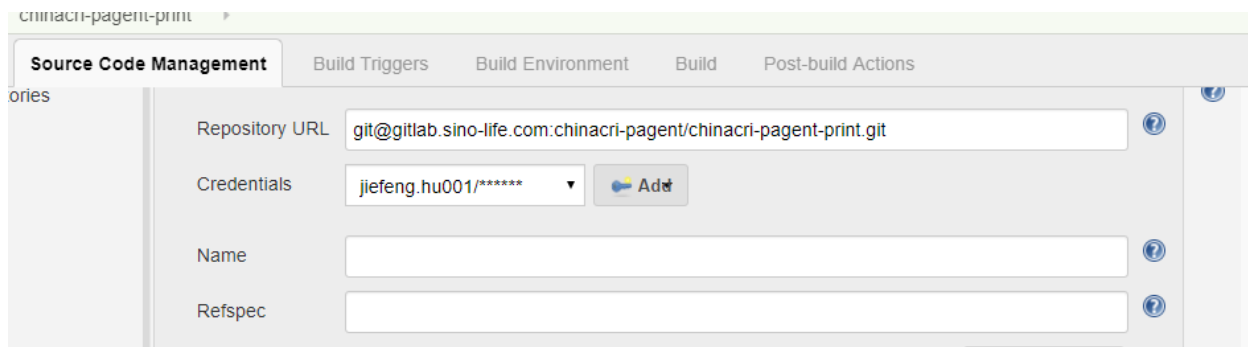

The screenshot shows the 'Source Code Management' tab of a GitLab CI configuration page for a project named 'chinacri-pagent-print'. The page has a sidebar on the left with the word 'ories' visible. The main content area has a header with tabs: 'Source Code Management', 'Build Triggers', 'Build Environment', 'Build', and 'Post-build Actions'. Below the tabs, there are four input fields: 'Repository URL' (containing 'git@gitlab.sino-life.com:chinacri-pagent/chinacri-pagent-print.git'), 'Credentials' (containing 'jiefeng.hu001/*****' and an 'Add' button), 'Name' (empty), and 'Refspec' (empty). Each input field has a help icon (a question mark in a circle) to its right.

172.16.222.39

<http://172.16.222.39:9527/login>