


REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	13/10/26
B	Audit v3: flange holes 6.6 (D1), M5 drill 10 (F08), groove 4.75 (OPEN-10) (#272)	Claude	16/10/26
C	M5 tapped through (#275); first drawing issued (#280)	Claude; drawing SteveCAD	17/10/26

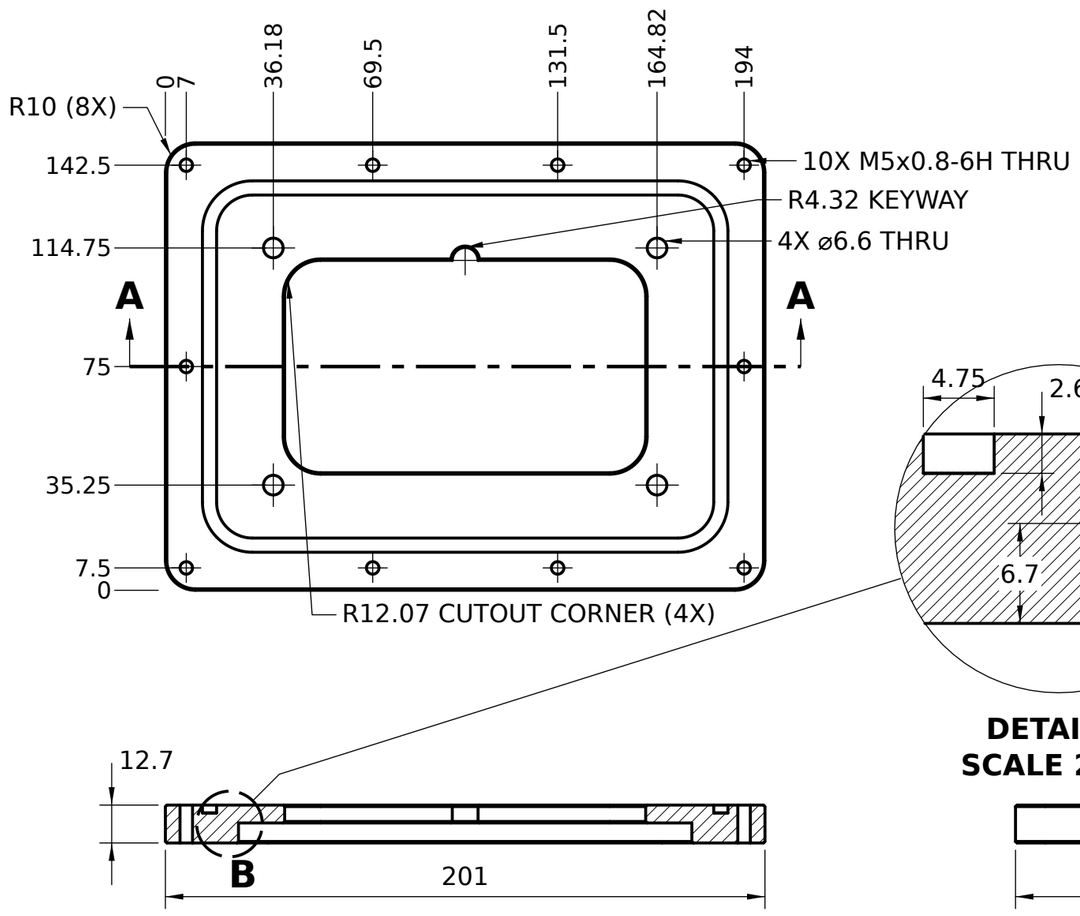


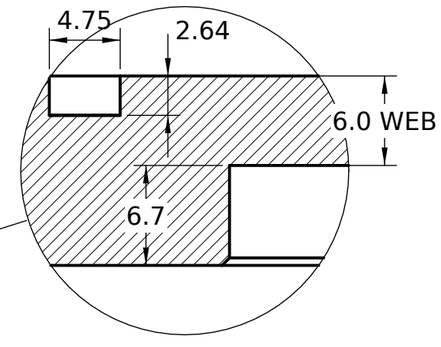

DETAIL B
SCALE 2.5:1

SECTION A-A



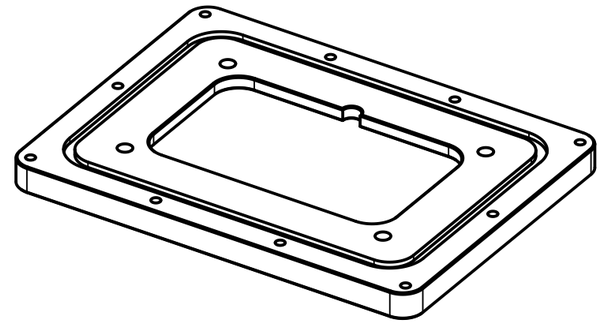

TRIMETRIC VIEW (SCALE 1:2.5)

NOTES:

1. 6061-T6 ALUMINUM, 1/2 IN (12.7) PLATE x 205 x 155. THE TOP AS SHOWN IS THE FIREWALL FACE.
2. FIREWALL FACE GROOVE FOR AN AS568-261 O-RING: 4.75 WIDE x 2.64 DEEP, INSIDE 166.66 x 115.0 R12, OUTSIDE R16.75. GROOVE Ra 0.8.
3. ENGINE FACE POCKET 152 x 104 R10 LEAVES A 6.0 WEB UNDER THE CONNECTOR. CUTOUT 121.03 x 71.17 R12.07 ±0.25 WITH THE R4.32 KEY NOTCH (TE DRBF-1X).
4. THE 0.5 x 45° CHAMFERS (PERIMETER, POCKET RIM, CUTOUT, FLANGE HOLES) ARE IN THE MODEL: CUT THEM AS SHOWN.
5. THE 10 M5 HOLES ARE TAPPED RIGHT THROUGH. FIREWALL SCREWS: M5 A2, SHEET (+ WASHER) + 7.5 TO 12.7 LONG, TIP AT OR UNDER THE ENGINE FACE, THREAD SEALANT ON EACH.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
DRB102 FIREWALL PLATE

PART / DWG NO.	REV	MATERIAL
ST185-DRB-101	C.01	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	1 OF 1	2026-10-19	SteveCAD

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\drb102-plate\\DRB102-firewall-plate.step

3RD ANGLE