REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	unknown	14/10/26
B	Fairsolid rev 4: OEM pump position (24.20 -> 24.88 cm3)	unknown	14/10/26
C	Fairsolid rev 6: R4 corners, 4 floor windows, 4 side windows, back pad trimmed	unknown	14/10/26
D	Fairsolid rev 7 build (19.21 -> 20.00 cm3); first drawing issued (#279)	unknown; drawing SteveCAD	14/10/26
E	Option B: two side arms, 2 M4 taps + key, R0.8 fillets (3 skipped)	SteveCAD	17/10/26

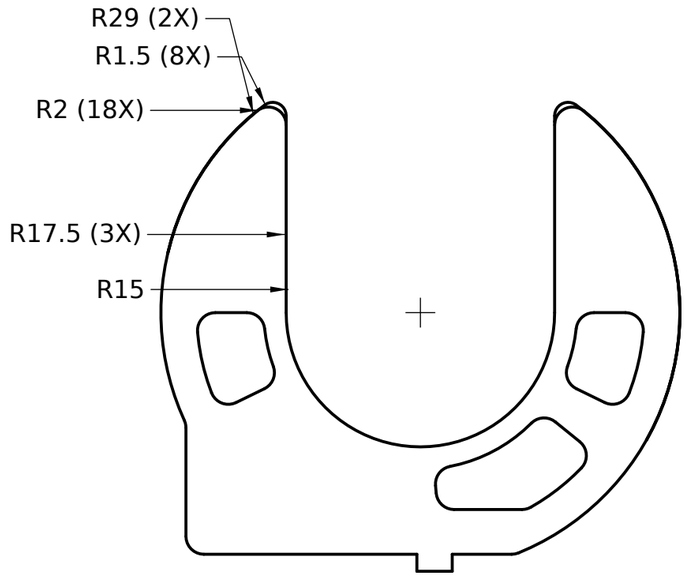

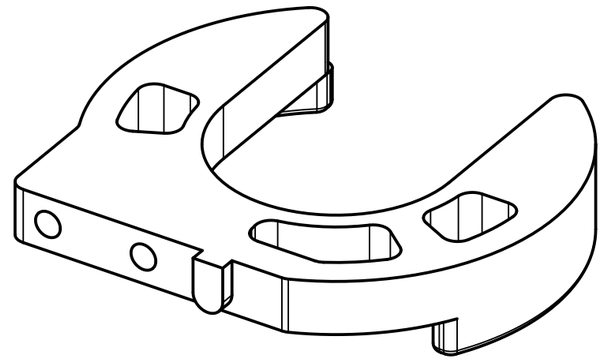

TRIMETRIC VIEW (SCALE 1.5:1)

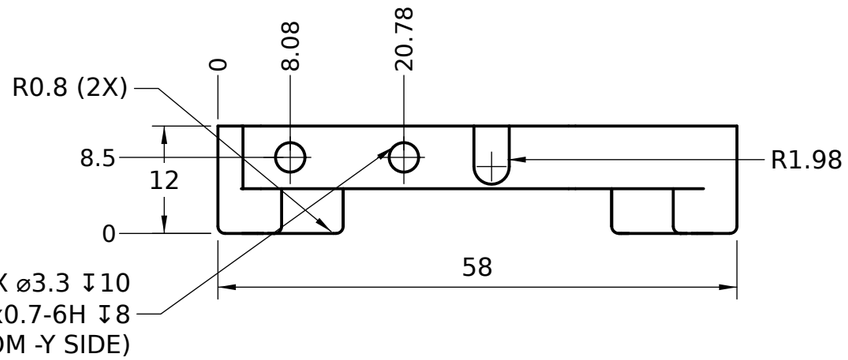

NOTES:

1. 6061-T6 ALUMINUM BILLET. SPOT FACE EVERY TAPPED HOLE ENTRY 90°, AS WIDE AS THE THREAD.
2. THE FRONT VIEW SHOWS THE BACK FACE (IT SITS ON THE STRUT): 2 M4 TAPPED HOLES, 10 DEEP, FOR ISO 4762 M4 x 14 SCREWS.
3. THE KEY TONGUE FITS THE SLOT IN THE STRUT FOOT.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
FUEL HANGER - FOOT

PART / DWG NO.	REV	MATERIAL
ST185-FH-104	**E.01**	6061-T6 ALUMINUM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1.5:1	mm	B (11x17)	1 OF 1	2026-10-18	SteveCAD

SOURCE: st185-link-ecu-config\cad\fuel-hanger\fuel-hanger-foot.step (build123d)

3RD ANGLE