

```
https://manage.devcenter.microsoft.com/v1.0/my/analytics/desktop/failedetails?applicationId=10238467886765136388&failureHash=00001111-aaaa-2222-bbbb-3333cccc4444&startDate=2016-11-05&endDate=2016-11-06&top=10&skip=0&filter=market eq 'US' and deviceType eq 'PC' HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

### Response body

 Expand table

| Value      | Type    | Description                                                                                                                                                                                                                                                               |
|------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Value      | array   | An array of objects that contain detailed error data. For more information about the data in each object, see the <a href="#">error detail values</a> section below.                                                                                                      |
| @nextLink  | string  | If there are additional pages of data, this string contains a URI that you can use to request the next page of data. For example, this value is returned if the <b>top</b> parameter of the request is set to 10 but there are more than 10 rows of errors for the query. |
| TotalCount | integer | The total number of rows in the data result for the query.                                                                                                                                                                                                                |

### Error detail values

Elements in the *Value* array contain the following values.

 Expand table

| Value         | Type   | Description                                                                                                                                                                                                                        |
|---------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| applicationId | string | The product ID of the desktop application for which you retrieved error details.                                                                                                                                                   |
| failureHash   | string | The unique identifier for the error.                                                                                                                                                                                               |
| failureName   | string | The name of the failure, which is made up of four parts: one or more problem classes, an exception/bug check code, the name of the image where the failure occurred, and the associated function name.                             |
| date          | string | The first date in the date range for the error data. If the request specified a single day, this value is that date. If the request specified a week, month, or other date range, this value is the first date in that date range. |

| Value              | Type   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cabIdHash          | string | The unique ID hash of the CAB file that is associated with this error.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| cabExpirationTime  | string | The date and time when the CAB file is expired and can no longer be downloaded, in ISO 8601 format.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| market             | string | The ISO 3166 country code of the device market.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| osBuild            | string | The build number of the OS on which the error occurred.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| applicationVersion | string | The version of the application executable in which the error occurred.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| deviceModel        | string | A string that specifies the model of the device on which the app was running when the error occurred.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| osVersion          | string | <p>One of the following strings that specifies the OS version on which the desktop application is installed:</p> <ul style="list-style-type: none"> <li>• <b>Windows 7</b></li> <li>• <b>Windows 8.1</b></li> <li>• <b>Windows 10</b></li> <li>• <b>Windows 11</b></li> <li>• <b>Windows Server 2016</b></li> <li>• <b>Windows Server 1709</b></li> <li>• <b>Unknown</b></li> </ul>                                                                                                                                                                                                                                                                                                         |
| osRelease          | string | <p>One of the following strings that specifies the OS release or flighting ring (as a subpopulation within OS version) on which the error occurred.</p> <p>For Windows 11: <b>Version 21H0</b></p> <p>For Windows 10:</p> <ul style="list-style-type: none"> <li>• <b>Version 1507</b></li> <li>• <b>Version 1511</b></li> <li>• <b>Version 1607</b></li> <li>• <b>Version 1703</b></li> <li>• <b>Version 1709</b></li> <li>• <b>Version 1803</b></li> <li>• <b>Release Preview</b></li> <li>• <b>Insider Fast</b></li> <li>• <b>Insider Slow</b></li> </ul> <p>For Windows Server 1709:</p> <ul style="list-style-type: none"> <li>• <b>RTM</b></li> </ul> <p>For Windows Server 2016:</p> |

| Value           | Type    | Description                                                                                                                                                                                                                                                                                                                              |
|-----------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 |         | <ul style="list-style-type: none"> <li>Version 1607</li> </ul> <p>For Windows 8.1:</p> <ul style="list-style-type: none"> <li>Update 1</li> </ul> <p>For Windows 7:</p> <ul style="list-style-type: none"> <li>Service Pack 1</li> </ul> <p>If the OS release or flighting ring is unknown, this field has the value <b>Unknown</b>.</p> |
| deviceType      | string  | <p>One of the following strings that indicates the type of device on which the error occurred:</p> <ul style="list-style-type: none"> <li>PC</li> <li>Server</li> <li>Unknown</li> </ul>                                                                                                                                                 |
| cabDownloadable | Boolean | Indicates whether the CAB file is downloadable for this user.                                                                                                                                                                                                                                                                            |
| fileName        | string  | The name of the executable file for the desktop application for which you retrieved error details.                                                                                                                                                                                                                                       |

## Response example

The following example demonstrates an example JSON response body for this request.

JSON

```
{
  "Value": [
    {
      "applicationId": "10238467886765136388",
      "failureHash": "012345-5dbc9-b12f-c124-9d9810f05d8b",
      "failureName":
"NULL_CLASS_PTR_WRITE_c0000005_contoso.exe!unknown_error_in_process",
      "date": "2018-01-28 23:55:29",
      "cabIdHash": "54ffb83a-e159-41d2-8158-f36f306cc01e",
      "cabExpirationTime": "2018-02-27 23:55:29",
      "market": "US",
      "osBuild": "10.0.10240",
      "applicationVersion": "2.2.2.0",
      "deviceModel": "Contoso All-in-one",
      "osVersion": "Windows 10",
      "osRelease": "Version 1703",
      "deviceType": "PC",
    }
  ]
}
```

```
        "cabDownloadable": false,  
        "fileName": "contosodemo.exe"  
    }  
],  
"@nextLink": null,  
"TotalCount": 1  
}
```

## Related topics

- [Health report](#)
- [Access analytics data using Microsoft Store services](#)
- [Get error reporting data for your desktop application](#)
- [Get the stack trace for an error in your desktop application](#)
- [Download the CAB file for an error in your desktop application](#)

---

## Feedback

Was this page helpful?

 Yes

 No

[Provide product feedback](#)  | [Get help at Microsoft Q&A](#)

# Get the stack trace for an error in your desktop application

Article • 11/01/2022

Use this method in the Microsoft Store analytics API to get the stack trace for an error in a desktop application that you have added to the [Windows Desktop Application program](#). This method can only download the stack trace for an error that occurred in the last 30 days. Stack traces are also available in the [Health report](#) for desktop applications in Partner Center.

Before you can use this method, you must first use the [get details for an error in your desktop application](#) method to retrieve the ID hash of the CAB file that is associated with the error for which you want to retrieve the stack trace.

## Prerequisites

To use this method, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store analytics API.
- [Obtain an Azure AD access token](#) to use in the request header for this method. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.
- Get the ID hash of the CAB file that is associated with the error for which you want to retrieve the stack trace. To get this value, use the [get details for an error in your desktop application](#) method to retrieve details for a specific error in your app, and use the `cabIdHash` value in the response body of that method.

## Request

### Request syntax

 Expand table

| Method | Request URI                                                                              |
|--------|------------------------------------------------------------------------------------------|
| GET    | <code>https://manage.devcenter.microsoft.com/v1.0/my/analytics/desktop/stacktrace</code> |

## Request header

 Expand table

| Header        | Type   | Description                                                            |
|---------------|--------|------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <token>. |

## Request parameters

 Expand table

| Parameter     | Type   | Description                                                                                                                                                                                                                                                                                                                                                       | Required |
|---------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| applicationId | string | The product ID of the desktop application for which you want to get a stack trace. To get the product ID of a desktop application, open any <a href="#">analytics report for your desktop application in Partner Center</a> (such as the <b>Health report</b> ) and retrieve the product ID from the URL.                                                         | Yes      |
| cabIdHash     | string | The unique ID hash of the CAB file that is associated with the error for which you want to retrieve the stack trace. To get this value, use the <a href="#">get details for an error in your desktop application</a> method to retrieve details for a specific error in your application, and use the <b>cabIdHash</b> value in the response body of that method. | Yes      |

## Request example

The following example demonstrates how to get a stack trace using this method. Replace the *applicationId* and *cabIdHash* parameters with the appropriate values for your desktop application.

syntax

```
GET
https://manage.devcenter.microsoft.com/v1.0/my/analytics/desktop/stacktrace?
applicationId=10238467886765136388&cabIdHash=00001111-aaaa-2222-bbbb-
3333cccc4444 HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

# Response body

 Expand table

| Value      | Type    | Description                                                                                                                                                                                                                                                               |
|------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Value      | array   | An array of objects that each contain one frame of stack trace data. For more information about the data in each object, see the <a href="#">stack trace values</a> section below.                                                                                        |
| @nextLink  | string  | If there are additional pages of data, this string contains a URI that you can use to request the next page of data. For example, this value is returned if the <b>top</b> parameter of the request is set to 10 but there are more than 10 rows of errors for the query. |
| TotalCount | integer | The total number of rows in the data result for the query.                                                                                                                                                                                                                |

## Stack trace values

Elements in the *Value* array contain the following values.

 Expand table

| Value    | Type   | Description                                                                                                                                     |
|----------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| level    | string | The frame number that this element represents in the call stack.                                                                                |
| image    | string | The name of the executable or library image that contains the function that is called in this stack frame.                                      |
| function | string | The name of the function that is called in this stack frame. This is available only if your app includes symbols for the executable or library. |
| offset   | string | The byte offset of the current instruction relative to the start of the function.                                                               |

## Response example

The following example demonstrates an example JSON response body for this request.

JSON

```
{
  "Value": [
    {
      "level": "0",
      "image": "Contoso.ContosoApp",
      "function": "Contoso.ContosoApp.MainPage.DoWork",

```

```
        "offset": "0x25C"
    }
    {
        "level": "1",
        "image": "Contoso.ContosoApp",
        "function": "Contoso.ContosoApp.MainPage.Initialize",
        "offset": "0x26"
    }
    {
        "level": "2",
        "image": "Contoso.ContosoApp",
        "function": "Contoso.ContosoApp.Start",
        "offset": "0x66"
    }
],
"@nextLink": null,
"TotalCount": 3
}
```

## Related topics

- [Health report](#)
- [Access analytics data using Microsoft Store services](#)
- [Get error reporting data for your desktop application](#)
- [Get details for an error in your desktop application](#)
- [Download the CAB file for an error in your desktop application](#)

---

## Feedback

Was this page helpful?

 Yes

 No

[Provide product feedback](#)  | [Get help at Microsoft Q&A](#)

# Download the CAB file for an error in your desktop application

Article • 11/01/2022

Use this method in the Microsoft Store analytics API to download the CAB file that is associated with a particular error for a desktop application that you have added to the [Windows Desktop Application program](#). This method can only download the CAB file for an app error that occurred in the last 30 days. CAB file downloads are also available in the [Health report](#) for desktop applications in Partner Center.

Before you can use this method, you must first use the [get details for an error in your desktop application](#) method to retrieve the ID hash of the CAB file you want to download.

## Prerequisites

To use this method, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store analytics API.
- [Obtain an Azure AD access token](#) to use in the request header for this method. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.
- Get the ID hash of the CAB file you want to download. To get this value, use the [get details for an error in your desktop application](#) method to retrieve details for a specific error in your app, and use the **cabIdHash** value in the response body of that method.

## Request

### Request syntax

 Expand table

| Method | Request URI                                                                               |
|--------|-------------------------------------------------------------------------------------------|
| GET    | <code>https://manage.devcenter.microsoft.com/v1.0/my/analytics/desktop/cabdownload</code> |

## Request header

 Expand table

| Header        | Type   | Description                                                            |
|---------------|--------|------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <token>. |

## Request parameters

 Expand table

| Parameter     | Type   | Description                                                                                                                                                                                                                                                                                              | Required |
|---------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| applicationId | string | The product ID of the desktop application for which you want to download a CAB file. To get the product ID of a desktop application, open any <a href="#">Partner Center analytics report for your desktop application</a> (such as the <b>Health report</b> ) and retrieve the product ID from the URL. | Yes      |
| cabIdHash     | string | The unique ID hash of the CAB file you want to download. To get this value, use the <a href="#">get details for an error in your desktop application</a> method to retrieve details for a specific error in your application, and use the <b>cabIdHash</b> value in the response body of that method.    | Yes      |

## Request example

The following example demonstrates how to download a CAB file using this method. Replace the *applicationId* and *cabIdHash* parameters with the appropriate values for your desktop application.

syntax

```
GET
https://manage.devcenter.microsoft.com/v1.0/my/analytics/desktop/cabdownload
?applicationId=10238467886765136388&cabIdHash=00001111-aaaa-2222-bbbb-
3333cccc4444 HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

This method returns a 302 (redirect) response code, and the **Location** header in the response is assigned to the shared access signature (SAS) URI of the CAB file. The caller

is redirected to this URI to automatically download the CAB file.

## Related topics

- [Health report](#)
  - [Access analytics data using Microsoft Store services](#)
  - [Get error reporting data for your desktop application](#)
  - [Get details for an error in your desktop application](#)
  - [Get the stack trace for an error in your desktop application](#)
- 

## Feedback

Was this page helpful?

 Yes

 No

[Provide product feedback](#)  | [Get help at Microsoft Q&A](#)

# Respond to reviews using Store services

Article • 07/14/2023

## 📘 Important

The *Microsoft Store reviews API*, as documented in this topic, is currently not in a working state. Instead of using the APIs, you can achieve the same task(s) by [using Partner Center](#).

Use the *Microsoft Store reviews API* to programmatically respond to reviews of your app in the Store. This API is especially useful for developers who want to bulk respond to many reviews without using Partner Center. This API uses Azure Active Directory (Azure AD) to authenticate the calls from your app or service.

The following steps describe the end-to-end process:

1. Make sure that you have completed all the [prerequisites](#).
2. Before you call a method in the Microsoft Store reviews API, [obtain an Azure AD access token](#). After you obtain a token, you have 60 minutes to use this token in calls to the Microsoft Store reviews API before the token expires. After the token expires, you can generate a new token.
3. [Call the Microsoft Store reviews API](#).

## 📌 Note

In addition to using the Microsoft Store reviews API to programmatically respond to reviews, you can alternatively respond to reviews [using Partner Center](#).

## Step 1: Complete prerequisites for using the Microsoft Store reviews API

Before you start writing code to call the Microsoft Store reviews API, make sure that you have completed the following prerequisites.

- You (or your organization) must have an Azure AD directory and you must have [Global administrator](#) permission for the directory. If you already use Microsoft 365 or other business services from Microsoft, you already have Azure AD directory. Otherwise, you can [create a new Azure AD in Partner Center](#) for no additional charge.

- You must associate an Azure AD application with your Partner Center account, retrieve the tenant ID and client ID for the application and generate a key. The Azure AD application represents the app or service from which you want to call the Microsoft Store reviews API. You need the tenant ID, client ID and key to obtain an Azure AD access token that you pass to the API.

#### ⓘ Note

You only need to perform this task one time. After you have the tenant ID, client ID and key, you can reuse them any time you need to create a new Azure AD access token.

To associate an Azure AD application with your Partner Center account and retrieve the required values:

1. In Partner Center, [associate your organization's Partner Center account with your organization's Azure AD directory](#).
2. Next, from the **Users** page in the **Account settings** section of Partner Center, [add the Azure AD application](#) that represents the app or service that you will use to respond to reviews. Make sure you assign this application the **Manager** role. If the application doesn't exist yet in your Azure AD directory, you can [create a new Azure AD application in Partner Center](#).
3. Return to the **Users** page, click the name of your Azure AD application to go to the application settings, and copy down the **Tenant ID** and **Client ID** values.
4. Click **Add new key**. On the following screen, copy down the **Key** value. You won't be able to access this info again after you leave this page. For more information, see [Manage keys for an Azure AD application](#).

## Step 2: Obtain an Azure AD access token

Before you call any of the methods in the Microsoft Store reviews API, you must first obtain an Azure AD access token that you pass to the **Authorization** header of each method in the API. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can refresh the token so you can continue to use it in further calls to the API.

To obtain the access token, follow the instructions in [Service to Service Calls Using Client Credentials](#) to send an HTTP POST to the

`https://login.microsoftonline.com/<tenant_id>/oauth2/token` endpoint. Here is a sample request.

syntax

```
POST https://login.microsoftonline.com/<tenant_id>/oauth2/token HTTP/1.1
Host: login.microsoftonline.com
Content-Type: application/x-www-form-urlencoded; charset=utf-8

grant_type=client_credentials
&client_id=<your_client_id>
&client_secret=<your_client_secret>
&resource=https://manage.devcenter.microsoft.com
```

For the *tenant\_id* value in the POST URI and the *client\_id* and *client\_secret* parameters, specify the tenant ID, client ID and the key for your application that you retrieved from Partner Center in the previous section. For the *resource* parameter, you must specify `https://manage.devcenter.microsoft.com`.

After your access token expires, you can refresh it by following the instructions [here](#).

## Step 3: Call the Microsoft Store reviews API

After you have an Azure AD access token, you are ready to call the Microsoft Store reviews API. You must pass the access token to the **Authorization** header of each method.

The Microsoft Store reviews API contains several methods you can use to determine whether you are allowed to respond to a given review and to submit responses to one or more reviews. Follow this process to use this API:

1. Get the IDs of the reviews you want to respond to. Review IDs are available in the response data of the [get app reviews](#) method in the Microsoft Store analytics API and in the [offline download](#) of the [Reviews report] (`/windows/apps/publish/reviews-report`).
2. Call the [get response info for app reviews](#) method to determine whether you are allowed to respond to the reviews. When a customer submits a review, they can choose not to receive responses to their review. You cannot respond to reviews submitted by customers who have chosen not to receive review responses.
3. Call the [submit responses to app reviews](#) method to programmatically respond to the reviews.

## Related topics

- [Get app reviews](#)
- [Get response info for app reviews](#)
- [Submit responses to app reviews](#)

# Get response info for reviews

Article • 07/14/2023

## ❗ Important

The *Microsoft Store reviews API*, as documented in this topic, is currently not in a working state. Instead of using the APIs, you can achieve the same task(s) by [using Partner Center](#).

If you want to programmatically respond to a customer review of your app, you can use this method in the Microsoft Store reviews API to first determine whether you have permission to respond to the review. You cannot respond to reviews submitted by customers who have chosen not to receive review responses. After you confirm that you can respond to the review, you can then use the [submit responses to app reviews](#) method to programmatically respond to it.

## Prerequisites

To use this method, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store analytics API.
- [Obtain an Azure AD access token](#) to use in the request header for this method. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.
- Get the ID of the review you want to check to determine whether you can respond to it. Review IDs are available in the response data of the [get app reviews](#) method in the Microsoft Store analytics API and in the [offline download](#) of the [Reviews report](#).

## Request

### Request syntax

| Method | Request URI                                                                                                        |
|--------|--------------------------------------------------------------------------------------------------------------------|
| GET    | <code>https://manage.devcenter.microsoft.com/v1.0/my/reviews/{reviewId}/apps/{applicationId}/responses/info</code> |

### Request header

| Header        | Type   | Description                                                            |
|---------------|--------|------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <token>. |

### Request parameters

| Parameter     | Type   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                         | Required |
|---------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| applicationId | string | The Store ID of the app that contains the review for which you want to determine whether you can respond to. The Store ID is available on the <a href="#">App identity page</a> in Partner Center. An example Store ID is 9WZDNCRFJ3Q8.                                                                                                                                                                                                             | Yes      |
| reviewId      | string | The ID of the review you want to respond to (this is a GUID). Review IDs are available in the response data of the <a href="#">get app reviews</a> method in the Microsoft Store analytics API and in the <a href="#">offline download</a> of the <a href="#">Reviews report</a> .<br><br>If you omit this parameter, the response body for this method will indicate whether you have permissions to respond to any reviews for the specified app. | No       |

## Request example

The following examples how to use this method to determine whether you can respond to a given review.

syntax

```
GET https://manage.devcenter.microsoft.com/v1.0/my/reviews/6be543ff-1c9c-4534-aced-af8b4fbe0316/apps/9WZDNCRFJ3Q8/responses/info HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

### Response body

| Value | Type | Description |

|-----|-----|-----| | CanRespond | Boolean | The value **true** indicates that you can respond to the specified review, or that you have permissions to respond to any review for the specified app. Otherwise, this value is **false**. | | DefaultSupportEmail | string | Your app's [support email address](#) as specified in your app's Store listing. If you did not specify a support email address, this field is empty. |

### Response example

The following example demonstrates an example JSON response body for this request.

JSON

```
{
  "CanRespond": true,
  "DefaultSupportEmail": "support@contoso.com"
}
```

## Related topics

- [Submit responses to reviews using the Microsoft Store analytics API](#)
- [Respond to customer reviews using Partner Center](#)
- [Respond to reviews using Microsoft Store services](#)
- [Get app reviews](#)

# Submit responses to reviews

Article • 07/14/2023

## ❗ Important

The *Microsoft Store reviews API*, as documented in this topic, is currently not in a working state. Instead of using the APIs, you can achieve the same task(s) by [using Partner Center](#).

Use this method in the Microsoft Store reviews API to programmatically respond to reviews of your app. When you call this method, you must specify the IDs of the reviews you want to respond to. Review IDs are available in the response data of the [get app reviews](#) method in the Microsoft Store analytics API and in the [offline download](#) of the [Reviews report](#).

When a customer submits a review, they can choose not to receive responses to their review. If you try to respond to a review for which the customer chose not to receive responses, the response body of this method will indicate that the response attempt was unsuccessful. Before calling this method, you can optionally determine whether you are allowed to respond to a given review by using the [get response info for app reviews](#) method.

## ❗ Note

In addition to using this method to programmatically respond to reviews, you can alternatively respond to reviews [using Partner Center](#).

## Prerequisites

To use this method, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store reviews API.
- [Obtain an Azure AD access token](#) to use in the request header for this method. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.
- Get the IDs of the reviews you want to respond to. Review IDs are available in the response data of the [get app reviews](#) method in the Microsoft Store analytics API and in the [offline download](#) of the [Reviews report](#).

# Request

## Request syntax

| Method | Request URI                                                                   |
|--------|-------------------------------------------------------------------------------|
| POST   | <code>https://manage.devcenter.microsoft.com/v1.0/my/reviews/responses</code> |

## Request header

| Header        | Type   | Description                                                                          |
|---------------|--------|--------------------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <i>&lt;token&gt;</i> . |

## Request parameters

This method has no request parameters.

## Request body

The request body has the following values.

| Value     | Type  | Description                                                                                                                                         |
|-----------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Responses | array | An array of objects that contain the response data you want to submit. For more information about the data in each object, see the following table. |

Each object in the *Responses* array contains the following values.

| Value         | Type   | Description                                                                                                                                                                                                                                                                        | Required |
|---------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| ApplicationId | string | The Store ID of the app with the review you want to respond to. The Store ID is available on the <a href="#">App identity page</a> of Partner Center. An example Store ID is 9WZDNCRFJ3Q8.                                                                                         | Yes      |
| ReviewId      | string | The ID of the review you want to respond to (this is a GUID). Review IDs are available in the response data of the <a href="#">get app reviews</a> method in the Microsoft Store analytics API and in the <a href="#">offline download</a> of the <a href="#">Reviews report</a> . | Yes      |
| ResponseText  | string | The response you want to submit. Your response must follow <a href="#">these guidelines</a> .                                                                                                                                                                                      | Yes      |

| Value        | Type    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Required |
|--------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| SupportEmail | string  | Your app's support email address, which the customer can use to contact you directly. This must be a valid email address.                                                                                                                                                                                                                                                                                                                                                                                      | Yes      |
| IsPublic     | Boolean | If you specify <b>true</b> , your response will be displayed in your app's Store listing, directly below the customer's review, and will be visible to all customers. If you specify <b>false</b> and the user hasn't opted out of receiving email responses, your response will be sent to the customer via email, and it will not be visible to other customers in your app's Store listing. If you specify <b>false</b> and the user has opted out of receiving email responses, an error will be returned. | Yes      |

## Request example

The following example demonstrates how to use this method to submit responses to several reviews.

JSON

```
POST https://manage.devcenter.microsoft.com/v1.0/my/reviews/responses
HTTP/1.1
Authorization: Bearer <your access token>
Content-Type: application/json
{
  "Responses": [
    {
      "ApplicationId": "9WZDNCRFJ3Q8",
      "ReviewId": "6be543ff-1c9c-4534-aced-af8b4fbe0316",
      "ResponseText": "Thank you for pointing out this bug. I fixed it and published an update, you should have the fix soon",
      "SupportEmail": "support@contoso.com",
      "IsPublic": true
    },
    {
      "ApplicationId": "9NBLGGH1RP08",
      "ReviewId": "80c9671a-96c2-4278-bcbc-be0ce5a32a7c",
      "ResponseText": "Thank you for submitting your review. Can you tell more about what you were doing in the app when it froze? Thanks very much for your help.",
      "SupportEmail": "support@contoso.com",
      "IsPublic": false
    }
  ]
}
```

# Response

## Response body

| Value  | Type  | Description                                                                                                                                           |
|--------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Result | array | An array of objects that contain data about each response you submitted. For more information about the data in each object, see the following table. |

Each object in the *Result* array contains the following values.

| Value         | Type   | Description                                                                                                                                     |
|---------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| ApplicationId | string | The Store ID of the app with the review you responded to. An example Store ID is 9WZDNCRFJ3Q8.                                                  |
| ReviewId      | string | The ID of the review you responded to. This is a GUID.                                                                                          |
| Successful    | string | The value <b>true</b> indicates that your response was sent successfully. The value <b>false</b> indicates that your response was unsuccessful. |
| FailureReason | string | If <b>Successful</b> is <b>false</b> , this value contains a reason for the failure. If <b>Successful</b> is <b>true</b> , this value is empty. |

## Response example

The following example demonstrates an example JSON response body for this request.

JSON

```
{
  "Result": [
    {
      "ApplicationId": "9WZDNCRFJ3Q8",
      "ReviewId": "6be543ff-1c9c-4534-aced-af8b4fbe0316",
      "Successful": "true",
      "FailureReason": ""
    },
    {
      "ApplicationId": "9NBLGGH1RP08",
      "ReviewId": "80c9671a-96c2-4278-bcbc-be0ce5a32a7c",
      "Successful": "false",
      "FailureReason": "No Permission"
    }
  ]
}
```

## Related topics

- [Respond to customer reviews using Partner Center](#)
- [Respond to reviews using Microsoft Store services](#)
- [Get response info for app reviews](#)
- [Get app reviews](#)

# Run ad campaigns using Store services

Article • 01/04/2023

Use the *Microsoft Store promotions API* to programmatically manage promotional ad campaigns for apps that are registered to your or your organization's Partner Center account. This API enables you to create, update and monitor your campaigns and other related assets such as targeting and creatives. This API is especially useful for developers who create large volumes of campaigns, and who want to do so without using Partner Center. This API uses Azure Active Directory (Azure AD) to authenticate the calls from your app or service.

The following steps describe the end-to-end process:

1. Make sure that you have completed all the [prerequisites](#).
2. Before you call a method in the Microsoft Store promotions API, [obtain an Azure AD access token](#). After you obtain a token, you have 60 minutes to use this token in calls to the Microsoft Store promotions API before the token expires. After the token expires, you can generate a new token.
3. [Call the Microsoft Store promotions API](#).

You can alternatively create and manage ad campaigns using Partner Center, and any ad campaigns that you create programmatically via the Microsoft Store promotions API can also be accessed in Partner Center. For more information about managing ad campaigns in Partner Center, see [Create an ad campaign for your app](#).

## ⓘ Note

Any developer with a Partner Center account can use the Microsoft Store promotions API to manage ad campaigns for their apps. Media agencies can also request access to this API to run ad campaigns on behalf of their advertisers. If you are a media agency who wants to know more about this API or request access to it, send your request to [storepromotionsapi@microsoft.com](mailto:storepromotionsapi@microsoft.com).

## Step 1: Complete prerequisites for using the Microsoft Store promotions API

Before you start writing code to call the Microsoft Store promotions API, make sure that you have completed the following prerequisites.

- Before you can successfully create and start an ad campaign using this API, you must first [create one paid ad campaign using the Ad campaigns page in Partner Center](#), and you must add at least one payment instrument on this page. After you do this, you will be able to successfully create billable delivery lines for ad campaigns using this API. Delivery lines for ad campaigns you create using this API will automatically bill the default payment instrument chosen on the **Ad campaigns** page in Partner Center.
- You (or your organization) must have an Azure AD directory and you must have [Global administrator](#) permission for the directory. If you already use Microsoft 365 or other business services from Microsoft, you already have Azure AD directory. Otherwise, you can [create a new Azure AD in Partner Center](#) for no additional charge.
- You must associate an Azure AD application with your Partner Center account, retrieve the tenant ID and client ID for the application and generate a key. The Azure AD application represents the app or service from which you want to call the Microsoft Store promotions API. You need the tenant ID, client ID and key to obtain an Azure AD access token that you pass to the API.

ⓘ **Note**

You only need to perform this task one time. After you have the tenant ID, client ID and key, you can reuse them any time you need to create a new Azure AD access token.

To associate an Azure AD application with your Partner Center account and retrieve the required values:

1. In Partner Center, [associate your organization's Partner Center account with your organization's Azure AD directory](#).
2. Next, from the **Users** page in the **Account settings** section of Partner Center, [add the Azure AD application](#) that represents the app or service that you will use to manage promotion campaigns for your Partner Center account. Make sure you assign this application the **Manager** role. If the application doesn't exist yet in your Azure AD directory, you can [create a new Azure AD application in Partner Center](#).
3. Return to the **Users** page, click the name of your Azure AD application to go to the application settings, and copy down the **Tenant ID** and **Client ID** values.
4. Click **Add new key**. On the following screen, copy down the **Key** value. You won't be able to access this info again after you leave this page. For more information,

see [Manage keys for an Azure AD application](#).

## Step 2: Obtain an Azure AD access token

Before you call any of the methods in the Microsoft Store promotions API, you must first obtain an Azure AD access token that you pass to the **Authorization** header of each method in the API. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can refresh the token so you can continue to use it in further calls to the API.

To obtain the access token, follow the instructions in [Service to Service Calls Using Client Credentials](#) to send an HTTP POST to the

`https://login.microsoftonline.com/<tenant_id>/oauth2/token` endpoint. Here is a sample request.

syntax

```
POST https://login.microsoftonline.com/<tenant_id>/oauth2/token HTTP/1.1
Host: login.microsoftonline.com
Content-Type: application/x-www-form-urlencoded; charset=utf-8

grant_type=client_credentials
&client_id=<your_client_id>
&client_secret=<your_client_secret>
&resource=https://manage.devcenter.microsoft.com
```

For the *tenant\_id* value in the POST URI and the *client\_id* and *client\_secret* parameters, specify the tenant ID, client ID and the key for your application that you retrieved from Partner Center in the previous section. For the *resource* parameter, you must specify `https://manage.devcenter.microsoft.com`.

After your access token expires, you can refresh it by following the instructions [here](#).

## Step 3: Call the Microsoft Store promotions API

After you have an Azure AD access token, you are ready to call the Microsoft Store promotions API. You must pass the access token to the **Authorization** header of each method.


In the context of the Microsoft Store promotions API, an ad campaign consists of a *campaign* object that contains high-level information about the campaign, and additional objects that represent the *delivery lines*, *targeting profiles*, and *creatives* for the ad campaign. The API includes different sets of methods that are grouped by these

object types. To create a campaign, you typically call a different POST method for each of these objects. The API also provides GET methods you can use to retrieve any object and PUT methods you can use to edit campaign, delivery line, and targeting profile objects.

For more information about these objects and their related methods, see the following table.

| Object             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Campaigns          | <p>This object represents the ad campaign, and it sits at the top of the object model hierarchy for ad campaigns. This object identifies the type of campaign you are running (paid, house, or community), the campaign objective, the delivery lines for the campaign, and other details. Each campaign can be associated with only one app.</p> <p>For more information about the methods related to this object, see <a href="#">Manage ad campaigns</a>.</p> <p><b>Note</b> After you create an ad campaign, you can retrieve performance data for the campaign by using the <a href="#">Get ad campaign performance data</a> method in the <a href="#">Microsoft Store analytics API</a>.</p> |
| Delivery lines     | <p>Every campaign has one or more delivery lines that are used to buy inventory and deliver your ads. For each delivery line, you can set targeting, set your bid price, and decide how much you want to spend by setting a budget and linking to creatives you want to use.</p> <p>For more information about the methods related to this object, see <a href="#">Manage delivery lines for ad campaigns</a>.</p>                                                                                                                                                                                                                                                                                 |
| Targeting profiles | <p>Every delivery line has one targeting profile that specifies the users, geographies and inventory types that you want to target. Targeting profiles can be created as a template and shared across delivery lines.</p> <p>For more information about the methods related to this object, see <a href="#">Manage targeting profiles for ad campaigns</a>.</p>                                                                                                                                                                                                                                                                                                                                    |
| Creatives          | <p>Every delivery line has one or more creatives that represent the ads that are shown to customers as part of the campaign. A creative may be associated with one or more delivery lines, even across ad campaigns, provided it always represents the same app.</p> <p>For more information about the methods related to this object, see <a href="#">Manage creatives for ad campaigns</a>.</p>                                                                                                                                                                                                                                                                                                  |

The following diagram illustrates the relationship between campaigns, delivery lines, targeting profiles, and creatives.

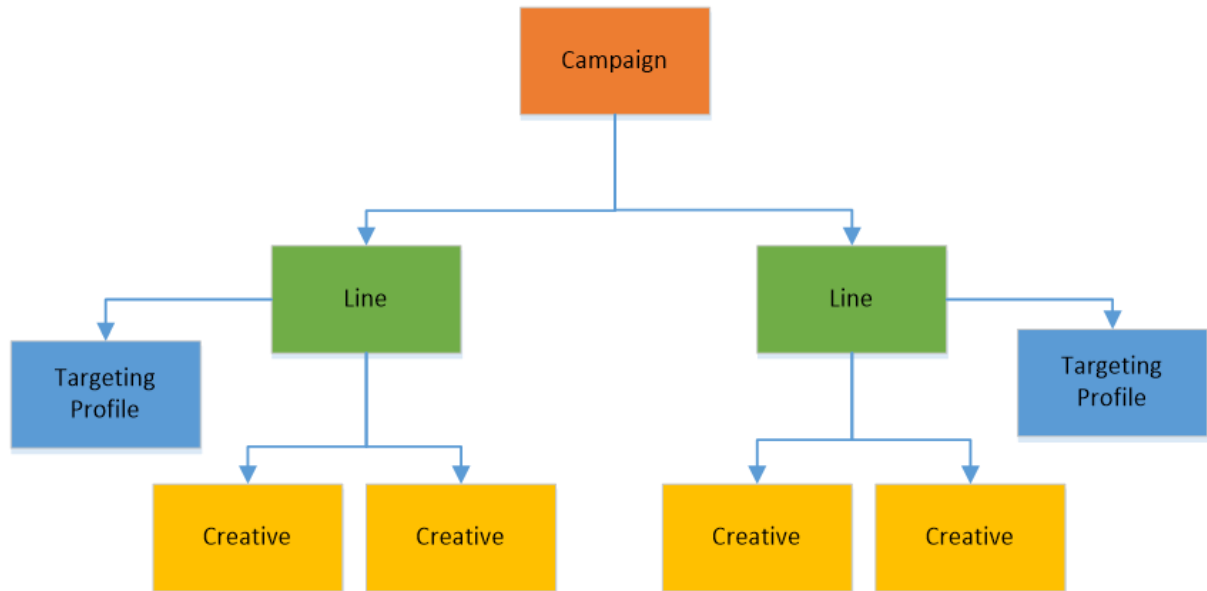

## Code example

The following code example demonstrates how to obtain an Azure AD access token and call the Microsoft Store promotions API from a C# console app. To use this code example, assign the *tenantId*, *clientId*, *clientSecret*, and *appId* variables to the appropriate values for your scenario. This example requires the [Json.NET package](#) from Newtonsoft to deserialize the JSON data returned by the Microsoft Store promotions API.

C#

```
using Newtonsoft.Json;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Net.Http;
using System.Net.Http.Headers;
using System.Text;
using System.Threading.Tasks;

namespace TestPromotionsAPI
{
    class Program
    {
        static void Main(string[] args)
        {
            string tenantId = "<your tenant ID>";
            string clientId = "<your client ID>";
            string clientSecret = "<your secret>";

            string scope = "https://manage.devcenter.microsoft.com";
```

```

        // Retrieve an Azure AD access token
        string accessToken = GetClientCredentialAccessToken(
            tenantId,
            clientId,
            clientSecret,
            scope).Result;

        int pageSize = 100;
        int startPageIndex = 0;

        // This is your app's Store ID. This ID is available on
        // the App identity page of the Dev Center dashboard.
        string appID = "<your app's Store ID>";

        // Call the Windows Store promotions API
        CallPromotionsAPI(accessToken, appID, pageSize, startPageIndex);

        Console.Read();
    }

    private static void CallPromotionsAPI(string accessToken, string
appID, int fetch, int skip)
    {
        string requestURI;

        // Get ad campaigns.
        requestURI = string.Format(

            "https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign?
applicationId={0}&fetch={1}&skip={2}&campaignSetSortColumn=createdDateTime",
            appID, fetch, skip);

        HttpRequestMessage requestMessage = new
HttpRequestMessage(HttpMethod.Get, requestURI);
        requestMessage.Headers.Authorization = new
AuthenticationHeaderValue("Bearer", accessToken);

        WebRequestHandler handler = new WebRequestHandler();
        HttpClient httpClient = new HttpClient(handler);

        HttpResponseMessage response =
httpClient.SendAsync(requestMessage).Result;

        Console.WriteLine(response);
        Console.WriteLine(response.Content.ReadAsStringAsync().Result);

        response.Dispose();
    }

    public static async Task<string>
GetClientCredentialAccessToken(string tenantId, string clientId, string
clientSecret, string scope)
    {
        string tokenEndpointFormat =

```

```

"https://login.microsoftonline.com/{0}/oauth2/token";
    string tokenEndpoint = string.Format(tokenEndpointFormat,
tenantId);

    dynamic result;
    using (HttpClient client = new HttpClient())
    {
        string tokenUrl = tokenEndpoint;
        using (
            HttpRequestMessage request = new HttpRequestMessage(
                HttpMethod.Post,
                tokenUrl))
        {
            string content =
                string.Format(
                    "grant_type=client_credentials&client_id=
{0}&client_secret={1}&resource={2}",
                    clientId,
                    clientSecret,
                    scope);

            request.Content = new StringContent(content,
Encoding.UTF8, "application/x-www-form-urlencoded");

            using (HttpResponseMessage response = await
client.SendAsync(request))
            {
                string responseContent = await
response.Content.ReadAsStringAsync();
                result =
JsonConvert.DeserializeObject(responseContent);
            }
        }

        return result.access_token;
    }
}

```

## Related topics

- [Manage ad campaigns](#)
- [Manage delivery lines for ad campaigns](#)
- [Manage targeting profiles for ad campaigns](#)
- [Manage creatives for ad campaigns](#)
- [Get ad campaign performance data](#)

# Manage ad campaigns

Article • 01/04/2023

Use these methods in the [Microsoft Store promotions API](#) to create, edit and get promotional ad campaigns for your app. Each campaign you create using this method can be associated with only one app.

**Note** You can also create and manage ad campaigns using Partner Center, and campaigns that you create programmatically can be accessed in Partner Center. For more information about managing ad campaigns in Partner Center, see [Create an ad campaign for your app](#).

When you use these methods to create or update a campaign, you typically also call one or more of the following methods to manage the *delivery lines*, *targeting profiles*, and *creatives* that are associated with the campaign. For more information about the relationship between campaigns, delivery lines, targeting profiles, and creatives, see [Run ad campaigns using Microsoft Store services](#).

- [Manage delivery lines for ad campaigns](#)
- [Manage targeting profiles for ad campaigns](#)
- [Manage creatives for ad campaigns](#)

## Prerequisites

To use these methods, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store promotions API.

**Note** As part of the prerequisites, be sure that you [create at least one paid ad campaign in Partner Center](#) and that you add at least one payment instrument for the ad campaign in Partner Center. Delivery lines for ad campaigns you create using this API will automatically bill the default payment instrument chosen on the **Ad campaigns** page in Partner Center.

- [Obtain an Azure AD access token](#) to use in the request header for these methods. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.

## Request

These methods have the following URIs.

| Method type | Request URI                                                                                 | Description                                                                                              |
|-------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| POST        | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign</code>              | Creates a new ad campaign.                                                                               |
| PUT         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign/{campaignId}</code> | Edits the ad campaign specified by <i>campaignId</i> .                                                   |
| GET         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign/{campaignId}</code> | Gets the ad campaign specified by <i>campaignId</i> .                                                    |
| GET         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign</code>              | Queries for ad campaigns. See the <a href="#">Parameters</a> section for the supported query parameters. |

## Header

| Header        | Type   | Description                                                                          |
|---------------|--------|--------------------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <i>&lt;token&gt;</i> . |
| Tracking ID   | GUID   | Optional. An ID that tracks the call flow.                                           |

## Parameters

The GET method to query for ad campaigns supports the following optional query parameters.

| Name | Type | Description |
|------|------|-------------|
|------|------|-------------|

| Name                  | Type    | Description                                                                                                                                                                                                                                                                                                                             |
|-----------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| skip                  | int     | The number of rows to skip in the query. Use this parameter to page through data sets. For example, fetch=10 and skip=0 retrieves the first 10 rows of data, top=10 and skip=10 retrieves the next 10 rows of data, and so on.                                                                                                          |
| fetch                 | int     | The number of rows of data to return in the request.                                                                                                                                                                                                                                                                                    |
| campaignSetSortColumn | string  | Orders the <a href="#">Campaign</a> objects in the response body by the specified field. The syntax is <i>CampaignSetSortColumn=field</i> , where the <i>field</i> parameter can be one of the following strings: <ul style="list-style-type: none"> <li>id</li> <li>createdDateTime</li> </ul> The default is <b>createdDateTime</b> . |
| isDescending          | Boolean | Sorts the <a href="#">Campaign</a> objects in the response body in descending or ascending order.                                                                                                                                                                                                                                       |
| storeProductId        | string  | Use this value to return only the ad campaigns that are associated with the app with the specified <a href="#">Store ID</a> . An example Store ID for a product is 9nblggh42cfd.                                                                                                                                                        |
| label                 | string  | Use this value to return only the ad campaigns that include the specified <i>label</i> in the <a href="#">Campaign</a> object.                                                                                                                                                                                                          |

## Request body

The POST and PUT methods require a JSON request body with the required fields of a [Campaign](#) object and any additional fields you want to set or change.

## Request examples

The following example demonstrates how to call the POST method to create an ad campaign.

JSON

```
POST https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign HTTP/1.1
Authorization: Bearer <your access token>
```

```
{
  "name": "Contoso App Campaign",
  "storeId": "9nblggh42cfd",
  "configuredStatus": "Active",
  "objective": "DriveInstalls",
  "type": "Community"
}
```

The following example demonstrates how to call the GET method to retrieve a specific ad campaign.

JSON

```
GET https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign/31043481
HTTP/1.1
Authorization: Bearer <your access token>
```

The following example demonstrates how to call the GET method to query for a set of ad campaigns, sorted by the created date.

JSON

```
GET https://manage.devcenter.microsoft.com/v1.0/my/promotion/campaign?
storeProductId=9nblggh42cfd&fetch=100&skip=0&campaignSetSortColumn=createdDateT
ime HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

These methods return a JSON response body with one or more [Campaign](#) objects, depending on the method you called. The following example demonstrates a response body for the GET method for a specific campaign.

JSON

```
{
  "Data": {
    "id": 31043481,
    "name": "Contoso App Campaign",
    "createdDate": "2017-01-17T10:12:15Z",
    "storeProductId": "9nblggh42cfd",
    "configuredStatus": "Active",
    "effectiveStatus": "Active",
    "effectiveStatusReasons": [
      "{ \"ValidationStatusReasons\": null }"
    ],
    "labels": [],
    "objective": "DriveInstalls",
    "type": "Paid",
    "lines": [
      {
        "id": 31043476,
        "name": "Contoso App Campaign - Paid Line"
      }
    ]
  }
}
```

# Campaign object

The request and response bodies for these methods contain the following fields. This table shows which fields are read-only (meaning that they cannot be changed in the PUT method) and which fields are required in the request body for the POST method.

| Field                  | Type    | Description                                                                                                                                                                                                                                                                                                     | Read only | Default | Required for POST |
|------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|-------------------|
| id                     | integer | The ID of the ad campaign.                                                                                                                                                                                                                                                                                      | Yes       |         | No                |
| name                   | string  | The name of the ad campaign.                                                                                                                                                                                                                                                                                    | No        |         | Yes               |
| configuredStatus       | string  | One of the following values that specifies the status of the ad campaign specified by the developer: <ul style="list-style-type: none"><li>• <b>Active</b></li><li>• <b>Inactive</b></li></ul>                                                                                                                  | No        | Active  | Yes               |
| effectiveStatus        | string  | One of the following values that specifies the effective status of the ad campaign based on system validation: <ul style="list-style-type: none"><li>• <b>Active</b></li><li>• <b>Inactive</b></li><li>• <b>Processing</b></li></ul>                                                                            | Yes       |         | No                |
| effectiveStatusReasons | array   | One or more of the following values that specify the reason for the effective status of the ad campaign: <ul style="list-style-type: none"><li>• <b>AdCreativesInactive</b></li><li>• <b>BillingFailed</b></li><li>• <b>AdLinesInactive</b></li><li>• <b>ValidationFailed</b></li><li>• <b>Failed</b></li></ul> | Yes       |         | No                |
| storeProductId         | string  | The <a href="#">Store ID</a> for the app that this ad campaign is associated with. An example Store ID for a product is 9nblggh42cfd.                                                                                                                                                                           | Yes       |         | Yes               |

| Field       | Type   | Description                                                                                                                                                                                                                                  | Read only | Default      | Required for POST |
|-------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------|-------------------|
| labels      | array  | One or more strings that represent custom labels for the campaign. These labels be used for searching and tagging campaigns.                                                                                                                 | No        | null         | No                |
| type        | string | One of the following values that specifies the campaign type: <ul style="list-style-type: none"> <li>• <b>Paid</b></li> <li>• <b>House</b></li> <li>• <b>Community</b></li> </ul>                                                            | Yes       |              | Yes               |
| objective   | string | One of the following values that specifies the objective of the campaign: <ul style="list-style-type: none"> <li>• <b>DriveInstall</b></li> <li>• <b>DriveReengagement</b></li> <li>• <b>DriveInAppPurchase</b></li> </ul>                   | No        | DriveInstall | Yes               |
| lines       | array  | One or more objects that identify the <a href="#">delivery lines</a> that are associated with the ad campaign. Each object in this field consists of an <i>id</i> and <i>name</i> field that specifies the ID and name of the delivery line. | No        |              | No                |
| createdDate | string | The date and time the ad campaign was created, in ISO 8601 format.                                                                                                                                                                           | Yes       |              | No                |

## Related topics

- [Run ad campaigns using Microsoft Store Services](#)
- [Manage delivery lines for ad campaigns](#)
- [Manage targeting profiles for ad campaigns](#)
- [Manage creatives for ad campaigns](#)
- [Get ad campaign performance data](#)

# Manage delivery lines

Article • 01/04/2023

Use these methods in the Microsoft Store promotions API to create one or more *delivery lines* to buy inventory and deliver your ads for a promotional ad campaign. For each delivery line, you can set targeting, set your bid price, and decide how much you want to spend by setting a budget and linking to creatives you want to use.

For more information about the relationship between delivery lines and ad campaigns, targeting profiles, and creatives, see [Run ad campaigns using Microsoft Store services](#).

**Note** Before you can successfully create delivery lines for ad campaigns using this API, you must first [create one paid ad campaign using the Ad campaigns page in Partner Center](#), and you must add at least one payment instrument on this page. After you do this, you will be able to successfully create billable delivery lines for ad campaigns using this API. Ad campaigns you create using the API will automatically bill the default payment instrument chosen on the **Ad campaigns** page in Partner Center.

## Prerequisites

To use these methods, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store promotions API.

### ⓘ Note

As part of the prerequisites, be sure that you **create at least one paid ad campaign in Partner Center** and that you add at least one payment instrument for the ad campaign in Partner Center. Delivery lines you create using this API will automatically bill the default payment instrument chosen on the **Ad campaigns** page in Partner Center.

- [Obtain an Azure AD access token](#) to use in the request header for these methods. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.

## Request

These methods have the following URIs.

| Method type | Request URI                                                                         | Description                                          |
|-------------|-------------------------------------------------------------------------------------|------------------------------------------------------|
| POST        | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/line</code>          | Creates a new delivery line.                         |
| PUT         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/line/{lineId}</code> | Edits the delivery line specified by <i>lineId</i> . |
| GET         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/line/{lineId}</code> | Gets the delivery line specified by <i>lineId</i> .  |

## Header

| Header        | Type   | Description                                                                          |
|---------------|--------|--------------------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <i>&lt;token&gt;</i> . |
| Tracking ID   | GUID   | Optional. An ID that tracks the call flow.                                           |

## Request body

The POST and PUT methods require a JSON request body with the required fields of a [Delivery line](#) object and any additional fields you want to set or change.

## Request examples

The following example demonstrates how to call the POST method to create a delivery line.

JSON

```
POST https://manage.devcenter.microsoft.com/v1.0/my/promotion/line HTTP/1.1
Authorization: Bearer <your access token>
```

```
{
  "name": "Contoso App Campaign - Paid Line",
  "configuredStatus": "Active",
```

```

"startDateTime": "2017-01-19T12:09:34Z",
"endDateTime": "2017-01-31T23:59:59Z",
"bidAmount": 0.4,
"dailyBudget": 20,
"targetProfileId": {
  "id": 310021746
},
"creatives": [
  {
    "id": 106851
  }
],
"campaignId": 31043481,
"minMinutesPerImp ": 1
}

```

The following example demonstrates how to call the GET method to retrieve a delivery line.

JSON

```

GET https://manage.devcenter.microsoft.com/v1.0/my/promotion/line/31019990
HTTP/1.1
Authorization: Bearer <your access token>

```

## Response

These methods return a JSON response body with a [Delivery line](#) object that contains information about the delivery line that was created, updated, or retrieved. The following example demonstrates a response body for these methods.

JSON

```

{
  "Data": {
    "id": 31043476,
    "name": "Contoso App Campaign - Paid Line",
    "configuredStatus": "Active",
    "effectiveStatus": "Active",
    "effectiveStatusReasons": [
      "{ \"ValidationStatusReasons\": null}"
    ],
    "startDateTime": "2017-01-19T12:09:34Z",
    "endDateTime": "2017-01-31T23:59:59Z",
    "createdDateTime": "2017-01-17T10:28:34Z",
    "bidType": "CPM",
    "bidAmount": 0.4,
    "dailyBudget": 20,
    "targetProfileId": {

```

```

        "id": 310021746
    },
    "creatives": [
        {
            "id": 106126
        }
    ],
    "campaignId": 31043481,
    "minMinutesPerImp ": 1,
    "pacingType ": "SpendEvenly",
    "currencyId ": 732
}
}

```

## Delivery line object

The request and response bodies for these methods contain the following fields. This table shows which fields are read-only (meaning that they cannot be changed in the PUT method) and which fields are required in the request body for the POST or PUT methods.

| Field            | Type    | Description                                                                                                                                                                                                                     | Read only | Default | Required for POST/PUT |
|------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|-----------------------|
| id               | integer | The ID of the delivery line.                                                                                                                                                                                                    | Yes       |         | No                    |
| name             | string  | The name of the delivery line.                                                                                                                                                                                                  | No        |         | POST                  |
| configuredStatus | string  | One of the following values that specifies the status of the delivery line specified by the developer: <ul style="list-style-type: none"> <li>Active</li> <li>Inactive</li> </ul>                                               | No        |         | POST                  |
| effectiveStatus  | string  | One of the following values that specifies the effective status of the delivery line based on system validation: <ul style="list-style-type: none"> <li>Active</li> <li>Inactive</li> <li>Processing</li> <li>Failed</li> </ul> | Yes       |         | No                    |

| Field                  | Type    | Description                                                                                                                                                                                                              | Read only | Default                                                                             | Required for POST/PUT                           |
|------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------|
| effectiveStatusReasons | array   | One or more of the following values that specify the reason for the effective status of the delivery line: <ul style="list-style-type: none"> <li><b>AdCreativesInactive</b></li> <li><b>ValidationFailed</b></li> </ul> | Yes       |                                                                                     | No                                              |
| startDatetime          | string  | The start date and time for the delivery line, in ISO 8601 format. This value cannot be changed if it is already in the past.                                                                                            | No        |                                                                                     | POST, PUT                                       |
| endDatetime            | string  | The end date and time for the delivery line, in ISO 8601 format. This value cannot be changed if it is already in the past.                                                                                              | No        |                                                                                     | POST, PUT                                       |
| createdDatetime        | string  | The date and time the delivery line was created, in ISO 8601 format.                                                                                                                                                     | Yes       |                                                                                     | No                                              |
| bidType                | string  | A value that specifies the bidding type of the delivery line. Currently, the only supported value is <b>CPM</b> .                                                                                                        | No        | CPM                                                                                 | No                                              |
| bidAmount              | decimal | The bid amount to be used for bidding any ad request.                                                                                                                                                                    | No        | The average CPM value based on target markets (this value is revised periodically). | No                                              |
| dailyBudget            | decimal | The daily budget for the delivery line. Either <i>dailyBudget</i> or <i>lifetimeBudget</i> must be set.                                                                                                                  | No        |                                                                                     | POST, PUT (if <i>lifetimeBudget</i> is not set) |
| lifetimeBudget         | decimal | The lifetime budget for the delivery line. Either <i>lifetimeBudget</i> * or <i>dailyBudget</i> must be set.                                                                                                             | No        |                                                                                     | POST, PUT (if <i>dailyBudget</i> is not set)    |

| Field              | Type    | Description                                                                                                                                                                                                                                                                | Read only | Default                                                                                            | Required for POST/PUT |
|--------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------|-----------------------|
| targetingProfileId | object  | On object that identifies the <a href="#">targeting profile</a> that describes the users, geographies and inventory types that you want to target for this delivery line. This object consists of a single <i>id</i> field that specifies the ID of the targeting profile. | No        |                                                                                                    | No                    |
| creatives          | array   | One or more objects that represent the <a href="#">creatives</a> that are associated with the delivery line. Each object in this field consists of a single <i>id</i> field that specifies the ID of a creative.                                                           | No        |                                                                                                    | No                    |
| campaignId         | integer | The ID of the parent ad campaign.                                                                                                                                                                                                                                          | No        |                                                                                                    | No                    |
| minMinutesPerImp   | integer | Specifies the minimum time interval (in minutes) between two impressions shown to the same user from this delivery line.                                                                                                                                                   | No        | 4000                                                                                               | No                    |
| pacingType         | string  | One of the following values that specify the pacing type: <ul style="list-style-type: none"> <li><b>SpendEvenly</b></li> <li><b>SpendAsFastAsPossible</b></li> </ul>                                                                                                       | No        | SpendEvenly                                                                                        | No                    |
| currencyId         | integer | The ID of the currency of the campaign.                                                                                                                                                                                                                                    | Yes       | The currency of the developer account (you do not need to specify this field in POST or PUT calls) | No                    |

## Related topics

- [Run ad campaigns using Microsoft Store Services](#)

- Manage ad campaigns
- Manage targeting profiles for ad campaigns
- Manage creatives for ad campaigns
- Get ad campaign performance data

# Manage targeting profiles

Article • 01/04/2023

Use these methods in the Microsoft Store promotions API to select the users, geographies and inventory types that you want to target for each delivery line in a promotional ad campaign. Targeting profiles can be created and reused across multiple delivery lines.

For more information about the relationship between targeting profiles and ad campaigns, delivery lines, and creatives, see [Run ad campaigns using Microsoft Store services](#).

## Prerequisites

To use these methods, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store promotions API.
- [Obtain an Azure AD access token](#) to use in the request header for these methods. After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.

## Request

These methods have the following URIs.

| Method type | Request URI                                                                                                  | Description                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| POST        | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/targeting-profile</code>                      | Creates a new targeting profile.                                     |
| PUT         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/targeting-profile/{targetingProfileId}</code> | Edits the targeting profile specified by <i>targetingProfileId</i> . |
| GET         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/targeting-profile/{targetingProfileId}</code> | Gets the targeting profile specified by <i>targetingProfileId</i> .  |

# Header

| Header        | Type   | Description                                                            |
|---------------|--------|------------------------------------------------------------------------|
| Authorization | string | Required. The Azure AD access token in the form <b>Bearer</b> <token>. |
| Tracking ID   | GUID   | Optional. An ID that tracks the call flow.                             |

## Request body

The POST and PUT methods require a JSON request body with the required fields of a [Targeting profile](#) object and any additional fields you want to set or change.

## Request examples

The following example demonstrates how to call the POST method to create a targeting profile.

JSON

```
POST https://manage.devcenter.microsoft.com/v1.0/my/promotion/targeting-profile HTTP/1.1
Authorization: Bearer <your access token>
```

```
{
  "name": "Contoso App Campaign - Targeting Profile 1",
  "targetingType": "Manual",
  "age": [
    651,
    652],
  "gender": [
    700
  ],
  "country": [
    11,
    12
  ],
  "osVersion": [
    504
  ],
  "deviceType": [
    710
  ],
  "supplyType": [
    11470
  ]
}
```

The following example demonstrates how to call the GET method to retrieve a targeting profile.

JSON

```
GET https://manage.devcenter.microsoft.com/v1.0/my/promotion/targeting-profile/310023951 HTTP/1.1
Authorization: Bearer <your access token>
```

## Response

These methods return a JSON response body with a [Targeting profile](#) object that contains information about the targeting profile that was created, updated, or retrieved. The following example demonstrates a response body for these methods.

JSON

```
{
  "Data": {
    "id": 310021746,
    "name": "Contoso App Campaign - Targeting Profile 1",
    "targetingType": "Manual",
    "age": [
      651,
      652
    ],
    "gender": [
      700
    ],
    "country": [
      6,
      13,
      29
    ],
    "osVersion": [
      504,
      505,
      506,
      507,
      508
    ],
    "deviceType": [
      710,
      711
    ],
    "supplyType": [
      11470
    ]
  }
}
```

# Targeting profile object

The request and response bodies for these methods contain the following fields. This table shows which fields are read-only (meaning that they cannot be changed in the PUT method) and which fields are required in the request body for the POST method.

| Field         | Type    | Description                                                                                                                                                                                                                                                                                               | Read only | Default | Required for POST |
|---------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|-------------------|
| id            | integer | The ID of the targeting profile.                                                                                                                                                                                                                                                                          | Yes       |         | No                |
| name          | string  | The name of the targeting profile.                                                                                                                                                                                                                                                                        | No        |         | Yes               |
| targetingType | string  | One of the following values: <ul style="list-style-type: none"><li>• <b>Auto</b>: Specify this value to allow Microsoft to choose the targeting profile based on the settings for your app in Partner Center.</li><li>• <b>Manual</b>: Specify this value to define your own targeting profile.</li></ul> | No        | Auto    | Yes               |
| age           | array   | One or more integers that identify the age ranges of the users to target. For a complete list of integers, see <a href="#">Age values</a> in this article.                                                                                                                                                | No        | null    | No                |
| gender        | array   | One or more integers that identify the genders of the users to target. For a complete list of integers, see <a href="#">Gender values</a> in this article.                                                                                                                                                | No        | null    | No                |
| country       | array   | One or more integers that identify the country codes of the users to target. For a complete list of integers, see <a href="#">Country code values</a> in this article.                                                                                                                                    | No        | null    | No                |
| osVersion     | array   | One or more integers that identify the OS versions of the users to target. For a complete list of integers, see <a href="#">OS version values</a> in this article.                                                                                                                                        | No        | null    | No                |
| deviceType    | array   | One or more integers that identify the device types of the users to target. For a complete list of integers, see <a href="#">Device type values</a> in this article.                                                                                                                                      | No        | null    | No                |

| Field      | Type  | Description                                                                                                                                                                               | Read only | Default | Required for POST |
|------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|-------------------|
| supplyType | array | One or more integers that identify the type of inventory where the campaign's ads will be shown. For a complete list of integers, see <a href="#">Supply type values</a> in this article. | No        | null    | No                |

## Age values

The *age* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the age ranges of the users to target.

| Integer value for <i>age</i> field | Corresponding age range |
|------------------------------------|-------------------------|
| 651                                | 13 to 17                |
| 652                                | 18 to 24                |
| 653                                | 25 to 34                |
| 654                                | 35 to 49                |
| 655                                | 50 and above            |

To get the supported values for the *age* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** <token>.

JSON

```
GET https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/age
Authorization: Bearer <your access token>
```

The following example shows the response body for this method.

JSON

```
{
  "Data": {
    "Age": {
      "651": "Age13To17",
      "652": "Age18To24",
      "653": "Age25To34",
      "654": "Age35To49",
      "655": "Age50AndAbove"
    }
  }
}
```

```
}  
}  
}
```

## Gender values

The *gender* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the genders of the users to target.

| Integer value for <i>gender</i> field | Corresponding gender |
|---------------------------------------|----------------------|
| 700                                   | Male                 |
| 701                                   | Female               |

To get the supported values for the *gender* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** <token>.

JSON

GET

`https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/gender`  
`Authorization: Bearer <your access token>`

The following example shows the response body for this method.

JSON

```
{  
  "Data": {  
    "Gender": {  
      "700": "Male",  
      "701": "Female"  
    }  
  }  
}
```

## OS version values

The *osVersion* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the OS versions of the users to target.

| Integer value for <i>osVersion</i> field | Corresponding OS version |
|------------------------------------------|--------------------------|
|------------------------------------------|--------------------------|

| Integer value for <i>osVersion</i> field | Corresponding OS version |
|------------------------------------------|--------------------------|
| 500                                      | Windows Phone 7          |
| 501                                      | Windows Phone 7.1        |
| 502                                      | Windows Phone 7.5        |
| 503                                      | Windows Phone 7.8        |
| 504                                      | Windows Phone 8.0        |
| 505                                      | Windows Phone 8.1        |
| 506                                      | Windows 8.0              |
| 507                                      | Windows 8.1              |
| 508                                      | Windows 10               |
| 509                                      | Windows 10 Mobile        |
| 510                                      | Windows 11               |

To get the supported values for the *osVersion* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** *<token>*.

JSON

GET

`https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/osversion`  
 Authorization: Bearer <your access token>

The following example shows the response body for this method.

JSON

```
{
  "Data": {
    "OsVersion": {
      "500": "WindowsPhone70",
      "501": "WindowsPhone71",
      "502": "WindowsPhone75",
      "503": "WindowsPhone78",
      "504": "WindowsPhone80",
      "505": "WindowsPhone81",
      "506": "Windows80",
      "507": "Windows81",
      "508": "Windows10",
      "509": "WindowsPhone10"
    }
  }
}
```

```
}  
}  
}
```

## Device type values

The *deviceType* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the device types of the users to target.

| Integer value for <i>deviceType</i> field | Corresponding device type | Description                                                                                  |
|-------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------|
| 710                                       | Windows                   | This represents devices running a desktop version of Windows 11, Windows 10, or Windows 8.x. |
| 711                                       | Phone                     | This represents devices running Windows 10 Mobile, Windows Phone 8.x, or Windows Phone 7.x.  |

To get the supported values for the *deviceType* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** *<token>*.

JSON

GET

`https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/devicetype`  
`Authorization: Bearer <your access token>`

The following example shows the response body for this method.

JSON

```
{  
  "Data": {  
    "DeviceType": {  
      "710": "Windows",  
      "711": "Phone"  
    }  
  }  
}
```

## Supply type values

The *supplyType* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the type of inventory where the campaign's ads will be shown.

| Integer value for <i>supplyType</i> field | Corresponding supply type | Description                                                                            |
|-------------------------------------------|---------------------------|----------------------------------------------------------------------------------------|
| 11470                                     | App                       | This refers to ads that appear in apps only.                                           |
| 11471                                     | Universal                 | This refers to ads that appear in apps, on the Web, and on and other display surfaces. |

To get the supported values for the *supplyType* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** <token>.

JSON

```
GET
https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/supplytype
Authorization: Bearer <your access token>
```

The following example shows the response body for this method.

JSON

```
{
  "Data": {
    "SupplyType": {
      "11470": "App",
      "11471": "Universal"
    }
  }
}
```

## Country code values

The *country* field in the [TargetingProfile](#) object contains one or more of the following integers that identify the [ISO 3166-1 alpha-2](#) country codes of the users to target.

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 1                                      | US                         |
| 2                                      | AU                         |

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 3                                      | AT                         |
| 4                                      | BE                         |
| 5                                      | BR                         |
| 6                                      | CA                         |
| 7                                      | DK                         |
| 8                                      | FI                         |
| 9                                      | FR                         |
| 10                                     | DE                         |
| 11                                     | GR                         |
| 12                                     | HK                         |
| 13                                     | IN                         |
| 14                                     | IE                         |
| 15                                     | IT                         |
| 16                                     | JP                         |
| 17                                     | LU                         |
| 18                                     | MX                         |
| 19                                     | NL                         |
| 20                                     | NZ                         |
| 21                                     | NO                         |
| 22                                     | PL                         |
| 23                                     | PT                         |
| 24                                     | SG                         |
| 25                                     | ES                         |
| 26                                     | SE                         |
| 27                                     | CH                         |
| 28                                     | TW                         |

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 29                                     | GB                         |
| 30                                     | RU                         |
| 31                                     | CL                         |
| 32                                     | CO                         |
| 33                                     | CZ                         |
| 34                                     | HU                         |
| 35                                     | ZA                         |
| 36                                     | KR                         |
| 37                                     | CN                         |
| 38                                     | RO                         |
| 39                                     | TR                         |
| 40                                     | SK                         |
| 41                                     | IL                         |
| 42                                     | ID                         |
| 43                                     | AR                         |
| 44                                     | MY                         |
| 45                                     | PH                         |
| 46                                     | PE                         |
| 47                                     | UA                         |
| 48                                     | AE                         |
| 49                                     | TH                         |
| 50                                     | IQ                         |
| 51                                     | VN                         |
| 52                                     | CR                         |
| 53                                     | VE                         |
| 54                                     | QA                         |

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 55                                     | SI                         |
| 56                                     | BG                         |
| 57                                     | LT                         |
| 58                                     | RS                         |
| 59                                     | HR                         |
| 60                                     | HR                         |
| 61                                     | LV                         |
| 62                                     | EE                         |
| 63                                     | IS                         |
| 64                                     | KZ                         |
| 65                                     | SA                         |
| 67                                     | AL                         |
| 68                                     | DZ                         |
| 70                                     | AO                         |
| 72                                     | AM                         |
| 73                                     | AZ                         |
| 74                                     | BS                         |
| 75                                     | BD                         |
| 76                                     | BB                         |
| 77                                     | BY                         |
| 81                                     | BO                         |
| 82                                     | BA                         |
| 83                                     | BW                         |
| 87                                     | KH                         |
| 88                                     | CM                         |
| 94                                     | CD                         |

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 95                                     | CI                         |
| 96                                     | CY                         |
| 99                                     | DO                         |
| 100                                    | EC                         |
| 101                                    | EG                         |
| 102                                    | SV                         |
| 107                                    | FJ                         |
| 108                                    | GA                         |
| 110                                    | GE                         |
| 111                                    | GH                         |
| 114                                    | GT                         |
| 118                                    | HT                         |
| 119                                    | HN                         |
| 120                                    | JM                         |
| 121                                    | JO                         |
| 122                                    | KE                         |
| 124                                    | KW                         |
| 125                                    | KG                         |
| 126                                    | LA                         |
| 127                                    | LB                         |
| 133                                    | MK                         |
| 135                                    | MW                         |
| 138                                    | MT                         |
| 141                                    | MU                         |
| 145                                    | ME                         |
| 146                                    | MA                         |

| Integer value for <i>country</i> field | Corresponding country code |
|----------------------------------------|----------------------------|
| 147                                    | MZ                         |
| 148                                    | NA                         |
| 150                                    | NP                         |
| 151                                    | NI                         |
| 153                                    | NG                         |
| 154                                    | OM                         |
| 155                                    | PK                         |
| 157                                    | PA                         |
| 159                                    | PY                         |
| 167                                    | SN                         |
| 172                                    | LK                         |
| 176                                    | TZ                         |
| 180                                    | TT                         |
| 181                                    | TN                         |
| 184                                    | UG                         |
| 185                                    | UY                         |
| 186                                    | UZ                         |
| 189                                    | ZM                         |
| 190                                    | ZW                         |
| 219                                    | MD                         |
| 224                                    | PS                         |
| 225                                    | RE                         |
| 246                                    | PR                         |

To get the supported values for the *country* field programmatically, you can call the following GET method. For the `Authorization` header, pass your Azure AD access token in the form **Bearer** *<token>*.

## JSON

GET

<https://manage.devcenter.microsoft.com/v1.0/my/promotion/reference/country>

Authorization: Bearer <your access token>

The following example shows the response body for this method.

## JSON

```
{
  "Data": {
    "Country": {
      "1": "US",
      "2": "AU",
      "3": "AT",
      "4": "BE",
      "5": "BR",
      "6": "CA",
      "7": "DK",
      "8": "FI",
      "9": "FR",
      "10": "DE",
      "11": "GR",
      "12": "HK",
      "13": "IN",
      "14": "IE",
      "15": "IT",
      "16": "JP",
      "17": "LU",
      "18": "MX",
      "19": "NL",
      "20": "NZ",
      "21": "NO",
      "22": "PL",
      "23": "PT",
      "24": "SG",
      "25": "ES",
      "26": "SE",
      "27": "CH",
      "28": "TW",
      "29": "GB",
      "30": "RU",
      "31": "CL",
      "32": "CO",
      "33": "CZ",
      "34": "HU",
      "35": "ZA",
      "36": "KR",
      "37": "CN",
      "38": "RO",
      "39": "TR",
      "40": "SK",
```

"41": "IL",  
"42": "ID",  
"43": "AR",  
"44": "MY",  
"45": "PH",  
"46": "PE",  
"47": "UA",  
"48": "AE",  
"49": "TH",  
"50": "IQ",  
"51": "VN",  
"52": "CR",  
"53": "VE",  
"54": "QA",  
"55": "SI",  
"56": "BG",  
"57": "LT",  
"58": "RS",  
"59": "HR",  
"60": "BH",  
"61": "LV",  
"62": "EE",  
"63": "IS",  
"64": "KZ",  
"65": "SA",  
"67": "AL",  
"68": "DZ",  
"70": "AO",  
"72": "AM",  
"73": "AZ",  
"74": "BS",  
"75": "BD",  
"76": "BB",  
"77": "BY",  
"81": "BO",  
"82": "BA",  
"83": "BW",  
"87": "KH",  
"88": "CM",  
"94": "CD",  
"95": "CI",  
"96": "CY",  
"99": "DO",  
"100": "EC",  
"101": "EG",  
"102": "SV",  
"107": "FJ",  
"108": "GA",  
"110": "GE",  
"111": "GH",  
"114": "GT",  
"118": "HT",  
"119": "HN",  
"120": "JM",  
"121": "JO",

```
"122": "KE",
"124": "KW",
"125": "KG",
"126": "LA",
"127": "LB",
"133": "MK",
"135": "MW",
"138": "MT",
"141": "MU",
"145": "ME",
"146": "MA",
"147": "MZ",
"148": "NA",
"150": "NP",
"151": "NI",
"153": "NG",
"154": "OM",
"155": "PK",
"157": "PA",
"159": "PY",
"167": "SN",
"172": "LK",
"176": "TZ",
"180": "TT",
"181": "TN",
"184": "UG",
"185": "UY",
"186": "UZ",
"189": "ZM",
"190": "ZW",
"219": "MD",
"224": "PS",
"225": "RE",
"246": "PR"
}
}
}
```

## Related topics

- [Run ad campaigns using Microsoft Store Services](#)
- [Manage ad campaigns](#)
- [Manage delivery lines for ad campaigns](#)
- [Manage creatives for ad campaigns](#)
- [Get ad campaign performance data](#)

# Manage creatives

Article • 01/04/2023

Use these methods in the Microsoft Store promotions API to upload your own custom creatives to use in promotional ad campaigns or get an existing creative. A creative may be associated with one or more delivery lines, even across ad campaigns, provided it always represents the same app.

For more information about the relationship between creatives and ad campaigns, delivery lines, and targeting profiles, see [Run ad campaigns using Microsoft Store services](#).

## ⓘ Note

When using this API to upload your own creative, the maximum allowed size for your creative is 40 KB. If you submit a creative file larger than this, this API will not return an error, but the campaign will not successfully be created.

## Prerequisites

To use these methods, you need to first do the following:

- If you have not done so already, complete all the [prerequisites](#) for the Microsoft Store promotions API.
- [Obtain an Azure AD access token](#) to use in the request header for these methods.  
After you obtain an access token, you have 60 minutes to use it before it expires. After the token expires, you can obtain a new one.

## Request

These methods have the following URIs.

| Method type | Request URI                                                                                 | Description                                        |
|-------------|---------------------------------------------------------------------------------------------|----------------------------------------------------|
| POST        | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/creative</code>              | Creates a new creative.                            |
| GET         | <code>https://manage.devcenter.microsoft.com/v1.0/my/promotion/creative/{creativeId}</code> | Gets the creative specified by <i>creativeId</i> . |