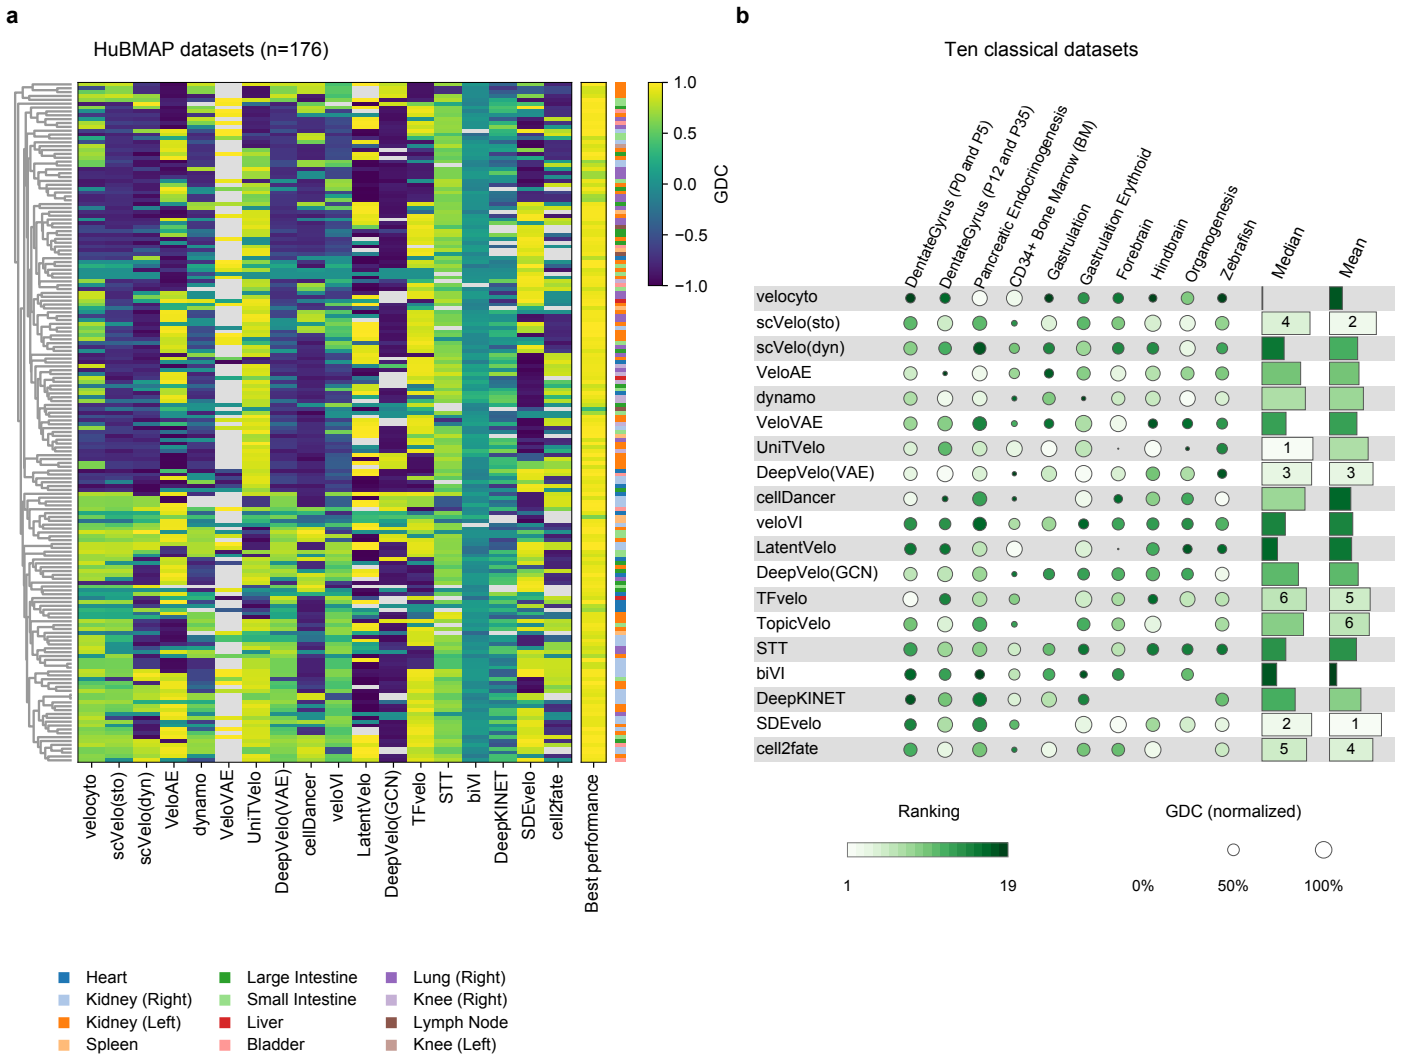


Extended Data Fig. 6 | Global direction-weighted coherence on real-world datasets. a, Original-style row-clustered heatmap of saved GDC values for 176 HuBMAP datasets and 18 available configurations, with organ annotations recovered by exact UUID matching to Supplementary Table 3. Best performance is the maximum finite value per dataset and is displayed separately; it is not an additional method. The shared raw GDC color scale is -1 to 1. Grey denotes missing data. Average-linkage clustering uses Euclidean distances with column-median filling only to define display order; plotted values and numerical summaries remain unfilled. b, Original-style green bubble matrix for ten classical datasets and 19 configurations, with Median/Mean bars and top-six rank labels. Dot area is globally normalized from the panel minimum minus 0.01 to its maximum; lighter color denotes better within-dataset rank. Raw values, display order, coverage and organ mapping are provided in source data. Missing entries are not scored as zero.