

# Universal Windows Platform 编程学习笔记

Roger Young

2017 年 9 月 13 日



# 目录

目录	3
第一章 了解应用程序项目	5
第二章 XMAL 界面原理和语法	7
第三章 应用导航	9
第四章 页面排版	11
第五章 控件	13
第六章 数据视图	15
第七章 图形	17
第八章 动画	19
第九章 图像	21
第十章 多媒体	23
第十一章 启动与激活	25
第十二章 文件和数据	27
12.1 文件与目录 . . . . .	27
12.2 XML 数据处理 . . . . .	27
12.2.1 XML 格式简介 . . . . .	27
12.2.2 读写 XML . . . . .	27
12.2.3 相关类简介 . . . . .	29
12.3 JSON 数据处理 . . . . .	29
第十三章 应用设置和数据	31

<b>第十四章 数据库编程</b>	<b>33</b>
14.1 SQLite 数据库的使用 . . . . .	33
14.1.1 C# Example . . . . .	33
14.1.2 SQLite C# API Wrappers . . . . .	34
14.1.3 Visual Studio set-up . . . . .	34
14.1.4 Code . . . . .	35
14.1.5 What about Entity Framework? . . . . .	39
14.1.6 Conclusion . . . . .	40
<b>第十五章 网络通信</b>	<b>41</b>
<b>第十六章 传感器与地理信息</b>	<b>43</b>
<b>第十七章 语言识别技术</b>	<b>45</b>
17.1 元素周期表 . . . . .	
17.2 密码子表 . . . . .	

# 第一章 了解应用程序项目



## 第二章 XMAL 界面原理和语法





## 第三章 应用导航



## 第四章 页面排版



## 第五章 控件



## 第六章 数据视图





## 第七章 图形



## 第八章 动画



## 第九章 图像



## 第十章 多媒体





## 第十一章 启动与激活



## 第十二章 文件和数据

在应用程序的开发过程中，数据的读写操作是一项基本、必备的操作。需要熟练掌握相关的技术。

### 12.1 文件与目录

UWP 提供了对文件/目录操作的支持，使用 UWP 提供的 API，可以实现最常见的文件读写操作。文件读写相关的主要类型，主要分布在 **Windows.Storage** 命名空间及该命名空间的子命名空间中。

表 12.1: 文件/目录操作相关的重要类型

类型名	说明
<b>StorageFile</b>	表示一个文件实例。
<b>StorageFolder</b>	表示一个目录。
<b>KnownFolders</b>	静态类型，可访问几个特殊的目录。
<b>FileIO</b>	针对 StorageFile 实例而设计，通过一系列静态方法来实现对文件的读写。
<b>PathIO</b>	针对表示文件（夹）的字符串而设计，通过一系列静态方法来实现对文件的读写。

### 12.2 XML 数据处理

#### 12.2.1 XML 格式简介

#### 12.2.2 读写 XML

**Windows.Data.Xml.Dom** 命名空间下提供了若干类型，可以帮助开发者对 XML 文档进行读取、写入、筛选等操作。其中 **XmlDocument** 类是比较核心的类型，它表示一个 XML 文档的实例，使用该类型可以通过代码来构建 XML 文档。

在读取 XML 数据时，可以调用 **LoadFromUriAsync**（从 URI 加载）方法或 **LoadFromFileAsync**（从文件加载）两个静态成员，直接返回 **XmlDocument** 对象实例，随后，就可以对 XML 文档进行读取或编辑操作。如果要创建全新的 XML 文档，可在实例化 **XmlDocument** 类后，调用相应的方法来为文档创建各种类型的节点：

- **CreateComment** 方法：创建 XML 注释节点，返回类型为 **XmlComment**；

- **CreateElement** 方法: 创建 XML 元素, 返回类型为 **XmlElement**;
- **CreateTextNode** 方法: 创建纯文本节点;
- **CreateAttribute** 方法: 创建 XML 元素属性的 “name = value” 对, 返回类型为 **XmlAttribute**;
- **CreateCDataSection** 方法: 创建 CData 节点, 可以存储不被 XML 解析器分析的文本;

不管是 **XmlDocument**, 还是 **XmlComment**、**XmlElement** 等类型的节点, 它们都实现了同一个接口 **IXmlNode**, 所以只需要调用 **A** 节点的 **AppendChild** 方法, 并将 **B** 节点作为参数, 就可以将 **B** 节点添加到 **A** 节点的子节点集合中。要从 **A** 节点的子节点集合中删除 **B** 节点, 调用 **RemoveChild** 方法即可。

下面通过一个实例来展示如何创建一个 XML 文档和读取 XML 文档。

XmlSample 页面的 XAML 代码如下:

```

1 <Grid Background="{ThemeResource ApplicationPageBackgroundThemeBrush}">
2     <Grid.RowDefinitions>
3         <RowDefinition Height="*" />
4         <RowDefinition Height="auto" />
5     </Grid.RowDefinitions>
6
7     <CommandBar Grid.Row="1">
8         <AppBarButton x:Name="SaveXml" Icon="Save" Label="创建" Click="SaveXml_Click"/>
9         <AppBarButton x:Name="LoadXml" Icon="Read" Label="读取" Click="LoadXml_Click"/>
10    </CommandBar>
11
12    <TextBlock Name="XmlTextBlock" TextWrapping="Wrap" Margin="5"/>
13 </Grid>

```

可用下面的代码创建并保存 XML 文档 (函数 **SaveXml\_Click**):

```

1 private async void SaveXml_Click(System.Object sender, RoutedEventArgs e)
2 {
3     //创建 XmlDocument 实例
4     XmlDocument doc = new XmlDocument();
5     XmlElement root = doc.CreateElement("Books");
6     doc.AppendChild(root);
7
8     XmlElement book = doc.CreateElement("book");
9     // 设置属性
10    book.SetAttribute("ISBN", "978-0321563842");
11    book.SetAttribute("Version", "4th Edition");
12    XmlText text = doc.CreateTextNode("The C++ Programming Language");
13    book.AppendChild(text);
14
15    root.AppendChild(book);
16    // 保持到文件
17    StorageFolder local = ApplicationData.Current.LocalFolder;
18    StorageFile xmlFile = await local.CreateFileAsync("sample.xml", CreationCollisionOption.
19        ReplaceExisting);
20    if (xmlFile != null)
21    {
22        await doc.SaveToFileAsync(xmlFile);
23        await new MessageDialog("File Saved!").ShowAsync();
24    }
25 }

```

```
23     }
24 }
```

可用下面的代码读取 XML 文档（函数 *LoadXml\_Click*）:

```
1 private async void LoadXml_Click(System.Object sender, RoutedEventArgs e)
2 {
3     // 从本地文件中加载XML
4     StorageFolder local = ApplicationData.Current.LocalFolder;
5     StorageFile xmlFile = await local.GetFilesAsync("sample.xml");
6     if (xmlFile != null)
7     {
8         XmlDocument doc = await XmlDocument.LoadFromFileAsync(xmlFile);
9         XmlTextBlock.Text = doc.GetXml();
10    }
11 }
```

### 12.2.3 相关类简介

## 12.3 JSON 数据处理

JSON (JavaScript Object Notation) 即 JavaScript 对象表示方法。可用简单的文本来描述 JavaScript 语言所能识别的对象。

*Windows.Data.Json* 命名空间下包含一些让开发者能够轻松访问和处理 JSON 格式数据的类型。

- *IJsonValue* 接口: 对封装 JSON 值的类型进行界定规范。其中 *Stringify* 方法可以返回某个 JSON 值的字符串表示形式;
- *JsonValue* 类: 表示一个简单的 JSON 值, 如字符串、数值等。
- *JsonArray* 类: 表示 JSON 中的数值;
- *JsonObject* 类: 表示一个单独的 JSON 对象。

下面通过一个实例来展示如何创建一个 JSON 文档和读取 JSON 文档。

JsonSample 页面的 XAML 代码如下:

```
1 <Grid Background="{ThemeResource ApplicationPageBackgroundThemeBrush}">
2     <Grid.RowDefinitions>
3         <RowDefinition Height="*" />
4         <RowDefinition Height="*" />
5         <RowDefinition Height="auto" />
6     </Grid.RowDefinitions>
7
8     <CommandBar Grid.Row="2">
9         <AppBarButton x:Name="SaveJson" Icon="Save" Label="创建" Click="SaveJson_Click"/>
10        <AppBarButton x:Name="LoadJson" Icon="Read" Label="读取" Click="LoadJson_Click"/>
11    </CommandBar>
12
13    <TextBlock Name="SaveJsonTextBlock" Grid.Row="0" TextWrapping="Wrap" Margin="5"/>
```

```
14 <TextBlock Name="LoadJsonTextBlock" Grid.Row="1" TextWrapping="Wrap" Margin="5"/>
15 </Grid>
```

可用下面的代码创建并保存 JSON（函数 *SaveJson\_Click*）

```
1 private async void SaveJson_Click(object sender, RoutedEventArgs e)
2 {
3     JsonObject obj = new JsonObject();
4     obj["Title"] = JsonValue.CreateStringValue("The C++ Programming Language");
5     obj["ISBN"] = JsonValue.CreateStringValue("978-0321563842");
6     obj["Version"] = JsonValue.CreateStringValue("4th Edition");
7
8     SaveJsonTextBlock.Text = obj.Stringify();
9
10    var local = ApplicationData.Current.LocalFolder;
11    var jsonFile = await local.CreateFileAsync("sample.json", CreationCollisionOption.
        ReplaceExisting);
12    if (jsonFile != null)
13    {
14        await FileIO.WriteTextAsync(jsonFile, obj.Stringify());
15        await new MessageDialog("File Saved!").ShowAsync();
16    }
17 }
```

可用下面的代码读取 JSON 文档（函数 *LoadJson\_Click*）：

```
1 private async void LoadJson_Click(object sender, RoutedEventArgs e)
2 {
3     var local = ApplicationData.Current.LocalFolder;
4     var jsonFile = await local.GetFileAsync("sample.json");
5     if (jsonFile != null)
6     {
7         LoadJsonTextBlock.Text = await FileIO.ReadTextAsync(jsonFile);
8     }
9 }
```

## 第十三章 应用设置和数据

应用设置是指 Windows Universal Platform 应用中可由用户自定义的部分，比如应用的颜色等。

应用数据是应用自身创建和管理的数据，主要包含运行时的状态、应用设置、参考内容以及其他设置等。





## 第十四章 数据库编程

### 14.1 SQLite 数据库的使用

<https://blogs.windows.com/buildingapps/2017/02/06/using-sqlite-databases-uwp-apps/>

For many developers, SQLite has become the preferred client-side technology for data storage. It is a server-less, embedded, open-source database engine that satisfies most local data access scenarios. There are numerous advantages that come with its use, many of which are explained in the SQLite about page.

Since the Windows 10 Anniversary Update (Build 14393), SQLite has also shipped as part of the Windows SDK. This means that when you are building your Universal Windows Platform (UWP) app that runs across the different Windows device form factors, you can take advantage of the SDK version of SQLite for local data storage. This comes with some advantages:

- Your application size reduces since you don't download your own SQLite binary and package it as part of your application
  - Note: *Microsoft.Data.SQLite* (used in the example below) currently has an issue where both SQLite3.dll and WinSQLite.dll are loaded in memory whenever a .NET Native version of your application is run. This is a tracked issue that will be addressed in subsequent updates of the library.
- You can depend on the Windows team to update the version of SQLite running on the operating system with every release of Windows.
- Application load time has the potential to be faster since the SDK version of SQLite will likely already be loaded in memory.

Below, we provided a quick coding example on how to consume the SDK version of SQLite in your C# application.

Note: Since the Windows SDK version of SQLite has only been available since the Windows 10 Anniversary Update, it can only be used for UWP apps targeting Build 14393 or higher.

#### 14.1.1 C# Example

In this example, we will build a UWP application that will allow users to input text into an app local database. The goal is to provide developers with concise guidance on how to use the SQLite



图 14.1

binary that's shipped as part of the Windows SDK. Therefore this code sample is meant to be as simple as possible, so as to provide a foundation that can be further built upon.

An example of the end product is shown below:

### 14.1.2 SQLite C# API Wrappers

As mentioned in the SQLite documentation, the API provided by SQLite is fairly low-level and can add an additional level of complexity for the developer. Because of this, many open-source libraries have been produced to act as wrappers around the core SQLite API. These libraries abstract away a lot of the core details behind SQLite, allowing developers to more directly deal with executing SQL statements and parsing the results. For SQLite consumption across Windows, we recommend the open-source Microsoft.Data.Sqlite library built by the ASP.NET team. It is actively being maintained and provides an intuitive wrapper around the SQLite API. The rest of the example assumes use of the Microsoft.Data.Sqlite library.

Alternative SQLite wrappers are also linked in the “Additional Resources” section below.

### 14.1.3 Visual Studio set-up

The packages used in this sample have a dependency on NuGet version 3.5 or greater. You can check your version of NuGet by going to Help About Microsoft Visual Studio and looking through the

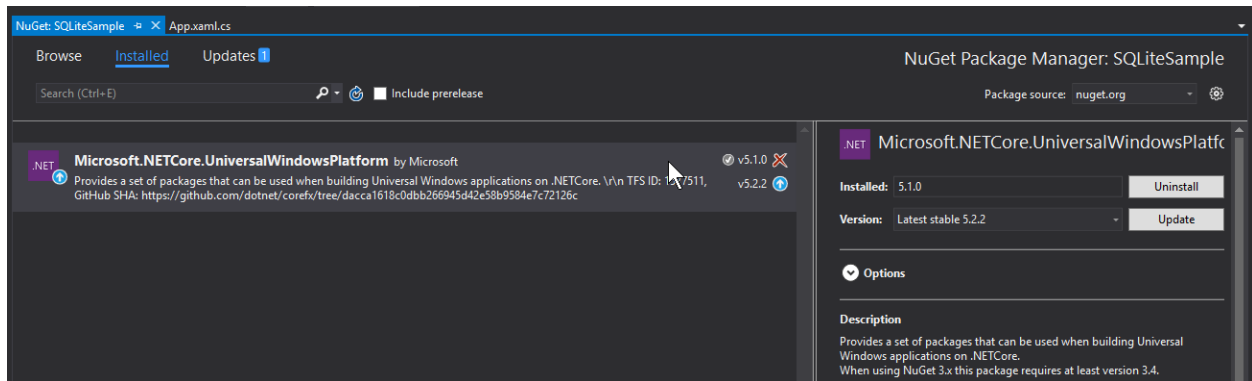


图 14.2

Installed Products for NuGet Package Manager. You can go to the NuGet download page and grab the version 3.5 VSIX update if you have a lower version.

Note: Visual Studio 2015 Update 3 is pre-installed with NuGet version 3.4, and will likely require an upgrade. Visual Studio 2017 RC is installed with NuGet version 4.0, which works fine for this sample.

#### 14.1.3.1 Adding *Microsoft.Data.Sqlite* and upgrading the .NET Core template

The *Microsoft.Data.Sqlite* package relies on at least the 5.2.2 version of .NET Core for UWP, so we'll begin by upgrading this:

- Right click on *References* → *Manage NuGet Packages*
- Under the *Installed* tab, look for the *Microsoft.NETCore.UniversalWindowsPlatform* package and check the version number on the right-hand side. If it's not up to date, you'll be able to update to version 5.2.2 or higher.

Note: Version 5.2.2 is the default for VS 2017 RC. Therefore, this step is not required if you are using this newest version of Visual Studio.


To add the *Microsoft.Data.Sqlite* NuGet package to your application, follow a similar pattern:

- Right-click on *References* → *Manage NuGet Packages*
- Under the Browse tab, search for the *Microsoft.Data.Sqlite* package and install it.

### 14.1.4 Code

#### 14.1.4.1 Application User Interface

We'll start off by making a simple UI for our application so we can see how to add and retrieve entries from our SQLite database.

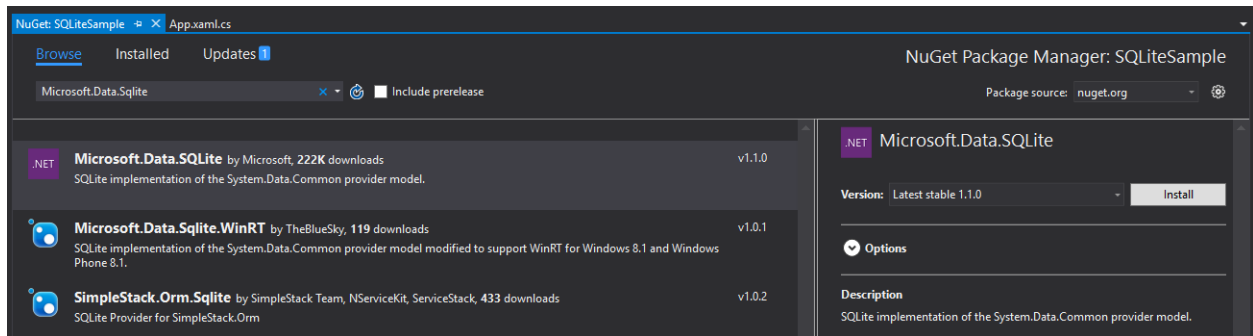图 14.3: *Microsoft.Data.Sqlite* 安装界面

```

1 <Grid Background="{ThemeResource ApplicationPageBackgroundThemeBrush}">
2     <StackPanel>
3         <TextBox Name="Input_Box"></TextBox>
4         <Button Click="Add_Text">Add</Button>
5         <ListView Name="Output">
6             <ListView.ItemTemplate>
7                 <DataTemplate>
8                     <TextBlock Text="{Binding}" />
9                 </DataTemplate>
10            </ListView.ItemTemplate>
11        </ListView>
12    </StackPanel>
13</Grid>

```

There are three important parts to our application's interface:

1. A text box that allows us to take text from the user.
2. A button linked to an event for pulling the text and placing it in the SQLite database.
3. An ItemTemplate to show previous entries in the database.

#### 14.1.4.2 Code Behind for Application

In the App.xaml.cs and MainPage.xaml.cs files generated by Visual Studio, we'll start by importing the Microsoft.Data.Sqlite namespaces that we'll be using.

```

1 using Microsoft.Data.Sqlite;
2 using Microsoft.Data.Sqlite.Internal;

```

Then as part of the app constructor, we'll run a "CREATE TABLE IF NOT EXISTS" command to guarantee that the SQLite .db file and table are created the first time the application is launched.

```

1 public App()
2 {
3     this.InitializeComponent();
4     this.Suspending += OnSuspending;
5     SqliteEngine.UseWinSqlite3(); //Configuring library to use SDK version of SQLite
6     using (SqliteConnection db = new SqliteConnection("Filename=sqliteSample.db"))

```

```

7      {
8          db.Open();
9          String tableCommand = @"CREATE TABLE IF NOT EXISTS MyTable (
10                                     Primary_Key INTEGER PRIMARY KEY AUTOINCREMENT,
11                                     Text_Entry NVARCHAR(2048) NULL)";
12          SqliteCommand createTable = new SqliteCommand(tableCommand, db);
13          try
14          {
15              createTable.ExecuteReader();
16          }
17          catch (SqliteException e)
18          {
19              //Do nothing
20          }
21      }
22  }

```

There are couple of points worth noting with this code:

1. We make a call to `SqliteEngine.UseWinSqlite3()` before making any other SQL calls, which guarantees that the `Microsoft.Data.Sqlite` framework will use the SDK version of SQLite as opposed to a local version.
2. We then open a connection to a SQLite .db file. The name of the file passed as a String is your choice, but should be consistent across all `SqliteConnection` objects. This file is created on the fly the first time it's called, and is stored in the application's local data store.
3. After establishing the connection to the database, we instantiate a `SqliteCommand` object passing in a String representing the specific command and the `SqliteConnection` instance, and call `execute`.
4. We place the `ExecuteReader()` call inside a try-catch block. This is because SQLite will always throw a `SqliteException` whenever it can't execute the SQL command. Not getting the error confirms that the command went through correctly.

Next, we'll add code in the View's code-behind file to handle the button-clicked event. This will take text from the text box and put it into our SQLite database.

```

1  private void Add_Text(object sender, RoutedEventArgs e)
2  {
3      using (SqliteConnection db = new SqliteConnection("Filename=sqliteSample.db"))
4      {
5          db.Open();
6
7          SqliteCommand insertCommand = new SqliteCommand();
8          insertCommand.Connection = db;
9
10         //Use parameterized query to prevent SQL injection attacks
11         insertCommand.CommandText = "INSERT INTO MyTable VALUES (NULL, @Entry)";
12         insertCommand.Parameters.AddWithValue("@Entry", Input_Box.Text);
13
14         try
15         {

```

```

16         insertCommand.ExecuteReader();
17     }
18     catch (SQLiteException error)
19     {
20         //Handle error
21         return;
22     }
23     db.Close();
24 }
25 Output.ItemsSource = Grab_Entries();
26 }

```

As you can see, this isn't drastically different than the SQLite code explained in the app's constructor above. The only major deviation is the use of parameters in the query so as to prevent SQL injection attacks. You will find that commands that make changes to the database (i.e. creating tables, or inserting entries) will mostly follow the same logic.

Finally, we go to the implementation of the `Grab_Entries()` method, where we grab all the entries from the `Text_Entry` column and fill in the XAML template with this information.

```

1 private List<String> Grab_Entries()
2 {
3     List<String> entries = new List<string>();
4     using (SQLiteConnection db = new SQLiteConnection("Filename=sqliteSample.db"))
5     {
6         db.Open();
7         SQLiteCommand selectCommand = new SQLiteCommand("SELECT Text_Entry from MyTable", db);
8         SQLiteDataReader query;
9
10        try
11        {
12            query = selectCommand.ExecuteReader();
13        }
14        catch (SQLiteException error)
15        {
16            //Handle error
17            return entries;
18        }
19
20        while(query.Read())
21        {
22            entries.Add(query.GetString(0));
23        }
24        db.Close();
25    }
26    return entries;
27 }

```

Here, we take advantage of the `SQLiteDataReader` object returned from the `ExecuteReader()` method to run through the results and add them to the `List` we eventually return. There are two methods worth pointing out:

1. The `Read()` method advances through the rows returned back from the executed SQLite command,

and returns a boolean based on whether you’ ve reached the end of the query or not (True if there are more rows left, and False if you’ ve reached the end).

2. The `GetString()` method returns the value of the specified column as a `String`. It takes in one parameter, an `int` that represents the zero-based column ordinal. There are similar methods like `GetDateTime()` and `GetBoolean()` that you can use based on the data type of the column that you are dealing with.
  - (a) The ordinal parameter isn’ t as relevant in this example since we are selecting all the entries in a single column. However, in the case where multiple columns are part of the query, the ordinal represents the column you are pulling from. So if we selected both `Primary_Key` and `Text_Entry`, then `GetString(0)` would return the value of `Primary_Key` `String` and `GetString(1)` would return the value of `Text_Entry` as a `String`.

And that’ s it! You can now build your application and add any text you like into your SQLite database. You can even close and open your application to see that the data persists.

A link to the full code can be found at: <https://github.com/Microsoft/windows-developer-blog-samples/tree/master/Samples/SQLiteSample>

#### 14.1.4.3 Moving Forward

There are plenty of additions that you can make to tailor this sample to your needs:

1. Adding more tables and more complicated queries.
2. Providing more sanitation over the text entries to prevent faulty user input.
3. Communicating with your database in the cloud to propagate information across devices.
4. And so much more!

#### 14.1.5 What about Entity Framework?

For those developers looking to abstract away particular database details, Microsoft’ s Entity Framework provides a great model that lets you work at the “Object” layer as opposed to the database access layer. You can create models for your database using code, or visually define your model in the EF designer. Then Entity Framework makes it super-easy to generate a database from your defined object model. It’ s also possible to map your models to existing databases you may have already created.

SQLite is one of many database back-ends that Entity Framework is configured to work with. This documentation provides an example to work from.

### 14.1.6 Conclusion

From embedded applications for Windows 10 IoT Core to a cache for enterprise relations database server (RDBS) data, SQLite is the premier choice for any application that needs local storage support. SQLite' s server-less and self-contained architecture makes it compact and easy to manage, while its tried and tested API surface coupled with its massive community support provides additional ease of use. And since it ships as part of Windows 10, you can have peace of mind, knowing that you' re always using an up-to-date version of the binary.

As always, please leave any questions in the comments section, and we' ll try our best to answer them. Additional resources are also linked below.



## 第十五章 网络通信



## 第十六章 传感器与地理信息



## 第十七章 语言识别技术





## 附录

## 17.1 元素周期表

[illegible]

相对原子质量来源: (<http://ciaaw.org/atomic-weights.htm>). © 2017 张洋

An asterisk (\*) next to a subshell indicates an anomalous (Aufbau rule-breaking) ground state electron configuration.



## 17.2 密码子表



## 密码子表