


Intelligent Robots – Introduction to ROS

- § ROS architecture & philosophy
- § ROS master, nodes, and topics
- § Console commands
- § Catkin workspace and build system
- § Launch-files
- § Gazebo simulator



What is ROS?

ROS = Robot Operating System

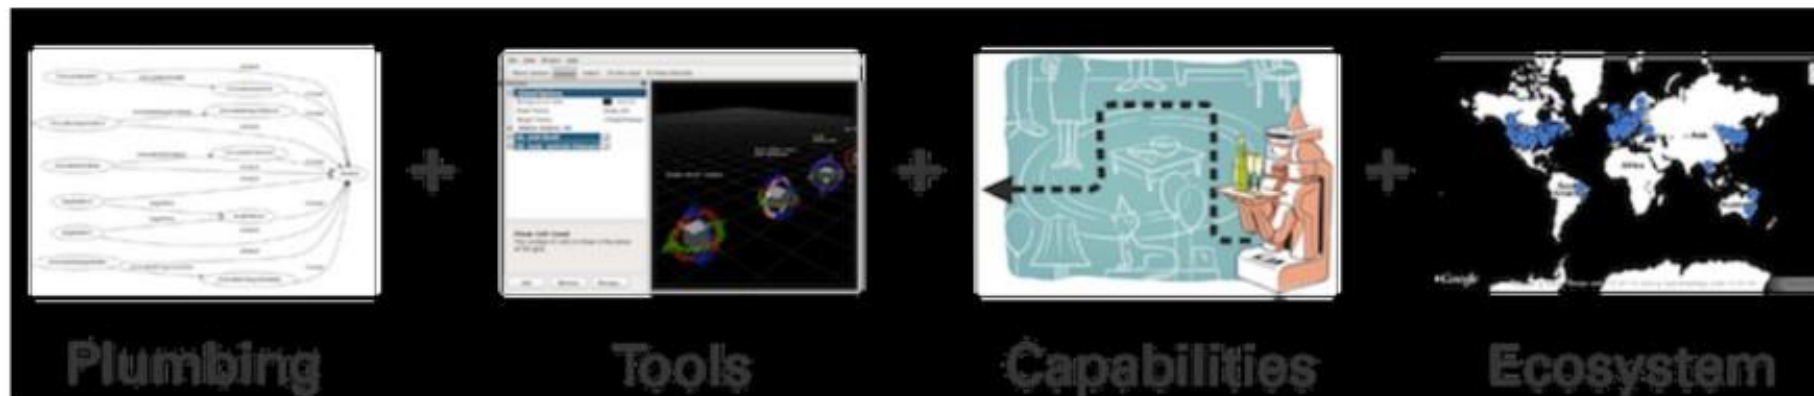

ros.org

- § Process management
- § Inter-process communication
- § Device drivers

- § Simulation
- § Visualization
- § Graphical user interface
- § Data logging

- § Control
- § Planning
- § Perception
- § Mapping
- § Manipulation

- § Package organization
- § Software distribution
- § Documentation
- § Tutorials

History of ROS

- § Originally developed in 2007 at the Stanford Artificial Intelligence Laboratory
- § Since 2013 managed by OSRF
- § Today used by many robots, universities and companies
- § De facto standard for robot programming



ros.org

ROS Philosophy

§ Peer to peer

Individual programs communicate over defined API (ROS *messages*, *services*, etc.).

§ Distributed

Programs can be run on multiple computers and communicate over the network.

§ Multi-lingual

ROS modules can be written in any language for which a client library exists (C++, Python, MATLAB, Java, etc.).

§ Light-weight

Stand-alone libraries are wrapped around with a thin ROS layer.

§ Free and open-source

Most ROS software is open-source and free to use.

ROS Workspace Environment

§ Defines context for the current workspace

§ Default workspace loaded with

```
> source /opt/ros/indigo/setup.bash
```

Overlay your *catkin* workspace with

```
> cd ~/catkin_ws  
> source devel/setup.bash
```

Check your workspace with

```
> echo $ROS_PACKAGE_PATH
```

This is
already
setup in the
provided
installation.

See setup with

```
> cat ~/.bashrc
```

More info

<http://wiki.ros.org/indigo/Installation/Ubuntu>

<http://wiki.ros.org/catkin/workspaces>



ROS Master

- § Manages the communication between nodes
- § Every node registers at startup with the master

ROS Master

Start a master with

```
> roscore
```

More info

<http://wiki.ros.org/Master>



ROS Nodes

- § Single-purpose, executable program
- § Individually compiled, executed, and managed
- § Organized in *packages*

Run a node with


```
> rosrun package_name node_name
```

See active nodes with

```
> rosnodetop
```

Retrieve information about a node with

```
> rostopic info /topic_name
```

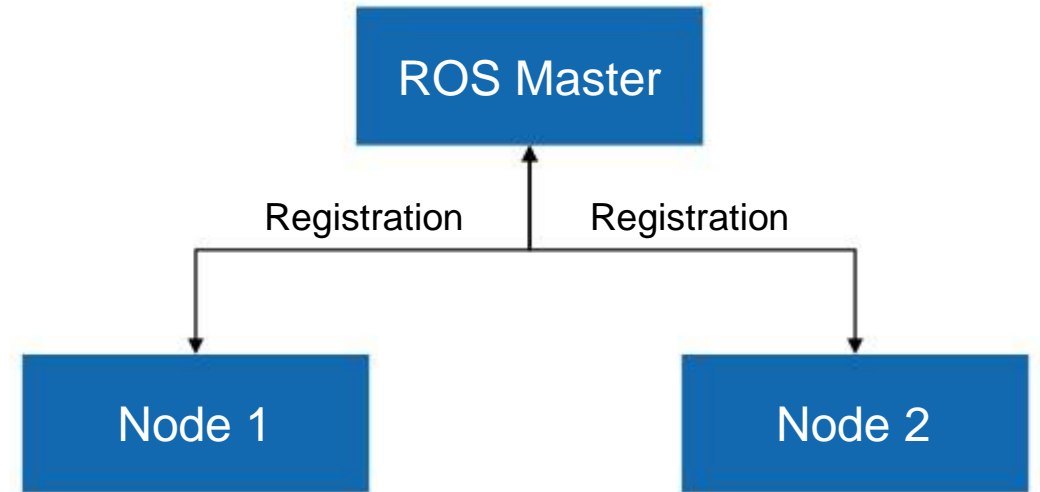

More info

<http://wiki.ros.org/rosnode>

ROS Topics

- § Nodes communicate over *topics*
 - § Nodes can *publish* or *subscribe* to a topic
 - § Typically, 1 publisher and n subscribers
- § Topic is a name for a stream of *messages*

List active topics with


```
> rostopic list
```

Subscribe and print the contents of a topic with

```
> rostopic echo /topic
```

Show information about a topic with

```
> rostopic info /topic
```

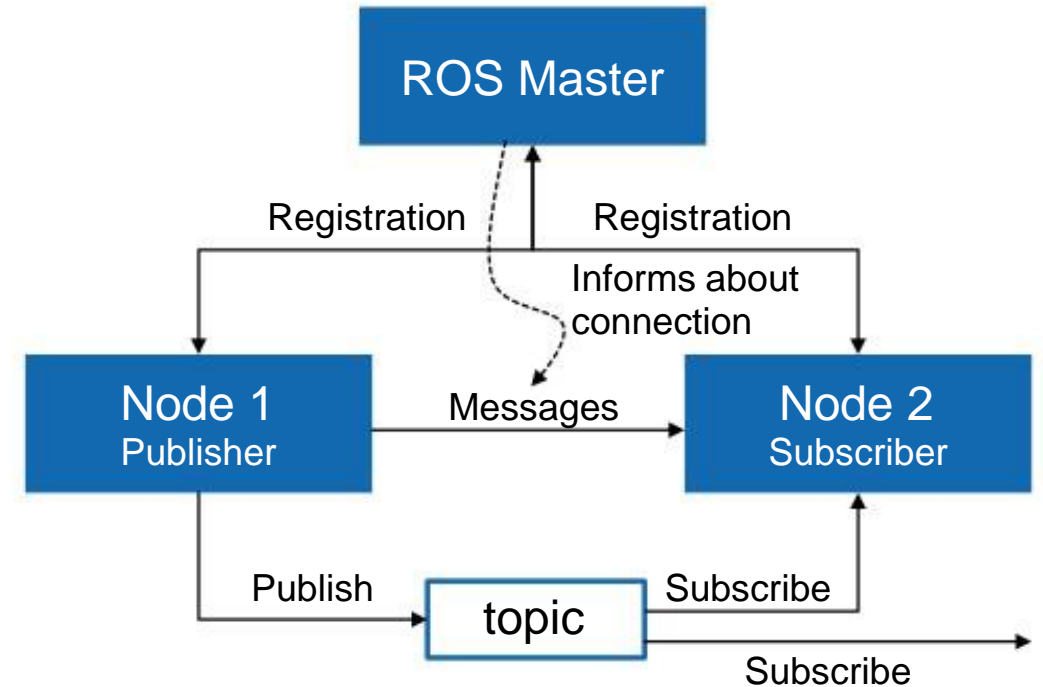

More info

<http://wiki.ros.org/rostopic>

ROS Messages


- § Data structure defining the *type* of a topic
- § Comprised of a nested structure of integers, floats, booleans, strings etc. and arrays of objects
- § Defined in *.msg files

See the type of a topic

```
> rostopic type /topic
```

Publish a message to a topic

```
> rostopic pub /topic type args
```

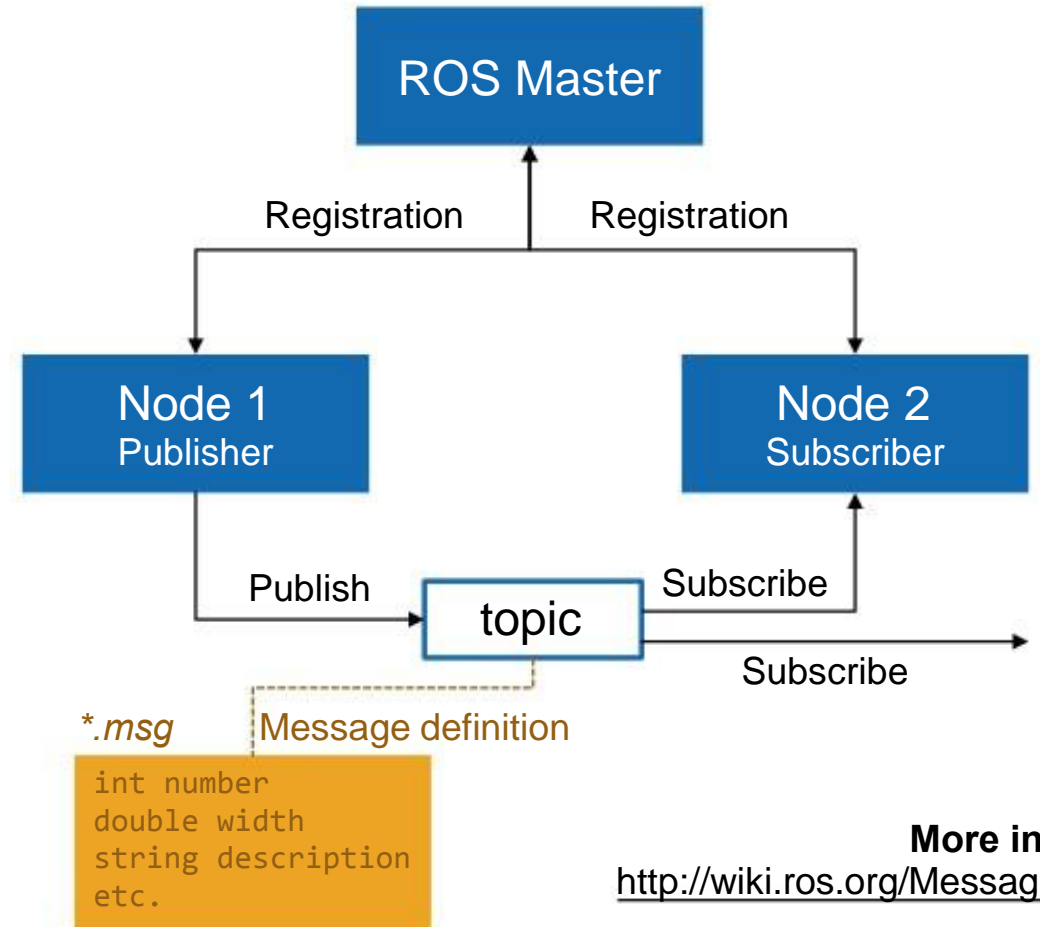

More info

<http://wiki.ros.org/Messages>

ROS Messages

Pose Stamped Example

geometry_msgs/Point.msg

```
float64 x
float64 y
float64 z
```

sensor_msgs/Image.msg

```
std_msgs/Header header
  uint32 seq
  time stamp
  string frame_id
uint32 height
uint32 width
string encoding
uint8 is_bigendian
uint32 step
uint8[] data
```

geometry_msgs/PoseStamped.msg

```
std_msgs/Header header
uint32 seq
time stamp
string frame_id
geometry_msgs/Pose pose
  geometry_msgs/Point position
    float64 x
    float64 y
    float64 z
  geometry_msgs/Quaternion orientation
    float64 x
    float64 y
    float64 z
    float64 w
```

Example

Console Tab Nr. 1 - Starting a *roscore*

Start a roscore with

```
> roscore
```

```
student@ubuntu:~/catkin_ws$ roscore
... logging to /home/student/.ros/log/6c1852aa-e961-11e6-8543-000c297bd368/ros
launch-ubuntu-6696.log
Checking log directory for disk usage. This may take awhile.
Press Ctrl-C to interrupt
Done checking log file disk usage. Usage is <1GB.

started roslaunch server http://ubuntu:34089/
ros_comm version 1.11.20

SUMMARY
=====

PARAMETERS
* /rostdistro: indigo
* /rosversion: 1.11.20

NODES

auto-starting new master
process[master]: started with pid [6708]
ROS_MASTER_URI=http://ubuntu:11311/

setting /run_id to 6c1852aa-e961-11e6-8543-000c297bd368
process[rosout-1]: started with pid [6721]
started core service [/rosout]
```

Example

Console Tab Nr. 2 - Starting a *talker* node

Run a talker demo node with

```
> rosrun roscpp_tutorials talker
```

```
student@ubuntu:~/catkin_ws$ rosrun roscpp_tutorials talker
[ INFO] [1486051708.424661519]: hello world 0
[ INFO] [1486051708.525227845]: hello world 1
[ INFO] [1486051708.624747612]: hello world 2
[ INFO] [1486051708.724826782]: hello world 3
[ INFO] [1486051708.825928577]: hello world 4
[ INFO] [1486051708.925379775]: hello world 5
[ INFO] [1486051709.024971132]: hello world 6
[ INFO] [1486051709.125450960]: hello world 7
[ INFO] [1486051709.225272747]: hello world 8
[ INFO] [1486051709.325389210]: hello world 9
```


Example

Console Tab Nr. 3 - Analyze *talker* node

See the list of active nodes

```
> rosnod list
```


```
student@ubuntu:~/catkin_ws$ rosnod list
/roout
/talker
```



Show information about the *talker* node

```
> rosnod info /talker
```

```
student@ubuntu:~/catkin_ws$ rosnod info /talker
-----
--
Node [/talker]
Publications:
 * /chatter [std_msgs/String]
 * /roout [rograph_msgs/Log]
Subscriptions: None
Services:
 * /talker/get_loggers
 * /talker/set_logger_level
```





See information about the *chatter* topic

```
> rostopic info /chatter
```

```
student@ubuntu:~/catkin_ws$ rostopic info /chatter
Type: std_msgs/String

Publishers:
 * /talker (http://ubuntu:39173/)
Subscribers: None
```



Example

Console Tab Nr. 3 - Analyze *chatter* topic

Check the type of the *chatter* topic

```
> rostopic type /chatter
```

```
student@ubuntu:~/catkin_ws$ rostopic type /chatter  
std_msgs/String
```

Show the message contents of the topic

```
> rostopic echo /chatter
```

```
student@ubuntu:~/catkin_ws$ rostopic echo /chatter  
data: hello world 11874  
---  
data: hello world 11875  
---  
data: hello world 11876
```

Analyze the frequency

```
> rostopic hz /chatter
```

```
student@ubuntu:~/catkin_ws$ rostopic hz /chatter  
subscribed to [/chatter]  
average rate: 9.991  
  min: 0.099s max: 0.101s std dev: 0.00076s window: 10  
average rate: 9.996  
  min: 0.099s max: 0.101s std dev: 0.00069s window: 20
```


Example

Console Tab Nr. 4 - Starting a *listener* node

Run a listener demo node with

```
> rosrunc roscpp_tutorials listener
```

```
student@ubuntu:~/catkin_ws$ rosrunc roscpp_tutorials listener
[ INFO] [1486053802.204104598]: I heard: [hello world 19548]
[ INFO] [1486053802.304538827]: I heard: [hello world 19549]
[ INFO] [1486053802.403853395]: I heard: [hello world 19550]
[ INFO] [1486053802.504438133]: I heard: [hello world 19551]
[ INFO] [1486053802.604297608]: I heard: [hello world 19552]
```

Example

Console Tab Nr. 3 - Analyze

See the new *listener* node with

```
> rosnod list
```

```
student@ubuntu:~/catkin_ws$ rosnod list
/listener
/rosout
/talker
```

Show the connection of the nodes over the chatter topic with

```
> rostopic info /chatter
```

```
student@ubuntu:~/catkin_ws$ rostopic info /chatter
Type: std_msgs/String

Publishers:
 * /talker (http://ubuntu:39173/)

Subscribers:
 * /listener (http://ubuntu:34664/)
```

Example

Console Tab Nr. 3 - Publish Message from Console

Close the *talker* node in console nr. 2 with Ctrl + C


Publish your own message with

```
> rostopic pub /chatter std_msgs/String  
"data: 'ETH Zurich ROS Course'"
```

```
student@ubuntu:~/catkin_ws$ rostopic pub /chatter std_msgs/String "data: 'ETH  
Zurich ROS Course'"  
publishing and latching message. Press ctrl-C to terminate
```

Check the output of the *listener* in console nr. 4

```
[ INFO] [1486054667.584148712]: I heard: [hello world 28202]  
[ INFO] [1486054667.604322265]: I heard: [hello world 28202]  
[ INFO] [1486054667.704264199]: I heard: [hello world 28203]  
[ INFO] [1486054667.804389058]: I heard: [hello world 28204]  
[ INFO] [1486054707.646404558]: I heard: [ETH Zurich ROS Course]
```



catkin Build System

- § *catkin* is the ROS build system to generate executables, libraries, and interfaces
- § We suggest to use the *Catkin Command Line Tools*

→ Use **catkin build** instead of `catkin_make`

Navigate to your catkin workspace with

```
> cd ~/catkin_ws
```

Build a package with

```
> catkin build package_name
```

! Whenever you build a **new** package, update your environment

```
> source devel/setup.bash
```

The catkin command line tools are pre-installed in the provided installation.

More info

<http://wiki.ros.org/catkin/Tutorials>
<https://catkin-tools.readthedocs.io/>

catkin Build System

The catkin workspace contains the following spaces

Work here



The *source space* contains the source code. This is where you can clone, create, and edit source code for the packages you want to build.

Don't touch



The *build space* is where CMake is invoked to build the packages in the source space. Cache information and other intermediate files are kept here.

Don't touch



The *development (devel) space* is where built targets are placed (prior to being installed).

If necessary, clean the entire build and devel space with

```
> catkin clean
```

More info

<http://wiki.ros.org/catkin/workspaces>

catkin Build System

The catkin workspace setup can be checked with

```
> catkin config
```

For example, to set the *CMake build type* to Release (or Debug etc.), use

```
> catkin build --cmake-args  
-DCMAKE_BUILD_TYPE=Release
```

More info

http://catkin-tools.readthedocs.io/en/latest/verbs/catkin_config.html

http://catkin-tools.readthedocs.io/en/latest/cheat_sheet.html

```
student@ubuntu:~/catkin_ws$ catkin config  
-----  
Profile:                                default  
Extending:                             [env] /opt/ros/indigo:/home/student/catkin_ws/devel  
Workspace:                             /home/student/catkin_ws  
-----  
Source Space:                          [exists] /home/student/catkin_ws/src  
Log Space:                             [exists] /home/student/catkin_ws/logs  
Build Space:                           [exists] /home/student/catkin_ws/build  
Devel Space:                           [exists] /home/student/catkin_ws/devel  
Install Space:                         [unused] /home/student/catkin_ws/install  
DESTDIR:                               [unused] None  
-----  
Devel Space Layout:                    linked  
Install Space Layout:                 None  
-----  
Additional CMake Args:                 -GEclipse CDT4 - Unix Makefiles -DCMAKE_CXX_COMP  
ILER_ARG1=-std=c++11 -DCMAKE_BUILD_TYPE=Release  
Additional Make Args:                  None  
Additional catkin Make Args:           None  
Internal Make Job Server:              True  
Cache Job Environments:                False  
-----  
Whitelisted Packages:                 None  
Blacklisted Packages:                 None  
-----  
Workspace configuration appears valid.  
-----
```

Already
setup in the
provided
installation.

Example

Open a terminal and browse to your git folder

```
> cd ~/git
```

Clone the Git repository with


```
> git clone https://github.com/ethz-asl/ros_best_practices.git
```

Symlink the new package to your catkin workspace

```
> ln -s ~/git/ros_best_practices/ ~/catkin_ws/src/
```

Note: You could also directly clone to your catkin workspace, but using a common git folder is convenient if you have multiple catkin workspaces.

https://github.com/ethz-asl/ros_best_practices

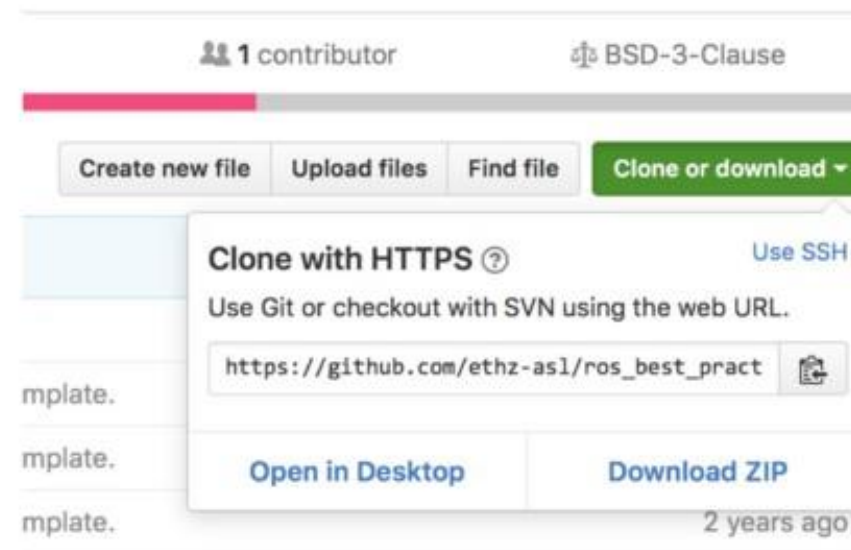

Example

Go to your catkin workspace

```
> cd ~/catkin_ws
```

Build the package with

```
> catkin build ros_package_template
```

Re-source your workspace setup

```
> source devel/setup.bash
```

Launch the node with

```
> roslaunch ros_package_template  
ros_package_template.launch
```

```
NOTE: Forcing CMake to run for each package.  
-----  
[build] Found '1' packages in 0.0 seconds.  
[build] Updating package table.  
Starting >>> catkin_tools_prebuild  
Finished <<< catkin_tools_prebuild [ 1.0 seconds ]  
Starting >>> ros_package_template  
Finished <<< ros_package_template [ 4.1 seconds ]  
[build] Summary: All 2 packages succeeded!  
[build] Ignored: None.  
[build] Warnings: None.  
[build] Abandoned: None.  
[build] Failed: None.  
[build] Runtime: 5.2 seconds total.  
[build] Note: Workspace packages have changed, please re-source setup files to use them.  
student@ubuntu:~/catkin_ws$
```

```
/ros_package_template/subscriber_topic: /temperature  
* /roscpp: indigo  
* /rosversion: 1.11.20  
  
NODES  
/  
ros_package_template (ros_package_template/ros_package_template)  
  
auto-starting new master  
process[master]: started with pid [27185]  
ROS_MASTER_URI=http://localhost:11311  
  
setting /run_id to e43f937a-ed52-11e6-9789-000c297bd368  
process[rosout-1]: started with pid [27198]  
started core service [/rosout]  
process[ros_package_template-2]: started with pid [27201]  
[ INFO] [1486485095.843512614]: Successfully launched node.
```

ROS Launch

- § *launch* is a tool for launching multiple nodes (as well as setting parameters)
- § Are written in XML as **.launch* files
- § If not yet running, launch automatically starts a roscore

Browse to the folder and start a launch file with

```
> roslaunch file_name.launch
```

Start a launch file from a package with

```
> roslaunch package_name file_name.launch
```

More info

<http://wiki.ros.org/roslaunch>

Example console output for
roslaunch roscpp_tutorials talker_listener.launch

```
student@ubuntu:~/catkin_ws$ roslaunch roscpp_tutorials talker_listener.launch
... logging to /home/student/.ros/log/794321aa-e950-11e6-95db-000c297bd368/rosl
Checking log directory for disk usage. This may take awhile.
Press Ctrl-C to interrupt
Done checking log file disk usage. Usage is <16B.

started roslaunch server http://ubuntu:37592/

SUMMARY
=====

PARAMETERS
* /rostdistro: indigo
* /rosversion: 1.11.20

NODES
/
  listener (roscpp_tutorials/listener)
  talker (roscpp_tutorials/talker)

auto-starting new master
process[master]: started with pid [5772]
ROS_MASTER_URI=http://localhost:11311

setting /run_id to 794321aa-e950-11e6-95db-000c297bd368
process[rosout-1]: started with pid [5785]
started core service [/rosout]
process[listener-2]: started with pid [5788]
process[talker-3]: started with pid [5795]
[ INFO] [1486044252.537801350]: hello world 0
[ INFO] [1486044252.638886504]: hello world 1
[ INFO] [1486044252.738279674]: hello world 2
[ INFO] [1486044252.838357245]: hello world 3
```

ROS Launch File Structure

! Attention when copy & pasting code from the internet

talker_listener.launch

```
<launch>  
  <node name="listener" pkg="roscpp_tutorials" type="listener" output="screen"/>  
  <node name="talker" pkg="roscpp_tutorials" type="talker" output="screen"/>  
</launch>
```

! Notice the syntax difference
for self-closing tags:
<tag></tag> and <tag/>

- § **launch**: Root element of the launch file
- § **node**: Each `<node>` tag specifies a node to be launched
- § **name**: Name of the node (free to choose)
- § **pkg**: Package containing the node
- § **type**: Type of the node, there must be a corresponding executable with the same name
- § **output**: Specifies where to output log messages (screen: console, log: log file)

More info

<http://wiki.ros.org/roslaunch/XML>

<http://wiki.ros.org/roslaunch/Tutorials/Roslaunch%20tips%20for%20larger%20projects>

ROS Launch Arguments

- § Create re-usable launch files with `<arg>` tag, which works like a parameter (default optional)

```
<arg name="arg_name" default="default_value"/>
```

- § Use arguments in launch file with

```
$(arg arg_name)
```

- § When launching, arguments can be set with

```
> roslaunch launch_file.launch arg_name:=value
```

range_world.launch (simplified)

```
<?xml version="1.0"?>
<launch>
  <arg name="use_sim_time" default="true"/>
  <arg name="world" default="gazebo_ros_range"/>
  <arg name="debug" default="false"/>
  <arg name="physics" default="ode"/>

  <group if="$(arg use_sim_time)">
    <param name="/use_sim_time" value="true" />
  </group>

  <include file="$(find gazebo_ros)
                                     /launch/empty_world.launch">
    <arg name="world_name" value="$(find gazebo_plugins)/
                                   test/test_worlds/$(arg world).world"/>
    <arg name="debug" value="$(arg debug)"/>
    <arg name="physics" value="$(arg physics)"/>
  </include>
</launch>
```

More info

<http://wiki.ros.org/roslaunch/XML/arg>

ROS Launch

Including Other Launch Files

- § Include other launch files with `<include>` tag to organize large projects

```
<include file="package_name"/>
```

- § Find the system path to other packages with

```
$(find package_name)
```

- § Pass arguments to the included file

```
<arg name="arg_name" value="value"/>
```

range_world.launch (simplified)

```
<?xml version="1.0"?>
<launch>
  <arg name="use_sim_time" default="true"/>
  <arg name="world" default="gazebo_ros_range"/>
  <arg name="debug" default="false"/>
  <arg name="physics" default="ode"/>

  <group if="$(arg use_sim_time)">
    <param name="/use_sim_time" value="true" />
  </group>

  <include file="$(find gazebo_ros)
                                     /launch/empty_world.launch">
    <arg name="world_name" value="$(find gazebo_plugins)/
                                   test/test_worlds/$(arg world).world"/>
    <arg name="debug" value="$(arg debug)"/>
    <arg name="physics" value="$(arg physics)"/>
  </include>
</launch>
```

More info


<http://wiki.ros.org/roslaunch/XML/include>

Gazebo Simulator

- § Simulate 3d rigid-body dynamics
- § Simulate a variety of sensors including noise
- § 3d visualization and user interaction
- § Includes a database of many robots and environments (*Gazebo worlds*)
- § Provides a ROS interface
- § Extensible with plugins

Run Gazebo with

```
> rosrun gazebo_ros gazebo
```

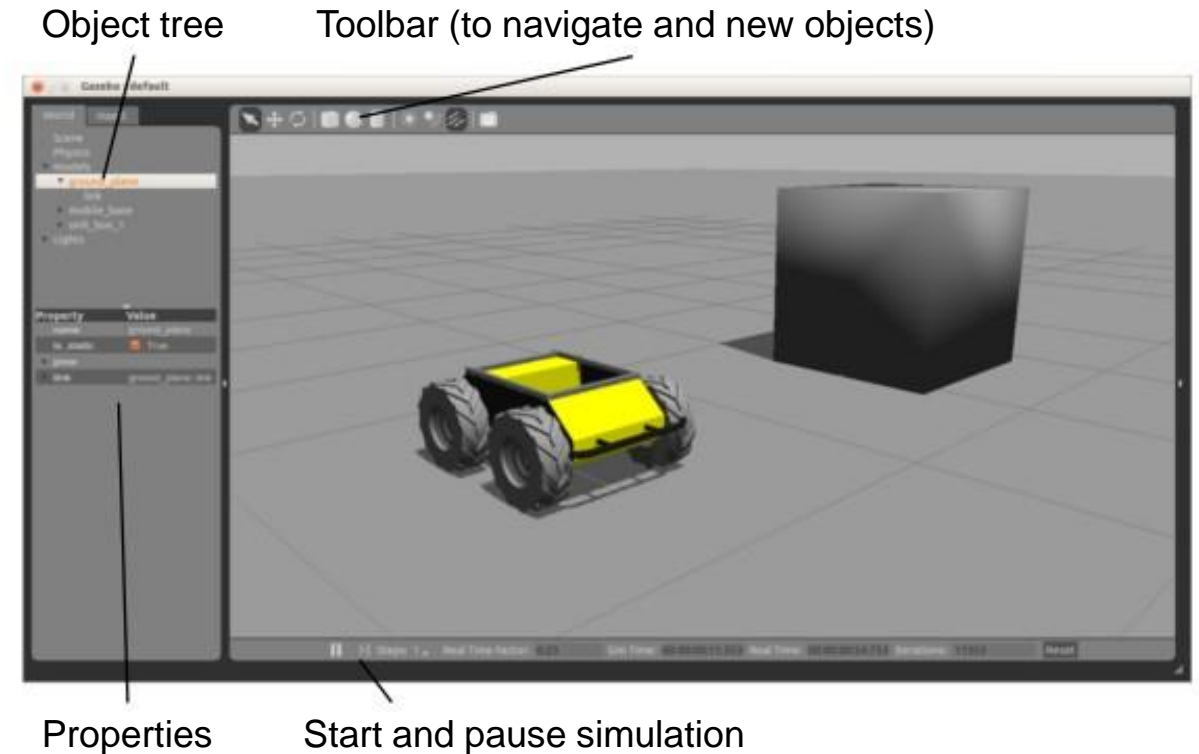

More info

<http://gazebosim.org/>

<http://gazebosim.org/tutorials>

Further References

§ ROS Wiki

§ <http://wiki.ros.org/>

§ Installation

§ <http://wiki.ros.org/ROS/Installation>

§ Tutorials

§ <http://wiki.ros.org/ROS/Tutorials>

§ Available packages

§ <http://www.ros.org/browse/>

§ ROS Cheat Sheet

§ https://github.com/ros/cheatsheet/releases/download/0.0.1/ROScheatsheet_catkin.pdf

§ ROS Best Practices

§ https://github.com/ethz-asl/ros_best_practices/wiki

§ ROS Package Template

§ https://github.com/ethz-asl/ros_best_practices/tree/master/ros_package_template