

Table of Contents

Introduction	1.1
1.快速上手	1.2
1.1.直接使用	1.2.1
1.2.后台常用页面	1.2.2
1.3.图表Charts	1.2.3
1.4.UI界面元素	1.2.4
1.5.表单Forms	1.2.5
1.6.表格Tables	1.2.6
1.7.样例数据管理	1.2.7
1.8.目录结构	1.2.8
1.9.JQuery插件列表	1.2.9
1.10.Skins皮肤	1.2.10
1.11.Layout	1.2.11
1.12.JS选项	1.2.12
2.组件	1.3
2.1.图表charts	1.3.1
2.2.编辑器	1.3.2
2.3.日期控件	1.3.3
2.4.字体	1.3.4
2.5.按钮	1.3.5
2.6.时间线	1.3.6
2.7.InputMasks	1.3.7
2.8.颜色选取	1.3.8
2.9.iCheck	1.3.9
2.10.数据表格	1.3.10

AdminLTE2-IT黑马-定制版

订单号	产品名称	会员	价格	状态	操作
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已取消	<button>编辑</button>
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已出团(待点评)	<button>编辑</button>
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已处理(待付款)	<button>编辑</button>
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已处理(待出团)	<button>编辑</button>
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已取消	<button>编辑</button>
2017020200001	西安3日自由行-超级自由行	bi'peng0405	¥ 500	已取消	<button>编辑</button>

- 在线文档
- 下载pdf
- 项目Git地址
- 界面在线浏览
- 官方手册翻译

前言

- 本后台管理模板是基于开源项目 AdminLTE，为符合在国内项目中使用，就行定制开发。
- AdminLTE 是一个完全的响应式管理模板，基于 Bootstrap3 框架，高度可定制，易于使用。适合从小型移动设备到大型台式机的屏幕分辨率。
- AdminLTE 框架在网页架构与设计上，有很大的辅助作用，尤其是前端架构设计师，用好 AdminLTE 不但美观，而且可以免去写很大CSS与JS的工作量。

AdminLTE is a popular open source WebApp template for admin dashboards and control panels. It is a responsive HTML template that is based on the CSS framework Bootstrap 3. It utilizes all of the Bootstrap components in its design and re-styles many commonly used plugins to create a consistent design that can be used as a user interface for backend applications. AdminLTE is based on a modular design, which allows it to be easily customized and built upon. This documentation will guide you through installing the template and exploring the various components that are bundled with the template.

浏览器兼容性

- IE 9+
- Firefox (latest)
- Chrome (latest)
- Safari (latest)
- Opera (latest)

技术栈

- 前端
Bootstrap3 + jQuery
- 编译
fis3 + gulp + npm

定制说明

- 修改 - 默认中文字体 微软雅黑
- 修改 - 本项目访问字体库文件 font-awesome bootstrap-font 避免了墙内 无法下载，打开页面长时间 白屏 问题
- 修改 - 谷歌 js库文件为本项目访问, 原因同上
- 修改 - 汉化常用控件 如: timepicker 、 datepicker 、 daterangepicker 、 ckeditor 、 WYSIHTML5 、 Markdown

- 重构 - 基于node技术，采用 百度fis3 工程化管理
- 重构 - 发布文件有两种，一种是带工具栏导航的完整页面，另一种是不带的直接内容页，方便后台人员定制
- 重构 - 所有用到的组件都整理在了 `plugins` 目录下，取消了bower包管理，因为组件会进行二次开发定制
- 添加 - 通用界面 示范代码 (登录 、 注册 、 404错误页 、 500错误页 、 空白页 、 数据列表页 、 表单页样式)
- 添加 - 图表Charts 示范代码 (ChartJS 、 Morris Charts 、 Flot Charts 、 Inline Charts)
- 添加 - UI界面元素 示范代码 (标准 General 、 图标 Icons 、 按钮 Buttons 、 滑块 Sliders 、 时间线 Timeline 、 对话框样式 Modals 、 窗体小部件 widgets)
- 添加 - 表单 Forms 示范代码 (基础表单元素 、 高级表单元素 、 编辑器)
- 添加 - 表格 tables 示范代码 (简单表格 、 数据表格)
- 添加 - 样例-订单管理 示范代码 (全部订单 、 订单表单 、 退款)
- 添加 - 样例-游记管理 示范代码 (游记列表 、 添加游记 、 游记点评 、 游记设置)
- 添加 - 样例-系统管理 示范代码 (系统设置)

目录

- 1.快速上手
 - 1.1.直接使用
 - 1.2.后台常用页面
 - 1.3.图表Charts
 - 1.4.UI界面元素
 - 1.5.表单Forms
 - 1.6.表格Tables
 - 1.7.样例数据管理
 - 1.8.目录结构
 - 1.9.JQuery插件列表
 - 1.10.Skins皮肤
 - 1.11.Layout
 - 1.12.JS选项
- 2.组件

- [2.1.图表charts](#)
- [2.2.编辑器](#)
- [2.3.日期控件](#)
- [2.4.字体](#)
- [2.5.按钮](#)
- [2.6.时间线](#)
- [2.7.InputMasks](#)
- [2.8.颜色选取](#)
- [2.9.iCheck](#)
- [2.10.数据表格](#)

参考

- [AdminLTE2官方网站](#)
- [百度fis3](#)
- [gulp](#)

1.1. 直接使用

前言

- 通过本章节，你将会了解如何把这套静态后台加入自己的项目中。
- 你的项目可能是java web、php、node，只要是基于模板系统的，都可以套用。

下载

- git方式

```
git clone https://git.oschina.net/docafe/adminlte2-itcast.git
```

- 下载zip包

```
http://git.oschina.net/docafe/adminlte2-itcast/repository/archive/master
```

发布目录说明

release\dsit	发布目录
\pages	页面
\plugins	插件库
\img	图片
\css	css

创建模板步骤

1. 安置静态文件

1. 快速上手

请把 `plugins` 、 `img` 、 `css` 三个目录放入模板系统的静态目录，在你的项目下可能是 `assets` 、 `static` 、 `public`

假设你是放在 `public` 下：

```
\public\plugins  
\public\img  
\public\css
```

1. 开始第一个页面，后台首页

- 复制 `/release/dist/pages/all-admin-index.html` 到你的项目模板目录中
- 替换文件路径
 - 默认路径是相对的 `../plugins/xxx` , 在你的模板系统下可以这样替换
 - 查找 `../plugins/` , 替换成 `<%=public_path%>/plugins/`
`<%=public_path%>` 是你模板系统的 静态资源目录 , 请酌情修改
- 运行你的项目看看效果

模板化拆分页面

/release/dist/pages/all-admin-index.html 为例

- 页面结构说明



分为4个部分 顶部导航、侧栏菜单、底部版权、内容区域

- dom 说明

1. 快速上手

```
1  <!DOCTYPE html>
2  <html>
3  | <head>
4  | | <!-- 页面meta -->
5  | | <link rel="import" href="../../modules/ui-modules/admin-meta/admin-meta.html?_inline">
6  | | <!-- 页面meta /-->
7  | </head>
8  | <body class="hold-transition skin-purple sidebar-mini">
9
10 |   <div class="wrapper">
11
12   |   <!-- 页面头部 -->
13   |   <link rel="import" href="../../modules/ui-modules/admin-header/admin-header.html?_inline">
14   |   <!-- 页面头部 /-->
15
16   |   <!-- 导航侧栏 -->
17   |   <link rel="import" href="../../modules/ui-modules/admin-sidebar/admin-sidebar.html?_inline">
18   |   <!-- 导航侧栏 /-->
19
20   |   <!-- 内容区域 -->
21   |   <link rel="import" href="admin-index.html?_inline">
22   |   <!-- 内容区域 /-->
23
24   |   <!-- 底部导航 -->
25   |   <link rel="import" href="../../modules/ui-modules/admin-footer/admin-footer.html?_inline">
26   |   <!-- 底部导航 /-->
27
28   </div>
29
30 </body>
31 | </html><!---->
```

- 如支持 Layout 创建母版

```
<!DOCTYPE html>
<html>
  <head>
    <!-- 页面meta /-->
    <!-- 页面CSS /-->
  </head>
  <body class="hold-transition skin-purple sidebar-mini">
    <div class="wrapper">
      <!-- 页面头部 /-->
      <!-- 导航侧栏 /-->
      <!-- 内容区域 /-->
      <!-- 底部版权 /-->
    </div>
    <!-- 页面js /-->
  </body>
</html>
```

- 直接使用 内容区域 html

- 在发布目录下，有单独的 内容区域 html 方便大家使用

1. 快速上手

- 如：后台首页 `admin-index`，会提供两个文件对应
 - `/release/dist/pages/all-admin-index.html` 全部html
 - `/release/dist/pages/admin-index.html` 内容区域的html

下载已套好的模板套件

感谢传智播客老师辛苦劳动~

- [java Spring MVC 模板](#)
- [php Thinkphp5 模板](#)
- [php CodeIgniter3 模板](#)
- [php Laravel 模板](#)
- [php yii2 模板](#)
- [nodejs Express 模板](#)
- [nodejs egg 模板](#)

1.2.后台常用页面

前言

- 我们已为大家准备了常用界面，技术上采用 `Bootstrap3 + jQuery`，熟悉的同学，直接复制代码。

登录界面

- 截图



- 文件

- `/release/dist/pages/all-admin-login.html`
- `/release/dist/pages/admin-login.html`

注册界面

- 截图



- 文件

- `/release/dist/pages/all-admin-register.html`
- `/release/dist/pages/admin-register.html`

404 错误界面

- 截图

1.2.后台常用页面

The screenshot shows the '404 错误页面' (404 Error Page) from a management system. The left sidebar has a dark theme with white text. It includes a user profile for '张猿猿' (Zhang YuanYuan), a '菜单' (Menu) section, and a '后台通用页面' (Backend General Page) section with options like '登录' (Login), '注册' (Register), '404页' (404 Page), '500页' (500 Page), '空白页' (Blank Page), '数据列表页' (Data List Page), and '表单页' (Form Page). Below these are sections for '图表Charts' and 'UI界面元素' (UI Interface Elements). A large orange '404' is centered on the page, with a warning icon and the text 'Oops! 页面没有找到.' (Oops! Page not found.). Below it is a message: '没有找到你请求的页面, 你可以 [返回到后台首页](#) 或者通过搜索查询' (The requested page was not found, you can return to the [backend homepage](#) or search for it). There is also a search bar with a magnifying glass icon.

- 文件

- `/release/dist/pages/all-admin-404.html`
- `/release/dist/pages/admin-404.html`

500错误界面

- 截图

The screenshot shows the '500 错误页面' (500 Error Page) from the same management system. The left sidebar is identical to the 404 page. The main content features a large red '500' with a warning icon and the text 'Oops! 页面程序有错误.' (Oops! The page program has an error.). Below it is a message: '你访问的页面发生错误, 你可以 [返回到后台首页](#) 或者通过搜索查询' (The page you visited has an error, you can return to the [backend homepage](#) or search for it). There is also a search bar with a magnifying glass icon. At the bottom of the page, there is a copyright notice: 'Copyright © 2014-2017 研究院研发部. All rights reserved.' and a version note: 'Version 1.0.8'.

- 文件

- `/release/dist/pages/all-admin-500.html`
- `/release/dist/pages/admin-500.html`

空白页

适合开始一个全新的页面，已包含基础元素： 模块标题 、 子标题 、 当前路径
 、 模块plan

- 截图



- 文件

- /release/dist/pages/all-admin-blank.html
- /release/dist/pages/admin-blank.html

数据列表页

数据管理列表是一个后台的常见界面，我们规范了基础元素，为了提高用户体验的一致性，推荐大家作为模板。

- 界面元素

- 表格

- 搜索输入框
- 全选
- 行高亮
- 排序按钮
- 操作按钮

- 工具栏

- 新建
- 删除
- 开启
- 屏蔽
- 刷新

- 翻页

1.2.后台常用页面

- 共计页数 当前页数 每页条数
- 首页 尾页 上一页 下一页 前后5个页

- 截图

The screenshot shows a data management interface titled "数据管理 数据列表". On the left is a sidebar with a user profile and a navigation menu. The main area displays a table with 7 rows of data, each representing a browser version. The columns are: ID, Browser [降序], Platform(s) [屏蔽降序], Engine version [屏蔽降序], CSS grade [点击排序], 屏蔽, and 操作. The "操作" column contains buttons for "订单", "详情", and "编辑". At the bottom, there are pagination controls and a copyright notice.

ID	Browser [降序]	Platform(s) [屏蔽降序]	Engine version [屏蔽降序]	CSS grade [点击排序]	屏蔽	操作
1	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
2	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
3	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
4	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
5	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
6	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>
7	Internet Explorer 4.0	Win 95+	4	X	开启	<button>订单</button> <button>详情</button> <button>编辑</button>

- 文件

- /release/dist/pages/all-admin-datalist.html
- /release/dist/pages/admin-datalist.html

表单页

数据表单的重要性和多样性无需多说，，我们也做了模板页。

- 界面元素

- 布局

- 四列, 行两个项目 两列 三列 四列

- 基础控件

- 文本 密码 用户名 整数 货币 图标输入框
 - 多选checkbox 多选radio 文件上传 内容输入框 颜色选取 颜色选取[选取按钮]

- 下拉框

- 下拉框[标准] 下拉框[输入单选] 下拉框[输入多选]

- 日期控件

- 日期[单选] 日期[区间] 日期时间[区间] 日期[时间段]

- 树表格

- 多层级 可折叠 行高亮

- 编辑器

- WYSIHTML5 轻量级的文字编辑输入

- Markdown 喜欢md输入的

- CK Editor 专业级文字编辑工作

- 模块窗口

- 弹出模式窗口

| 控件使用说明，可查看后续 组件 章节。

- 截图

1.2.后台常用页面

数据管理 数据表单

label显示 基础控件 下拉框 日期控件 树表格 编辑器 模态窗口

四列，行两个项目

订单编号	xxxxxxxx	下单时间	2019-01-01
路线名称	xxxxxxxx	出发城市	北京
其他信息	aaadfsdfdsfsdfsda		
高度2x	请输入...		

三列

销量	下单金额1 307,02120 ↑2.66%	下单客户数 37,02120 ↓3.16%
----	------------------------------	-----------------------------

两列、三列、四列

转化	店铺成交转化率 2.25%	先付款率 88.52%	
回访	30日客户回头率 1.95%	30日重复购买率 1.97%	
上架	上架商品数量(SKU) 32	上架商品数量(SKU) 28	上架商品数量(SKU) 28

Copyright © 2014-2017 研究院研发部. All rights reserved. Version 1.0.8

数据管理 数据表单

label显示 基础控件 下拉框 日期控件 树表格 编辑器 模态窗口

文本	文本	密码	密码
用户名	@ 用户名	整数	.00
货币	¥ .00	图标输入框	请输入...
多选checkbox	□ 选项1 □ 选项2 □ 选项3 □ 选项4 □ 选项5		
多选radio	○ 选项1 ○ 选项2 ○ 选项3 ○ 选项4 ○ 选项5		
文件上传	点击这里上传文件		
内容输入框	请输入...		
颜色选取	颜色选取	颜色选取[选取按钮]	○
	保存	返回	

数据管理 数据表单

label显示 基础控件 下拉框 日期控件 树表格 编辑器 模态窗口

流量来源	浏览量	浏览量占比
总计	732,191,5	100%
自主访问	12345	8%
我的京东	1211	3%
我的京东一	1211	3%
我的京东二	1211	3%
购物车	11134	5%
购物车一	1211	3%

1.2.后台常用页面

购物车二	1211	3%
负责流量	12345	8%
负责流量一	12345	8%
负责流量二	12345	8%

● 文件

- </release/dist/pages/all-admin-dataform.html>
- </release/dist/pages/admin-dataform.html>

个人中心

● 截图

The screenshot shows a user profile for 'Nina Mcintire' (Software Engineer). The sidebar contains a navigation menu with sections like '菜单', '首页', '后台通用页面' (selected), '登录', '注册', etc. The main content area displays the user's profile picture, name, and statistics: Followers (1,322), Following (543), and Friends (13,287). A 'Follow' button is present. Below this is the 'About Me' section, which includes 'Education' (B.S. in Computer Science from the University of Tennessee at Knoxville), 'Location' (Malibu, California), 'Skills' (UI Design, Coding, Javascript, PHP, Node.js), and 'Notes' (Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam fermentum enim neque.). To the right, there is a timeline section showing activity from 'Jonathan Burke Jr.' (Shared publicly - 7:30 PM today) and 'Sarah Ross' (Sent you a message - 3 days ago). It also shows a post by 'Adam Jones' (Posted 5 photos - 5 days ago) with several thumbnail images of cityscapes.

● 文件

- </release/dist/pages/all-admin-profile.html>
- </release/dist/pages/admin-profile.html>

发票

- 截图

Invoice #007612

Note: This page has been enhanced for printing. Click the print button at the bottom of the invoice to test.

AdminLTE, Inc. Date: 2/10/2014

From	To	Invoice #
Admin, Inc. 795 Folsom Ave, Suite 600 San Francisco, CA 94107 Phone: (804) 123-5432 Email: info@almasedstudio.com	John Doe 795 Folsom Ave, Suite 600 San Francisco, CA 94107 Phone: (555) 539-1037 Email: john.doe@example.com	#007612

Qty	Product	Serial #	Description	Subtotal
1	Call of Duty	455-981-221	El snort testosterone trophy driving gloves handsome	\$64.50
1	Need for Speed IV	247-925-726	Wes Anderson umami biodiesel	\$50.00
1	Monsters DVD	735-845-642	Terry Richardson helvetica tousled street art master	\$10.70
1	Grown Ups Blue Ray	422-568-642	Tousled lomo letterpress	\$25.99

Payment Methods: Amount Due 2/22/2014

VISA	MasterCard	AMERICAN EXPRESS	PayPal
Etsy doostang zoodles disqus groupon greplin oooj voxyl zoodles, weebly ning heekya handango imeem plugg dopplr jibjab, movity jajah plickers sifteo edmodo ifttt zimbra.			

Subtotal:	\$250.30
Tax (9.3%):	\$10.34
Shipping:	\$5.80
Total:	\$265.24

[Print](#) [Generate PDF](#) [Submit Payment](#)

Copyright © 2014-2017 研究院研发部. All rights reserved. Version 1.0.8

- 文件

- /release/dist/pages/all-admin-invoice.html
- /release/dist/pages/admin-invoice.html

发票打印

- 截图

1.2.后台常用页面

The screenshot shows two overlapping windows. On the left is a '打印' (Print) dialog box with the following settings:

- From: Admin, Inc.
- 795 Folsom Ave, Suite 600
- San Francisco, CA 94107
- Phone: (800) 123-5432
- Email: info@almaseedstudio.com
- Qty: 1
- 目标打印机: [dropdown] 另存为 PDF [button]
- 页码: 全部 [radio button]
- 布局: 横向 [dropdown]
- 更多设置 [button]
- Payment Methods: VISA, MasterCard, American Express, PayPal
- 使用系统对话框进行打印... (⌘+P)
- 使用预览程序打开 PDF

The right window is a preview of an invoice titled 'AdminLTE, Inc.' with the following details:

From: Admin, Inc.
795 Folsom Ave, Suite 600
San Francisco, CA 94107
Phone: (800) 123-5432
Email: info@almaseedstudio.com

To: John Doe
795 Folsom Ave, Suite 600
San Francisco, CA 94107
Phone: (555) 539-1037
Email: john.doe@example.com

Invoice #007612
Order ID: F4358J
Payment Due: 2/22/2014
Account: 968-34567

Subtotal: \$64.50
Amount Due 2/22/2014: \$265.24

Qty	Product	Serial #	Description	Subtotal
1	Call of Duty	455-981-221	EI snort testosterone trophy driving gloves handsome	\$64.50
1	Need for Speed IV	247-925-726	Wes Anderson umami biosiesel	\$50.00
1	Monsters DVD	735-845-642	Terry Richardson helvetica tousled street art master	\$10.70
1	Grown Ups Blue Ray	422-568-642	Tousled lomo letterpress	\$25.99

Payment Methods: VISA, MasterCard, American Express, PayPal

Etsy doostang zoobiles disqus groupon greplin oooj voxyl zoobiles, weebly ning heekya handango imemeem plugg dopplr jibjab, movity jaah plckers sifteo edmodo ittt zimbra.


● 文件

- /release/dist/pages/all-admin-invoice-print.html

1.3.图表Charts

ChartJS

- 截图

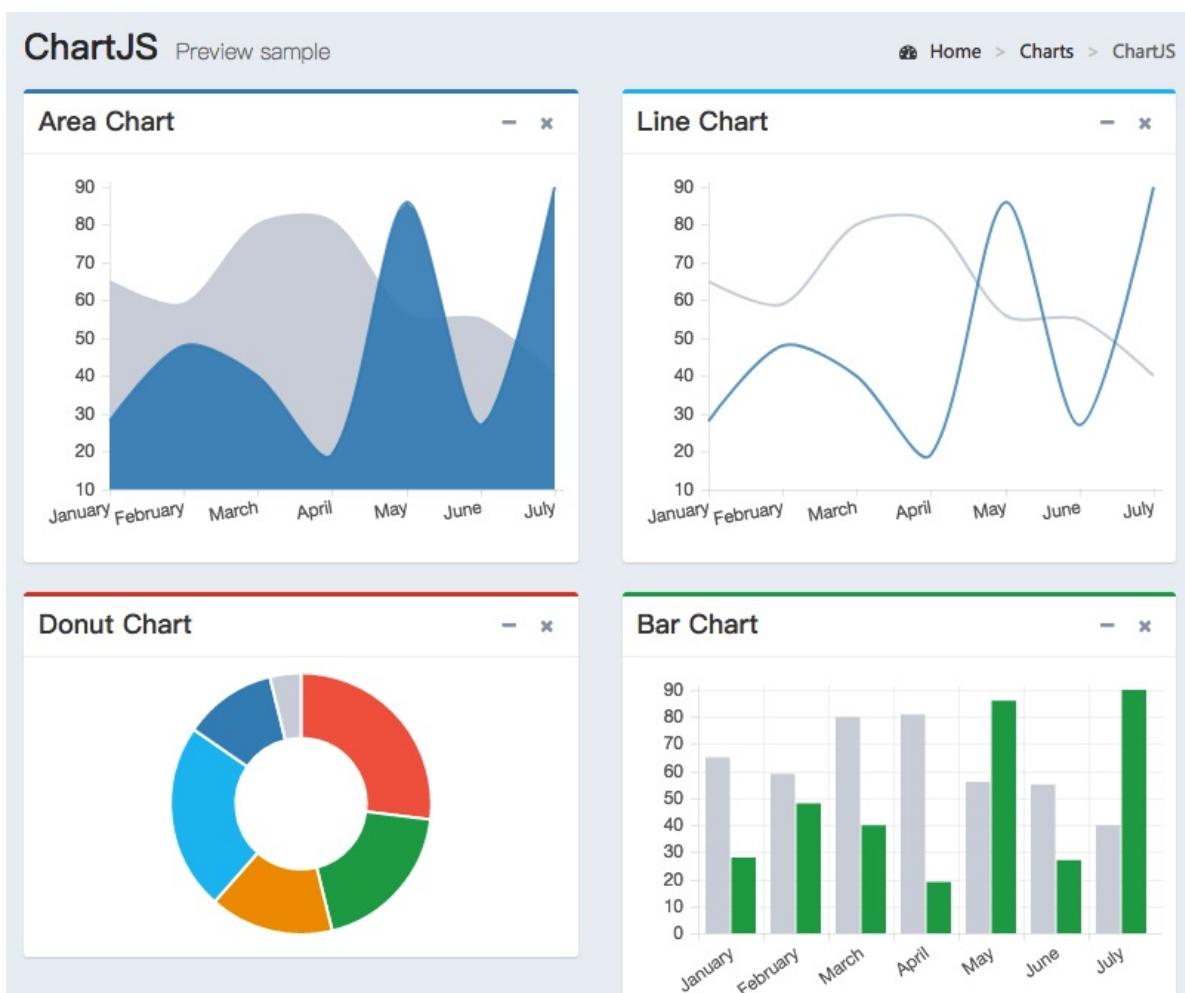


- 文件

- </release/dist/pages/all-charts-chartjs.html>
- </release/dist/pages/charts-chartjs.html>

Morris

- 截图

1.3. 图表Charts

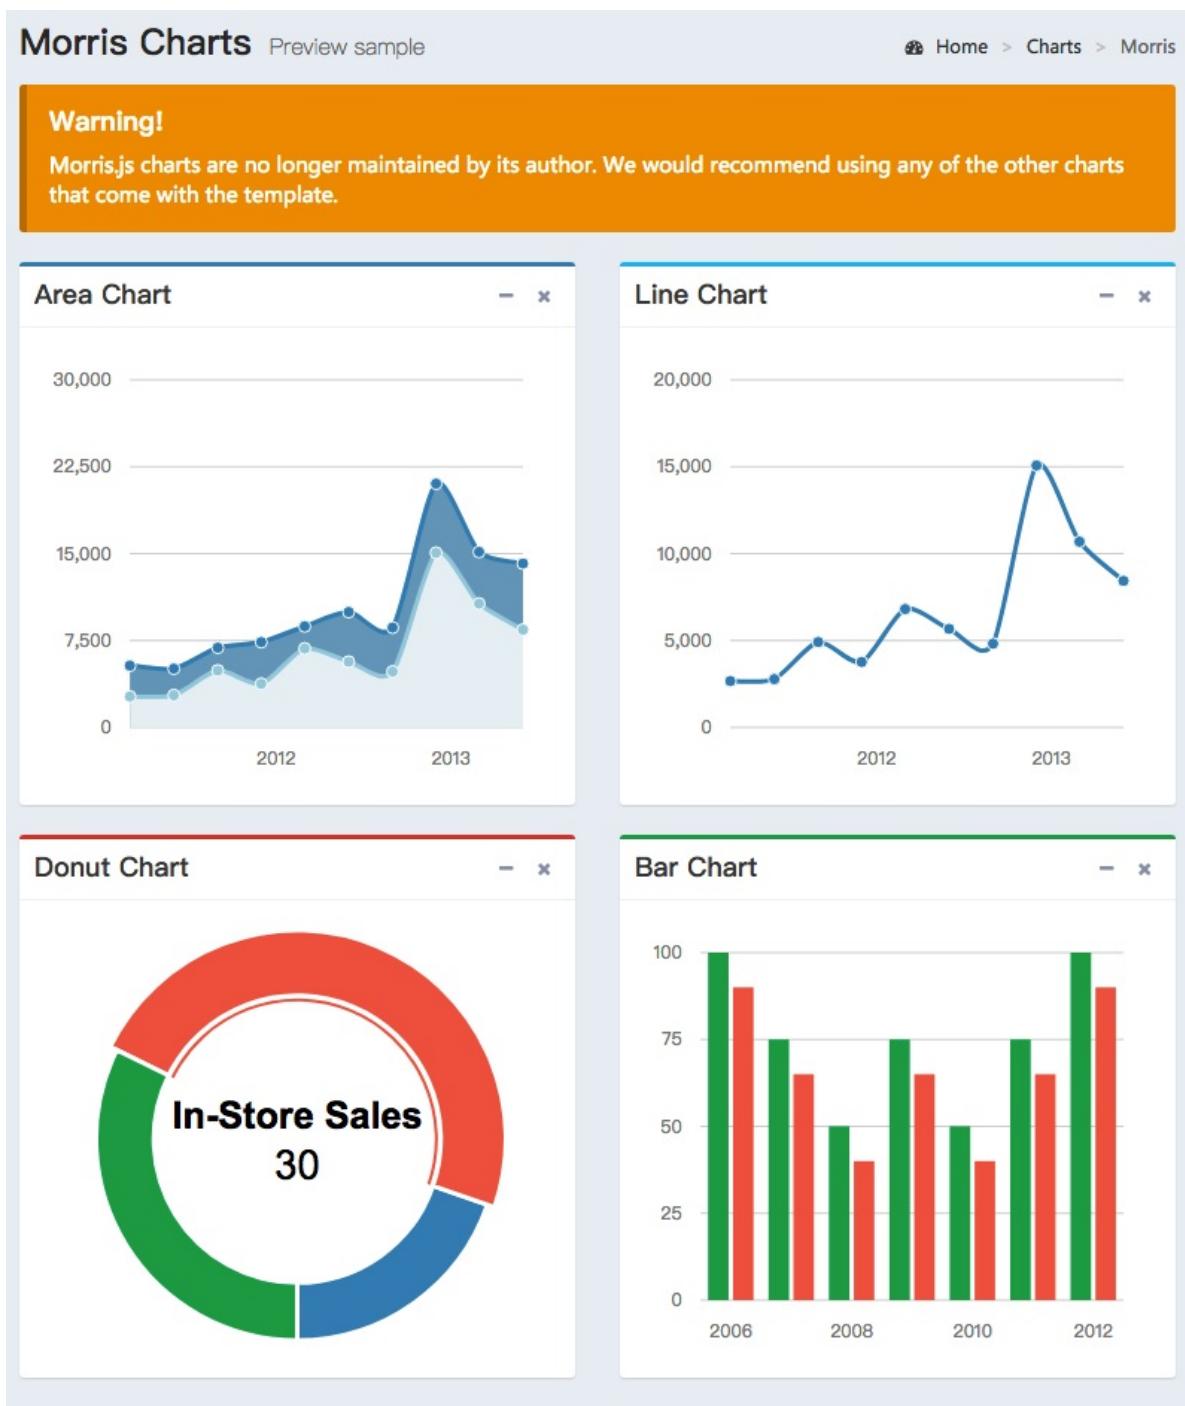


- 文件

- </release/dist/pages/all-charts-morris.html>
- </release/dist/pages/charts-morris.html>

Flot

- 截图

1.3.图表Charts

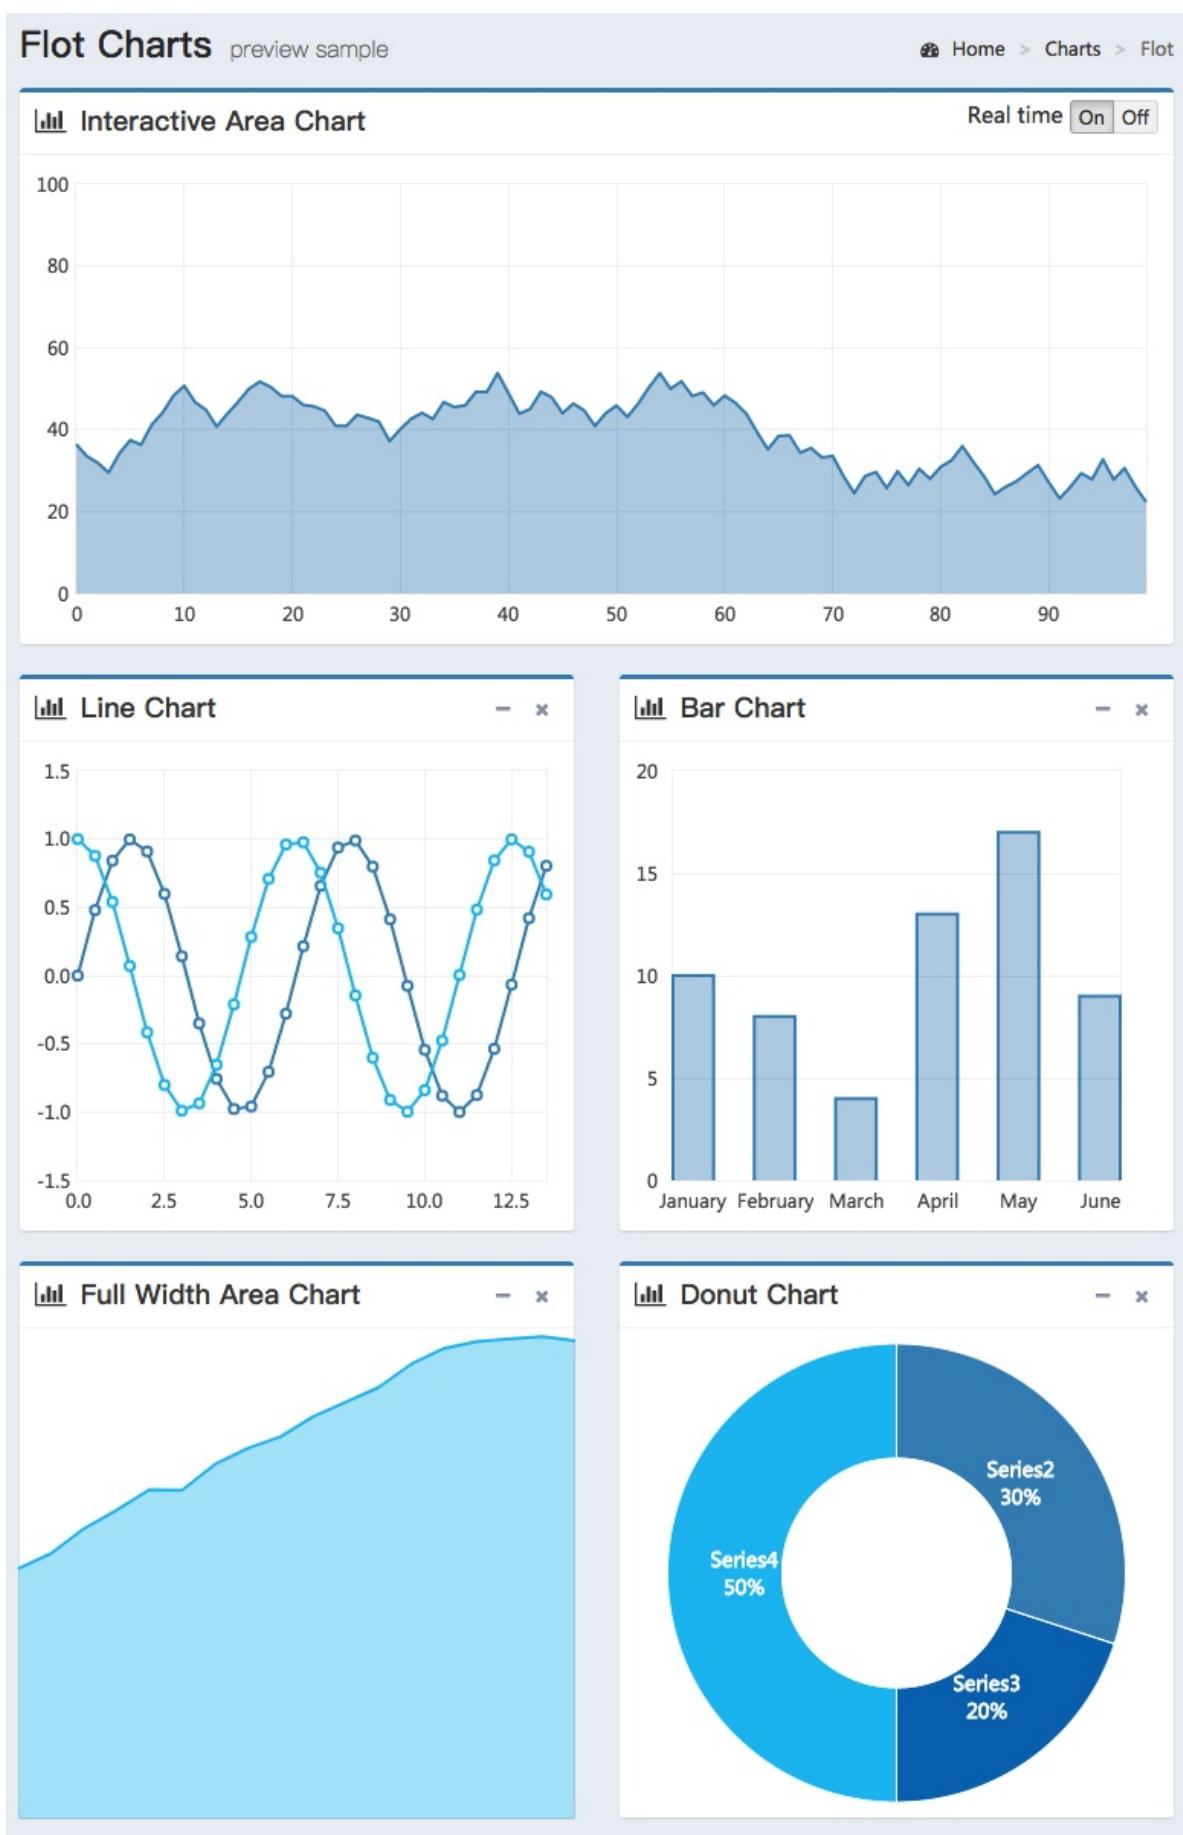

- 文件

- </release/dist/pages/all-charts-flot.html>
- </release/dist/pages/charts-flot.html>

Inline

- 截图

1.3.图表Charts

Inline Charts multiple types of charts

Home > Charts > Inline Charts

jQuery Knob

New Visitors: 30
Bounce Rate: 70
Server Load: -80
Disk Space: 40
Bandwidth: 90

jQuery Knob Different Sizes

data-width="90"
data-width="120"
data-thickness="0.1"
data-angleArc="250"

jQuery Knob Tron Style

data-width="90"
data-width="120"
data-thickness="0.1"
data-angleArc="250"

The following was created using data tags

The following three inline (sparkline) chart have been initialized to read and interpret data tags

Sparkline Pie

Sparkline line

Sparkline Bar

Sparkline examples

Mouse speed

Inline line graphs

Bar charts negative values: stacked:

Composite inline

Customize size and colours

Tristate charts (think games won, lost or drawn)

Tristate chart using a colour map:

- 文件

1.3. 图表Charts

- </release/dist/pages/all-charts-inline.html>
- </release/dist/pages/charts-inline.html>

1.4.UI界面元素

标准 **General**

- 截图

General UI Preview of UI elements

[Home > UI > General](#)

Color Palette

Primary	Info	Success	Warning	Danger	Gray
Navy	Teal	Purple	Orange	Maroon	Black

Alerts and Callouts

⚠ Alerts

- ⚠ Alert!**
Danger alert preview. This alert is dismissable. A wonderful serenity has taken possession of my entire soul, like these sweet mornings of spring which I enjoy with my whole heart.
- i Alert!**
Info alert preview. This alert is dismissable.
- ⚠ Alert!**
Warning alert preview. This alert is dismissable.
- ✓ Alert!**
Success alert preview. This alert is

📣 Callouts

- I am a danger callout!**
There is a problem that we need to fix. A wonderful serenity has taken possession of my entire soul, like these sweet mornings of spring which I enjoy with my whole heart.
- I am an info callout!**
Follow the steps to continue to payment.
- I am a warning callout!**
This is a yellow callout.
- I am a success callout!**
This is a green callout.

AdminLTE Custom Tabs

Tab 1 Tab 2 Tab 3 Dropdown ▾

How to use:
Exactly like the original bootstrap tabs except you should use the custom wrapper `.nav-tabs-custom` to achieve this style.

A wonderful serenity has taken possession of my entire soul, like these sweet mornings of spring which I enjoy with my whole heart. I am alone, and feel the charm of existence in this spot, which was created for the bliss of souls like mine. I am so

Dropdown ▾ Tab 3 Tab 2 Tab 1

How to use:
Exactly like the original bootstrap tabs except you should use the custom wrapper `.nav-tabs-custom` to achieve this style.

A wonderful serenity has taken possession of my entire soul, like these sweet mornings of spring which I enjoy with my whole heart. I am alone, and feel the charm of existence in this spot, which was created for the bliss of souls like mine. I am so happy, my dear friend, so absorbed in the exquisite

happy, my dear friend, so absorbed in the exquisite sense of mere tranquil existence, that I neglect my talents. I should be incapable of drawing a single stroke at the present moment; and yet I feel that I never was a greater artist than now.

happy, my dear friend, so absorbed in the exquisite sense of mere tranquil existence, that I neglect my talents. I should be incapable of drawing a single stroke at the present moment; and yet I feel that I never was a greater artist than now.

Progress Bars

Progress Bars Different Sizes

.progress



Class: .sm



Class: .xs



Class: .xxs




Progress bars



Vertical Progress Bars Different Sizes

By adding the class `.vertical` and `.progress-sm`, `.progress-xs` or `.progress-xxs` we achieve:



Vertical Progress bars

By adding the class `.vertical` we achieve:




Bootstrap Accordion & Carousel

Collapsible Accordion

Collapsible Group Item #1

Anim pariatur cliche reprehenderit, enim eiusmod high life accusamus terry richardson ad squid. 3 wolf moon officia aute, non cupidatat skateboard dolor brunch. Food truck quinoa nesciunt laborum eiusmod. Brunch 3 wolf moon tempor, sunt aliqua put a bird on it squid single-origin coffee nulla assumenda shoreditch et. Nihil anim keffiyeh helvetica, craft beer labore wes anderson cred nesciunt sapiente ea proident. Ad vegan excepteur butcher vice lomo. Leggings occaecat craft beer farm-to-table, raw denim aesthetic synth nesciunt you probably haven't heard of them accusamus labore sustainable VHS.

Carousel

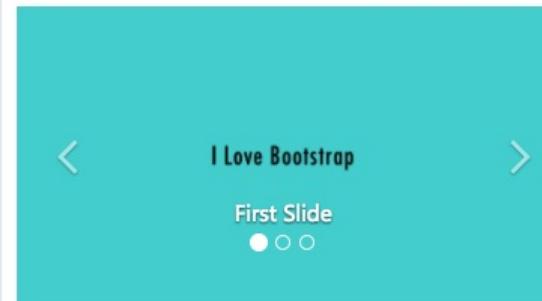

Collapsible Group Danger

Collapsible Group Success

Typography

Headlines

h1. Bootstrap heading

h2. Bootstrap heading

h3. Bootstrap heading

h4. Bootstrap heading

h5. Bootstrap heading

h6. Bootstrap heading

Text Emphasis

Lead to emphasize importance

Text green to emphasize success

Text aqua to emphasize info

Text light blue to emphasize info (2)

Text red to emphasize danger

Text yellow to emphasize warning

Text muted to emphasize general

Block Quotes

— Someone famous in *Source Title*

Block Quotes Pulled Right

— Someone famous in *Source Title* —

Unordered List	Ordered Lists	Unstyled List										
<ul style="list-style-type: none"> • Lorem ipsum dolor sit amet • Consectetur adipiscing elit • Integer molestie lorem at massa • Facilisis in pretium nisl aliquet • Nulla volutpat aliquam velit <ul style="list-style-type: none"> ◦ Phasellus iaculis neque ◦ Purus sodales ultricies ◦ Vestibulum laoreet porttitor sem ◦ Ac tristique libero volutpat at • Faucibus porta lacus fringilla vel • Aenean sit amet erat nunc • Eget porttitor lorem 	<ol style="list-style-type: none"> 1. Lorem ipsum dolor sit amet 2. Consectetur adipiscing elit 3. Integer molestie lorem at massa 4. Facilisis in pretium nisl aliquet 5. Nulla volutpat aliquam velit <ol style="list-style-type: none"> 1. Phasellus iaculis neque 2. Purus sodales ultricies 3. Vestibulum laoreet porttitor sem 4. Ac tristique libero volutpat at 6. Faucibus porta lacus fringilla vel 7. Aenean sit amet erat nunc 8. Eget porttitor lorem 	<p>Lorem ipsum dolor sit amet Consectetur adipiscing elit Integer molestie lorem at massa Facilisis in pretium nisl aliquet Nulla volutpat aliquam velit <ul style="list-style-type: none"> ◦ Phasellus iaculis neque ◦ Purus sodales ultricies ◦ Vestibulum laoreet porttitor sem ◦ Ac tristique libero volutpat at Faucibus porta lacus fringilla vel Aenean sit amet erat nunc Eget porttitor lorem </p>										
<p> Description</p> <p>Description lists A description list is perfect for defining terms. Euismod Vestibulum id ligula porta felis euismod semper eget lacinia odio sem nec elit. Donec id elit non mi porta gravida at eget metus. Malesuada porta Etiam porta sem malesuada magna mollis euismod.</p>	<p> Description Horizontal</p> <table border="0"> <tr> <td>Description lists</td> <td>A description list is perfect for defining terms.</td> </tr> <tr> <td>Euismod</td> <td>Vestibulum id ligula porta felis euismod semper eget lacinia odio sem nec elit.</td> </tr> <tr> <td>Malesuada porta</td> <td>Donec id elit non mi porta gravida at eget metus.</td> </tr> <tr> <td>Felis euismod semper ...</td> <td>Etiam porta sem malesuada magna mollis euismod.</td> </tr> <tr> <td></td> <td>Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus.</td> </tr> </table>	Description lists	A description list is perfect for defining terms.	Euismod	Vestibulum id ligula porta felis euismod semper eget lacinia odio sem nec elit.	Malesuada porta	Donec id elit non mi porta gravida at eget metus.	Felis euismod semper ...	Etiam porta sem malesuada magna mollis euismod.		Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus.	
Description lists	A description list is perfect for defining terms.											
Euismod	Vestibulum id ligula porta felis euismod semper eget lacinia odio sem nec elit.											
Malesuada porta	Donec id elit non mi porta gravida at eget metus.											
Felis euismod semper ...	Etiam porta sem malesuada magna mollis euismod.											
	Fusce dapibus, tellus ac cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus.											

- 文件

- </release/dist/pages/all-elements-general.html>
- </release/dist/pages/elements-general.html>

图标 Icons

- 截图

Icons a set of beautiful icons

Font Awesome Glyphicons

66 New Icons in 4.4

fa-500px	fa-amazon	fa-balance-scale	fa-battery-0 (alias)
fa-battery-1 (alias)	fa-battery-2 (alias)	fa-battery-3 (alias)	fa-battery-4 (alias)
fa-battery-empty	fa-battery-full	fa-battery-half	fa-battery-quarter
fa-battery-three-quarters	fa-black-tie	fa-calendar-check-o	fa-calendar-minus-o
fa-cc-jcb	fa-calendar-plus-o	fa-calendar-times-o	fa-cc-diners-club
fa-commenting-o	fa-chrome	fa-clone	fa-commenting
fa-firefox	fa-contao	fa-creative-commons	fa-expeditedssl
fa-gg	fa-fonticons	fa-genderless	fa-get-pocket
	fa-gg-circle	fa-hand-grab-o	fa-hand-lizard-o
		(alias)	fa-hand-paper-o
fa-hand-peace-o	fa-hand-pointer-o	fa-hand-rock-o	fa-hand-scissors-o
fa-hand-spock-o	fa-hand-stop-o	fa-hourglass	fa-hourglass-1 (alias)
	(alias)	fa-hourglass-2 (alias)	fa-hourglass-3 (alias)
fa-hourglass-end	fa-hourglass-half	fa-hourglass-o	fa-hourglass-start
fa-houzz	fa-i-cursor	fa-industry	fa-internet-explorer
fa-map	fa-map-o	fa-map-pin	fa-map-signs
fa-mouse-pointer	fa-object-group	fa-object-ungroup	fa-odnoklassniki
fa-odnoklassniki-square	fa-opencart	fa-opera	fa-optin-monster
fa-sticky-note-o	fa-registered	fa-safari	fa-sticky-note
fa-tv (alias)	fa-television	fa-trademark	fa-tripadvisor
fa-yc (alias)	fa-vimeo	W fa-wikipedia-w	fa-y-combinator

Web Application Icons

fa-adjust	fa-anchor	fa-archive	fa-area-chart
fa-arrows	fa-arrows-h	fa-arrows-v	fa-asterisk
fa-at	fa-automobile (alias)	fa-balance-scale	fa-ban
fa-bank (alias)	fa-bar-chart	fa-bar-chart-o (alias)	fa-barcode
fa-bars	fa-battery-0 (alias)	fa-battery-1 (alias)	fa-battery-2 (alias)
fa-battery-3 (alias)	fa-battery-4 (alias)	fa-battery-empty	fa-battery-full
fa-battery-half	fa-battery-quarter	fa-battery-three-quarters	fa-bed
fa-bell	fa-bell-o	fa-bell-slash	fa-beer
fa-bicycle	fa-binoculars	fa-birthday-cake	fa-bell-slash-o
fa-bomb	fa-book	fa-bookmark	fa-bolt
fa-briefcase	fa-bug	fa-building	fa-bookmark-o
fa-bullhorn	fa-bullseye	fa-bus	fa-building-o
fa-calculator	fa-calendar	fa-calendar-check-o	fa-cab (alias)

- 文件

- </release/dist/pages/all-elements-icons.html>
- </release/dist/pages/elements-icons.html>

按钮 Buttons

- 截图

Buttons Control panel

Home > UI > Buttons

Buttons

Various types of buttons. Using the base class `.btn`

Normal	Large <code>.btn-lg</code>	Small <code>.btn-sm</code>	X-Small <code>.btn-xs</code>	Flat <code>.btn-flat</code>	Disabled <code>.disabled</code>
Default	Default	Default	Default	Default	Default
Primary	Primary	Primary	Primary	Primary	Primary
Success	Success	Success	Success	Success	Success
Info	Info	Info	Info	Info	Info
Danger	Danger	Danger	Danger	Danger	Danger
Warning	Warning	Warning	Warning	Warning	Warning

Block Buttons

<code>.btn-block</code>
<code>.btn-block .btn-flat</code>
<code>.btn-block .btn-sm</code>

Horizontal Button Group

Horizontal button groups are easy to create with bootstrap. Just add your buttons inside `<div class="btn-group"></div>`

Button	Icons	Flat	Dropdown

Application Buttons

Add the classes `.btn .btn-app` to an `<a>` tag to achieve the following:

- 文件

- </release/dist/pages/all-elements-buttons.html>
- </release/dist/pages/elements-buttons.html>

滑块 Sliders

- 截图



- 文件

- </release/dist/pages/all-elements-sliders.html>
- </release/dist/pages/elements-sliders.html>

时间线 Timeline

- 截图

Timeline example

10 Feb. 2014

Support Team sent you an email ① 12:05

Etsy doostang zoodles disqus groupon greplin oooj voxyl zoodles, weebly ning heekya handango imeem plugg dopplr jibjab, movity jahah plickers sifteo edmodo ifttt zimbra. Babblely odeo kaboodle quora plaxo ideeli hulu weebly balihoo...

[Read more](#) [Delete](#)

Sarah Young accepted your friend request ② 5 mins ago

Jay White commented on your post ③ 27 mins ago

Take me to your leader! Switzerland is small and neutral! We are more like Germany, ambitious and misunderstood!

[View comment](#)

3 Jan. 2014

Mina Lee uploaded new photos ④ 2 days ago

150×100 150×100 150×100 150×100


Mr. Doe shared a video ⑤ 5 days ago

- 文件

- </release/dist/pages/all-elements-timeline.html>
- </release/dist/pages/elements-timeline.html>

对话框样式 Modals

- 截图

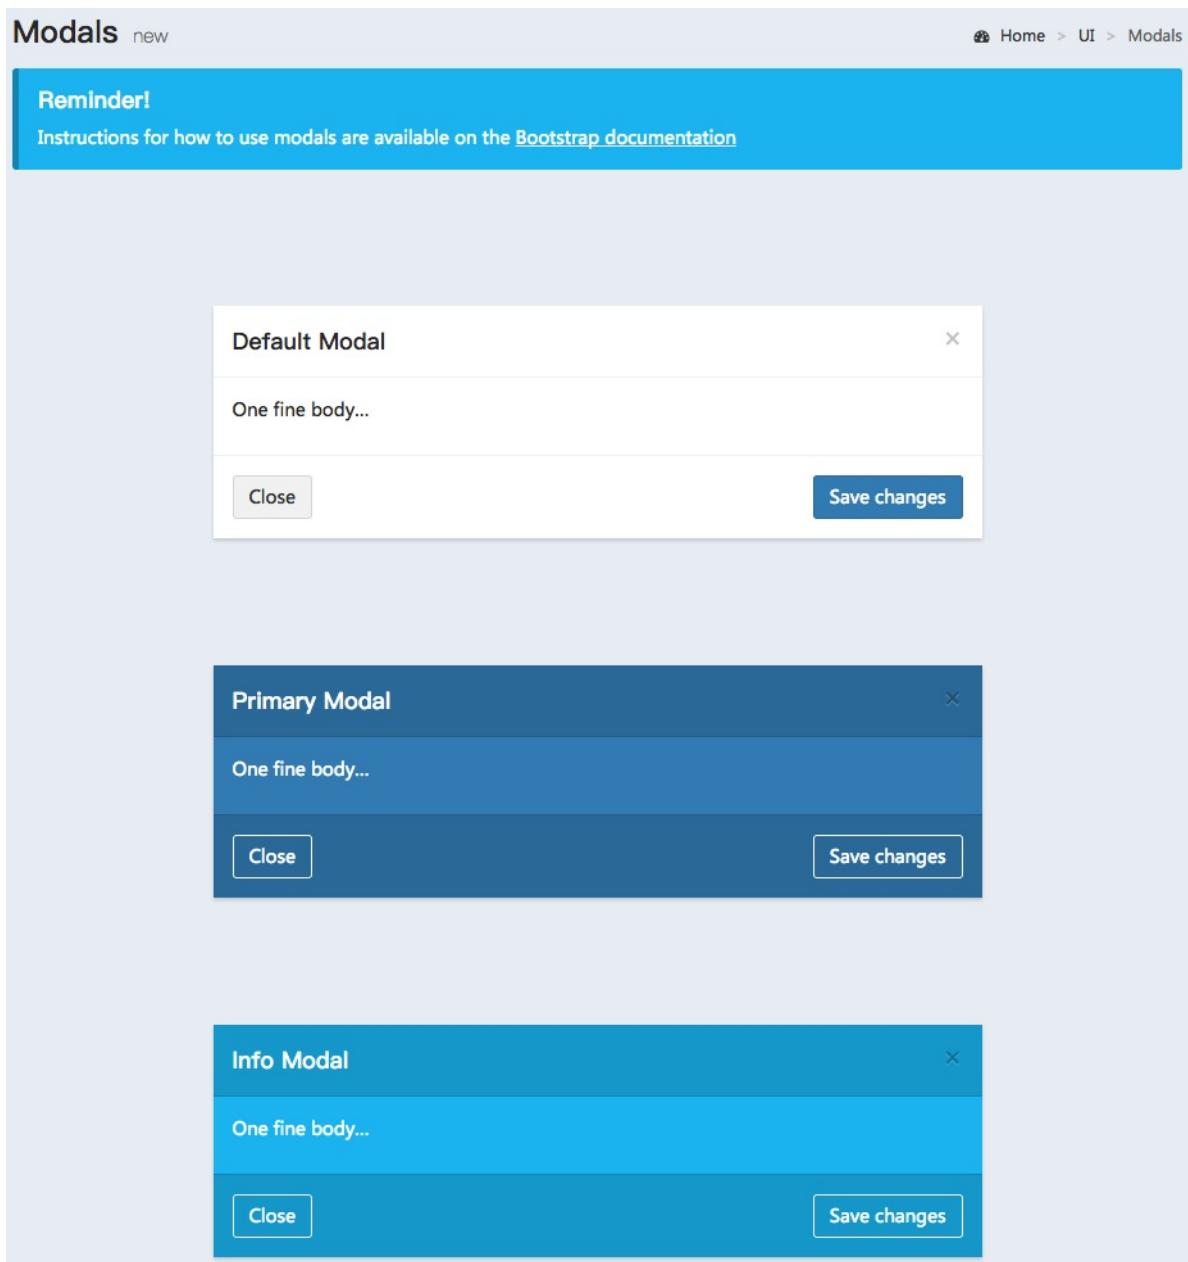

- 文件

- </release/dist/pages/all-elements-modals.html>
- </release/dist/pages/elements-modals.html>

窗体小部件 widgets

- 截图

1.4.UI界面元素

Widgets

Preview page

Home > Widgets

 MESSAGES 1,410	 BOOKMARKS 410	 UPLOADS 13,648	 LIKES 93,139
 BOOKMARKS 41,410 70% Increase..	 LIKES 41,410 70% Increase..	 EVENTS 41,410 70% Increase..	 COMMENTS 41,410 70% Increase..

150 New Orders 	53% Bounce Rate 
More info	More info

44 User Registrations 	65 Unique Visitors 
More info	More info

Expandable 	Removable 	Collapsible 	Loading state 
The body of the box	The body of the box	The body of the box	The body of the box

Expandable 	Removable 	Collapsible 	Loading state 
The body of the box	The body of the box	The body of the box	The body of the box


Direct Chat   	Direct Chat   	Direct Chat   	Direct Chat   
Alexander Pierce 23 Jan 2:00 pm  Is this template really for free? That's unbelievable!	Alexander Pierce 23 Jan 2:00 pm  Is this template really for free? That's unbelievable!	Alexander Pierce 23 Jan 2:00 pm  Is this template really for free? That's unbelievable!	Alexander Pierce 23 Jan 2:00 pm  Is this template really for free? That's unbelievable!
23 Jan 2:05 pm Sarah Bullock  You better believe it! 	23 Jan 2:05 pm Sarah Bullock  You better believe it! 	23 Jan 2:05 pm Sarah Bullock  You better believe it! 	23 Jan 2:05 pm Sarah Bullock  You better believe it! 
Type Message Send	Type Message Send	Type Message Send	Type Message Send

Social Widgets

 Nadia Carmichael Lead Developer	 Alexander Pierce Founder & CEO	 Elizabeth Pierce Web Designer
Projects 	3,200 SALES 13,000 FOLLOWERS 35 PRODUCTS	3,200 SALES 13,000 FOLLOWERS 35 PRODUCTS
Tasks 		
Completed Projects 		
Followers 		

Jonathan Burke Jr.  Jonathan Burke Jr. 

1.4.UI界面元素

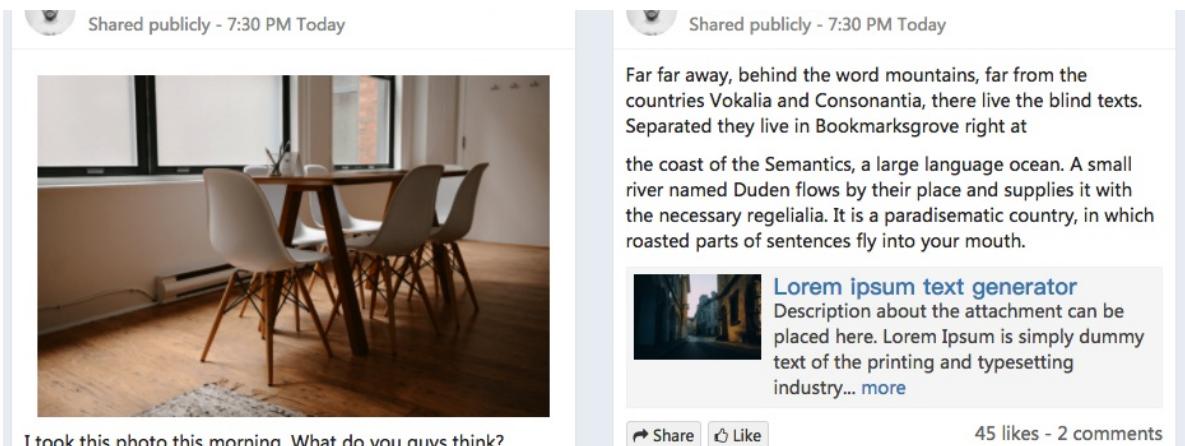

- 文件

- </release/dist/pages/all-elements-widgets.html>
- </release/dist/pages/elements-widgets.html>

1.5. 表单 Forms

基础表单元素

- 截图

1.5. 表单 Forms

General Form Elements Preview

[Home](#) > [Forms](#) > General Elements

Quick Example

Email address
root

Password
.....

File input
选择文件 未选择任何文件

Example block-level help text here.

Check me out

Submit

Different Height

.input-lg

Default input

.input-sm

Different Width

.col-xs-3 .col-xs-4 .col-xs-5

Input Addon

@ Username

.00

\$.00

With icons

Email

✓

\$

With checkbox and radio inputs

With buttons

Large: .input-group, .input-group-lg

Action ▾

Normal

Action

Small .input-group, .input-group-sm

Go!

Horizontal Form

Email root

Password

Remember me

Cancel **Sign in**

General Elements

Text

Enter ...

Text Disabled

Enter ...

Textarea

Enter ...

Textarea Disabled

Enter ...

✓ Input with success

Enter ...

Help block with success

Input with warning

Enter ...

Help block with warning

✗ Input with error

Enter ...

Help block with error

Checkbox 1

Checkbox 2

Checkbox disabled

Option one is this and that—be sure to include why it's great

Option two can be something else and selecting it will deselect option one

Option three is disabled

Select

option 1

Select Disabled

option 1

Select Multiple

option 1
option 2
option 3
option 4

Select Multiple Disabled

option 1
option 2



- 文件
 - </release/dist/pages/all-form-general.html>
 - </release/dist/pages/form-general.html>

高级表单元素

- 截图

Advanced Form Elements Preview [Home](#) > [Forms](#) > [Advanced Elements](#)

Select2

Minimal: Alabama

Disabled: Alabama

Multiple: Select a State

Disabled Result: Alabama

Visit [Select2 documentation](#) for more examples and information about the plugin.

Input masks

Date masks:

US phone mask:

Intl US phone mask:

IP mask:

Date picker

Date:

Date range: 05/19/2017 - 05/19/2017

Date and time range: 05/19/2017 - 05/19/2017

Date range button:

iCheck – Checkbox & Radio Inputs

Minimal skin checkbox

Minimal skin radio

Minimal red skin checkbox

Minimal red skin radio

Flat green skin checkbox

Flat green skin radio


Many more skins available. [Documentation](#)

- 文件

- </release/dist/pages/all-form-advanced.html>
- </release/dist/pages/form-advanced.html>

编辑器

- 截图

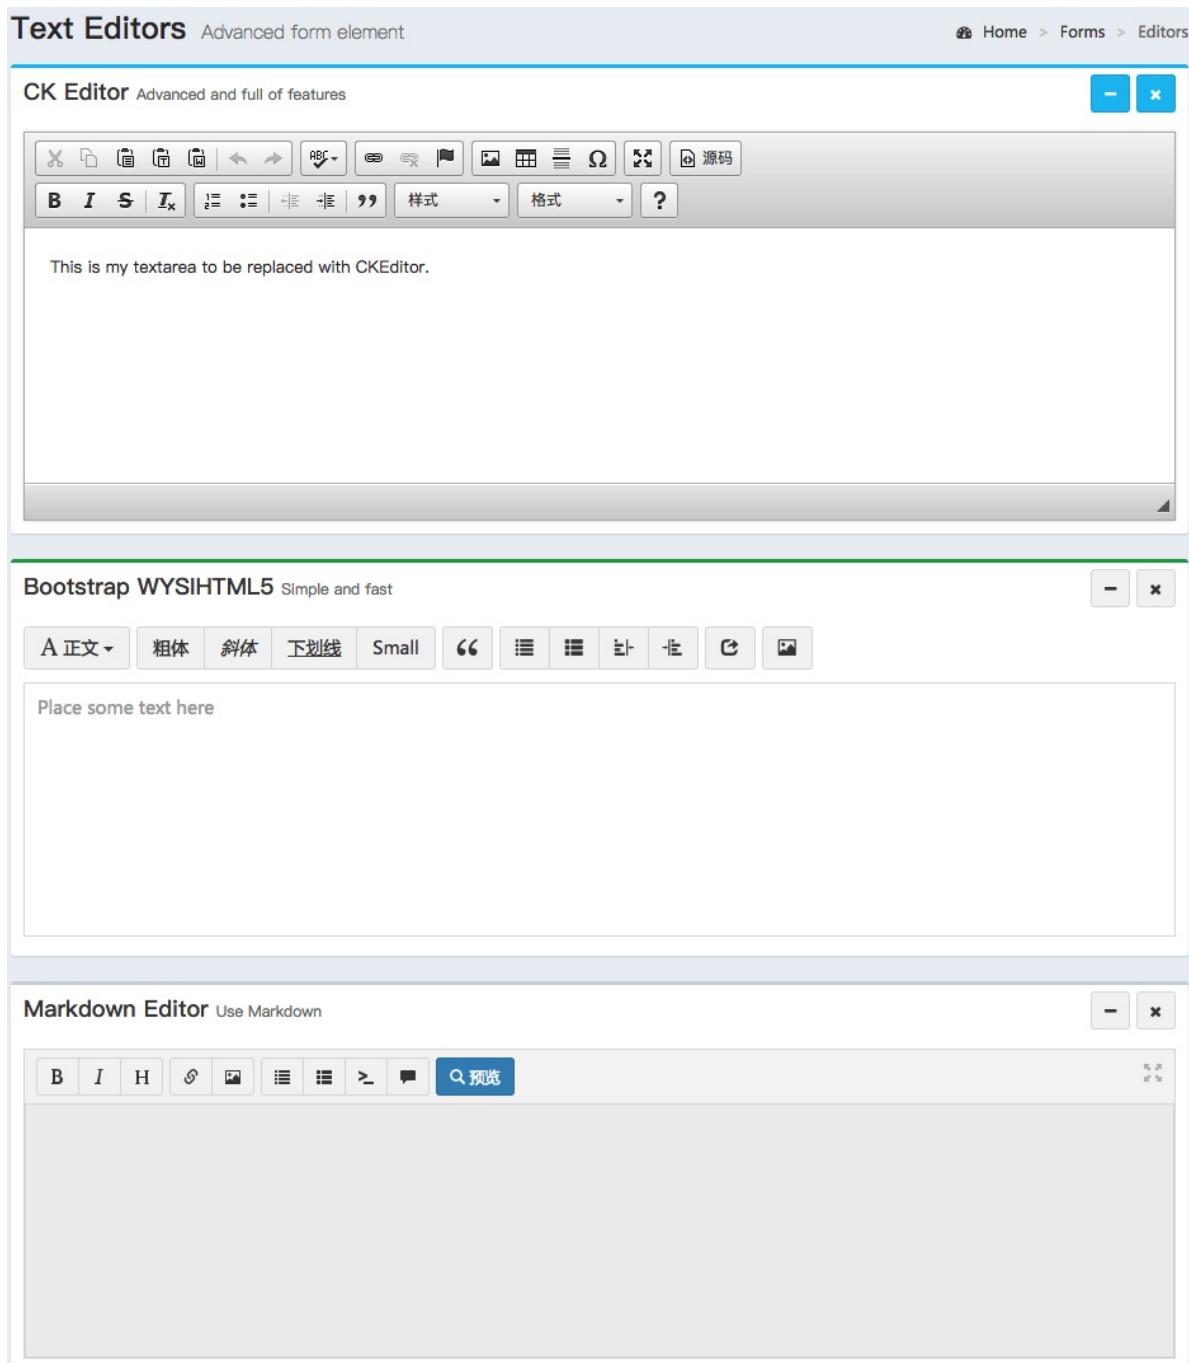

- 文件

1.5. 表单 Forms

- `/release/dist/pages/all-form-editors.html`
- `/release/dist/pages/form-editors.html`

1.6. 表格Tables

简单表格

- 截图

Simple Tables preview of simple tables

Bordered Table

#	Task	Progress	Label
1.	Update software	<div style="width: 55%;"> </div>	55%
2.	Clean database	<div style="width: 70%;"> </div>	70%
3.	Cron job running	<div style="width: 30%;"> </div>	30%
4.	Fix and squish bugs	<div style="width: 90%;"> </div>	90%

Simple Full Width Table

#	Task	Progress	Label
1.	Update software	<div style="width: 55%;"> </div>	55%
2.	Clean database	<div style="width: 70%;"> </div>	70%
3.	Cron job running	<div style="width: 30%;"> </div>	30%
4.	Fix and squish bugs	<div style="width: 90%;"> </div>	90%

Condensed Full Width Table

#	Task	Progress	Label
1.	Update software	<div style="width: 55%;"> </div>	55%
2.	Clean database	<div style="width: 70%;"> </div>	70%
3.	Cron job running	<div style="width: 30%;"> </div>	30%
4.	Fix and squish bugs	<div style="width: 90%;"> </div>	90%

Striped Full Width Table

#	Task	Progress	Label
1.	Update software	<div style="width: 55%;"> </div>	55%
2.	Clean database	<div style="width: 70%;"> </div>	70%
3.	Cron job running	<div style="width: 30%;"> </div>	30%
4.	Fix and squish bugs	<div style="width: 90%;"> </div>	90%

Responsive Hover Table

ID	User	Date	Status	Reason
183	John Doe	11-7-2014	Approved	Bacon ipsum dolor sit amet salami venison chicken flank fatback doner.
219	Alexander Pierce	11-7-2014	Pending	Bacon ipsum dolor sit amet salami venison chicken flank fatback doner.
657	Bob Doe	11-7-2014	Approved	Bacon ipsum dolor sit amet salami venison chicken flank fatback doner.
175	Mike Doe	11-7-2014	Denied	Bacon ipsum dolor sit amet salami venison chicken flank fatback doner.

- 文件

- </release/dist/pages/all-tables-simple.html>
- </release/dist/pages/tables-simple.html>

数据表格

- 截图

1.6. 表格Tables

Data Tables advanced tables

Home > Tables > Data tables

Hover Data Table

Rendering engine	Browser	Platform(s)	Engine version	CSS grade
Gecko	Firefox 1.0	Win 98+ / OSX.2+	1.7	A
Gecko	Firefox 1.5	Win 98+ / OSX.2+	1.8	A
Gecko	Firefox 2.0	Win 98+ / OSX.2+	1.8	A
Gecko	Firefox 3.0	Win 2k+ / OSX.3+	1.9	A
Gecko	Camino 1.0	OSX.2+	1.8	A
Gecko	Camino 1.5	OSX.3+	1.8	A
Gecko	Netscape 7.2	Win 95+ / Mac OS 8.6-9.2	1.7	A
Gecko	Netscape Browser 8	Win 98SE+	1.7	A
Gecko	Netscape Navigator 9	Win 98+ / OSX.2+	1.8	A
Gecko	Mozilla 1.0	Win 95+ / OSX.1+	1	A
Rendering engine	Browser	Platform(s)	Engine version	CSS grade

Showing 1 to 10 of 57 entries

Previous 1 2 3 4 5 6 Next

- 文件
 - `/release/dist/pages/all-tables-data.html`
 - `/release/dist/pages/tables-data.html`

1.7.样例数据管理

样例-订单管理-列表

- 截图

订单管理 全部订单								
列表								
	ID	订单编号	订单名称	金额	下单时间	订单状态	操作	
<input type="checkbox"/>	1	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	2	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	3	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	4	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	5	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	6	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	7	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>
<input type="checkbox"/>	8	71837383	北京一日游	¥1000	2017-03-09 13:51:26	已付款(待出行)	<button>订单</button>	<button>详情</button>

- 文件

- `/release/dist/pages/all-order-manage-list.html`
- `/release/dist/pages/order-manage-list.html`

样例-订单管理-添加

- 截图

1.7. 样例数据管理

订单管理		订单表单	
订单信息			
订单编号	订单编号	下单时间	选择日期
路线名称	路线名称	出发城市	Alabama
出发时间	选择日期	出游人数	出游人数
其他信息	其他信息		
游客信息			
人群	姓名	性别	手机号码
成人	姓名	男	13301131116
儿童	姓名	男	13301131116
证件类型	身份证	证件号码	13063519900417081X
联系人信息			
会员	bipeng	联系人	毕鹏
手机号	13301131116	邮箱	bipeng0405@163.com
费用信息			
支付方式	在线支付-支付宝	金额	¥1000
发票信息			
发票名称	○不需要发票 ○个人 ○单位名称	金额	¥1000
订单处理			
处理类型	自动处理		
支付方式	○未支付 ○微信支付 ○支付宝支付		
发票名称	○不需要发票 ○个人 ○单位名称		
订单状态	已支付		
状态改变	□发送短信或邮件(仅本次有效)		
管理员备注	管理员备注		
操作日志			
管理员	内容	IP	时间
-	-	-	-
-	-	-	-
-	-	-	-

1.7. 样例数据管理



- 文件

- </release/dist/pages/all-order-manage-edit.html>
- </release/dist/pages/order-manage-edit.html>

样例-游记管理-列表

- 截图

游记攻略管理 游记攻略列表															操作	
列表															操作	
	ID	标题		作者	优质	精华	实用	审核	推荐	顶	收藏数	点赞数	排序	屏蔽	操作	
	1	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	2	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	3	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	4	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	5	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	6	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	7	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论
	8	西安一日游 (内含攻略)		bipeng0405	Y	Y	Y	Y	N	N	1231	342	0	开启	编辑	查看评论

- 文件

- </release/dist/pages/all-travellog-manage-list.html>
- </release/dist/pages/travellog-manage-list.html>

样例-游记管理-添加

- 截图

游记攻略管理 游记攻略表单

首页 > 游记攻略管理 > 游记攻略表单

表单	
ID	xxxxx
标题	标题
来源	来源
作者	作者
状态	<input type="checkbox"/> 优质 <input type="checkbox"/> 精华 <input type="checkbox"/> 实用 <input type="checkbox"/> 审核 <input type="checkbox"/> 推荐 <input type="checkbox"/> 固顶
收藏数	收藏数
点赞数	点赞数
排序	排序

游记

添加游记

第xx天游记

第xx天游记标题

A 正文 - 粗体 斜体 下划线 Small ““ ”” [] [] [] []

第xx天游记正文

保存 返回

- 文件

- /release/dist/pages/all-travellog-manage-edit.html

- `/release/dist/pages/travellog-manage-edit.html`

1.8. 目录结构

目录

```
├── assets                                | 资源
│   ├── css
│   ├── data
│   └── img
├── modules                               | 模块 组件
│   ├── css-modules
│   ├── js-modules
│   └── ui-modules
├── pages                                  | 页面
│   ├── admin
│   ├── charts
│   ├── documentation
│   ├── elements
│   ├── forms
│   ├── tables
│   └── travel-demo
└── plugins                                | jquery插件
    ├── adminLTE
    ├── bootstrap
    ├── bootstrap-markdown
    ├── bootstrap-slider
    ├── bootstrap-wysihtml5
    ├── chartjs
    ├── ckeditor
    ├── colorpicker
    ├── datatables
    ├── datepicker
    ├── daterangepicker
    ├── fastclick
    ├── flot
    ├── font-awesome
    ├── fullcalendar
    └── iCheck
```

```
|   └── input-mask
|   └── ionicons
|   └── ionslider
|   └── jQuery
|   └── jQueryUI
|   └── jvectormap
|   └── knob
|   └── morris
|   └── pace
|   └── raphael
|   └── select2
|   └── slimScroll
|   └── sparkline
|   └── timepicker
|   └── treeTable
|
|   └── release | 发布目录
|       └── dist
|
└── README.md
└── fis-conf.js | fis3配置
└── fis-plus.js
└── gulpfile.js | gulp配置
└── package.json | npm配置
```

1.9.JQuery插件列表

Charts 图表

名称	说明
ChartJS	图表
FLOT	图表
Morris.js	图表
Sparkline	图表

表单元素

名称	说明
Bootstrap Slider	Slider
Ion Slider	Slider
Date Picker	日期
Date Range Picker	日期范围
Color Picker	颜色
Time Picker	时间
iCheck	checkbox选择
Input Mask	输入控制

编辑器

名称	说明
Bootstrap WYSIHTML5	WYSIHTML5
CK Editor	CK
Markdown Editor	md编辑器

其它

名称	说明
DataTables	数据表格
Full Calendar	日历
jQuery UI	JQuery UI界面库
jQuery Knob	旋钮
jVector Map	地图
Slim Scroll	滚动条
Pace	自动加载进度条

1.10.Skins皮肤

设置皮肤样式

```
...
<body class="skin-blue fixed" data-spy="scroll" data-target="#scrollspy">
    <div class="wrapper">
        ...
    </div>
</body>
```

设置 `body` 的 `class` 属性，具体效果大家可以试下。

皮肤样式列表

样式名称	说明
skin-blue	蓝
skin-blue-light	蓝-高亮
skin-yellow	黄
skin-yellow-light	黄-高亮
skin-green	绿
skin-green-light	绿-高亮
skin-purple	紫
skin-purple-light	紫-高亮
skin-red	红
skin-red-light	红-高亮
skin-black	黑
skin-black-light	黑-高亮

1.11.Layout布局

布局主要有四个主要的部分

- Wrapper `.wrapper`. A div that wraps the whole site.
- Main Header `.main-header`. Contains the logo and navbar.
- Sidebar `.sidebar-wrapper`. Contains the user panel and sidebar menu.
- Content `.content-wrapper`. Contains the page header and content.

布局选项

AdminLTE 2.0提供了一套适用于您的主要布局的选项。这些类中的每一个都可以添加到body标签中以获得所需的目标。

- Fixed: use the class `.fixed` to get a fixed header and sidebar.
- Collapsed Sidebar: use the class `.sidebar-collapse` to have a collapsed sidebar upon loading.
- Boxed Layout: use the class `.layout-boxed` to get a boxed layout that stretches only to 1250px.
- Top Navigation use the class `.layout-top-nav` to remove the sidebar and have your links at the top navbar.

Note: you cannot use both layout-boxed and fixed at the same time. Anything else can be mixed together.

1.12.JS选项

编辑 app.js

修改 `$.AdminLTE.options` 对象以适合您的用例。

定义 AdminLTEOptions

或者，您可以定义一个名为 `AdminLTEOptions` 的全局选项变量，并在加载 `app.js` 之前对其进行初始化。

例子

```
<script>
var AdminLTEOptions = {
    //Enable sidebar expand on hover effect for sidebar mini
    //This option is forced to true if both the fixed layout and
    sidebar mini
    //are used together
    sidebarExpandOnHover: true,
    //BoxRefresh Plugin
    enableBoxRefresh: true,
    //Bootstrap.js tooltip
    enableBSToppltip: true
};
</script>
<script src="dist/js/app.js" type="text/javascript"></script>
```

可用的 AdminLTE Options

```
{
    //Add slimscroll to navbar menus
    //This requires you to load the slimscroll plugin
    //in every page before app.js
```

```
navbarMenuSlimscroll: true,
navbarMenuSlimscrollWidth: "3px", //The width of the scroll bar

navbarMenuHeight: "200px", //The height of the inner menu
//General animation speed for JS animated elements such as box
collapse/expand and
//sidebar treeview slide up/down. This options accepts an inte
ger as milliseconds,
//'fast', 'normal', or 'slow'
animationSpeed: 500,
//Sidebar push menu toggle button selector
sidebarToggleSelector: "[data-toggle='offcanvas']",
//Activate sidebar push menu
sidebarPushMenu: true,
//Activate sidebar slimscroll if the fixed layout is set (requ
ires SlimScroll Plugin)
sidebarSlimScroll: true,
//Enable sidebar expand on hover effect for sidebar mini
//This option is forced to true if both the fixed layout and s
idebar mini
//are used together
sidebarExpandOnHover: false,
//BoxRefresh Plugin
enableBoxRefresh: true,
//Bootstrap.js tooltip
enableBSToppltip: true,
BSTooltipSelector: "[data-toggle='tooltip']",
//Enable Fast Click. Fastclick.js creates a more
//native touch experience with touch devices. If you
//choose to enable the plugin, make sure you load the script
//before AdminLTE's app.js
enableFastclick: true,
//Control Sidebar Tree Views
enableControlTreeView: true,
//Control Sidebar Options
enableControlSidebar: true,
controlSidebarOptions: {
    //Which button should trigger the open/close event
    toggleBtnSelector: "[data-toggle='control-sidebar']",
    //The sidebar selector
```



```
    selector: ".control-sidebar",
    //Enable slide over content
    slide: true
},
//Box Widget Plugin. Enable this plugin
//to allow boxes to be collapsed and/or removed
enableBoxWidget: true,
//Box Widget plugin options
boxWidgetOptions: {
    boxWidgetIcons: {
        //Collapse icon
        collapse: 'fa-minus',
        //Open icon
        open: 'fa-plus',
        //Remove icon
        remove: 'fa-times'
    },
    boxWidgetSelectors: {
        //Remove button selector
        remove: '[data-widget="remove"]',
        //Collapse button selector
        collapse: '[data-widget="collapse"]'
    }
},
//Direct Chat plugin options
directChat: {
    //Enable direct chat by default
    enable: true,
    //The button to open and close the chat contacts pane
    contactToggleSelector: '[data-widget="chat-pane-toggle"]'
},
//Define the set of colors to use globally around the website
colors: {
    lightBlue: "#3c8dbc",
    red: "#f56954",
    green: "#00a65a",
    aqua: "#00c0ef",
    yellow: "#f39c12",
    blue: "#0073b7",
    navy: "#001f3f",
```

```
teal: "#39CCCC",
olive: "#3D9970",
lime: "#01FF70",
orange: "#FF851B",
fuchsia: "#F012BE",
purple: "#8E24AA",
maroon: "#D81B60",
black: "#222222",
gray: "#d2d6de"

},
//The standard screen sizes that bootstrap uses.
//If you change these in the variables.less file, change
//them here too.
screenSizes: {
  xs: 480,
  sm: 768,
  md: 992,
  lg: 1200
}
}
```

图表插件-Chart.js

前言

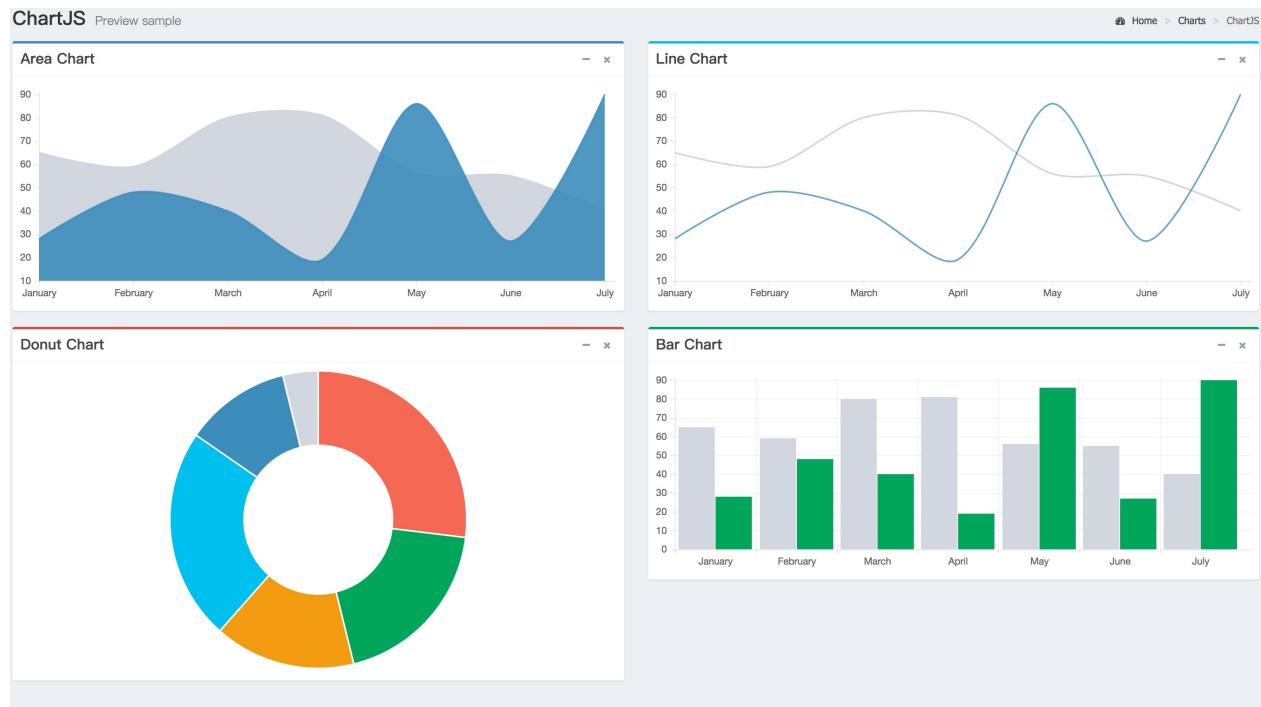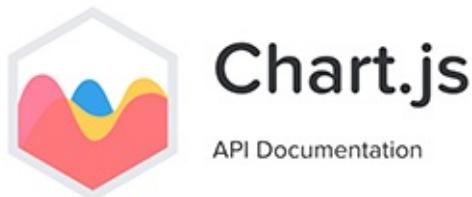

中文说明

- 简单快捷的创建图标的插件 英文说明
- Simple yet flexible JavaScript charting for designers & developers

参考文

[官址](#)

[英文文档](#)

[中文文档](#)

功能特点

- 1.制作混合类型图表(Mixed chart types)
Mix and match bar and line charts to provide a clear visual distinction between datasets.
- 2.制作轴类型图标(New chart axis types)
Plot complex, sparse datasets on date time, logarithmic or even entirely custom scales with ease.
- 3.令人惊叹的颜色、数据过度切换效果(Animate everything!)
Out of the box stunning transitions when changing data, updating colours and adding datasets.
- 4.chart是社区维护项目(Open source)
Chart.js is a community maintained project, contributions welcome!
- 5.8种不同方式的数据显示形式和可定制的动画效果(8 Chart types)
Visualize your data in 8 different ways; each of them animated and customisable.
- 5.支持IE9+的渲染性能(HTML5 Canvas)
Great rendering performance across all modern browsers (IE9+).
- 7.自适应的功能支持(Responsive)
Redraws charts on window resize for perfect scale granularity.


快速上手

- 引用文件 js css

```
<script src="../../plugins/Chart.js"></script>
```

- 例子1:

2.1.图表charts

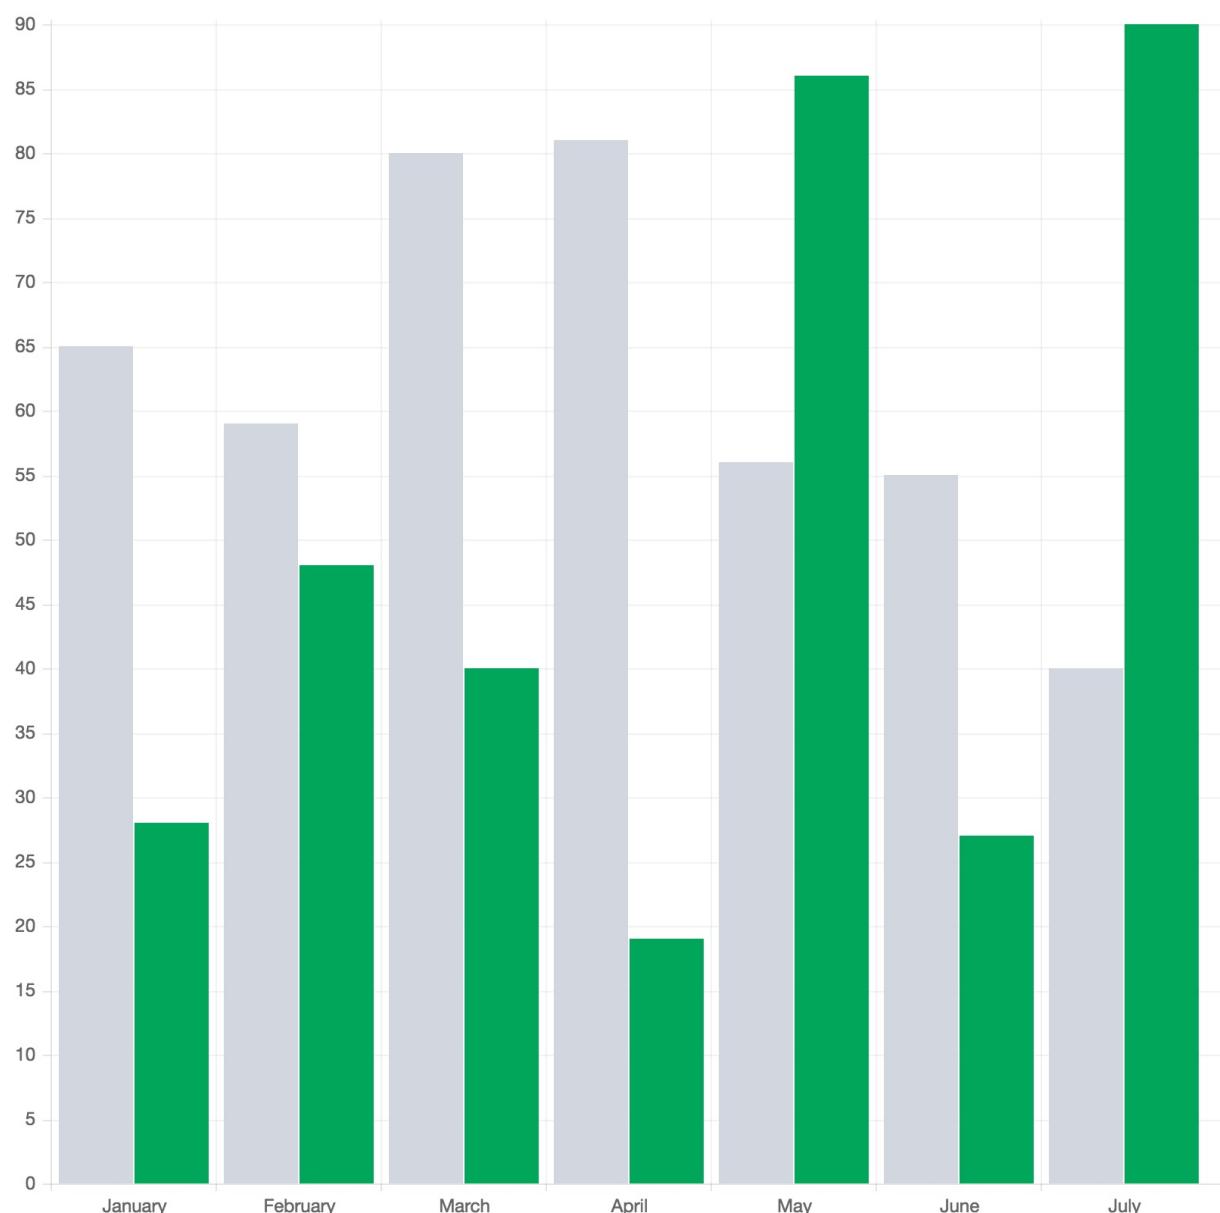

html

```
<canvas id="myChart" width="400" height="400"></canvas>
```

js

```
var areaChartData = {
    labels: ["January", "February", "March", "April", "May",
    "June", "July"],
    datasets: [
        {
            label: "Electronics",
            fillColor: "rgba(210, 214, 222, 1)",
```

```

        strokeColor: "rgba(210, 214, 222, 1)",
        pointColor: "rgba(210, 214, 222, 1)",
        pointStrokeColor: "#c1c7d1",
        pointHighlightFill: "#fff",
        pointHighlightStroke: "rgba(220,220,220,1)",
        data: [65, 59, 80, 81, 56, 55, 40]
    },
    {
        label: "Digital Goods",
        fillColor: "rgba(60,141,188,0.9)",
        strokeColor: "rgba(60,141,188,0.8)",
        pointColor: "#3b8bba",
        pointStrokeColor: "rgba(60,141,188,1)",
        pointHighlightFill: "#fff",
        pointHighlightStroke: "rgba(60,141,188,1)",
        data: [28, 48, 40, 19, 86, 27, 90]
    }
]
};

var barChartCanvas = $("#myChart").get(0).getContext("2d");
var barChart = new Chart(barChartCanvas);
var barChartData = areaChartData;
barChartData.datasets[1].fillColor = "#00a65a";
barChartData.datasets[1].strokeColor = "#00a65a";
barChartData.datasets[1].pointColor = "#00a65a";
var barChartOptions = {
    //Boolean - Whether the scale should start at zero, or a
    n order of magnitude down from the lowest value
    scaleBeginAtZero: true,
    //Boolean - Whether grid lines are shown across the chart


    scaleShowGridLines: true,
    //String - Colour of the grid lines
    scaleGridLineColor: "rgba(0,0,0,.05)",
    //Number - Width of the grid lines
    scaleGridLineWidth: 1,
    //Boolean - Whether to show horizontal lines (except X a
    xis)
    scaleShowHorizontalLines: true,
    //Boolean - Whether to show vertical lines (except Y axi

```

2.1. 图表charts

```
s)  
    scaleShowVerticalLines: true,  
    responsive: true,  
  
};  
  
barChart.Bar(barChartData, barChartOptions);
```

- 例子2:

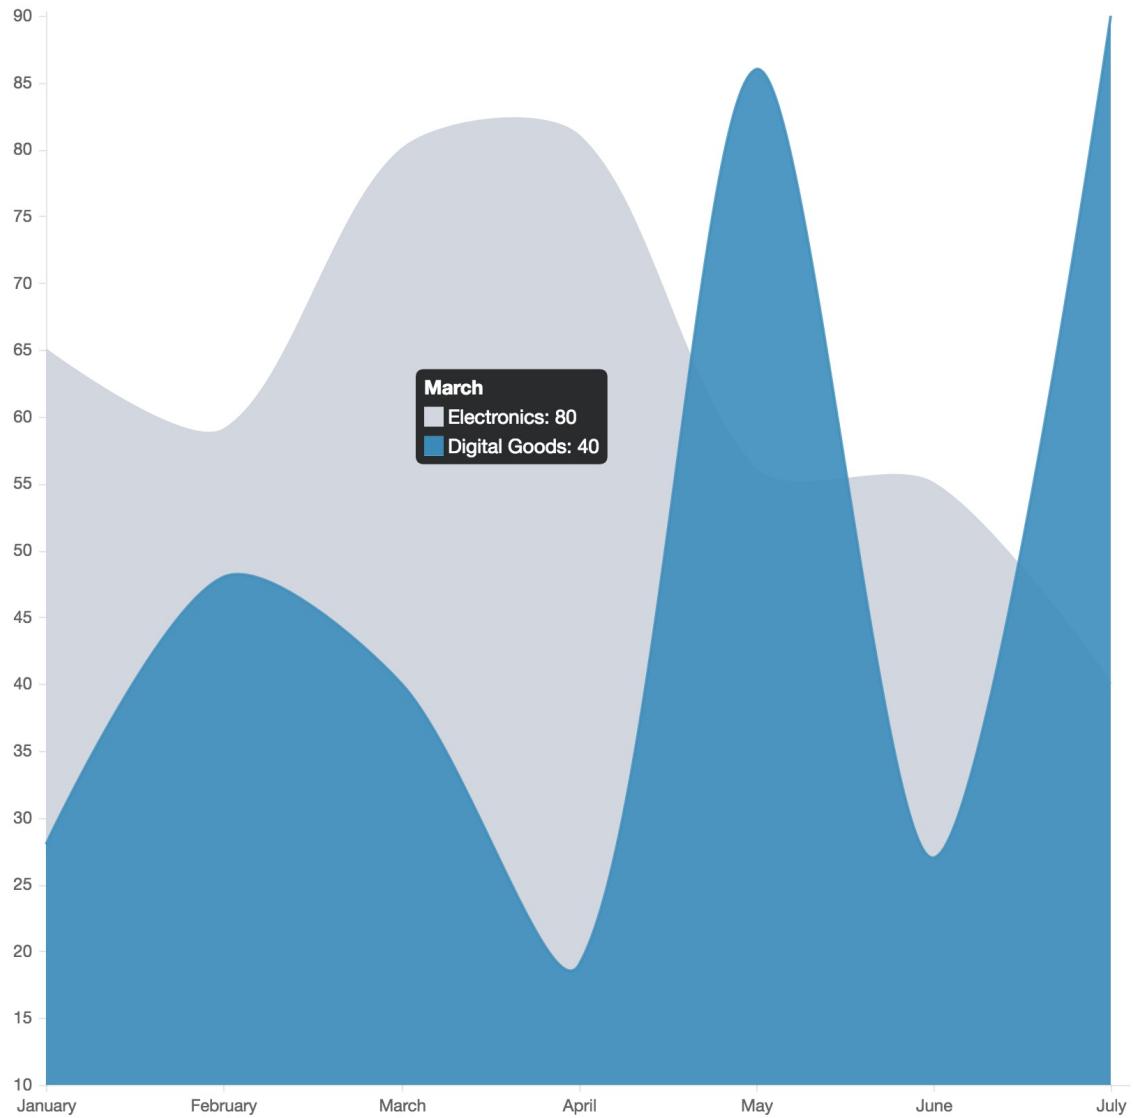

html

```
<canvas id="myChart" width="400" height="400"></canvas>
```

2.1.图表charts

js

```
// Get context with jQuery - using jQuery's .get() method.  
var areaChartCanvas = $("#myChart").get(0).getContext("2d");  
// This will get the first returned node in the jQuery collection.  
var areaChart = new Chart(areaChartCanvas);  
  
var areaChartData = {  
    labels: ["January", "February", "March", "April", "May", "June", "July"],  
    datasets: [  
        {  
            label: "Electronics",  
            fillColor: "rgba(210, 214, 222, 1)",  
            strokeColor: "rgba(210, 214, 222, 1)",  
            pointColor: "rgba(210, 214, 222, 1)",  
            pointStrokeColor: "#c1c7d1",  
            pointHighlightFill: "#fff",  
            pointHighlightStroke: "rgba(220,220,220,1)",  
            data: [65, 59, 80, 81, 56, 55, 40]  
        },  
        {  
            label: "Digital Goods",  
            fillColor: "rgba(60,141,188,0.9)",  
            strokeColor: "rgba(60,141,188,0.8)",  
            pointColor: "#3b8bba",  
            pointStrokeColor: "rgba(60,141,188,1)",  
            pointHighlightFill: "#fff",  
            pointHighlightStroke: "rgba(60,141,188,1)",  
            data: [28, 48, 40, 19, 86, 27, 90]  
        }  
    ]  
};  
  
var areaChartOptions = {  
    //Boolean - If we should show the scale at all  
    showScale: true,  
    //Boolean - Whether grid lines are shown across the
```

```

chart
    scaleShowGridLines: false,
    //String - Colour of the grid lines
    scaleGridLineColor: "rgba(0,0,0,.05)",
    //Number - Width of the grid lines
    scaleGridLineWidth: 1,
    //Boolean - Whether to show horizontal lines (except
    t X axis)
    scaleShowHorizontalLines: true,
    //Boolean - Whether to show vertical lines (except
    Y axis)
    scaleShowVerticalLines: true,
    //Boolean - Whether the line is curved between points
    bezierCurve: true,
    //Number - Tension of the bezier curve between points
    bezierCurveTension: 0.3,
    //Boolean - Whether to show a dot for each point
    pointDot: false,
    responsive: true
};

//Create the line chart
areaChart.Line(areaChartData, areaChartOptions);

```

Chart用法及说明

- areaChartData 数据 根据实际需求 传入要显示的json数据
- json格式：

字段	说明	举例
labels	定义对应的X轴数据节点名	xxxxxxxxxx
labels	定义对应的X轴数据节点名	xxxxxxxxxx
labels	定义对应的X轴数据节点名	xxxxxxxxxx

2.1.图表charts

labels 定义对应的X轴数据节点名 datasets包含相关数据显示配置 如：
label：标签名；fillColor：填充颜色；strokeColor：边框颜色（色值可以是：red】、#ff0000、rgba(255,0,0,.2)等常用色值类型）
areaChartOptions 图表的配置 通过对options的参数传入配置显示形式（详细请对照文档查阅）

- 例如：

```
scaleBeginAtZero: true, //尺度是否应该从零开始，或从最低值降到一个  
数量级  
scaleShowGridLines: true, // 是否显示网格  
scaleGridLineColor: "rgba(0,0,0,.05)", //网格线条颜色  
scaleGridLineWidth: 1, //网格线条宽度  
scaleShowHorizontalLines: true, //是否显示水平线(X轴除外)  
scaleShowVerticalLines: true, //是否显示垂直线(Y轴除外)  
responsive: true, //是否开启图表响应
```

编辑器 -Editor

前言



Text Editors Advanced form element

CK Editor Advanced and full of features

This is my textarea to be replaced with CKEditor.

Bootstrap WYSIHTML5 Simple and fast

Place some text here

中文说明

- 文本编辑器 英文说明
 - the leading rich text editor with powerful features and exceptional reliability

参考文

ck-editor 官址

ck-editor 文档

功能特点

三种可选编辑器 ck-editor、Bootstrap WYSIHTML5、Markdown Editor 可根据不同需求选用 简单易用 -ckeditor 1. 高质量 (Quality)


- Years of continuous test-driven development (more than 5000 tests) and code peer review resulting in a mature product of the highest reliability. Maintained by a dedicated core development team supported by an active open source community, CKEditor is continuously advancing to be the most cutting edge online editor to date.
- 2. 不断开拓创新 (Innovation)
- Constantly leading innovation in the field of rich text editing. Take full control of your content creation process with such unique features as Paste from Word, Advanced Content Filter, widgets, custom HTML formatting and many more. Find out more
- 3. 高兼容的可访问性 (Accessibility)
- Complying with the latest web accessibility standards (WCAG 2.0, Section 508, WAI-ARIA) and simultaneously enabling you to create accessible content thanks to a built-in Accessibility Checker. Find out more
- 4. 可定制性 (Customizability)
- Customize every single detail of your editor and tailor it to your needs using its robust developer-friendly documentation and a rich JavaScript API. Find out more

快速上手

-ck-editor

- 引用文件 js `<script src="ckeditor.js"></script>` //下载到本地引用
`<script src="http://research.itcast.cn/adminlte2-itcast/release/dist/plugins/ckeditor/ckeditor.js"></script>`
//直接引用远程连接 也可以下载之后放到本地引用
- 例子一 (ckEditer) :

2.2. 编辑器

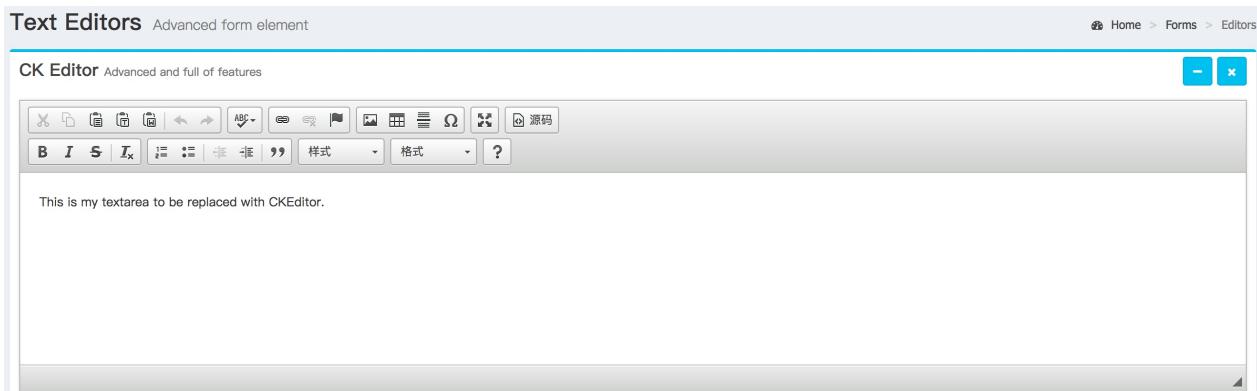

[查看效果](#)

html


```
<form>
    <textarea id="editor1" name="editor1" rows="10" cols="80">
        This is my textarea to be replaced with CKEditor.
    </textarea>
</form>
```

js

```
CKEDITOR.replace('editor1');
```

-Bootstrap WYSIHTML5

- 引用文件 js css
- 例子二（Bootstrap WYSIHTML5）：

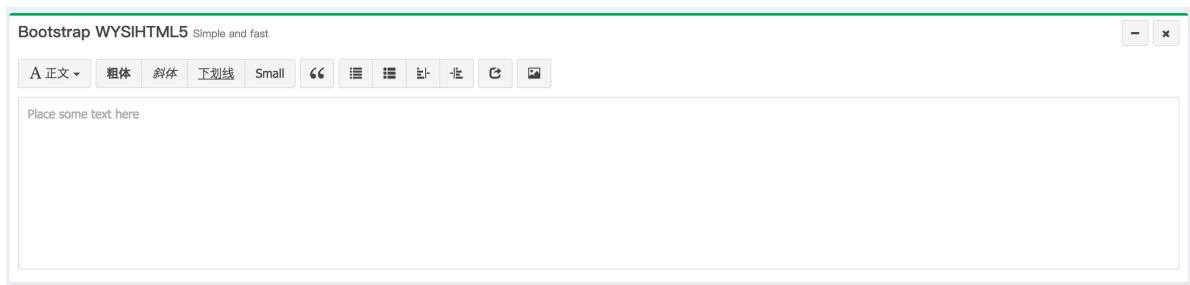

html

```
<div class="box-body pad">
  <form>
    <textarea class="textarea" placeholder="Place some text here" style="width: 100%; height: 200px; font-size: 14px; line-height: 18px; border: 1px solid #dddddd; padding: 10px;"></textarea>
  </form>
</div>
```

js

```
$(".textarea").wysihtml5({
  locale: 'zh-CN'
});
```

2.3. 日期控件

- 日期控件分为三种：单选、区间、时间段可根据实际需求进行选取

The screenshot shows a date picker interface with two calendar grids. The top grid is for selecting a single date, showing the month of June 2017 with the 14th selected. The bottom grid is for selecting a date range, showing the months of June and July 2017. Both grids have navigation arrows for previous and next months.

六月 2017							七月 2017						
一	二	三	四	五	六	日	一	二	三	四	五	六	日
29	30	31	1	2	3	4	29	30	31	1	2	3	4
5	6	7	8	9	10	11	5	6	7	8	9	10	11
12	13	14	15	16	17	18	12	13	14	15	16	17	18
19	20	21	22	23	24	25	19	20	21	22	23	24	25
26	27	28	29	30	1	2	26	27	28	29	30	1	2
3	4	5	6	7	8	9	3	4	5	6	7	8	9

The screenshot shows a date picker interface with a dropdown menu for selecting a date range. The menu includes options like '今日' (Today), '昨日' (Yesterday), '最近7日' (Last 7 days), '最近30日' (Last 30 days) (which is highlighted in blue), '本月' (This month), '上个月' (Last month), and '自定义' (Custom). There are also '确认' (Confirm) and '取消' (Cancel) buttons.

日期[单选]							日期[区间]						
日期时间[区间]							日期[时间段]						
<input type="text"/>													
<input type="button"/>													

```
<div class="row data-type">
    <div class="col-md-2 title">日期[单选]</div>
    <div class="col-md-4 data">
        <div class="input-group date">
            <div class="input-group-addon">
                <i class="fa fa-calendar">ffgdgfh</i>
            </div>
            <input type="text" class="form-control pull-right" id="datepicker">
        </div>
    </div>
</div>
```

```

<div class="col-md-2 title">日期[区间]</div>
<div class="col-md-4 data">
    <div class="input-group">
        <div class="input-group-addon">
            <i class="fa fa-calendar"></i>
        </div>
        <input type="text" class="form-control pull-right" id
="reservation">
    </div>
</div>

<div class="col-md-2 title">日期时间[区间]</div>
<div class="col-md-4 data">
    <div class="input-group">
        <div class="input-group-addon">
            <i class="fa fa-clock-o"></i>
        </div>
        <input type="text" class="form-control pull-right" id
="reservationtime">
    </div>
</div>

<div class="col-md-2 title">日期[时间段]</div>
<div class="col-md-4 data">
    <div class="input-group">
        <button type="button" class="btn btn-default pull-right" id="daterange-btn">
            <span>
                <i class="fa fa-calendar"></i> 日期选取
            </span>
            <i class="fa fa-caret-down"></i>
        </button>
    </div>
</div>
</div>

<script>
//日期[单选] Date picker
$('#datepicker').datepicker({
    autoclose: true,

```

```

language: 'zh-CN'
});

//日期时间[区间] Date range picker
$('#reservation').daterangepicker({
    locale: {
        applyLabel: '确认',
        cancelLabel: '取消',
        fromLabel: '起始时间',
        toLabel: '结束时间',
        customRangeLabel: '自定义',
        firstDay: 1
    },
    opens: 'left', // 日期选择框的弹出位置
    separator: ' 至 ',
    //showWeekNumbers : true,      // 是否显示第几周
});

//日期时间[区间] Date range picker with time picker
$('#reservationtime').daterangepicker({
    timePicker: true,
    timePickerIncrement: 30,
    format: 'MM/DD/YYYY h:mm A',
    locale: {
        applyLabel: '确认',
        cancelLabel: '取消',
        fromLabel: '起始时间',
        toLabel: '结束时间',
        customRangeLabel: '自定义',
        firstDay: 1
    },
    opens: 'right', // 日期选择框的弹出位置
    separator: ' 至 '
});

//日期[时间段] Date range as a button
$('#daterange-btn').daterangepicker({
    locale: {
        applyLabel: '确认',
        cancelLabel: '取消',

```

2.3. 日期控件

```
        fromLabel: '起始时间',
        toLabel: '结束时间',
        customRangeLabel: '自定义',
        firstDay: 1
    },
    opens: 'right', // 日期选择框的弹出位置
    separator: ' 至 ',
    ranges: {
        '今日': [moment(), moment()],
        '昨日': [moment().subtract(1, 'days'), moment().subtract(1, 'days')],
        '最近7日': [moment().subtract(6, 'days'), moment()],
        '最近30日': [moment().subtract(29, 'days'), moment()]
    ,
        '本月': [moment().startOf('month'), moment().endOf('month')],
        '上个月': [moment().subtract(1, 'month').startOf('month'), moment().subtract(1, 'month').endOf('month')]
    },
    startDate: moment().subtract(29, 'days'),
    endDate: moment()
},
function(start, end) {
    $('#daterange-btn span').html(start.format('MMMM D, YYYY') + ' - ' + end.format('MMMM D, YYYY'));
}
);
</script>
```

使用方法也非常简单 插入对应的HTML 和 js 即可调用对应的日期控件

2.4.字体

本项目访问字体库文件 font-awesome bootstrap-font (Glyphicons)

避免了 墙内 无法下载，打开页面长时间 白屏 问题

- 1.font-awesome

The screenshot shows the Font Awesome icon library interface. At the top, there are two tabs: "Font Awesome" and "Glyphicons". Below the tabs, a section titled "66 New Icons in 4.4" lists new icons added in version 4.4. The icons are categorized into several groups:

- General:** fa-500px, fa-battery-1 (alias), fa-battery-empty, fa-battery-three-quarters, fa-calendar-plus-o, fa-chrome, fa-contao, fa-fonticons, fa-gg-circle, fa-hand-peace-o, fa-hand-spock-o, fa-hourglass-2 (alias), fa-hourglass-o, fa-industry, fa-map-pin, fa-object-ungroup, fa-opera, fa-sticky-note, fa-tripadvisor, fa-y-combinator.
- Amazon:** fa-amazon
- Battery:** fa-battery-2 (alias), fa-battery-full, fa-black-tie, fa-battery-half, fa-battery-3 (alias), fa-battery-quarter, fa-battery-4 (alias).
- Clone:** fa-clone
- Creative Commons:** fa-creative-commons
- Genderless:** fa-genderless
- Hand:** fa-hand-grab-o (alias), fa-hand-pointer-o, fa-hand-stop-o (alias), fa-hand-lizard-o, fa-hand-rock-o
- Hourglass:** fa-hourglass-3 (alias), fa-hourglass-start, fa-hourglass-end, fa-hourglass-half
- Internet:** fa-internet-explorer
- Map:** fa-map, fa-map-signs
- Opt-in:** fa-optin-monster
- Note:** fa-sticky-note-o
- TV:** fa-tv (alias)
- Y:** fa-yc (alias)
- Balance Scale:** fa-balance-scale
- Commenting:** fa-commenting
- Expedited SSL:** fa-expeditedssl
- Get Pocket:** fa-get-pocket
- Mouse Pointer:** fa-mouse-pointer
- Television:** fa-television
- Vimeo:** fa-vimeo
- Other:** fa-balance-scale, fa-battery-0 (alias), fa-battery-1 (alias), fa-battery-2 (alias), fa-battery-3 (alias), fa-battery-4 (alias), fa-battery-empty, fa-battery-full, fa-battery-half, fa-battery-quarter, fa-battery-three-quarters, fa-battery-quarter, fa-bell-o, fa-binoculars, fa-book, fa-bug, fa-area-chart, fa-asterisk, fa-ban, fa-barcode, fa-battery-2 (alias), fa-battery-full, fa-bed, fa-bell-slash, fa-birthday-cake, fa-bookmark, fa-building.

Web Application Icons

fa-adjust	fa-anchor	fa-archive	fa-area-chart
fa-arrows	fa-arrows-h	fa-arrows-v	fa-asterisk
fa-at	fa-automobile	fa-balance-scale	fa-ban
fa-bank	fa-bar-chart	fa-bar-chart-o	fa-barcode
fa-bars	fa-battery-0 (alias)	fa-battery-1 (alias)	fa-battery-2 (alias)
fa-battery-3 (alias)	fa-battery-4 (alias)	fa-battery-empty	fa-battery-full
fa-battery-half	fa-battery-quarter	fa-battery-three-quarters	fa-bed
fa-beer	fa-bell	fa-bell-o	fa-bell-slash
fa-bolt	fa-bicycle	fa-binoculars	fa-birthday-cake
fa-bookmark-o	fa-bomb	fa-book	fa-bookmark
	fa-briefcase	fa-bug	fa-building

用法：

font-awesome 用法非常简单 只要在对应标签内部加上 对应的图标 class 就可以显示出你想要的图标

```
<i class="fa fa-fw fa-battery-1"></i>
```

fa fa-fw 是必选的class 最后一个是对图标 class 可对应[文档](#)查找

• 2 Glyphicons

Glyphicons 是与bootstrap合作并免费提供给 bootstrap 使用的Icon图标库

Font Awesome	Glyphicons								
		glyphicon-asterisk			glyphicon-plus	glyphicon-euro			glyphicon-eur
		glyphicon-glass			glyphicon-music	glyphicon-search			glyphicon-heart
		glyphicon-th-large			glyphicon-th	glyphicon-th-list			glyphicon-ok
		glyphicon-signal			glyphicon-cog	glyphicon-trash			glyphicon-home
		glyphicon-file			glyphicon-time			glyphicon-remove	
		glyphicon-download			glyphicon-upload			glyphicon-repeat	
		glyphicon-lock			glyphicon-tag			glyphicon-headphones	
		glyphicon-volume-off			glyphicon-volume-down			glyphicon-volume-up	
		glyphicon-tags			glyphicon-book			glyphicon-print	
		glyphicon-bold			glyphicon-italic			glyphicon-font	
		glyphicon-align-left			glyphicon-align-center			glyphicon-align-right	
		glyphicon-list			glyphicon-indent-left			glyphicon-justify	
		glyphicon-text-height			glyphicon-text-width			glyphicon-align-justify	

用法：

Glyphicons 与font-awesome 用法类似 只要在对应标签内部加上 对应的图标的 class 就可以显示出你想要的图标

```
<span class="glyphicon glyphicon-film"></span>
```

2.4.字体

glyphicon 是Glyphicons的必选的class 最后一个是对应图标的class 可对应文档查找

图标后是 对应的图标的Class 记得不要忘了加必选的class

2.5.按钮

AdminLTE 按钮分为以下九种按钮控件 Buttons、Block Buttons、Application Buttons、Horizontal Button Group、Different colors、Button Addon、Vertical Button Group、Split buttons、Social Buttons (By Lipis)

- Buttons

The screenshot shows a grid of buttons demonstrating different styles and sizes. The columns are labeled: Normal, Large .btn-lg, Small .btn-sm, X-Small .btn-xs, Flat .btn-flat, and Disabled .disabled. The rows represent different button states: Default, Primary, Success, Info, Danger, and Warning. Each cell contains a button with its corresponding label.

Normal	Large .btn-lg	Small .btn-sm	X-Small .btn-xs	Flat .btn-flat	Disabled .disabled
Default	Default	Default	Default	Default	Default
Primary	Primary	Primary	Primary	Primary	Primary
Success	Success	Success	Success	Success	Success
Info	Info	Info	Info	Info	Info
Danger	Danger	Danger	Danger	Danger	Danger
Warning	Warning	Warning	Warning	Warning	Warning

Buttons 默认为六种状态 分别为 default、primary、success、info、danger、warning 每种可设置不同的大小样式 具体实现代码 请查看
..../release/dist/pages/all-elements-buttons.html

用法：默认添加样式 btn btn-block 以及添加需要用到的状态 btn-default；使用不同大小样式时只需加上对应样式

使用六种状态方法

```
<button type="button" class="btn btn-block btn-default">Default</button>
```

使用不同大小样式时只需加上对应样式

2.5. 按钮

```
<button type="button" class="btn btn-block btn-default btn-lg">Default</button>
```

- Block Buttons

Block Buttons

.btn-block

.btn-block .btn-flat

.btn-block .btn-sm


用法与上面的基本一致 只需添加对应样式即可达到效果

```
<button type="button" class="btn btn-default btn-block btn-flat">Default</button>
```

- Application Buttons

Application Buttons

Add the classes `.btn .btn-app` to an `<a>` tag to achieve the following:





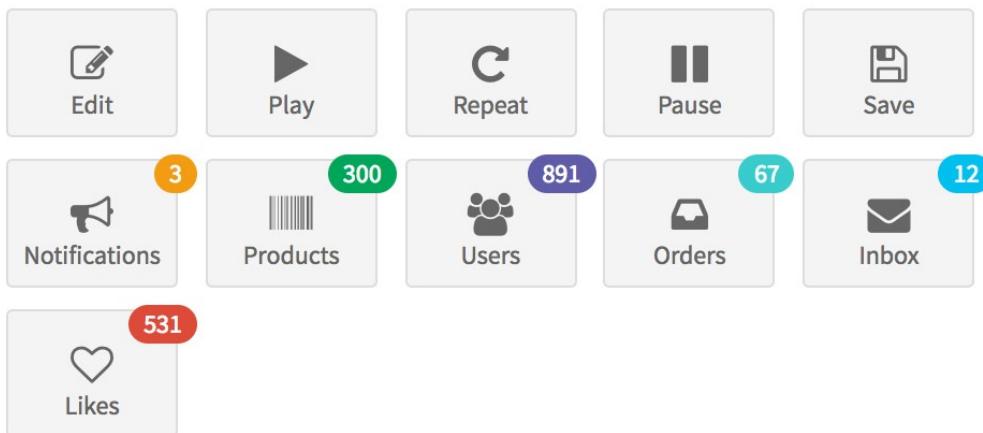


```
<a class="btn btn-app">
    <i class="fa fa-edit"></i> Edit
</a>
```

- Horizontal Button Group

Horizontal Button Group

Horizontal button groups are easy to create with bootstrap. Just add your buttons inside `<div class="btn-group"></div>`

Button	Icons	Flat	Dropdown
<div style="display: flex; justify-content: space-around;"> Left Middle </div> <div style="display: flex; justify-content: flex-end;"> Right </div>	 	 	 
<div style="display: flex; justify-content: space-around;"> Left Middle </div> <div style="display: flex; justify-content: flex-end;"> Right </div>	 	 	 
<div style="display: flex; justify-content: space-around;"> Left Middle </div> <div style="display: flex; justify-content: flex-end;"> Right </div>	 	 	 
<div style="display: flex; justify-content: space-around;"> Left Middle </div> <div style="display: flex; justify-content: flex-end;"> Right </div>	 	 	 
<div style="display: flex; justify-content: space-around;"> Left Middle </div> <div style="display: flex; justify-content: flex-end;"> Right </div>	 	 	 

```
<div class="btn-group">
    <button type="button" class="btn btn-default"><i class="fa fa-align-left"></i></button>
    <button type="button" class="btn btn-default"><i class="fa fa-align-center"></i></button>
    <button type="button" class="btn btn-default"><i class="fa fa-align-right"></i></button>
</div>
```

- Different colors

Different colors

Mix and match with various background colors. Use base class `.btn` and add any available `.bg-*` class

`.btn.bg-maroon.btn-flat`

`.btn.bg-purple.btn-flat`

`.btn.bg-navy.btn-flat`

`.btn.bg-orange.btn-flat`

`.btn.bg-olive.btn-flat`

`.btn.bg-maroon`

`.btn.bg-purple`

`.btn.bg-navy`

`.btn.bg-orange`

`.btn.bg-olive`

```
<button type="button" class="btn bg-maroon btn-flat margin">.btn
.bg-maroon.btn-flat</button>
```

- Button Addon

Button Addon

With dropdown

Action ▾

Normal

Action

Flat

Go!

```
<div class="input-group margin">
  <div class="input-group-btn">
    <button type="button" class="btn btn-default dropdown-toggle" data-toggle="dropdown">Action
      <span class="fa fa-caret-down"></span></button>
    <ul class="dropdown-menu">
      <li><a href="#">Action</a></li>
      <li><a href="#">Another action</a></li>
      <li><a href="#">Something else here</a></li>
      <li class="divider"></li>
      <li><a href="#">Separated link</a></li>
    </ul>
  </div>
  <input type="text" class="form-control">
</div>
```

- Vertical Button Group

Vertical Button Group


Vertical button groups are easy to create with bootstrap. Just add your buttons inside `<div class="btn-group-vertical"></div>`

Button	Icons	Flat	Dropdown
Top Middle Bottom	  	  	1 2 ▼
Top Middle Bottom	  	  	1 2 ▼
Top Middle Bottom	  	  	1 2 ▼
Top Middle Bottom	  	  	1 2 ▼
Top Middle Bottom	  	  	1 2 ▼

```
<div class="btn-group-vertical">
    <button type="button" class="btn btn-default">Top</button>
    <button type="button" class="btn btn-default">Middle</button>

    <button type="button" class="btn btn-default">Bottom</button>

</div>
```



- Split buttons

Split buttons

Normal split buttons:



Flat split buttons:




```
<div class="btn-group">
    <button type="button" class="btn btn-default">Action</button>

    <button type="button" class="btn btn-default dropdown-toggle"
        data-toggle="dropdown">
        <span class="caret"></span>
        <span class="sr-only">Toggle Dropdown</span>
    </button>
    <ul class="dropdown-menu" role="menu">
        <li><a href="#">Action</a></li>
        <li><a href="#">Another action</a></li>
        <li><a href="#">Something else here</a></li>
        <li class="divider"></li>
        <li><a href="#">Separated link</a></li>
    </ul>
</div>
`
```

- Social Buttons (By Lipis)

Social Buttons (By [Lipis](#))

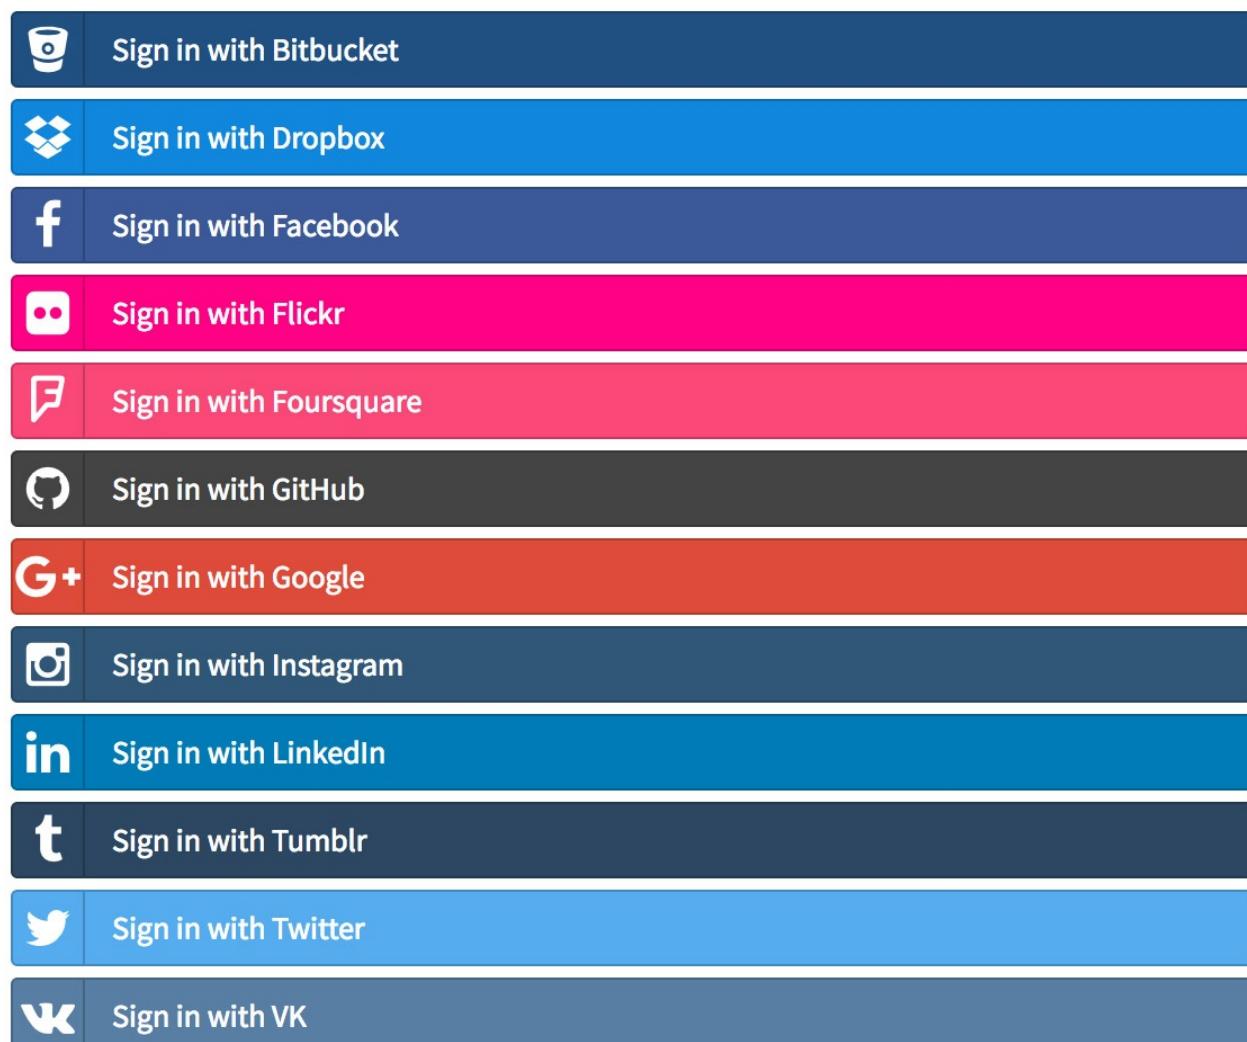

```
<a class="btn btn-block btn-social btn-bitbucket">
    <i class="fa fa-bitbucket"></i> Sign in with Bitbucket
</a>
```

使用方法基本相同 按照固定的样式进行嵌套 灵活使用不同状态的样式 将更好的控制显示的方式 达到我们想要的效果

2.6.时间线(TimeLine)

Timeline example

Home > UI > Timeline

10 Feb. 2014

Support Team sent you an email ① 12:05

Etsy doostang zoodles disqus groupon greplin ooj voxy zoodles, weebly ning heekya handango imeem plugg dopplr jibjab, movity jajah plickers sifteo edmodo ifttt zimbra. Babblely ideo kaboodle quora plaxo ideeli hulu weebly balihoo...

[Read more](#) [Delete](#)

Sarah Young accepted your friend request ② 5 mins ago

Jay White commented on your post ③ 27 mins ago

Take me to your leader! Switzerland is small and neutral! We are more like Germany, ambitious and misunderstood!

[View comment](#)

3 Jan. 2014

Mina Lee uploaded new photos ④ 2 days ago

150 x 100 150 x 100 150 x 100 150 x 100

Mr. Doe shared a video ⑤ 5 days ago

- 按照固定格式嵌套标签 显示内容灵活掌握

```

<ul class="timeline">

    <!-- label标签 定义时间节点 (timeline time label) -->
    <li class="time-label">
        <span class="bg-red">
            10 Feb. 2014
        </span>
    </li>
    <!-- /.timeline-label -->

    <!-- 时间节点内 事项列 timeline item -->
    <li>
        <!-- 每项的icon图标 timeline icon -->
        <i class="fa fa-envelope bg-blue"></i>
        <!-- 每项的具体内容想 右侧显示内容 timeline icon -->
        <div class="timeline-item">
            <span class="time"><i class="fa fa-clock-o"></i>12:05
        </span>
        <h3 class="timeline-header"><a href="#">Support Team
        </a> ...</h3>

        <div class="timeline-body">
            ...
            Content goes here
        </div>

        <div class="timeline-footer">
            <a class="btn btn-primary btn-xs">...</a>
        </div>
    </li>
    <!-- END timeline item -->

    ...
</ul>

```


2.7.Input Masks 组件

Inputmask是一个创建输入掩码的JavaScript库。 输入掩码可以针对vanilla javascript，jQuery和jqlite运行。

输入掩码通过确保预定义的格式来帮助用户输入。 这可以用于日期，数字，电话号码...

Inputmask is a javascript library which creates an input mask. Inputmask can run against vanilla javascript, jQuery and jqlite.

An inputmask helps the user with the input by ensuring a predefined format. This can be useful for dates, numerics, phone numbers, ...

插件说明

应用场景

1. 用户名、日期、电话号码等的输入；
2. 配合autoComplete做未输入控制；
3. 一些常规的数据输入。

浏览器支持及配置参数

该插件在IE6.0和Firefox3.0下调试通过。主要有以下配置参数：

1. upperletter:true, //是否大写
2. lowerletter:false, //是否小写
3. number:false, //是否数字
4. underline:false, //是否下滑线

参考文档


[官方网址](#)

示例：通过 **data-inputmask** 属性展示



引入文件：

```
<script src="../../plugins/jQuery/jquery-2.2.3.min.js"></scr  
ipt>  
<script src="../../plugins/jquery.inputmask.js"></script>  
<script src="../../plugins/jquery.inputmask.extensions.js"></  
script>  
<script src="../../plugins/jquery.inputmask.date.extensions.  
js"></script>
```



方法一：

html :

```

<div id="one">
    <span>日期：日/月/年格式</span>
    <input type="text" class="form-control" data-inputmask="alias': 'dd/mm/yyyy'" data-mask />
</div>
<div id="one">
    <span>日期：月/日/年格式</span>
    <input type="text" class="form-control" data-inputmask="alias': 'mm/dd/yyyy'" data-mask />
</div>
<div id="three">
    <span>电话号码：</span>
    <input type="text" class="form-control" data-inputmask='mask": "(999) 9999-9999"' data-mask>
</div>

<div id="four">
    <span>IP地址：</span>
    <input type="text" class="form-control" data-inputmask="alias': 'ip'" data-mask>
</div>

```

js :

```

$(function() {
    $('[data-mask]').inputmask();
})


```

案例说明：方法一是以 `data-inputmask` 属性的方式呈现的。

方法二：

```
**html :**
```

```
<div id="a">
    <span>日期：日/月/年格式</span>
    <input type="text" class="form-control date1" data-mask
/>
</div>
<div id="b">
    <span>日期：月/日/年格式</span>
    <input type="text" class="form-control date2" data-mask
/>
</div>
<div id="c">
    <span>电话号码：</span>
    <input type="text" class="form-control phone" data-mask>
</div>
```



```
$(function() {
    $(".date1").inputmask("dd/mm/yyyy", {"placeholder": "dd/mm
/yyyy"});
    $(".date2").inputmask("mm/dd/yyyy", {"placeholder": "mm/dd
/yyyy"});
    $(".phone").inputmask({"mask": "(999) 9999-9999"});
})
```

案例说明：方法二是通过jquery插件的方式呈现的。

整体说明：使用 Inputmask 可以通过Inputmask 类、jquery 插件、data-inputmask 属性 三种方式实现，上述案例使用了后两种。

2.8.颜色选取组件



Bootstrap Colorpicker 能够让你为文本输入框或其它任意元素添加颜色选择功能。它可以作为Bootstrap中的一个组件。

Bootstrap Colorpicker allows you to add color selection for text input boxes or any other element. It can be used as a component in Bootstrap.

参考文档

[官方网址](#)

关于Bootstrap Colorpicker

Bootstrap Colorpicker 可以将颜色选择器添加到字段或任何其他元素。

- 可用作组件；
- 作为alpha选择器；
- 支持多种格式：hex，rgb，rgba，hsl，hsla。

示例一：As a component



引入文件：

```
<script src="../../plugins/jQuery/jquery-2.2.3.min.js"></script>
<script src="../../plugins/bootstrap.min.js"></script>
<script src="../../plugins/bootstrap-colorpicker.min.js"></script>
```

2.8.颜色选取

```
<link rel="stylesheet" href="css/bootstrap.min.css" />
<link rel="stylesheet" href="css/bootstrap-colorpicker.min.cs
s" />
```

html :

```
<div id="one" class="input-group colorpicker-component">
    <input type="text" value="#00AABB" class="form-control"
/>
    <span class="input-group-addon"><i></i></span>
</div>
```

js :

```
$(function() {
    $('#one').colorpicker();
});
```

上述案例是Colorpicker的简单使用，通过使用 `colorpicker()` 方法来调用该插件。在表单中经常使用。

示例二：通过事件运用



引入的js文件和css文件和上述案例相同。这里不再赘述。

html :

```
<a href="#" class="btn btn-default" id="change">改变颜色</a>
<div id="two">
    <p>这是被改变背景颜色的div.</p>
    <p>这是被改变背景颜色的div.</p>
    <p>这是被改变背景颜色的div.</p>
</div>
```


js :

```
$( '#change' ).colorpicker().on( 'changeColor', function(e) {  
    $('#two')[0].style.backgroundColor = e.color.toString(  
        'rgba');  
});
```

上述案例是运用了 `changeColor` 事件，通过 `changeColor` 可以改变所需的颜色。

其他选项和事件说明参见 [参考文档](#)

2.9.iCheck 组件

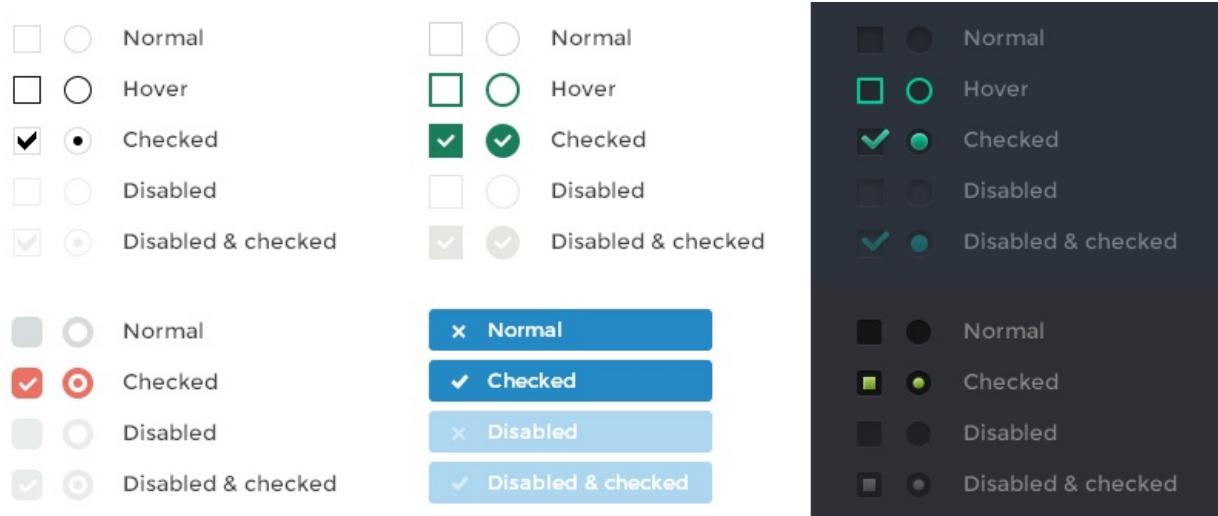

iCheck是一款对checkbox的美化插件，支持几乎所有浏览器包括移动浏览器。它支持所有选择器 (selectors)，并且只针对复选框和单选按钮起作用。

iCheck is a beautification plugin for checkbox that supports almost all browsers including mobile browsers. It supports all selectors, and only works for checkboxes and radio buttons.

参考文档

[官方网址](#)

[中文参考](#)

功能特点

- 在不同浏览器(包括ie6+)和设备上都有相同的表现 — 包括桌面和移动设备
- 支持触摸设备 — iOS、Android、BlackBerry、Windows Phone等系统
- 支持键盘导航 - Tab、Spacebar、Arrow up/down 和其它快捷键
- Screenreader可访问输入 - VoiceOver等的ARIA属性
- 方便定制 — 用HTML 和 CSS 即可为其设置样式 (多套皮肤).


- 支持jQuery和Zepto JavaScript工具库
- 体积小巧 — gzip压缩后只有1 kb
- 32 种参数 用来定制复选框（checkbox）和单选按钮（radio button）
- 11 个回调事件 用来监听输入框的状态
- 7个方法 用来通过编程方式控制输入框的状态
- 能够将输入框的状态变化同步回原始输入框中， 支持所有选择器

使用指南

iCheck 包含 Minimal Skin、Square skin、Flat skin、Line skin、Polaris skin、Futurico skin六种皮肤，每种皮肤拥有不同的主题颜色。

所有皮肤（除了Line）都是支持透明的，你可以将它们应用在任何背景上。

示例一：单选框和多选框的使用

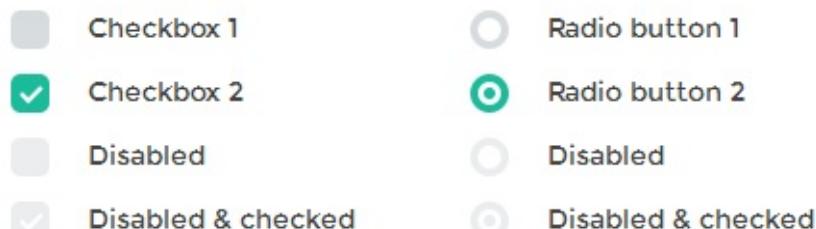

必须先引入 `jQuery v1.7+` (或 `Zepto`)，然后引入 `jquery.iceck.js` (或者 `zepto.iceck.js`)

引入文件：

```
<script src="../../plugins/jQuery/jquery-2.2.3.min.js"></script>
<script src="../../plugins/iCheck/icheck.js"></script>
<link rel="stylesheet" type="text/css" href="../../plugins/iCheck/flat/green.css" />
```


html：

```
<ul class="list">
    <li>
        <div class="icheckbox_flat-green">
            <input type="checkbox" name="icheck"/>
        </div>
        <label> Checkbox 1</label>
    </li>
    <li>
        <div class="icheckbox_flat-green">
            <input type="checkbox" checked="checked" name="icheck"/>
        </div>
        <label> Checkbox 2</label>
    </li>
    <li>
        <div class="icheckbox_flat-green disabled">
            <input type="checkbox" disabled="disabled"/>
        </div>
        <label> Disabled</label>
    </li>
    <li>
        <div class="icheckbox_flat-green checked disabled">
            <input type="checkbox" checked="checked" disabled="disabled"/>
        </div>
        <label> Disabled & checked</label>
    </li>
</ul>
<ul class="list">
    <li>
        <div class="iradio_flat-green">
            <input type="radio" name="iradio"/>
        </div>
        <label> Radio button 1</label>
    </li>
    <li>
        <div class="iradio_flat-green">
            <input type="radio" checked="checked" name="iradio"/>
        </div>
        <label> Radio button 2</label>
    </li>
</ul>
```

```

        </div>
        <label> Radio button 2</label>
    </li>
    <li>
        <div class="iradio_flat-green disabled">
            <input type="radio" disabled="disabled"/>
        </div>
        <label> Disabled</label>
    </li>
    <li>
        <div class="iradio_flat-green checked disabled">
            <input type="radio" checked="checked" disabled="disa
bled"/>
        </div>
        <label> Disabled & checked</label>
    </li>
</ul>

```



js :

```

$(document).ready(function(){
    $('input').iCheck({
        checkboxClass: 'icheckbox_flat',
        radioClass: 'iradio_flat'
    });
    $('input').on('ifChecked', function(event){
        alert("被点击了");
    });
});

```

属性说明

- iCheck 每种皮肤中包含10种不同的可用样式，上述案例以Green为例；

皮肤样式	样式文件
Black	square.css
Grey	gray.css
Red	red.css
Orange	orange.css
Green	green.css
Yellow	yellow.css
Blue	blue.css
Aero	aero.css
Pink	pink.css
Purple	purple.css

1. iCheck 提供了大量回调事件，都可以用来监听**change**事件，上述案例以 **ifChecked**为例。

事件名称	使用时机
ifClicked	用户点击了自定义的输入框或与其相关联的label
ifChanged	输入框的 checked 或 disabled 状态改变了
ifChecked	输入框的状态变为 checked
ifUnchecked	checked 状态被移除
ifDisabled	输入框状态变为 disabled
ifEnabled	disabled 状态被移除
ifCreated	输入框被应用了iCheck样式
ifDestroyed	iCheck样式被移除

其他方法

下面这些方法可以用来通过编程方式改变输入框状态（可以使用任何选择器）：

- `($('input').iCheck('check'));` — 将输入框的状态设置为**checked**
- `($('input').iCheck('uncheck'));` — 移除 **checked** 状态
- `($('input').iCheck('toggle'));` — toggle checked state

- `($('input').iCheck('disable'))` — 将输入框的状态设置为 disabled
- `($('input').iCheck('enable'))` — 移除 disabled 状态
- `($('input').iCheck('update'))` — apply input changes, which were done outside the plugin
- `($('input').iCheck('destroy'))` — 移除iCheck样式

2.10-数据表格



Datatables 是一款jquery表格插件。它是一个高度灵活的工具，可以将任何HTML表格添加高级的交互功能。

DataTables is a plug-in for the jQuery Javascript library. It is a highly flexible tool, based upon the foundations of progressive enhancement, and will add advanced interaction controls to any HTML table.

参考文档

[官方网址](#)

[中文网址](#)

功能特点

- 分页，即时搜索和排序
- 几乎支持任何数据源：DOM， javascript， Ajax 和 服务器处理
- 支持不同主题 DataTables, jQuery UI, Bootstrap, Foundation
- 各式各样的扩展: Editor, TableTools, FixedColumns
- 丰富多样的option和强大的API
- 支持国际化
- 超过2900+个单元测试
- 免费开源（MIT license）！商业支持

快速上手

基于jquery、Bootstrap，在引用时需要调用相关文件

示例：

每页 件 搜索

序号	标题	链接
Airi Satou	Accountant	Tokyo
Angelica Ramos	Chief Executive Officer (CEO)	London
Ashton Cox	Junior Technical Author	San Francisco
Bradley Greer	Software Engineer	London
Brenden Wagner	Software Engineer	San Francisco
Brielle Williamson	Integration Specialist	New York
Caesar Vance	Pre-Sales Support	New York
Cedric Kelly	Senior Javascript Developer	Edinburgh
Charde Marshall	Regional Director	San Francisco
Colleen Hurst	Javascript Developer	San Francisco

第 1 页 / 总 4 页 上一页 2 3 4 下一页

引入文件：

```

<link rel="stylesheet" href="../../bootstrap/css/bootstrap.min.css">
<link rel="stylesheet" href="../../plugins/datatables/dataTables.bootstrap.css">

<script src="../../plugins/jquery/jquery-2.2.3.min.js"></script>
<script src="../../plugins/datatables/jquery.dataTables.min.js">
</script>
<script src="../../bootstrap/js/bootstrap.min.js"></script>
<script src="../../plugins/datatables/dataTables.bootstrap.min.js"></script>

```

html：

2.10.数据表格

```
<table id="ajax-table" class="table table-bordered table-hover">
  <thead>
    <tr>
      <td>序号</td>
      <td>标题</td>
      <td>链接</td>
    </tr>
  </thead>
</table>
```

js :

```
$( "#ajax-table" ).DataTable({
  "ajax": './data.json',
  "paging": true,
  "lengthChange": true,
  "searching": true,
  "ordering": true,
  "info": true,
  "autoWidth": false,
  "language": {
    "search": "搜索",
    "lengthMenu": '每页 _MENU_ 件',
    "paginate": {
      "first": "第一页",
      "last": "最后一页",
      "next": "下一页",
      "previous": "上一页"
    },
    "info": "第 _PAGE_ 页 / 总 _PAGES_ 页",
    "infoFiltered": "(过滤总件数 _MAX_ 条)"
  }
})
```

json :

```
{  
    "data": [  
        [  
            "Tiger Nixon",  
            "System Architect",  
            "Edinburgh",  
            "5421",  
            "2011/04/25",  
            "$320,800"  
        ],  
        [  
            "Garrett Winters",  
            "Accountant",  
            "Tokyo",  
            "8422",  
            "2011/07/25",  
            "$170,750"  
        ],  
        [  
            "Ashton Cox",  
            "Junior Technical Author",  
            "San Francisco",  
            "1562",  
            "2009/01/12",  
            "$86,000"  
        ],  
        [  
            "Cedric Kelly",  
            "Senior Javascript Developer",  
            "Edinburgh",  
            "6224",  
            "2012/03/29",  
            "$433,060"  
        ]  
    ]  
}
```

案例说明：上述案例通过 Ajax 方式加载 json 格式数据，并更改表格选项属性为中文。

其他选项

DataTables 通过自定义选项来完成界面显示配置，一些常用选项如下：

- `paging: false` - 禁止表格分页，默认是显示的；
- `searching: false` - 禁用搜索，默认是显示的；
- `ordering: false` - 禁用排序，默认是显示的；
- `lengthChange: false` - 禁用每页显示条目，默认是显示的；
- `info: true` - 显示当前数据位置，默认是显示的；
- `autoWidth:false` - 表格数据自动宽度，默认是关闭的；

DataTables 默认选项是英文形式，可以通过`language` 来配置改为中文：

1. 方法一：

```
"language": {
    "search": "搜索",
    "lengthMenu": "每页 _MENU_ 件",
    "info": "第 _PAGE_ 页 / 总 _PAGES_ 页",
    "infoFiltered": "(过滤总件数 _MAX_ 条)" ,
    "paginate": {
        "first": "第一页",
        "last": "最后一页",
        "next": "下一页",
        "previous": "上一页"
    }
}
```

1. 方法二：

DataTables 可以从服务器Ajax加载语言信息，通过 `language.url`进行配置。

```
"language": {
    "url": "yourServer:/localisation/Chinese.json"
}
```