


All POP languages follows "TOP Down" approach.

C Programming Approach

top to bottom

Big problem or start

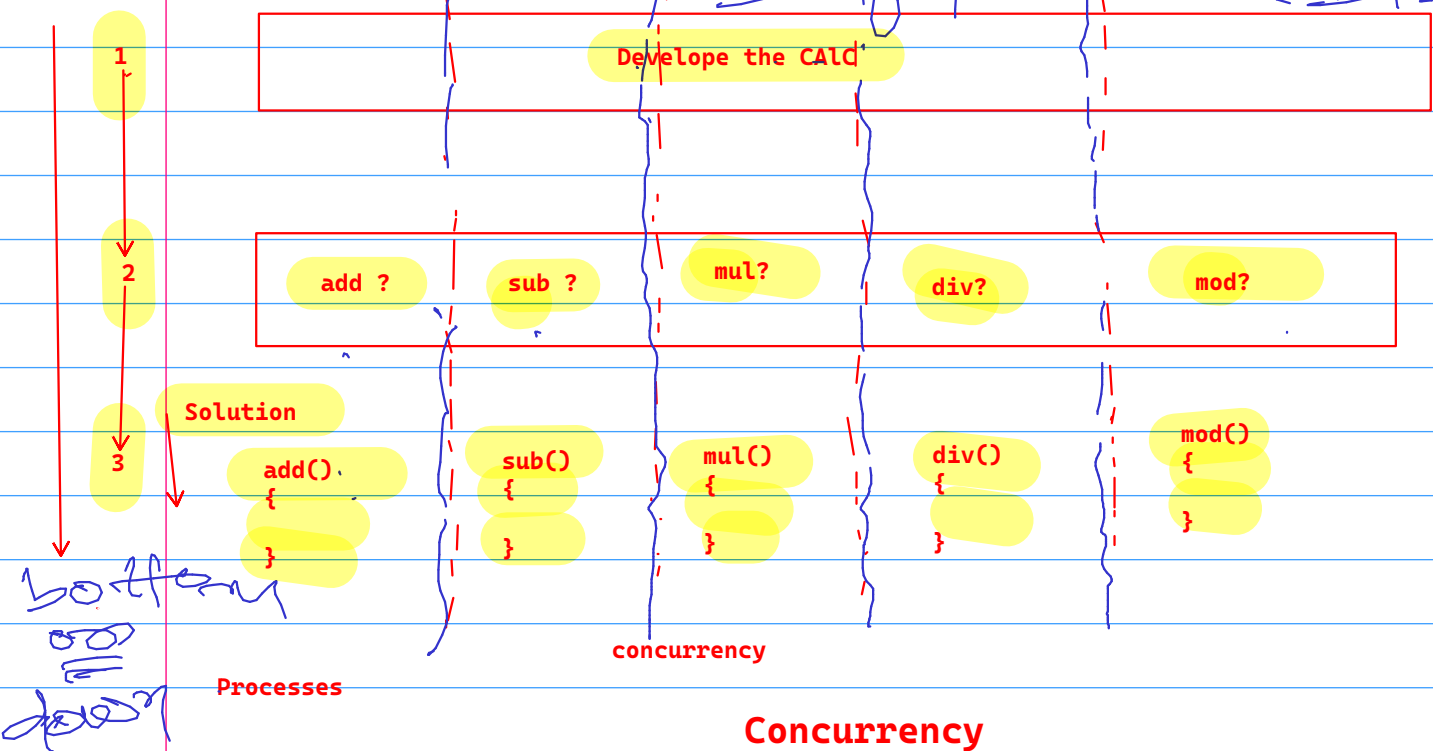


Processes

1. mp3, 2. vs code, 3.. pdf reader

Resources

CPU


Solution to above problem using concurrency

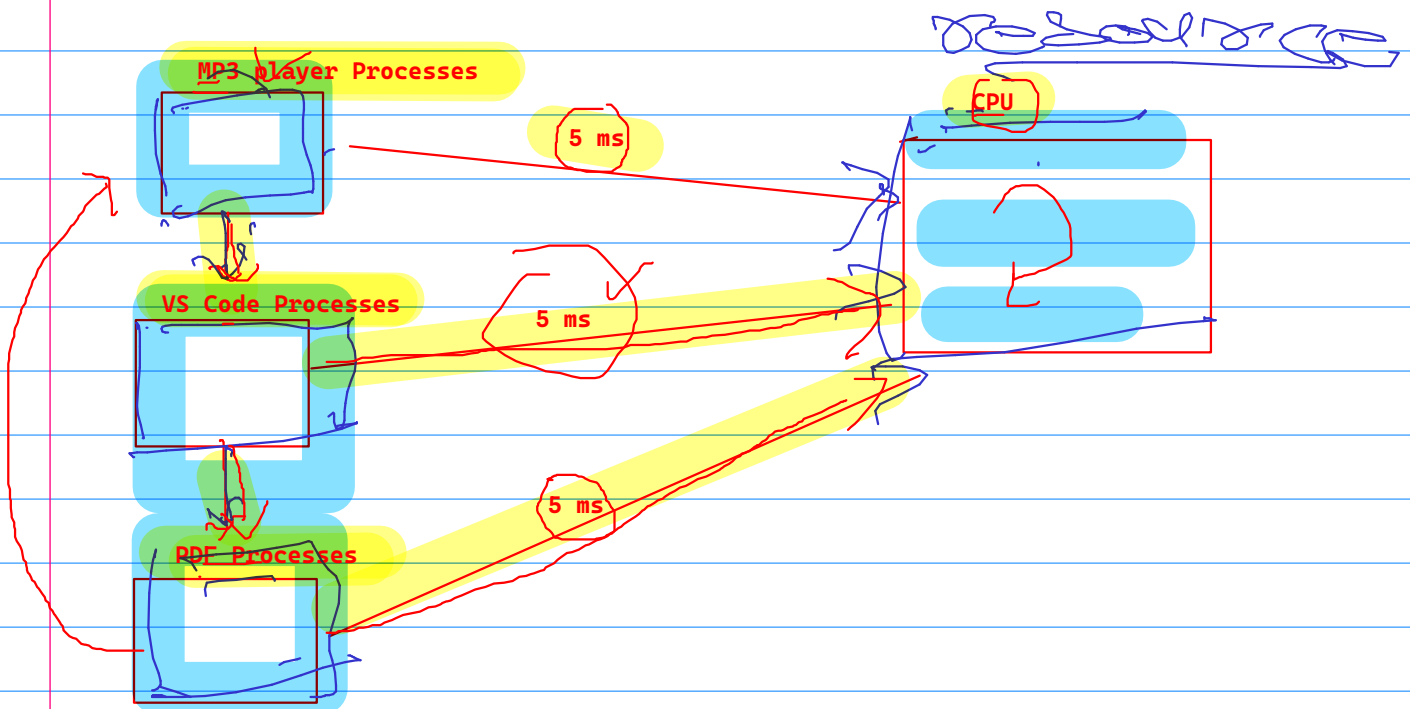

reference variable

```
int num1=10;  
int &refnum1=num1;
```

refnum1
or
num1



100

```
printf("%d",refnum1); // 10
```

```
refnum1=20;
```

```
printf("%d",num1); // 20
```

