



File Editor

> Open Tabs

Files

public

src

actions

components

containers

JS DeleteCo

JS Notificat

JS TodoInp

JS TodoIter

JS TodoList

reducers

sagas

selectors

JS TodoApp.js

JS bThreads.js

JS bp.js

JS bpMiddle...

JS createServ

JS index.js

JS store.js

.gitignore

README....

package.j...

shrinkwra...

Dependencies

< JS bThreads.js src

```
1 import types from './actions/types'
2
3 export default [
4   function* whenDeleteIsClickedDeleteTodo() {
5     while (true) {
6       yield {
7         wait: ['DELETE_CLICKED']
8       }
9       yield {
10        request: ['DELETE_TODO'],
11        payload: this.lastPayload
12      }
13    }
14  }
15 ]
16
```

< > ↺ https://2oq97j758p.codesandbox.

Todo App ✨

 Add

Learn Swift



~~Learn React~~



All Active Completed


Console

Problems

Tests

Console was cleared

show Confirmed when deleted

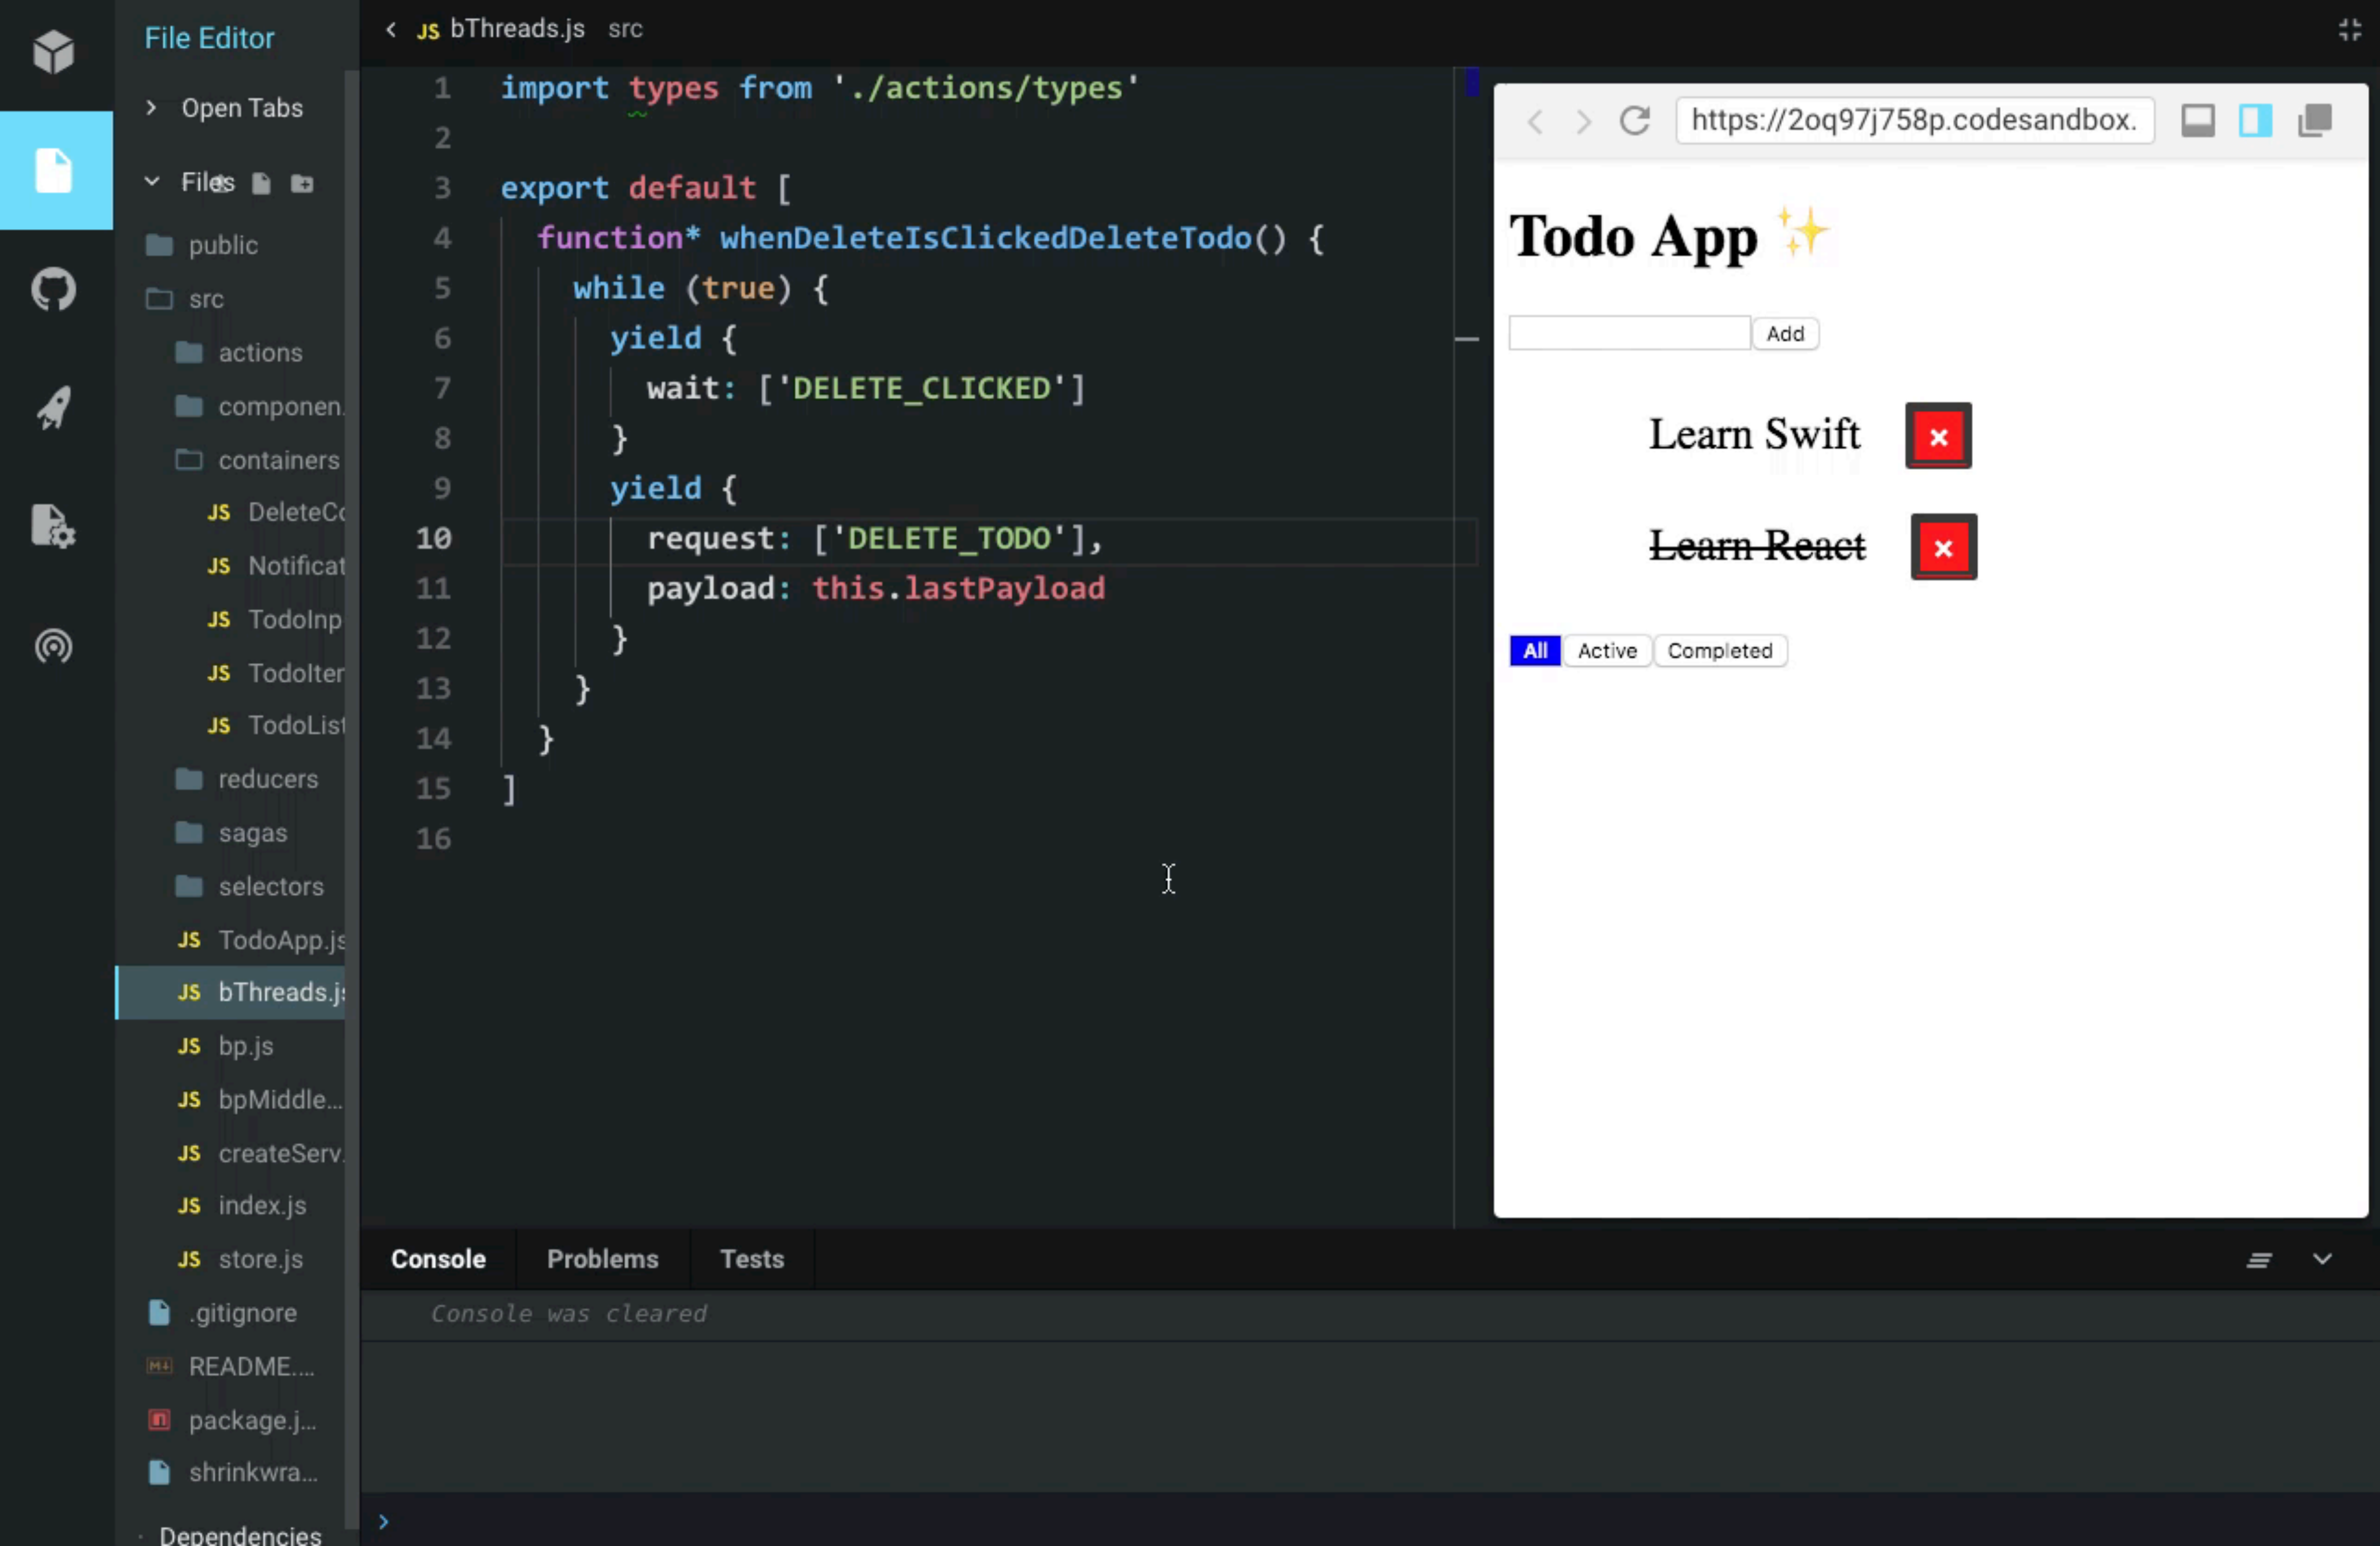

File Editor

> Open Tabs

Files

public

src

actions

componen.

containers

JS DeleteCo

JS Notificat

JS TodoInp

JS TodoIter

JS TodoList

reducers

sagas

selectors

JS TodoApp.js

JS bThreads.js

JS bp.js

JS bpMiddle...

JS createServ.

JS index.js

JS store.js

.gitignore

README....

package.j...

shrinkwra...

Dependencies

< JS bThreads.js src

```
1 import types from './actions/types'
2
3 export default [
4   function* whenDeleteIsClickedDeleteTodo() {
5     while (true) {
6       yield {
7         wait: ['DELETE_CLICKED']
8       }
9       yield {
10        request: ['DELETE_TODO'],
11        payload: this.lastPayload
12      }
13    }
14  }
15 ]
16
```

Console

Problems

Tests

Console was cleared

< > ↺ https://2oq97j758p.codesandbox.

Todo App ✨

Add

Learn Swift



~~Learn React~~



All Active Completed

Show Confirm when delete is clicked

The image shows a code editor interface with a file explorer on the left and a preview window on the right.

File Editor:

- Open Tabs: Files, public, src, actions, componen, containers
- Files:
 - public
 - src
 - actions
 - componen
 - containers
 - JS DeleteCo
 - JS Notificat
 - JS TodoInp
 - JS TodoIter
 - JS TodoList
 - reducers
 - sagas
 - selectors
 - JS TodoApp.js
 - JS bThreads.js**
 - JS bp.js
 - JS bpMiddle...
 - JS createServ
 - JS index.js
 - JS store.js
 - .gitignore
 - README....
 - package.j...
 - shrinkwra...

Code Editor (bThreads.js):


```
1 import types from './actions/types'
2
3 export default [
4   function* whenDeleteIsClickedDeleteTodo() {
5     while (true) {
6       yield {
7         wait: ['DELETE_CLICKED']
8       }
9       yield {
10        request: ['DELETE_TODO'],
11        payload: this.lastPayload
12      }
13    }
14  }
15 ]
16
```


Preview Window:

https://2oq97j758p.codesandbox.

Todo App ✨

Add

Learn Swift 

~~Learn React~~ 

All Active Completed

Console Problems Tests

Console was cleared

When delete is clicked, block delete until confirmation

The image shows a development environment with a code editor on the left and a web browser on the right. The code editor displays the `bThreads.js` file in the `src` directory. The code defines a `whenDeleteIsClickedDeleteTodo` function that uses a `while` loop to block execution until a confirmation is received.

```
1 import types from './actions/types'
2
3 export default [
4   function* whenDeleteIsClickedDeleteTodo() {
5     while (true) {
6       yield {
7         wait: ['DELETE_CLICKED']
8       }
9       yield {
10        request: ['DELETE_TODO'],
11        payload: this.lastPayload
12      }
13    }
14  }
15 ]
16
```

The web browser shows a `Todo App` interface. It includes an input field, an `Add` button, a `Learn React` link, and a list of todos with filters: `All`, `Active`, and `Completed`. A confirmation dialog is displayed with the text `Confirm delete?` and `Cancel` buttons.

The console at the bottom shows the following log messages:

```
Console was cleared
dispatching >Object {type: "DELETE_CLICKED", payload: Object, bpThread: true}
dispatching >Object {type: "DELETE_TODO", payload: Object, bpThread: true}
```