Class 5 Data Viz with ggplot

Lilit (TSS - 200070809)

Table of contents

Background 1
Lets add some features (more layers) 4
Gene Expression Plot 6
Going Further 9
Limit to 1977 and 2007 11

Background

There are many *graphics systems* in R for making plots and fingers. These include **"base R graphics"** like the `plot()` and add-on packages like **ggplot2**.

Lets compare how we make a simple graph with these two systems:


We can use the in-built `cars` dataset:

```
head(cars)
```

```
  speed dist
1     4    2
2     4   10
3     7    4
4     7   22
5     8   16
6     9   10
```

A base R plot:

```
plot(cars)
```

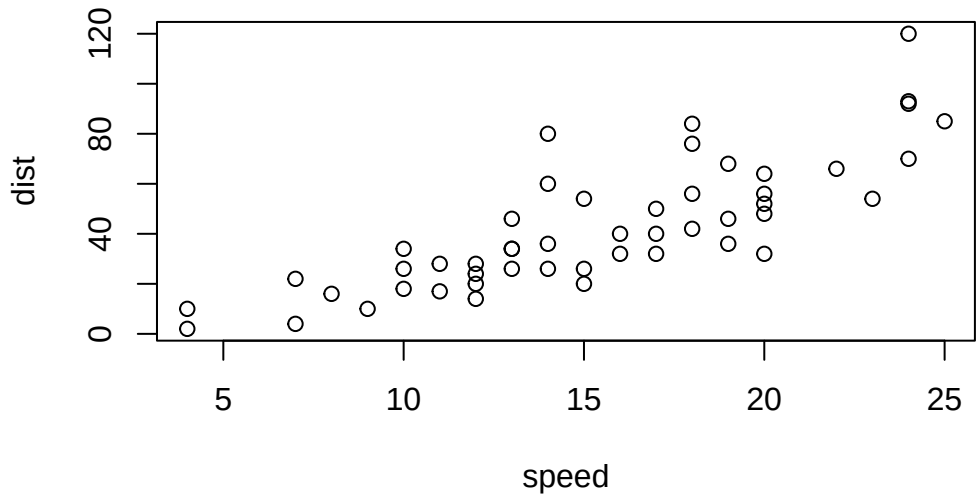

Now for **ggplot2**.

Before I can use ggplot2, I need to install it on my computer.To do this we can use the function'install.packages("ggplot2")'

> **N.B.** We never run an 'install.packages()' in our quarto doc(we run it in our R console) as it would re-install the package every time I render my document.


Once installed we still need to load up the package into our R session. We do this with a 'library()' call.

```
library(ggplot2)
ggplot(cars)
```

Every ggplot needs at least 3 inputs:

- the **data** (a data.frame of the stuff we want to plot)
- the **aesthetics** (how the data maps to the plot),
- the **geom** layer (how you want the plot drawn, points, lines etc.)


```
ggplot(cars) +
  aes (x=speed, y=dist) +
  geom_point()
```

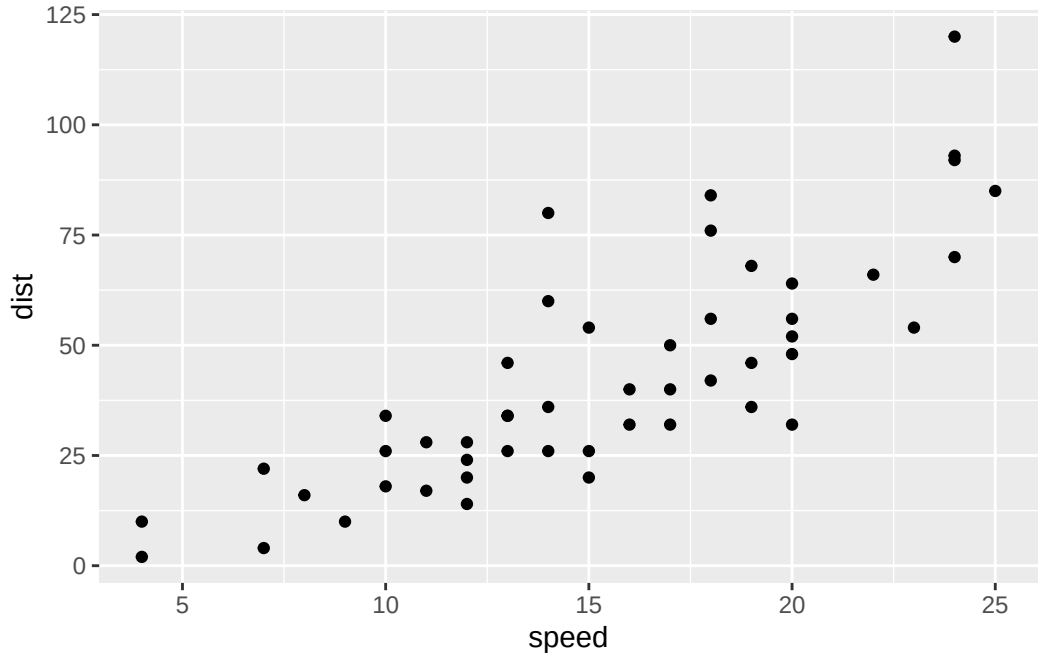

Lets add some features (more layers)


Let's add a trend line that shows the relationship between 'speed' and 'distance':

```
ggplot(cars) +
  aes(x=speed, y = dist) +
  geom_point() +
  geom_line()
```

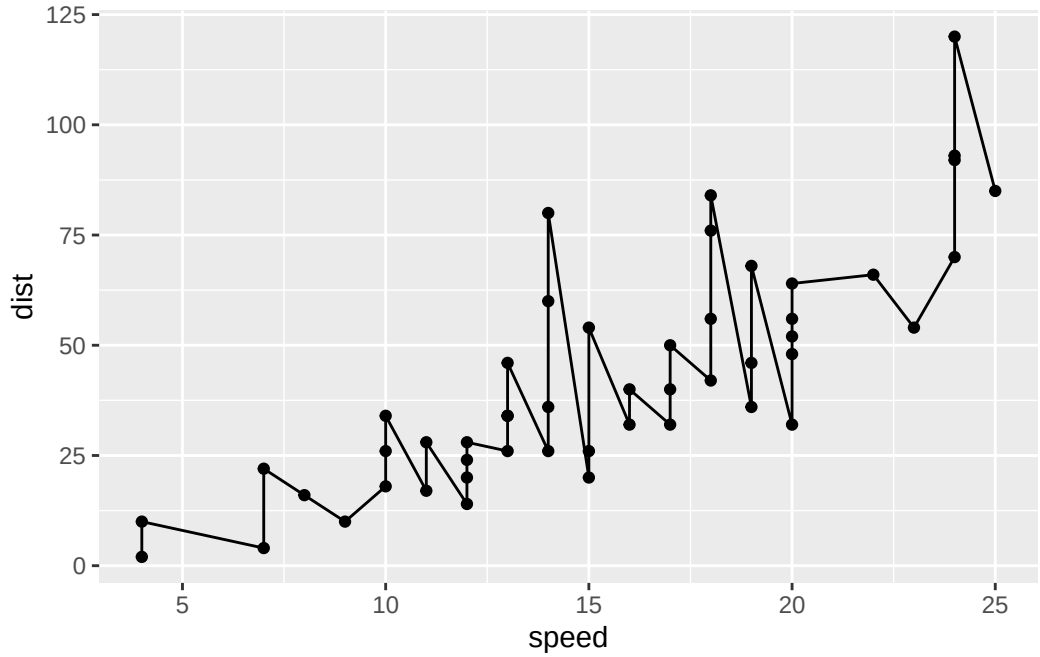


```
ggplot(cars) +
  aes(x=speed, y = dist) +
  geom_point() +
  geom_smooth(method = "lm",se=FALSE) +
  theme_bw()+
  labs(x="Speed (MPH",
       y="Stopping Distance (ft)",
       title ="Stopping distance of some old cars")
```

```
`geom_smooth()` using formula = 'y ~ x'
```

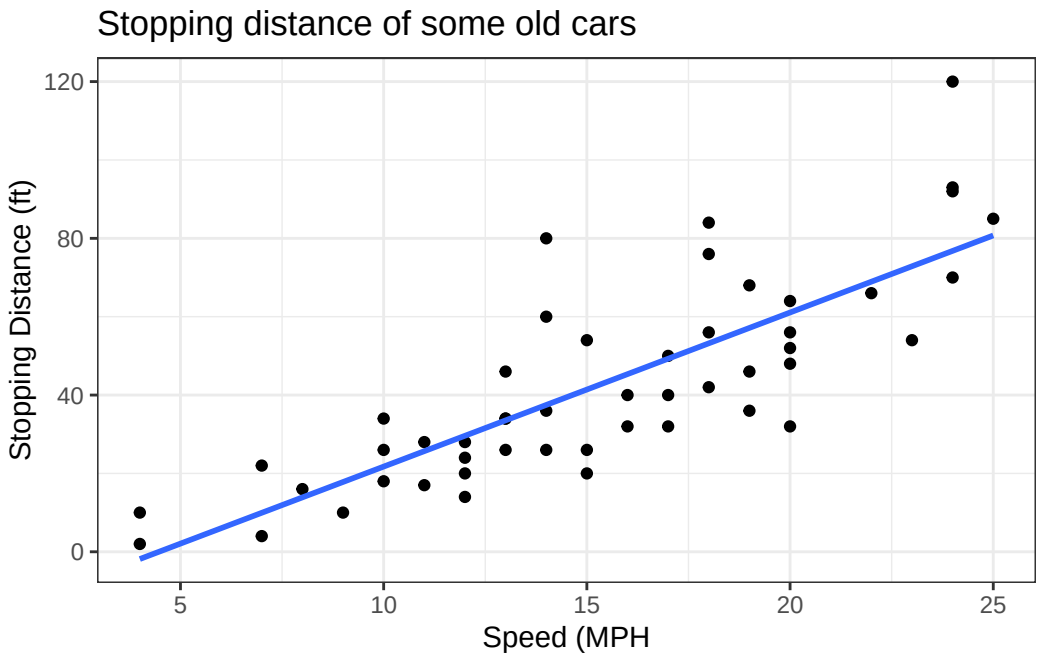


Gene Expression Plot

First we will read some expression data for the effects of a GLP-1 drug

```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes)
```

```
        Gene Condition1 Condition2      State
1      A4GNT -3.6808610 -3.4401355 unchanging
2       AAAS  4.5479580  4.3864126 unchanging
3      AASDH  3.7190695  3.4787276 unchanging
4       AATF  5.0784720  5.0151916 unchanging
5       AATK  0.4711421  0.5598642 unchanging
6 AB015752.4 -3.6808610 -3.5921390 unchanging
```

```
ggplot(genes)+
   aes(x=Condition1,y=Condition2, col =State)+
   geom_point()
```

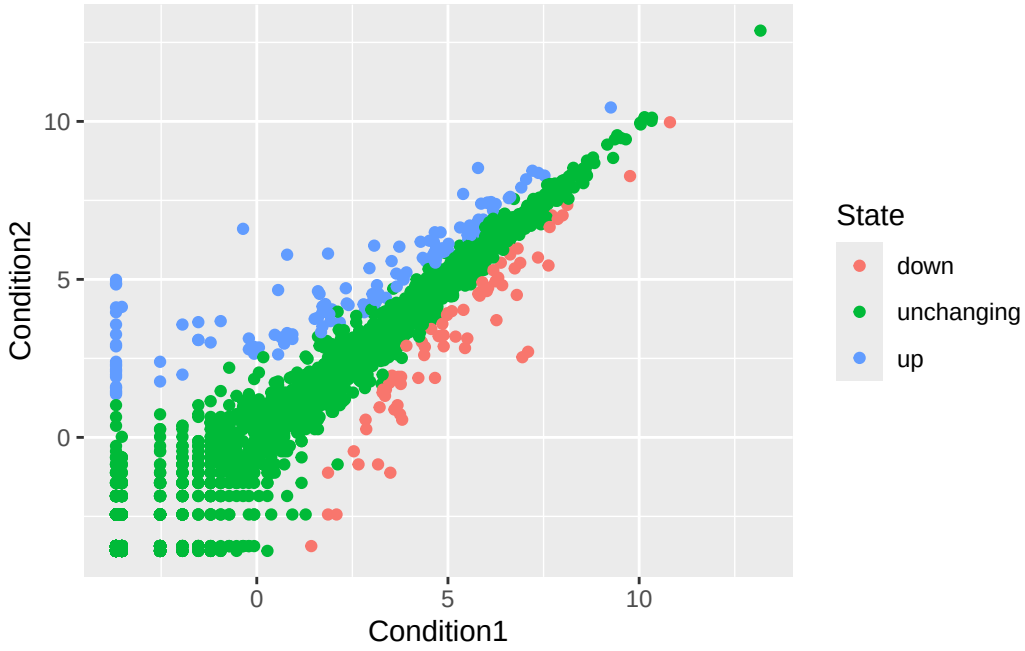


```
nrow(genes)
```

```
[1] 5196
```

```
colnames(genes)
```

```
[1] "Gene"       "Condition1" "Condition2" "State"
```

```
ncol(genes)
```

```
[1] 4
```

```
table(genes$State)
```

```
      down unchanging         up
        72       4997        127
```

```
round( table(genes$State)/nrow(genes) * 100, 2 )
```


```
      down unchanging         up
      1.39      96.17       2.44
```

```
n.total<-nrow(genes)
n.up<-sum(genes$State =="up")

round(n.up/n.total,2)
```

```
[1] 0.02
```

```
ggplot(genes) +
  aes(x=Condition1, y=Condition2, col=State) +
  geom_point()+
  scale_colour_manual(values=c("blue","gray","red")) +
  theme_bw()+
  labs(x="No drug",
       y="Drug",
       title="GLP-1 Inhibitor Effects on Gene Expression")
```

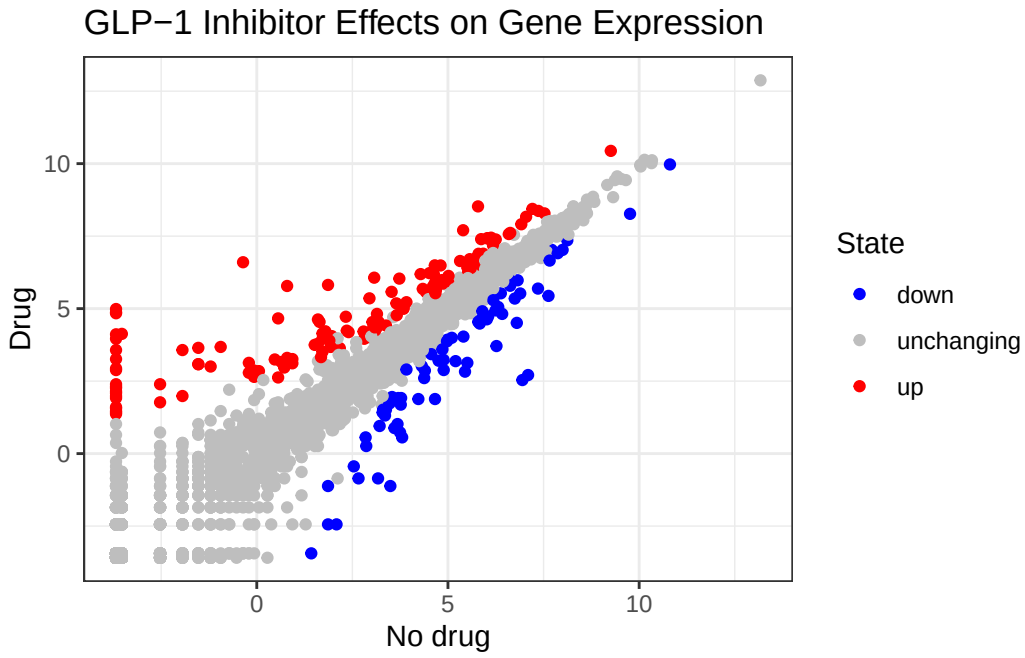

Going Further

Here we read the famous *gapmider* dataset:

```
# File location online
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder.tsv

gapminder <- read.delim(url)
head(gapminder)
```

```
      country continent year lifeExp      pop gdpPercap
1 Afghanistan      Asia 1952  28.801  8425333  779.4453
2 Afghanistan      Asia 1957  30.332  9240934  820.8530
3 Afghanistan      Asia 1962  31.997 10267083  853.1007
4 Afghanistan      Asia 1967  34.020 11537966  836.1971
5 Afghanistan      Asia 1972  36.088 13079460  739.9811
6 Afghanistan      Asia 1977  38.438 14880372  786.1134
```

Q. How many entries are in this dataset?

```
nrow(gapminder)
```

```
[1] 1704
```

Q. How many different "country" values are in this datset?

```
length(table(gapminder$country))
```


```
[1] 142
```

```
length(unique(gapminder$country))
```


```
[1] 142
```

Let's make our first plot of `gdpPercap` vs `lifeExp`:

```
ggplot(gapminder) +
  aes(x=gdpPercap, y = lifeExp, col=continent)+
  geom_point(alpha = 0.2)
```

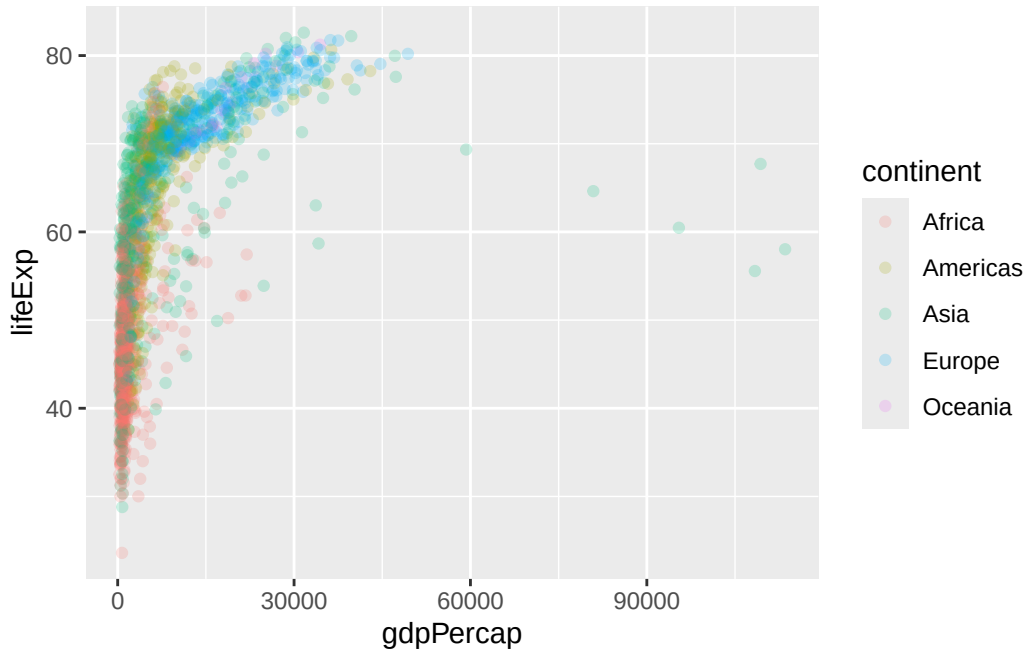



```
ggplot(gapminder) +
  aes(x=gdpPercap, y = lifeExp, col=continent)+
  geom_point()
```

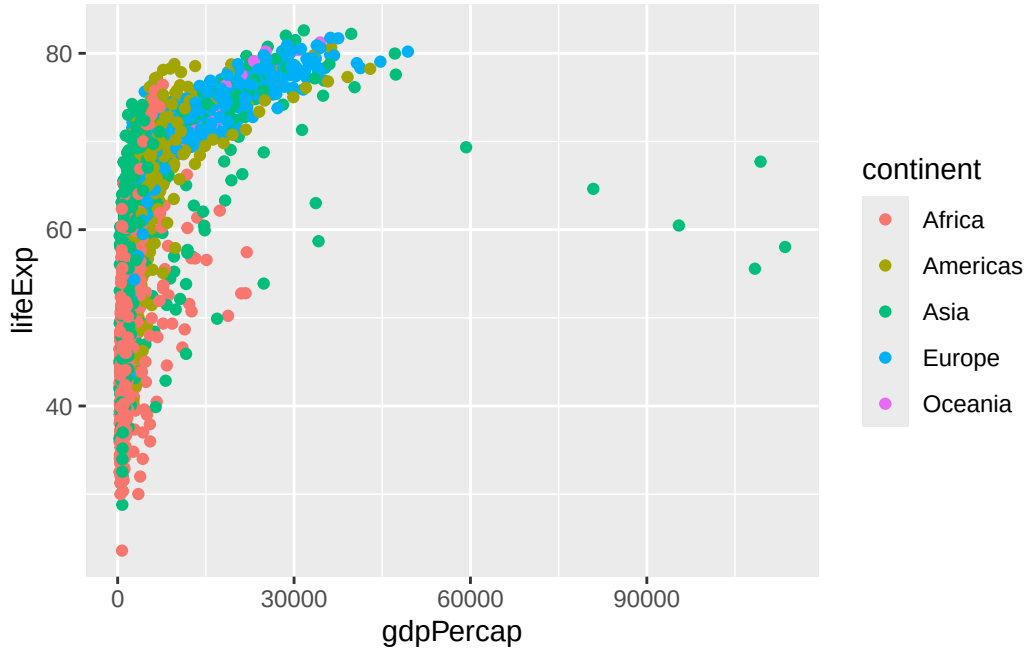

One useful layer we can add to explore big datasets like this is called "facetting"

```
ggplot(gapminder) +
  aes(x=gdpPercap, y = lifeExp, col=continent)+
  geom_point()+
  facet_wrap(~continent)
```

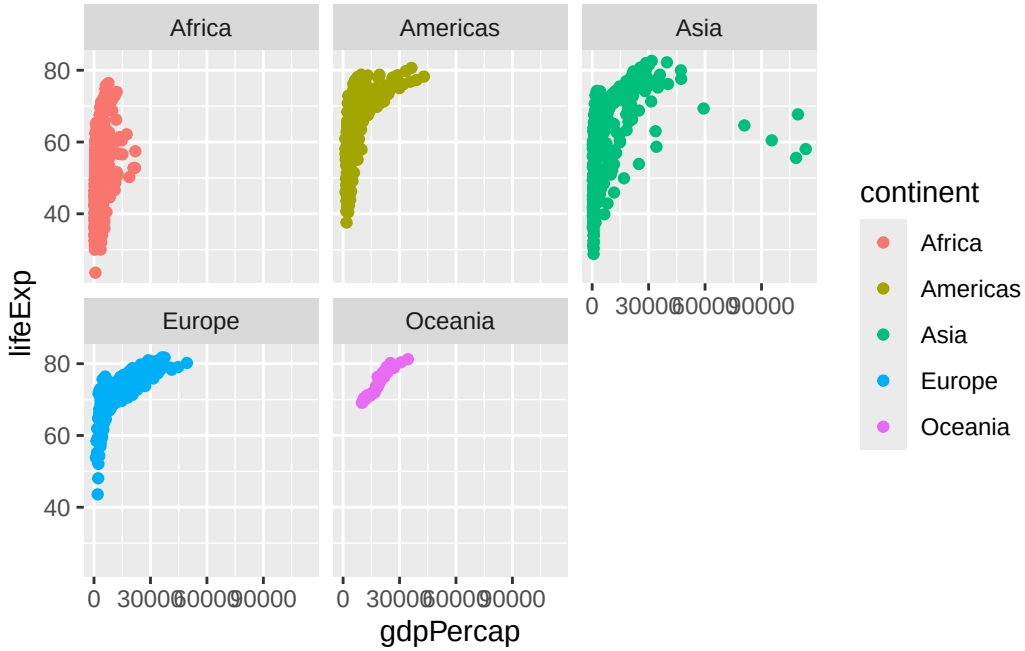

Limit to 1977 and 2007

We can install and use the **dplyr** package to help us "filter" the full dataset down to a smaller subset that only includes the years we want.

First we need to run `install.packages("dplyr")` and then load it with `library(dplyr)`.

```
library(dplyr)
```

```
Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

    filter, lag
```

```
The following objects are masked from 'package:base':

    intersect, setdiff, setequal, union
```

```
filter(gapminder, year==2007, country =="Ireland")
```

```
  country continent year lifeExp     pop gdpPercap
1 Ireland    Europe 2007  78.885 4109086     40676
```

```
filter(gapminder, year==1977, country =="Ireland")
```

```
  country continent year lifeExp     pop gdpPercap
1 Ireland    Europe 1977   72.03 3271900  11150.98
```

```
filter(gapminder, year==2007, country =="United States")
```


```
        country continent year lifeExp       pop gdpPercap
1 United States  Americas 2007  78.242 301139947  42951.65
```

```
#gapminder$year
```

Q. make a histogram of lifeExp fill color by continent

```
ggplot(gapminder)+
  aes(lifeExp, fill = continent)+
  geom_histogram()
```

```
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

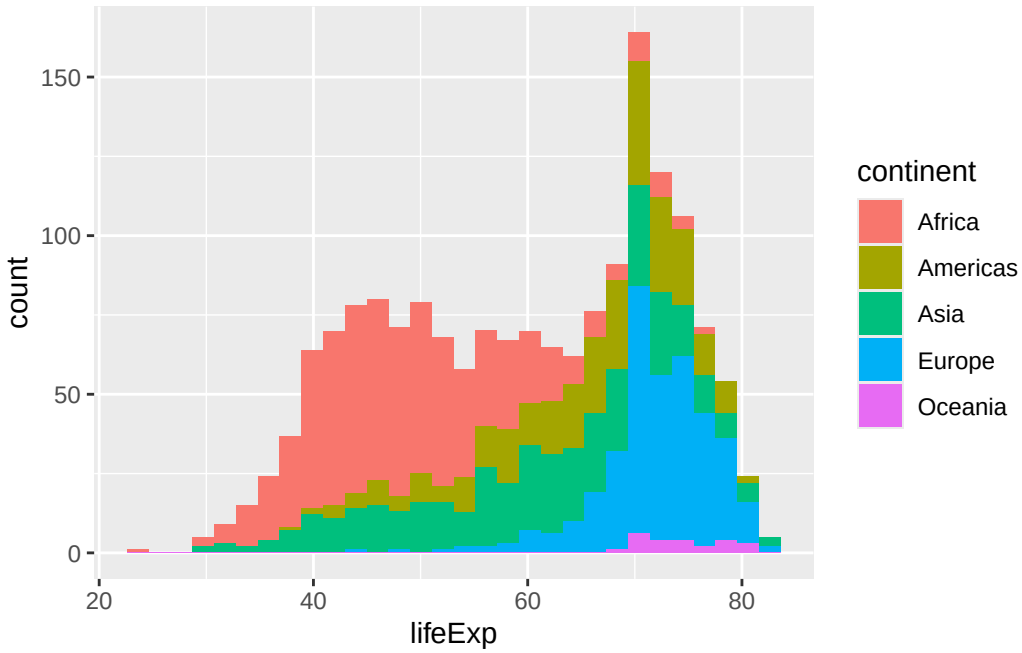


```
ggplot(gapminder)+
  aes(lifeExp, fill = continent)+
  geom_boxplot()
```

