


BQF-023

BOOSTER MAGNET REPORT

Results	
Date	31/03/2016
Hour	16:45:40
Temperature [°C]	21.2
Number of Measurements	17
Main Coil Current [A]	(129.9952 ± 0.0003)
Trim Coil Current [A]	(0 ± 0)
Integrated Gradient [T]	(-4.83175 ± 0.00001
Magnet Center Offset X [μm] - (< ±160.0)	(23.33 ± 0.06)
Magnet Center Offset Y [μm] - (< ±160.0)	(-24.25 ± 0.06)
Roll [mrad] - (< ±0.8)	(-3.99 ± 0.02) x E-1
Electric Parameters	ı
Indutance [mH]	8.252
Voltage [V]	0.476
Resistance [m Ω]	47.60
Main Coil Number of Turns	26.25

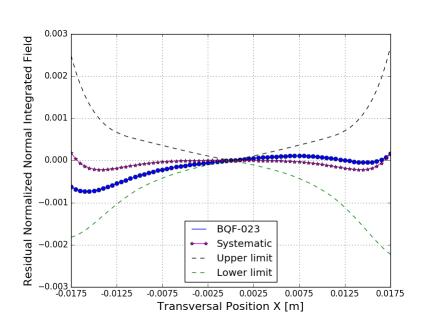

n	Normalized Normal Multipoles x=17.5 mm	Normalized Skew Multipoles x=17.5 mm		
			[T.m ⁽²⁻ⁿ⁾]	[T.m ⁽²⁻ⁿ⁾]
				[]
	1 (dipole)	(1.333 ± 0.003) x E-3	(-1.386 ± 0.003) x E-3	
2 (quadrupole)	(1.000000 ± 0.000002)	(-7.99 ± 0.01) x E-4		
3 (sextupole)	(3.77 ± 0.04) x E-4	(-8.55 ± 0.04) x E-4		
4	(-7.4 ± 0.1) x E-5	(5.6 ± 0.5) x E-5		
5	(1.0 ± 0.3) x E-5	(7.4 ± 0.3) x E-5		
6	(-1.174 ± 0.003) x E-3	(-1.4 ± 0.4) x E-5		
7	(1.7 ± 0.3) x E-5	(1.1 ± 0.4) x E-5		
8	(-1.2 ± 0.5) x E-5	(-5.8 ± 0.2) x E-5		
9	(-4 ± 4) x E-6	(1.5 ± 0.4) x E-5		
10	(1.114 ± 0.005) x E-3	(3.2 ± 0.5) x E-5		
11	(-1.2 ± 0.4) x E-5	(-2.9 ± 0.5) x E-5		
12	(-3 ± 7) x E-6	(-1.5 ± 0.4) x E-5		
13	(1.4 ± 0.4) x E-5	(2 ± 5) x E-6		
14	(-8.0 ± 0.6) x E-5	(1.6 ± 0.6) x E-5		
15	(-1.0 ± 0.3) x E-5	(1.6 ± 0.5) x E-5		
	I	1		

