


Planning-day inference and reward-map generation

TEMPpred selects the prototype class; STD and prototype-derived descriptors shape planner-ready rewards.

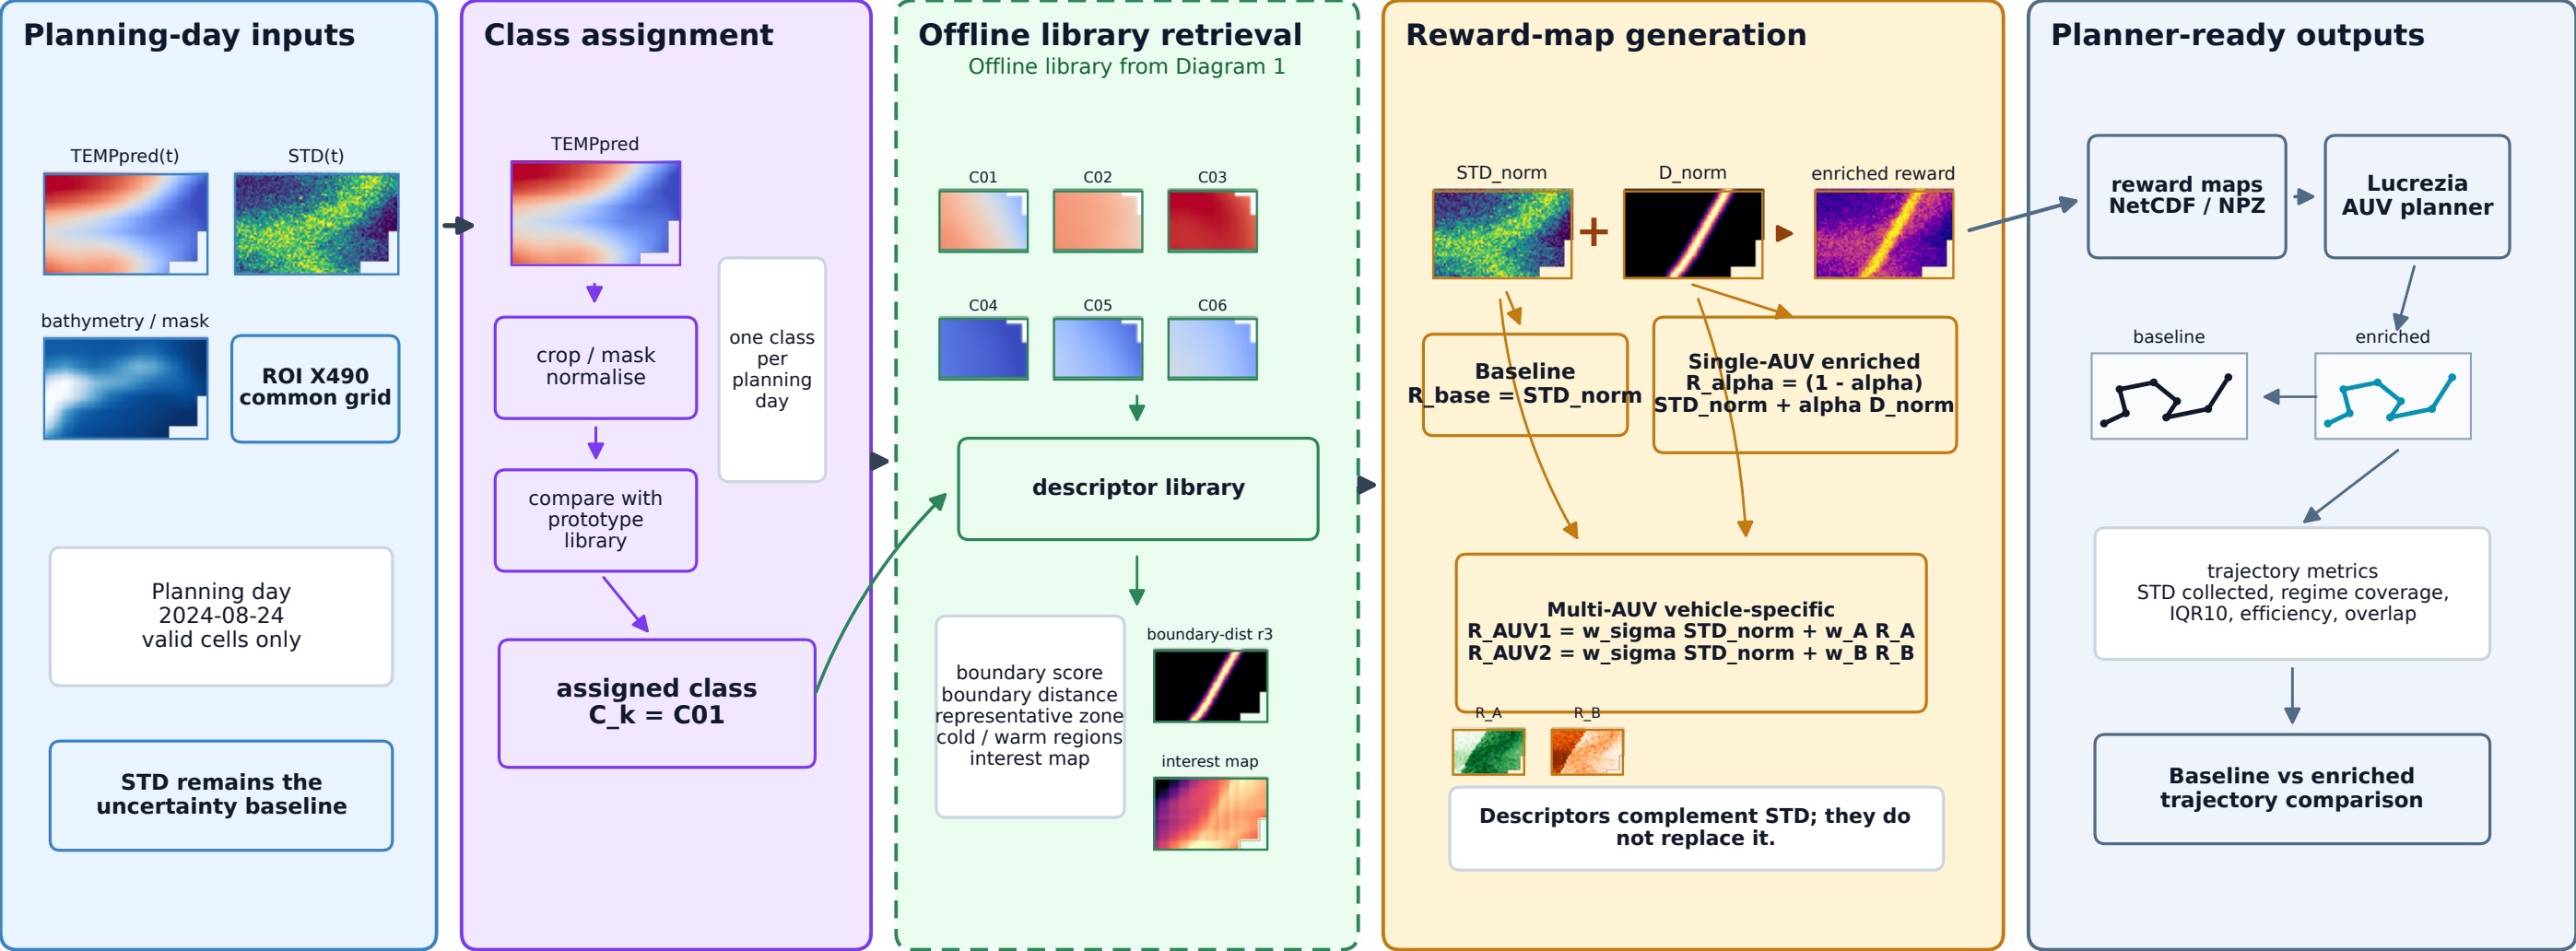

Correct logic: TEMPpred(t) -> assigned class C_k -> prototype-derived descriptors; STD(t) + descriptors -> reward map -> planner.