

My Reproducible Manuscript

Loesje Ubbink

This is a manuscript to show that I have learned to:

- Use markup language(s)
- Use figures
- Use tables
- Use equations
- Reference
- Make a document with clear presentation and consistency

Dog Intelligence

I will demonstrate my reproducible markup skills by using dog intelligence as an example, using data from Beautiful (2026).

I can use code that is not shown in the rendered document, by including `echo = FALSE`, like this:

See the `qmd` file for the code that is hidden in the rendered document

Or I can choose to use code that is shown in the rendered document, like this:

```
# Load data
# make sure only relative paths are used to ensure reproducibility!
DogInt <- read_csv("data/dog_intelligence.csv")
BreedInf <- read_csv("data/AKC Breed Info.csv")
DogCateg <- read_excel("data/DOG_categories.xlsx")

# Join the datasets based on breed
DogData <- left_join(DogInt, BreedInf, by = "Breed")
DogData <- left_join(DogData, DogCateg, by = "Breed")
```

```
# Remove double index variable
DogData <- DogData %>% dplyr::select(-index.y)
```

Table

As a measure of dog intelligence, I will look at the amount of repetitions they need before obeying. The more repetitions are needed, the less intelligent a dog is. Because the dataset contains an enormous amount of dog breeds, with 136 different breeds, I decided to only look at dog categories, which contains 8 different categories.

Some descriptive statistics about the repetitions needed per category, can be found in the table below:

Table 1: Repetitions of Command Needed Before Obeying Per Dog Category


Category	Mean Lower Reps	Mean Upper Reps	Mean Reps
herding	10.66667	20.73333	15.70000
hound	41.50000	56.50000	49.00000
non-sporting	31.20000	49.26667	40.23333
sporting	12.56522	22.52174	17.54348
terrier	26.18182	46.13636	36.15909
toy	34.26667	56.93333	45.60000
working	24.22222	39.88889	32.05556
NA	25.87500	45.00000	35.43750

Reps = repetitions; lower = least nr. of reps before obeying; upper = highest nr. of reps before obeying


Figure

To show I can make a figure, I will plot dog intelligence as a function of dog category.

```
# The lowest number of repetitions before a dog understands the command
ggplot(DogData, aes(x = Category, y = reps_lower, fill = Category)) +
  geom_boxplot() +
  theme_minimal() +
  theme(
    legend.position = "none",
    axis.text.x = element_text(angle = 30, hjust = 1)
  ) +
  labs(x = "Dog Category", y = "Least Number of Repetitions Before Obeying")
```

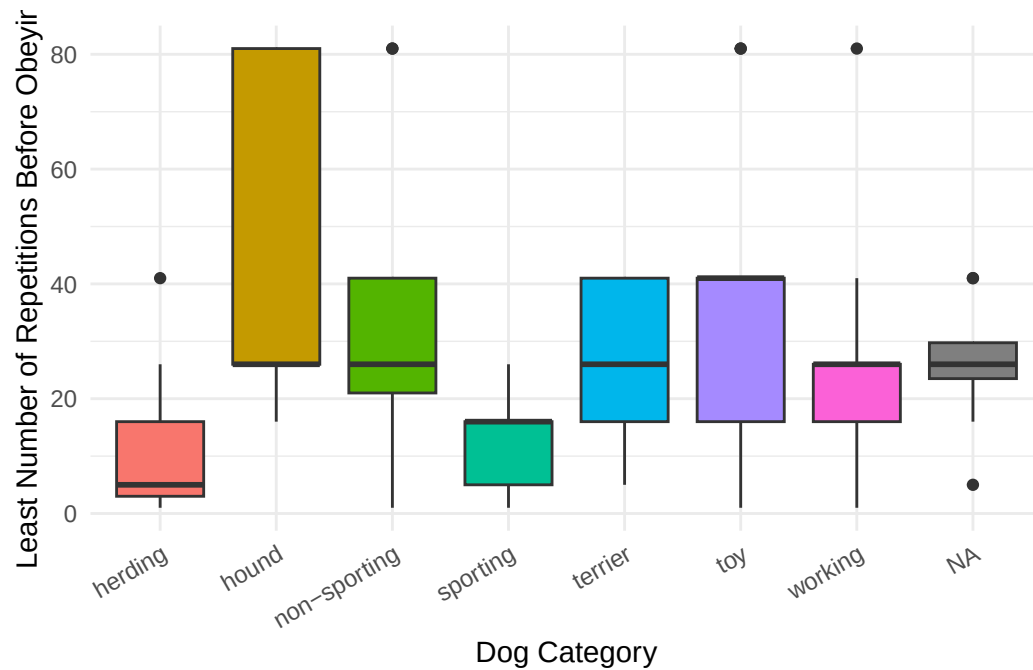

```
# The highest number of repetitions before a dog understands the command
ggplot(DogData, aes(x = Category, y = reps_upper, fill = Category)) +
  geom_boxplot() +
  theme_minimal() +
  theme(
    legend.position = "none",
    axis.text.x = element_text(angle = 30, hjust = 1)
  ) +
  labs(x = "Dog Category", y = "Least Number of Repetitions Before Obeying")
```

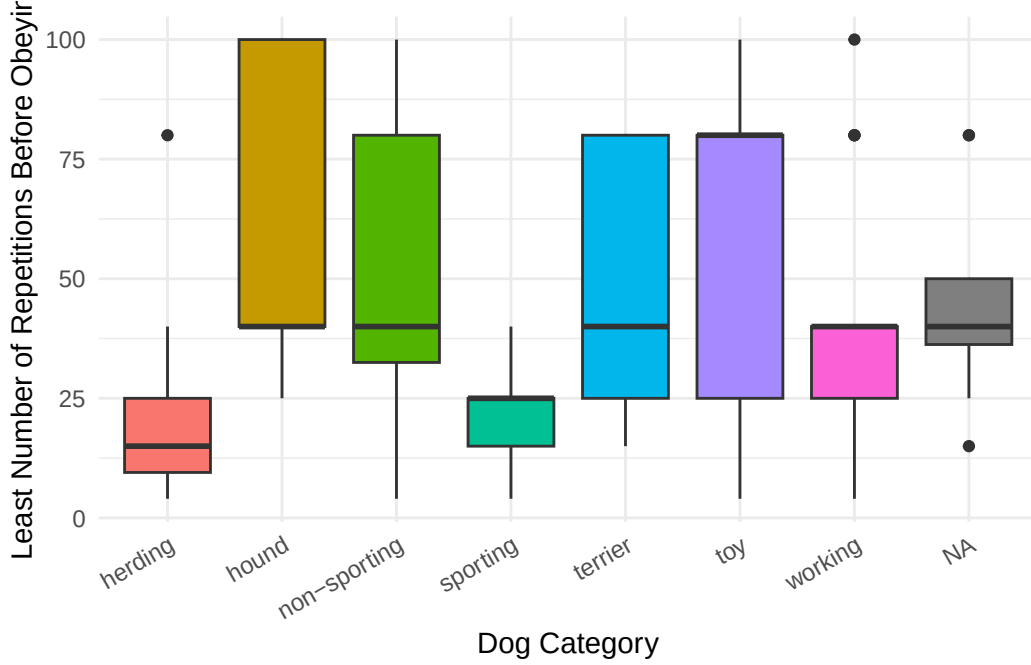

It is clear that herding and sporting dogs need the lowest number of repetitions, while on average hounds need the most repetition.

Equations

Hypothetically, we could say that dog intelligence per category ($I_{category}$) can be calculated as a function of the mean number of repetitions needed before obeying, as shown in Equation 1.

$$I_{category} = \frac{1}{1 + Rep_{category}} \quad (1)$$

In Equation 1, $Rep_{category}$ is the mean number of repetitions needed per category.

If we want a more complex (hypothetical!) model for dog intelligence per category ($I_{category}$), we could even include learning speed ($Speed_{category}$) and some constants (α), as shown in Equation 2.

$$I_{category} = \alpha \cdot \frac{1}{1 + Rep_{category}} + (1 - \alpha) \cdot Speed_{category} \quad (2)$$

Sourcing scripts

These equations can be implemented in a separate R script, and ran in this manuscript, by sourcing the R script `intelligence_eq1.R`, giving:

```
intelligence <- function(R) {  
  
  # Check that arguments provided are numeric  
  if (class(R) != "numeric") {  
    print("Error: your input should be numeric")  
  } else {  
    # Perform simple mean calculation and return the result  
    result <- 1 / (1 + R)  
    return(result)  
  }  
}
```

With this code, we can calculate the intelligence per category (using Eq.1) using the `DogSummary` dataset, `intelligence(DogSummary$mean_total_rep)`, giving: 0.0598802, 0.02, 0.0242522, 0.0539273, 0.0269113, 0.0214592, 0.0302521, 0.0274443.

This shows that herding dogs are indeed most intelligent, based on the number of repetitions they need before obeying a command.

Images of the smartest dogs

Not only the smartest, they might also be the cutest (“Dog - Herding, Breeds, Training | Britannica” 2026):



Figure 1: Herding dog puppies

For a very nice overview of more data on different dog breeds, see [this website](https://informationisbeautiful.net/visualizations/best-in-show-whats-the-top-data-dog/) (Beautiful 2026).

References

- Beautiful, Information is. 2026. “Best in Show – What’s the Best Dog Breed, According to Data?” *Information Is Beautiful*. <https://informationisbeautiful.net/visualizations/best-in-show-whats-the-top-data-dog/>.
- “Dog - Herding, Breeds, Training | Britannica.” 2026. <https://www.britannica.com/animal/dog/Herding-dogs>.