

# My Reproducible Manuscript

Loesje Ubbink

This is a manuscript to show that I have learned to:

- Use markup language(s)
- Use figures
- Use tables
- Use equations
- Reference
- Make a document with clear presentation and consistency

## Dog Intelligence

I will demonstrate my reproducible markup skills by using dog intelligence as an example, using data from Beautiful (2026).

I can use code that is not shown in the rendered document, by including `echo = FALSE`, like this:

See the `qmd` file for the code that is hidden in the rendered document

Or I can choose to use code that is shown in the rendered document, like this:

```
# Load data
# make sure only relative paths are used to ensure reproducibility!
DogInt <- read_csv("../data/dog_intelligence.csv")
BreedInf <- read_csv("../data/AKC Breed Info.csv")
DogCateg <- read_excel("../data/DOG_categories.xlsx")

# Join the datasets based on breed
DogData <- left_join(DogInt, BreedInf, by = "Breed")
DogData <- left_join(DogData, DogCateg, by = "Breed")
```

```
# Remove double index variable
DogData <- DogData %>% dplyr::select(-index.y)
```

## Table

As a measure of dog intelligence, I will look at the amount of repetitions they need before obeying. The more repetitions are needed, the less intelligent a dog is. Because the dataset contains an enormous amount of dog breeds, with 136 different breeds, I decided to only look at dog categories, which contains 8 different categories.

Some descriptive statistics about the repetitions needed before obeying a command, per category, can be found in the table below:

Table 1: Repetitions of Command Needed Before Obeying Per Dog Category

| Category     | Mean Lower Reps | Mean Upper Reps | Mean Reps |
|--------------|-----------------|-----------------|-----------|
| herding      | 10.66667        | 20.73333        | 15.70000  |
| hound        | 41.50000        | 56.50000        | 49.00000  |
| non-sporting | 31.20000        | 49.26667        | 40.23333  |
| sporting     | 12.56522        | 22.52174        | 17.54348  |
| terrier      | 26.18182        | 46.13636        | 36.15909  |
| toy          | 34.26667        | 56.93333        | 45.60000  |
| working      | 24.22222        | 39.88889        | 32.05556  |
| NA           | 25.87500        | 45.00000        | 35.43750  |

Reps = repetitions; lower = least nr. of reps before obeying; upper = highest nr. of reps before obeying

## Figure

To show I can make a figure, I will plot dog intelligence as a function of dog category.


```
# The lowest number of repetitions before a dog understands the command
ggplot(data = DogData,
       aes(x = Category,
           y = reps_lower,
           fill = Category)) +
  geom_boxplot() +
  theme_minimal() +
  theme(
    # remove legend
```


```

legend.position = "none",

# create label that is presented in a slight angle to increase readability
axis.text.x = element_text(angle = 30, hjust = 1)
) +
labs(x = "Dog Category",
     y = "Least Number of Repetitions Before Obeying")

```

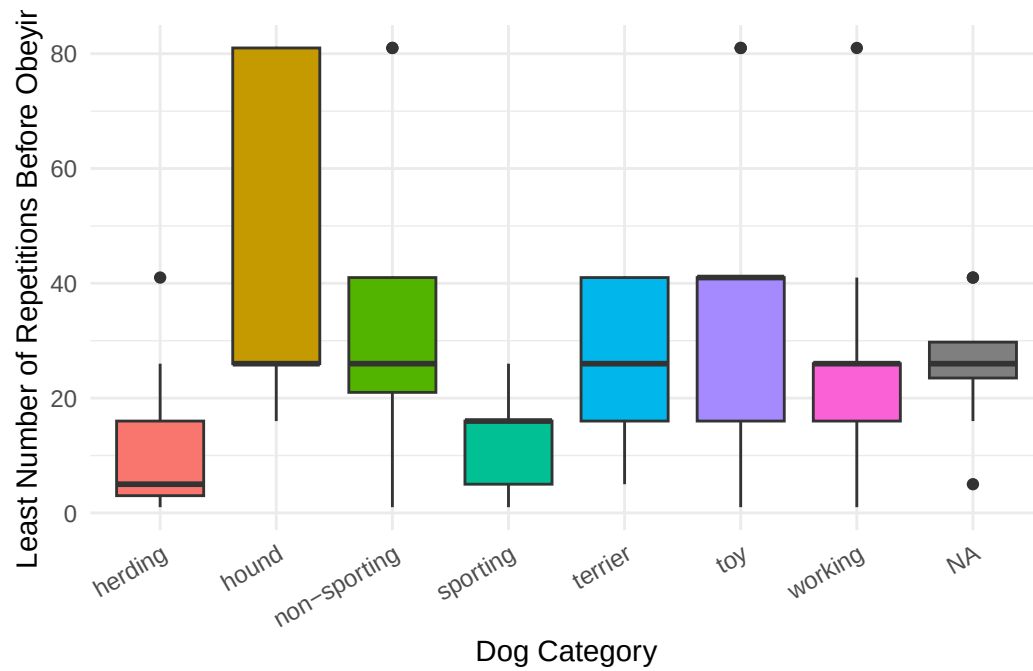

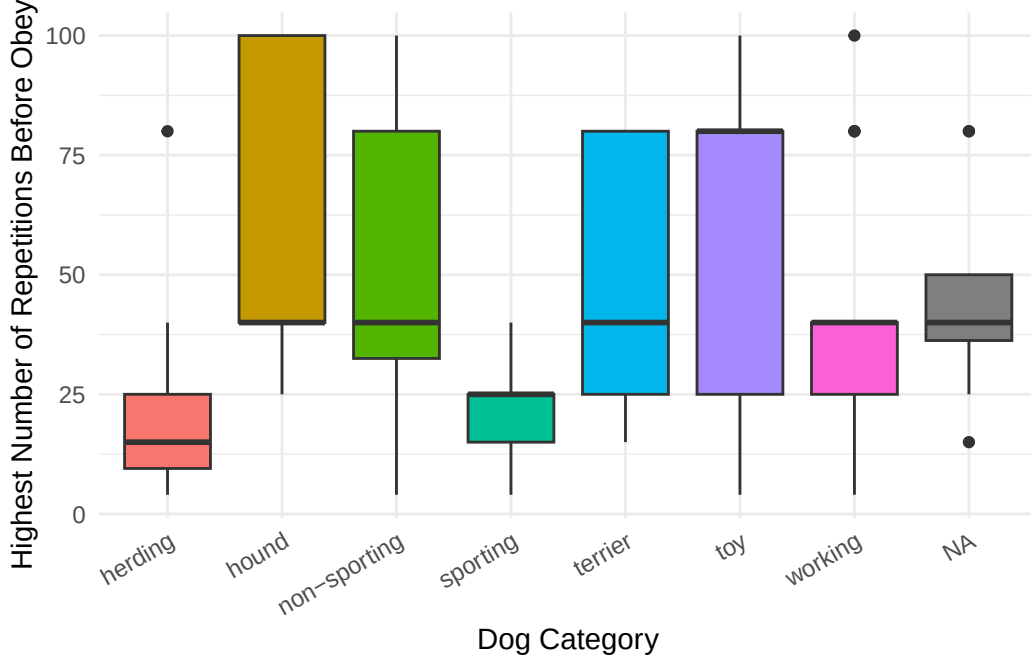

It is clear that herding and sporting dogs need the lowest number of repetitions, while on average hounds need the most repetition.

## Equations

Hypothetically, we could say that dog intelligence per category ( $I_{category}$ ) can be calculated as a function of the mean number of repetitions needed before obeying, as shown in Equation 1.

$$I_{category} = \frac{1}{1 + Rep_{category}} \quad (1)$$

In Equation 1,  $Rep_{category}$  is the mean number of repetitions needed per category.

If we want a more complex (hypothetical!) model for dog intelligence per category ( $I_{category}$ ), we could even include learning speed ( $Speed_{category}$ ) and some constants ( $\alpha$ ), as shown in Equation 2.

$$I_{category} = \alpha \cdot \frac{1}{1 + Rep_{category}} + (1 - \alpha) \cdot Speed_{category} \quad (2)$$

## Sourcing scripts

These equations can be implemented in a separate R script, and ran in this manuscript, by sourcing the R script `intelligence_eq1.R`, giving:

```
# Use relative path to source the script  
source("../scripts/intelligence_eq1.R")
```

With this code, we can calculate the intelligence per category (using Eq.1) using the `DogSummary` dataset, `intelligence(DogSummary$mean_total_rep)`, giving: 0.0598802, 0.02, 0.0242522, 0.0539273, 0.0269113, 0.0214592, 0.0302521, 0.0274443.

This shows that herding dogs are indeed most intelligent, based on the number of repetitions they need before obeying a command.

## Images of the smartest dogs

Not only the smartest, they might also be the cutest (“Dog - Herding, Breeds, Training | Britannica” 2026):



Figure 1: Herding dog puppies

For a very nice overview of more data on different dog breeds, see [this website](#) (Beautiful 2026).

## References

- Beautiful, Information is. 2026. “Best in Show – What’s the Best Dog Breed, According to Data?” *Information Is Beautiful*. <https://informationisbeautiful.net/visualizations/best-in-show-whats-the-top-data-dog/>.
- “Dog - Herding, Breeds, Training | Britannica.” 2026. <https://www.britannica.com/animal/dog/Herding-dogs>.