

← unsigned }
← signed }

Short ✓
long ✓

Data types :-

① (signed) int

② (signed) short int

③ (signed) long int

④ unsigned int

⑤ unsigned short int

⑥ unsigned long int



A diagram of a cylinder with a diameter of 100 and a length of x .

$$x = 7 - 2\alpha; \Rightarrow x = 7;$$

[illegible]

```
unsigned int no;
```

$m_0 = 72; \checkmark$ || $m_0 = -5; \times$

```
int num; // signed int num;
```

$n_{\text{um}} = -73213$ ✓

num = 5923; ✓

* Primary Datatypes :-

1) int

2) void

3) char

4) floating point

(signed) char


→ unsigned char

↳ float

→ double

↳ long double

→ char ✓



```
char myChar;
```

```
myChar = 'A'; // myChar = 65;
```

```
// myChar = 'd';
```


```
// myChar = 97;
```

ASCII value

A → 65

a → 97

(zero) 0 → 48

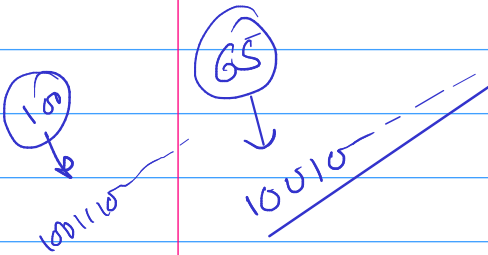

format specifier → (%c)

B = 66, C = 67, D = 68 ----

b = 98, c = 99, d = 100 ----

```
scanf("%c", &myChar);
```

```
printf("%c", myChar); // A
```

```
printf("%c %d", myChar, myChar); // A 65
```