
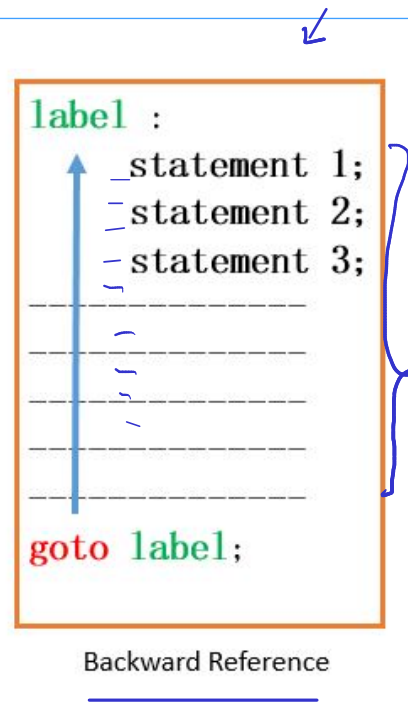


⊛ goto, exit, return


⇒ goto

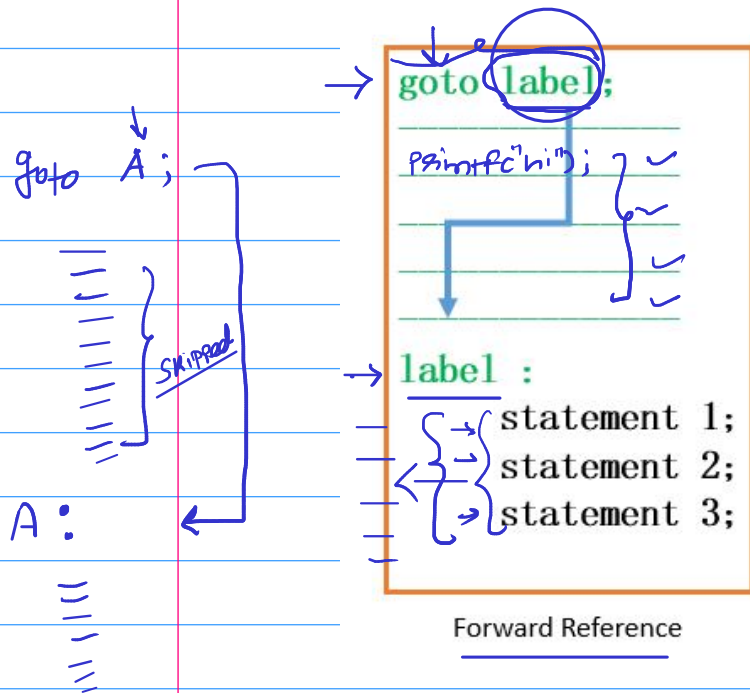


```

i = 7;
for (i = 1; i < 5; i++)
{
    M:
    for (j = 2; j < 3; j++)
    {
        //
        //
        //
    }
}

goto M;
    
```

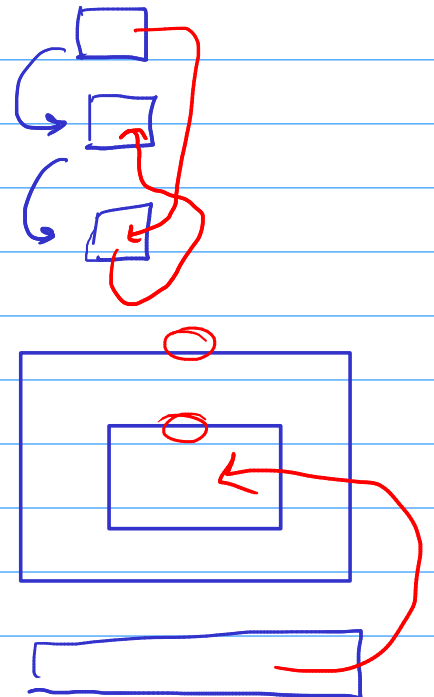

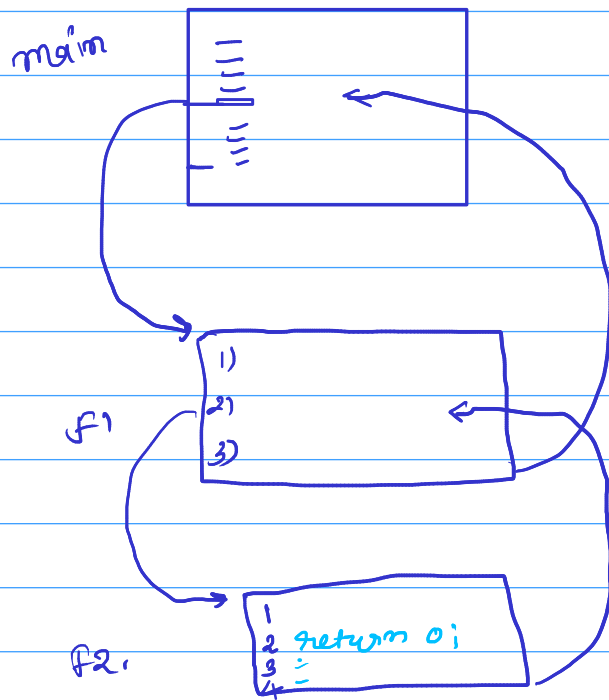

Exitco)

skipped {
 f2.3
 f2.4
 f1.3
 remaining code of main

return 0

✓ f1.3

✓ remain code of main

⇒ skipped (f2.3, f2.4)

```
char myChar;
```

```
myChar = getchar(); // read char
```

```
putchar (myChar); // print char
```

```
#include <ctype.h>
```

```
→ isalpha (myChar)
```

```
→ isdigit (myChar)
```

```
toupper (myChar)
```

```
→ isUpper (myChar)
```

```
tolower (myChar)
```

```
→ is lower (myChar)
```

```
→ 'isalnum (myChar)
```

→ true : 1
→ false : 0

char y;
y = toupper ('a');
printf (" %c", y); // A

0 → 48
1 → 49
⋮
9 → 57

a → 97
A → 65
0 → 48

```
main()  
{
```

```
char a = 'A';
```

```
isupper (a);
```

```
isupper ('a');
```

```
return 0;
```

```
}
```

```
→ printf (" %d", isupper (a)); // 1
```

```
→ printf (" %d", isupper ('a')); // 0
```