


Pointers

* → Value of
& → Address of

int x = 7;

✓ int *P;

✓ float *P2;
✓ char *P3;

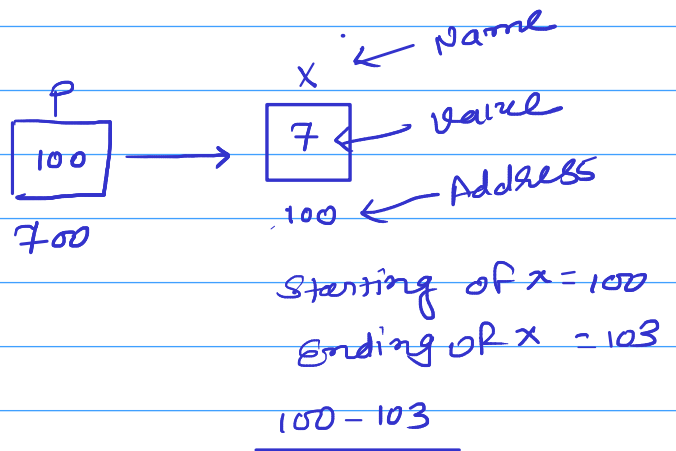

① + ②
int *P = &x; ✓

② Assignment
P = 100; ✗
→ P = &x; ✓

0X1A2237

printf("%p", P); // 100
printf("%p", &x); // 100 ✓

③ Accessing the data

P	// 100 → Add. of x	printf("%p", P);	// 100
*P	// 7 → value of x	printf("%d", *P);	// 7
&P	// 700 → Add. of P	printf("%p", &P);	// 700

1) int x=5, y=7, *P, *q;

2) p = &x; ✓

3) y = *P; ✓ // y=x;

4) *P = 70; ✓

5) *P = 70; ✓

6) P = &y; ✓

7) q = &x; ✓

8)

9) *q = *P; ✓

10) q = P; ✓


11) *q = 90; ✓

12)

13) printf ("x d x d x d", x, y, *P, *q); // 5 90 90 90

14) printf ("x P x P x P", &x, &y, &P, &q); // 100 5000 350 473

15) printf ("x P x P", &y, P, q); // 5000 5000 5000

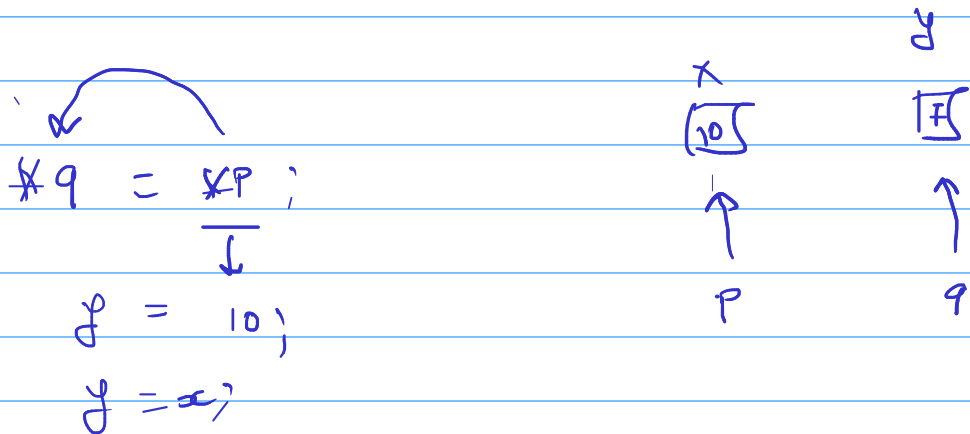

*q = *P;
↓
q = 10;
y = x;

&*P; ⇒ P; ⇒ &y;

*&P;
↓
*(350)
↓
5000