Experiment 09 Input Form Validation using HTML, CSS, JavaScript, and Validator.js

Aim

To design and develop a web-based input form that validates user data such as **email** and **phone number**, and displays appropriate error messages using **HTML, CSS, JavaScript, and Validator.js**.

Procedure Step 1: Create HTML Structure

- Design a form with input fields for **email** and **phone number**
- Add labels, placeholders, and a submit button
- Include elements below each input field to display error messages **Step 2: Apply CSS Styling**
- Style the form with a clean and centered layout
- Add padding, borders, and rounded corners **Step 3: Add Validator.js Library**
- Include Validator.js using a CDN link
- This library helps in validating input fields easily **Step 4: Implement JavaScript Validation**
- Use validator.isEmail() to validate email
- Use validator.isMobilePhone() for phone validation (with "en-IN")
- Display error messages for invalid inputs
- Highlight valid and invalid fields
- Prevent form submission if validation fails

Step 5: Add User Interaction

- Validate inputs on **blur** and **input events**
- Show real-time feedback to the user
- Display a success message when all inputs are valid

index.html > html > body > div.container

D:\projects\UI\EXP 6\index.html

```html
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Modern Form Validation</title>
  <link rel="stylesheet" href="style.css">

  <!-- Google Font -->
  <link href="https://fonts.googleapis.com/css2?family=Poppins&display=swap" rel="stylesheet">
</head>
<body>

<div class="container">
  <form id="myForm">
    <h2>Register</h2>

    <input type="text" id="email" placeholder="Enter Email">
    <span id="emailError" class="error"></span>

    <input type="text" id="phone" placeholder="Enter Phone Number">
    <span id="phoneError" class="error"></span>

    <button type="submit">Submit</button>
    <p id="successMsg"></p>
  </form>
</div>

<!-- Validator.js -->
<script src="https://cdnjs.cloudflare.com/ajax/libs/validator/13.6.0/validator.min.js"></script>
<script src="script.js"></script>
```

style.css > #successMsg

D:\projects\UI\EXP 6\style.css

```
bo
  font-family: 'Poppins', sans-serif;
  background: linear-gradient(135deg, #667eea, #764ba2);
  height: 100vh;
  display: flex;
  justify-content: center;
  align-items: center;
  margin: 0;
}

.container {
  backdrop-filter: blur(10px);
}

form {
  background: rgba(255, 255, 255, 0.1);
  padding: 30px;
  border-radius: 15px;
  width: 300px;
  box-shadow: 0 10px 25px rgba(0,0,0,0.3);
  text-align: center;
  color: white;
}

input {
  width: 100%;
  padding: 10px;
  margin: 10px 0;
  border: none;
  border-radius: 8px;
```

```
JS script.js > ...
document.getElementById("myForm").addEventListener("submit", function(e) {
  e.preventDefault();

  let email = document.getElementById("email").value;
  let phone = document.getElementById("phone").value;

  let emailError = document.getElementById("emailError");
  let phoneError = document.getElementById("phoneError");
  let successMsg = document.getElementById("successMsg");

  // Clear previous messages
  emailError.textContent = "";
  phoneError.textContent = "";
  successMsg.textContent = "";

  let valid = true;

  // Validate email
  if (!validator.isEmail(email)) {
    emailError.textContent = "Invalid email address";
    valid = false;
  }

  // Validate phone
  if (!validator.isMobilePhone(phone, 'any')) {
    phoneError.textContent = "Invalid phone number";
    valid = false;
  }
```

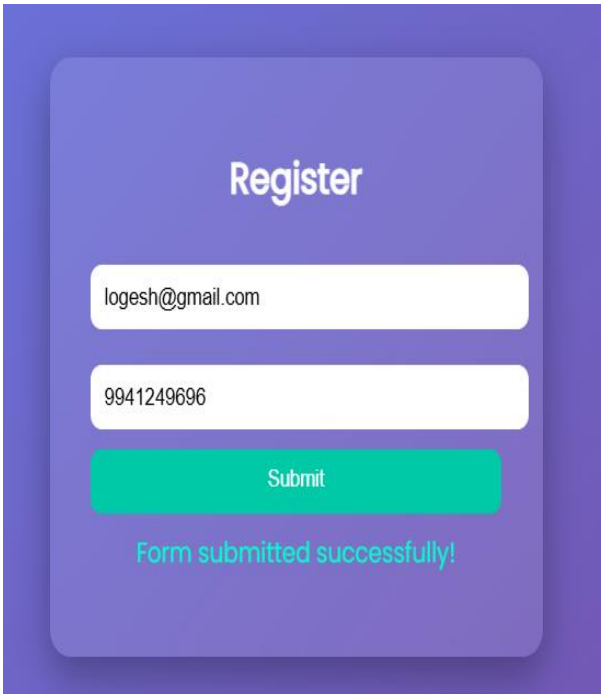

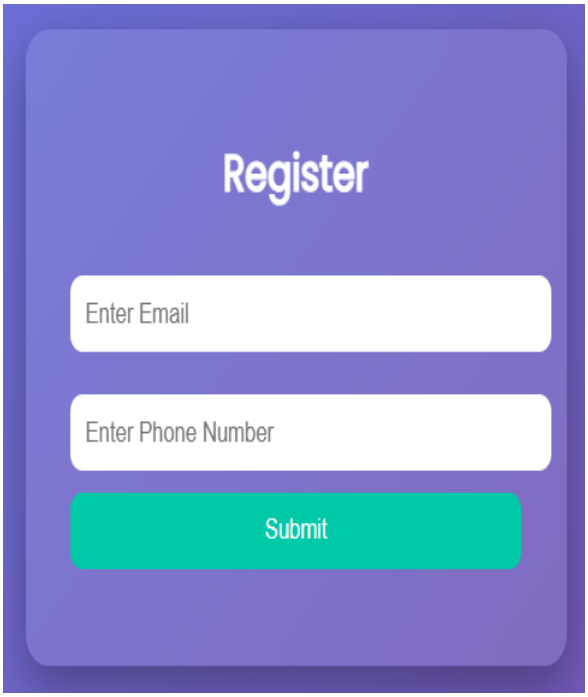

Result

The input form was successfully designed and implemented.

- Valid email and phone numbers are accepted and highlighted correctly
- Invalid inputs display appropriate error messages