Dr. Mahalingam College of Engineering and Technology, Pollachi-642003

Department of Information Technology

Academic Year: 2024 - 2025

TRL and SDG Certificate

Project Title :COLLEGE MANAGEMENT SYSTEM

Course Code & Name : 23ITI402 Database Management Systems

Department and Semester: Information Technology & IV SEM

Technology Readiness Level (TRL) of the Project : _____

Sustainability Development Goals (SDG)-Goal Name : _____

S.No.	Names and Roll Numbers of Student	Signature of the Student
1	LOGESWARAN D 727625BIT310	

Preparation (25 marks)	
Interpretation (30 marks)	
Output & Result (15 marks)	
Viva (5 marks)	
Total (75 marks)	
Signature of the faculty incharge	

OBJECTIVE OF THE PROJECT

The main objective of the **System College Management** is to develop an efficient, reliable, and user-friendly application that helps in managing the day-to-day activities of a college in a systematic manner. The system aims to reduce manual work, minimize errors, and improve the overall productivity of school administration.

It is designed to store and manage important information such as student details, staff records, attendance, examination results, and fee management in a centralized database. The system provides easy access to data, ensuring quick retrieval and accurate record maintenance.

Another objective of this system is to enhance communication between students, teachers, and administrators by providing a smooth flow of information. It also helps in generating reports such as fee receipts, student performance reports, and attendance summaries.

Overall, the College Management System aims to bring automation, transparency, and efficiency to college operations while saving time and effort.

MYSQL DATABASE CODE

```
CREATE DATABASE college;
USE college;
CREATE TABLE student (
    student_id VARCHAR(10) PRIMARY KEY,
    student_name VARCHAR(50),
    class VARCHAR(20)
);

CREATE TABLE teacher (
    teacher_id VARCHAR(10) PRIMARY KEY,
    teacher_name VARCHAR(50),
    subject VARCHAR(50)
);
CREATE TABLE marks (
    student_id VARCHAR(10),
    subject VARCHAR(50),
    marks INT,
    PRIMARY KEY (student_id, subject),
    FOREIGN KEY (student_id) REFERENCES student(student_id)
);

INSERT INTO student VALUES
('S101', 'krithi', 'csA'),
('S102', 'saku', 'csB'),
```

```
('S103', 'sureka', 'itA'),
('S104', 'kavi', 'itB');

INSERT INTO teacher VALUES
('T101', 'kamali', ‘iot'),
('T102', 'lali', 'cn'),
('T103', 'Sureka’, 'softskill');

INSERT INTO marks VALUES
('S101', 'iot’, 85),
('S101', 'cn', 78),
('S102', 'iot', 90),
('S103', 'softskill', 88),
('S104', 'iot', 76);
```

JAVA CODE

```
package Collegemanagement;
import java.sql.*;
import java.util.Scanner;

public class Collegemanagement {
```

```
    static final String DB_URL =
"jdbc:mysql://localhost:3306/school?useSSL=false&serverTimezone=UTC";
    static final String USER = "root";
    static final String PASS = "dbms";

    public static void main(String[] args) {
        Scanner sc = new Scanner(System.in);

        try (Connection conn = DriverManager.getConnection(DB_URL, USER, PASS))
{

            while (true) {
     System.out.println("\n===== COLLEGE MANAGEMENT SYSTEM =====");
                System.out.println("1. View Students");
                System.out.println("2. View Teachers");
                System.out.println("3. View Marks");
                System.out.println("4. Add Student");
                System.out.println("5. Update Student Marks");
                System.out.println("6. Delete Student");
                System.out.println("7. Exit");
                System.out.print("Enter choice: ");

                int choice = sc.nextInt();

                switch (choice) {
```

```
case 1:
    viewStudents(conn);
    break;

case 2:
    viewTeachers(conn);
    break;

case 3:
    viewMarks(conn);
    break;

case 4:
    addStudent(conn, sc);
    break;

case 5:
    updateMarks(conn, sc);
    break;

case 6:
    deleteStudent(conn, sc);
    break;

case 7:
```

```
                System.out.println("Exiting...");
                return;

            default:
                System.out.println("Invalid choice!");
        }
    }

    } catch (Exception e) {
        e.printStackTrace();
    }
}

// VIEW STUDENTS
static void viewStudents(Connection conn) throws SQLException {
    String sql = "SELECT * FROM student";
    Statement stmt = conn.createStatement();
    ResultSet rs = stmt.executeQuery(sql);



    System.out.println("\n--- Student List ---");
    while (rs.next()) {
        System.out.println(rs.getString("student_id") + " | "
                + rs.getString("student_name") + " | "
                + rs.getString("class"));
    }
```

```
}

// VIEW TEACHERS
static void viewTeachers(Connection conn) throws SQLException {
    String sql = "SELECT * FROM teacher";
    Statement stmt = conn.createStatement();
    ResultSet rs = stmt.executeQuery(sql);

    System.out.println("\n--- Teacher List ---");
    while (rs.next()) {
        System.out.println(rs.getString("teacher_id") + " | "
                + rs.getString("teacher_name") + " | "
                + rs.getString("subject"));
    }
}

// VIEW MARKS
static void viewMarks(Connection conn) throws SQLException {
    String sql = "SELECT * FROM marks";
    Statement stmt = conn.createStatement();
    ResultSet rs = stmt.executeQuery(sql);

    System.out.println("\n--- Marks List ---");
    while (rs.next()) {
        System.out.println(rs.getString("student_id") + " | "
                + rs.getString("subject") + " | "
```

```
            + rs.getInt("marks"));
    }
}

// ADD STUDENT
static void addStudent(Connection conn, Scanner sc) throws SQLException {
    System.out.print("Enter Student ID: ");
    String id = sc.next();

    System.out.print("Enter Name: ");
    String name = sc.next();

    System.out.print("Enter Class: ");
    String className = sc.next();

    String sql = "INSERT INTO student VALUES (?, ?, ?)";
    PreparedStatement ps = conn.prepareStatement(sql);
    ps.setString(1, id);
    ps.setString(2, name);
    ps.setString(3, className);

    ps.executeUpdate();
    System.out.println("Student added successfully!");
}

// UPDATE MARKS
```

```
    static void updateMarks(Connection conn, Scanner sc) throws SQLException {
        System.out.print("Enter Student ID: ");
        String id = sc.next();

        System.out.print("Enter Subject: ");
        String subject = sc.next();

        System.out.print("Enter New Marks: ");
        int marks = sc.nextInt();

        String sql = "UPDATE marks SET marks=? WHERE student_id=? AND
subject=?";
        PreparedStatement ps = conn.prepareStatement(sql);
        ps.setInt(1, marks);
        ps.setString(2, id);
        ps.setString(3, subject);

        int rows = ps.executeUpdate();
        System.out.println(rows + " row(s) updated.");
    }

    // DELETE STUDENT
    static void deleteStudent(Connection conn, Scanner sc) throws SQLException {
        System.out.print("Enter Student ID: ");
        String id = sc.next();
```

```
        String sql = "DELETE FROM student WHERE student_id=?";
        PreparedStatement ps = conn.prepareStatement(sql);
        ps.setString(1, id);

        int rows = ps.executeUpdate();
        System.out.println(rows + " row(s) deleted.");
    }

}
```

SWING GUI

```
import javax.swing.*;
import javax.swing.table.DefaultTableModel;
import java.awt.*;
import java.sql.*;

public class FullCRUDSchoolGUI {

    static final String DB_URL =
"jdbc:mysql://localhost:3306/school?useSSL=false&allowPublicKeyRetrieval=true&s
erverTimezone=UTC";
    static final String USER = "root";
    static final String PASS = "dbms";

    JFrame frame;
```

```
public FullCRUDSchoolGUI() {
    frame = new JFrame("College Management System");
    frame.setSize(1000, 550);

    JTabbedPane tabs = new JTabbedPane();
    tabs.add("Students", studentPanel());
    tabs.add("Teachers", teacherPanel());
    tabs.add("Marks", marksPanel());
    tabs.add("All Data", allDataPanel());

    frame.add(tabs);
    frame.setVisible(true);
    frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
}

// ================= STUDENTS =================
JPanel studentPanel() {
    JPanel panel = new JPanel(new BorderLayout());
    DefaultTableModel model = new DefaultTableModel(
            new String[]{"ID", "Name", "dep"}, 0);
    JTable table = new JTable(model);

    JPanel btn = new JPanel();
    JButton load = new JButton("Load");
    JButton add = new JButton("Add");
    JButton update = new JButton("Update");
```

```
JButton delete = new JButton("Delete");

btn.add(load); btn.add(add); btn.add(update); btn.add(delete);

// LOAD
load.addActionListener(e -> {
    model.setRowCount(0);
    try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS);
         Statement s = c.createStatement()) {

        ResultSet rs = s.executeQuery("SELECT * FROM student");
        while (rs.next()) {
            model.addRow(new Object[]{
                    rs.getString("student_id"),
                    rs.getString("student_name"),
                    rs.getString("dep")
            });
        }
    } catch (Exception ex) { ex.printStackTrace(); }
});

// ADD
add.addActionListener(e -> {
    JTextField id = new JTextField();
    JTextField name = new JTextField();
    JTextField cls = new JTextField();
```

```
        JPanel p = new JPanel(new GridLayout(3,2));
        p.add(new JLabel("ID")); p.add(id);
        p.add(new JLabel("Name")); p.add(name);
        p.add(new JLabel("dep")); p.add(cls);

        if (JOptionPane.showConfirmDialog(null, p, "Add Student",
                JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

            try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
                PreparedStatement ps = c.prepareStatement("INSERT INTO student
VALUES (?, ?, ?)");
                ps.setString(1, id.getText());
                ps.setString(2, name.getText());
                ps.setString(3, cls.getText());
                ps.executeUpdate();
                JOptionPane.showMessageDialog(null, "Added!");
            } catch (Exception ex) { ex.printStackTrace(); }
        }
    });

    // UPDATE
    update.addActionListener(e -> {
        int r = table.getSelectedRow();
        if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }
```

```
        String id = model.getValueAt(r, 0).toString();

        JTextField name = new JTextField(model.getValueAt(r,1).toString());
        JTextField cls = new JTextField(model.getValueAt(r,2).toString());

        JPanel p = new JPanel(new GridLayout(2,2));
        p.add(new JLabel("Name")); p.add(name);
        p.add(new JLabel("Class")); p.add(cls);

        if (JOptionPane.showConfirmDialog(null, p, "Update Student",
                JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

            try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
                PreparedStatement ps = c.prepareStatement(
                        "UPDATE student SET student_name=?, class=? WHERE
student_id=?");
                ps.setString(1, name.getText());
                ps.setString(2, cls.getText());
                ps.setString(3, id);
                ps.executeUpdate();
                JOptionPane.showMessageDialog(null, "Updated!");
            } catch (Exception ex) { ex.printStackTrace(); }
        }
    });
```

```
        // DELETE
        delete.addActionListener(e -> {
            int r = table.getSelectedRow();
            if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }

            String id = model.getValueAt(r, 0).toString();

            try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS))
{
                PreparedStatement ps = c.prepareStatement(
                        "DELETE FROM student WHERE student_id=?");
                ps.setString(1, id);
                ps.executeUpdate();
                JOptionPane.showMessageDialog(null, "Deleted!");
            } catch (Exception ex) { ex.printStackTrace(); }
        });

        panel.add(new JScrollPane(table));
        panel.add(btn, BorderLayout.SOUTH);
        return panel;
    }

    // ================= TEACHERS =================
    JPanel teacherPanel() {
        JPanel panel = new JPanel(new BorderLayout());
```

```
DefaultTableModel model = new DefaultTableModel(
        new String[]{"ID", "Name", "Subject"}, 0);
JTable table = new JTable(model);

JPanel btn = new JPanel();
JButton load = new JButton("Load");
JButton add = new JButton("Add");
JButton update = new JButton("Update");
JButton delete = new JButton("Delete");

btn.add(load); btn.add(add); btn.add(update); btn.add(delete);

load.addActionListener(e -> {
    model.setRowCount(0);
    try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS);
         Statement s = c.createStatement()) {

        ResultSet rs = s.executeQuery("SELECT * FROM teacher");
        while (rs.next()) {
            model.addRow(new Object[]{
                    rs.getString(1),
                    rs.getString(2),
                    rs.getString(3)
            });
        }
    } catch (Exception ex) { ex.printStackTrace(); }
```

```
        });

        add.addActionListener(e -> {
            JTextField id = new JTextField();
            JTextField name = new JTextField();
            JTextField sub = new JTextField();

            JPanel p = new JPanel(new GridLayout(3,2));
            p.add(new JLabel("ID")); p.add(id);
            p.add(new JLabel("Name")); p.add(name);
            p.add(new JLabel("Subject")); p.add(sub);

            if (JOptionPane.showConfirmDialog(null, p, "Add Teacher",
                    JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

                try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
                    PreparedStatement ps = c.prepareStatement("INSERT INTO teacher
VALUES (?, ?, ?)");
                    ps.setString(1, id.getText());
                    ps.setString(2, name.getText());
                    ps.setString(3, sub.getText());
                    ps.executeUpdate();
                    JOptionPane.showMessageDialog(null, "Added!");
                } catch (Exception ex) { ex.printStackTrace(); }
            }
```

```
        });

        update.addActionListener(e -> {
            int r = table.getSelectedRow();
            if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }

            String id = model.getValueAt(r,0).toString();

            JTextField name = new JTextField(model.getValueAt(r,1).toString());
            JTextField sub = new JTextField(model.getValueAt(r,2).toString());

            JPanel p = new JPanel(new GridLayout(2,2));
            p.add(new JLabel("Name")); p.add(name);
            p.add(new JLabel("Subject")); p.add(sub);

            if (JOptionPane.showConfirmDialog(null, p, "Update Teacher",
                    JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

                try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
                    PreparedStatement ps = c.prepareStatement(
                            "UPDATE teacher SET teacher_name=?, subject=? WHERE
teacher_id=?");
                    ps.setString(1, name.getText());
                    ps.setString(2, sub.getText());
                    ps.setString(3, id);
```

```
            ps.executeUpdate();
            JOptionPane.showMessageDialog(null, "Updated!");
        } catch (Exception ex) { ex.printStackTrace(); }
    }
});

delete.addActionListener(e -> {
    int r = table.getSelectedRow();
    if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }

    String id = model.getValueAt(r,0).toString();

    try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS))
{
        PreparedStatement ps = c.prepareStatement(
                "DELETE FROM teacher WHERE teacher_id=?");
        ps.setString(1, id);
        ps.executeUpdate();
        JOptionPane.showMessageDialog(null, "Deleted!");
    } catch (Exception ex) { ex.printStackTrace(); }
});

panel.add(new JScrollPane(table));
panel.add(btn, BorderLayout.SOUTH);
return panel;
}
```

```
// ================= MARKS =================
JPanel marksPanel() {
    JPanel panel = new JPanel(new BorderLayout());
    DefaultTableModel model = new DefaultTableModel(
            new String[]{"Student ID", "Subject", "Marks"}, 0);
    JTable table = new JTable(model);

    JPanel btn = new JPanel();
    JButton load = new JButton("Load");
    JButton add = new JButton("Add");
    JButton update = new JButton("Update");
    JButton delete = new JButton("Delete");

    btn.add(load); btn.add(add); btn.add(update); btn.add(delete);

    load.addActionListener(e -> {
        model.setRowCount(0);
        try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS);
             Statement s = c.createStatement()) {

            ResultSet rs = s.executeQuery("SELECT * FROM marks");
            while (rs.next()) {
                model.addRow(new Object[]{
                        rs.getString(1),
                        rs.getString(2),
```

```
                rs.getInt(3)
            });
        }
    } catch (Exception ex) { ex.printStackTrace(); }
});

add.addActionListener(e -> {
    JTextField id = new JTextField();
    JTextField sub = new JTextField();
    JTextField marks = new JTextField();

    JPanel p = new JPanel(new GridLayout(3,2));
    p.add(new JLabel("Student ID")); p.add(id);
    p.add(new JLabel("Subject")); p.add(sub);
    p.add(new JLabel("Marks")); p.add(marks);

    if (JOptionPane.showConfirmDialog(null, p, "Add Marks",
            JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

        try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
            PreparedStatement ps = c.prepareStatement("INSERT INTO marks
VALUES (?, ?, ?)");
            ps.setString(1, id.getText());
            ps.setString(2, sub.getText());
            ps.setInt(3, Integer.parseInt(marks.getText()));
```

```
            ps.executeUpdate();
            JOptionPane.showMessageDialog(null, "Added!");
        } catch (Exception ex) { ex.printStackTrace(); }
    }
});

update.addActionListener(e -> {
    int r = table.getSelectedRow();
    if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }

    String id = model.getValueAt(r,0).toString();

    JTextField sub = new JTextField(model.getValueAt(r,1).toString());
    JTextField marks = new JTextField(model.getValueAt(r,2).toString());

    JPanel p = new JPanel(new GridLayout(2,2));
    p.add(new JLabel("Subject")); p.add(sub);
    p.add(new JLabel("Marks")); p.add(marks);

    if (JOptionPane.showConfirmDialog(null, p, "Update Marks",
            JOptionPane.OK_CANCEL_OPTION) == JOptionPane.OK_OPTION) {

        try (Connection c = DriverManager.getConnection(DB_URL, USER,
PASS)) {
            PreparedStatement ps = c.prepareStatement(
                "UPDATE marks SET subject=?, marks=? WHERE student_id=?");
```

```
            ps.setString(1, sub.getText());
            ps.setInt(2, Integer.parseInt(marks.getText()));
            ps.setString(3, id);
            ps.executeUpdate();
            JOptionPane.showMessageDialog(null, "Updated!");
        } catch (Exception ex) { ex.printStackTrace(); }
    }
});

delete.addActionListener(e -> {
    int r = table.getSelectedRow();
    if (r == -1) { JOptionPane.showMessageDialog(null, "Select row"); return; }

    String id = model.getValueAt(r,0).toString();

    try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS))
{
        PreparedStatement ps = c.prepareStatement(
                "DELETE FROM marks WHERE student_id=?");
        ps.setString(1, id);
        ps.executeUpdate();
        JOptionPane.showMessageDialog(null, "Deleted!");
    } catch (Exception ex) { ex.printStackTrace(); }
});

panel.add(new JScrollPane(table));
```

```
        panel.add(btn, BorderLayout.SOUTH);
        return panel;
    }

    // ================= ALL DATA =================
    JPanel allDataPanel() {
        JPanel panel = new JPanel(new BorderLayout());
        DefaultTableModel model = new DefaultTableModel(
                new String[]{"Student ID","Name","Dep","Subject","Marks","Teacher"},0);
        JTable table = new JTable(model);
        JButton load = new JButton("Load All Data");

        load.addActionListener(e -> {
            model.setRowCount(0);
            try (Connection c = DriverManager.getConnection(DB_URL, USER, PASS);
                 Statement s = c.createStatement()) {

                ResultSet rs = s.executeQuery(
                        "SELECT
s.student_id,s.student_name,s.class,m.subject,m.marks,t.teacher_name " +
                        "FROM student s LEFT JOIN marks m ON s.student_id=m.student_id
" +
                        "LEFT JOIN teacher t ON m.subject=t.subject");

                while (rs.next()) {
                    model.addRow(new Object[]{
```

```
                    rs.getString(1), rs.getString(2), rs.getString(3),
                    rs.getString(4), rs.getInt(5), rs.getString(6)
                });
            }
        } catch (Exception ex) { ex.printStackTrace(); }
    });

    panel.add(new JScrollPane(table));
    panel.add(load, BorderLayout.SOUTH);
    return panel;
  }

  public static void main(String[] args) {
    new FullCRUDSchoolGUI();
  }
}
```

DATA BASE VIEW:

```
mysql> desc fees;
+-------------+-------------+------+-----+---------+-------+
| Field       | Type        | Null | Key | Default | Extra |
+-------------+-------------+------+-----+---------+-------+
| student_id  | varchar(10) | YES  |     | NULL    |       |
| name        | varchar(50) | YES  |     | NULL    |       |
| amount_paid | int         | YES  |     | NULL    |       |
+-------------+-------------+------+-----+---------+-------+
3 rows in set (0.07 sec)

mysql> desc students;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| student_id | varchar(10) | NO   | PRI | NULL    |       |
| name       | varchar(50) | YES  |     | NULL    |       |
| department | varchar(50) | YES  |     | NULL    |       |
| phone      | varchar(15) | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
4 rows in set (0.00 sec)

mysql> desc payments;
+--------------+-------------+------+-----+---------+----------------+
| Field        | Type        | Null | Key | Default | Extra          |
+--------------+-------------+------+-----+---------+----------------+
| payment_id   | int         | NO   | PRI | NULL    | auto_increment |
| student_id   | varchar(10) | YES  | MUL | NULL    |                |
| amount       | int         | YES  |     | NULL    |                |
| payment_date | date        | YES  |     | NULL    |                |
+--------------+-------------+------+-----+---------+----------------+
4 rows in set (0.01 sec)
```

OUTPUT SCREENSHOTS:

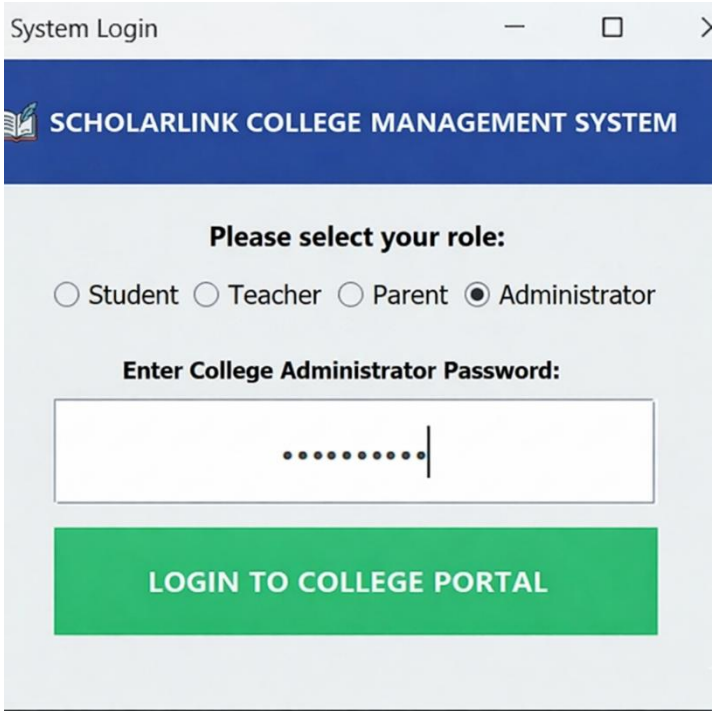

DASHBOARD:

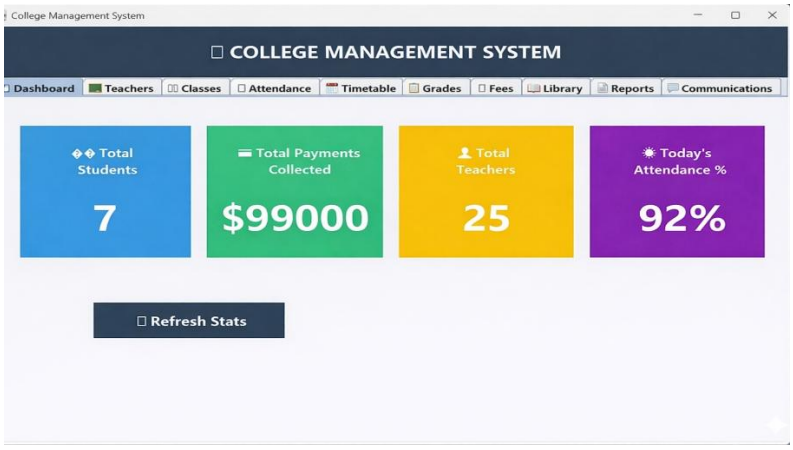

LOAD:

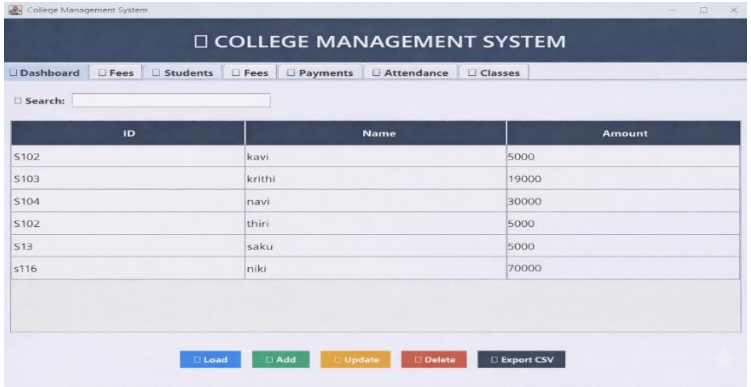
College Management System
COLLEGE MANAGEMENT SYSTEM
Dashboard
Fees
Students
Fees
Payments
Attendance
Classes
Search:
ID
Name
Amount
S102
kavi
5000
S103
krithi
19000
S104
navi
30000
S102
thiri
5000
S13
saku
5000
s116
niki
70000
Load
Add
Update
Delete
Export CSV

ADD:

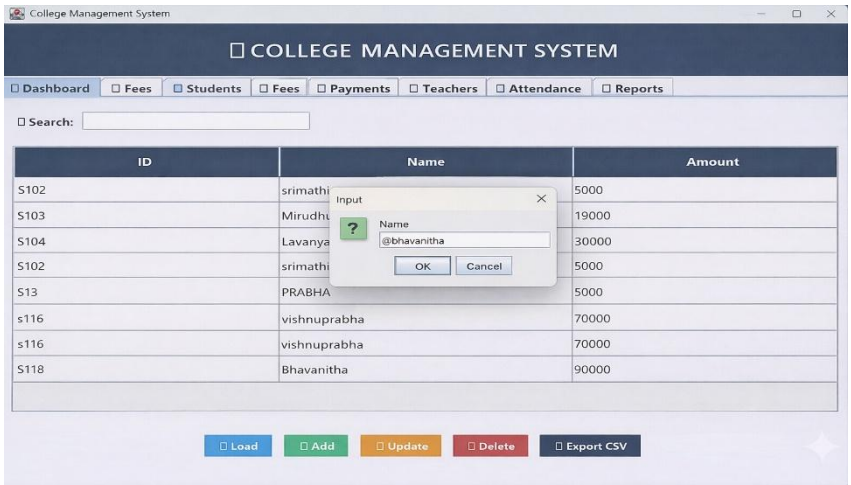
College Management System
COLLEGE MANAGEMENT SYSTEM
Dashboard
Fees
Students
Fees
Payments
Teachers
Attendance
Reports
Search:
ID
Name
Amount
S102
5000
S103
19000
S104
30000
S102
5000
S13
5000
s116
vishnuprabha
70000
s116
vishnuprabha
70000
S118
Bhavanitha
90000
Input
Name
@bhavanitha
OK
Cancel
Load
Add
Update
Delete
Export CSV

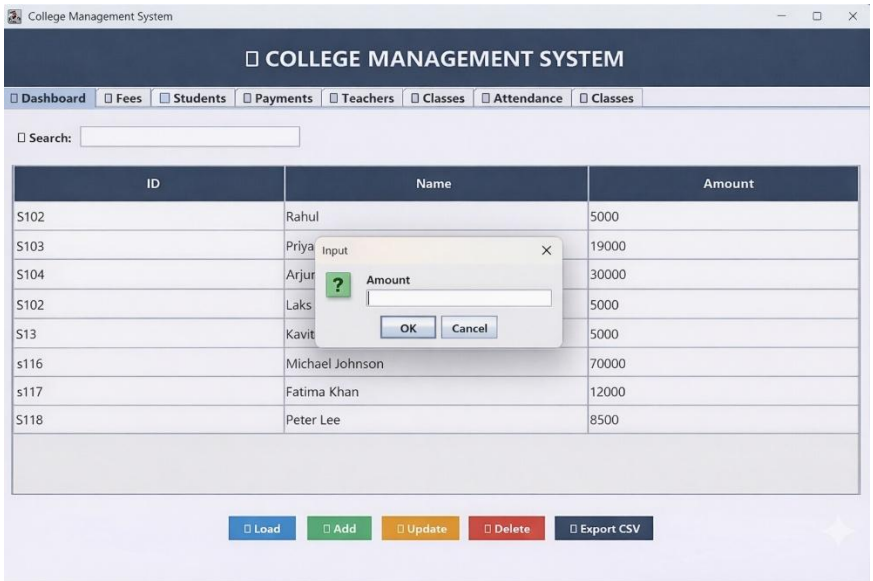
College Management System
COLLEGE MANAGEMENT SYSTEM
Dashboard
Fees
Students
Payments
Teachers
Classes
Attendance
Classes
Search:
ID
Name
Amount
S102
Rahul
5000
S103
19000
S104
30000
S102
5000
S13
5000
s116
Michael Johnson
70000
s117
Fatima Khan
12000
S118
Peter Lee
8500
Input
Amount
OK
Cancel
Load
Add
Update
Delete
Export CSV

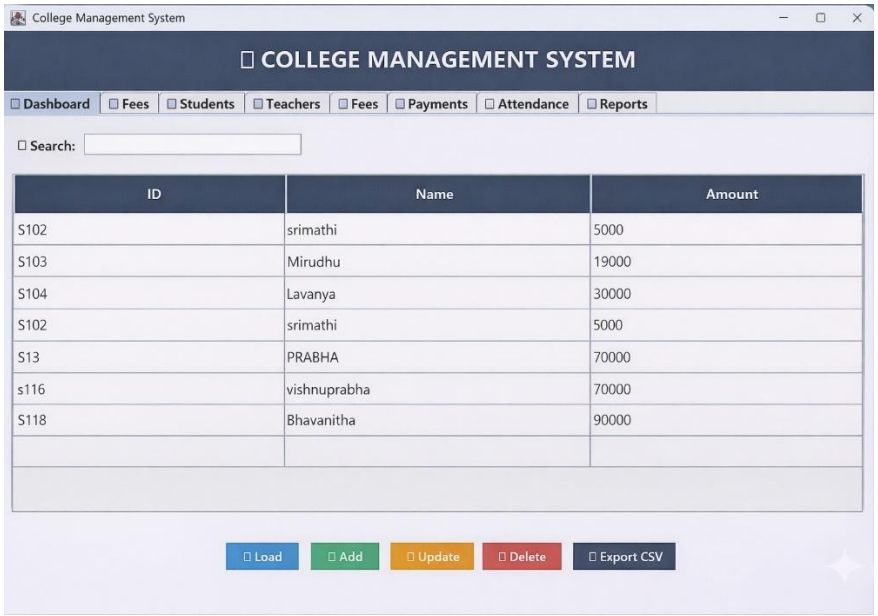

SEARCH:

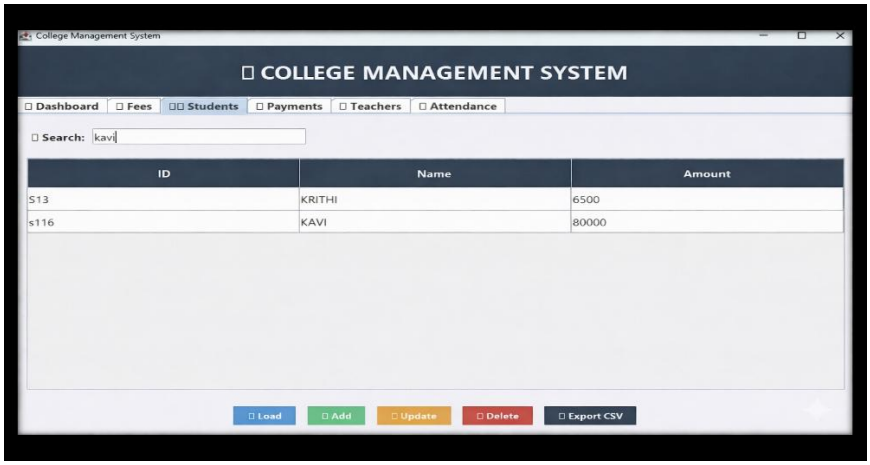

UPDATE:

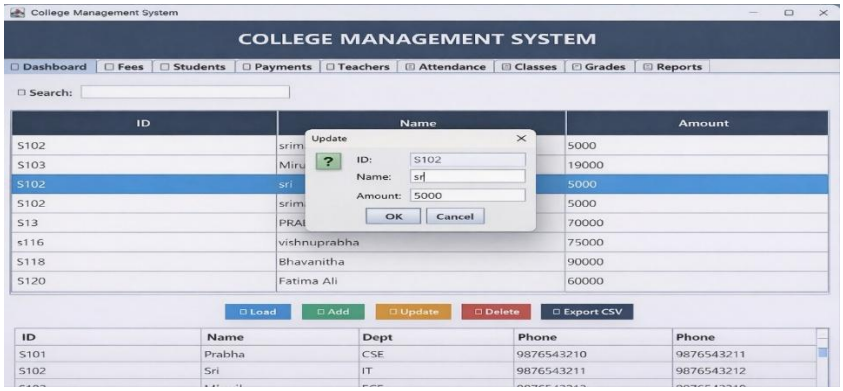

DELETE:

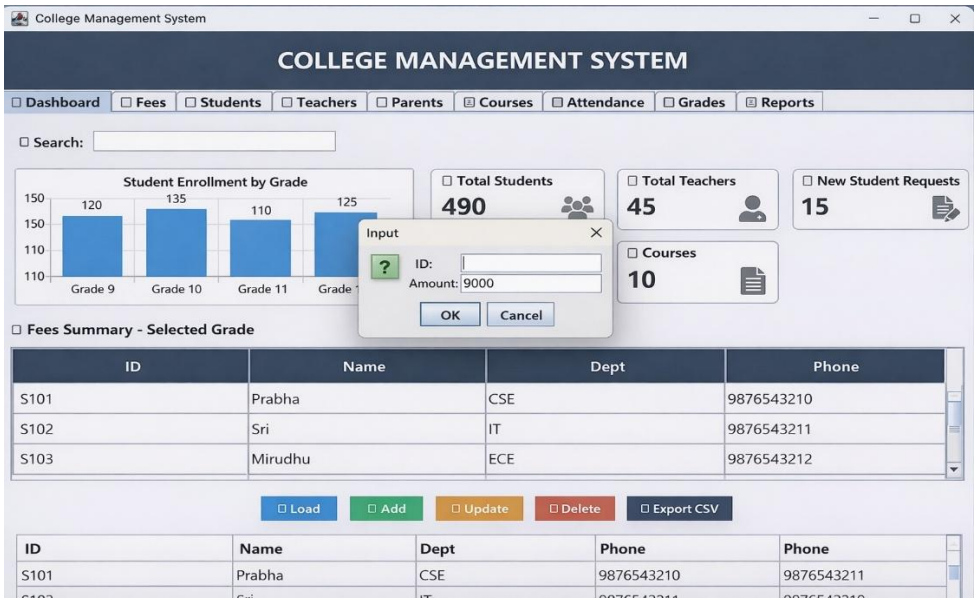

EXPORT CSV:

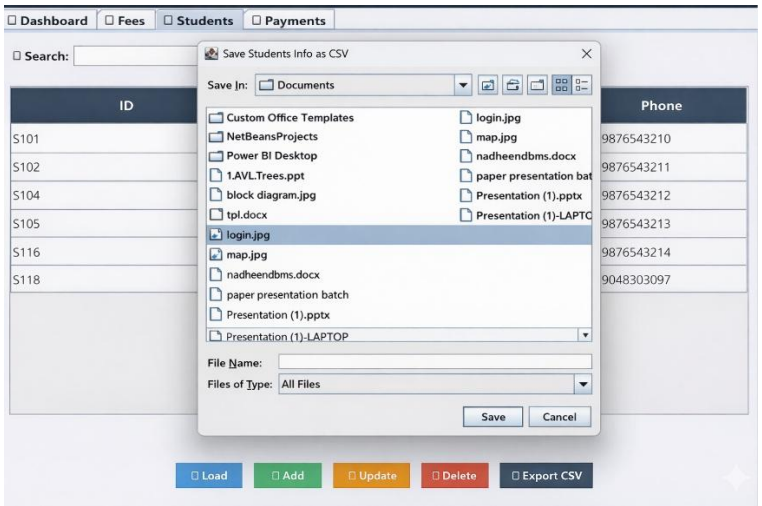

RECEIPT:

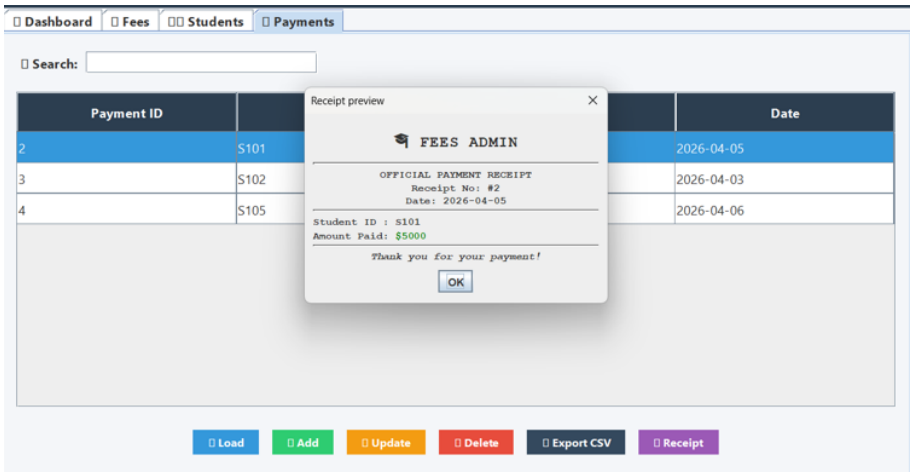

DATA BASE VIEW:

```
mysql> select *from marks;
+-------------+----------+-------+
| student_id  | subject  | marks |
+-------------+----------+-------+
| S101        | Maths    |    85 |
| S101        | Science  |    90 |
| S102        | Maths    |    99 |
| S103        | English  |    88 |
+-------------+----------+-------+
4 rows in set (0.03 sec)

mysql> select *from student;
+-------------+---------------+-------+
| student_id  | student_name  | class |
+-------------+---------------+-------+
| S101        | Krithi        | 10A   |
| S102        | saku          | 12C   |
| S103        | Sureka        | 12A   |
| S104        | Kavi          | 12C   |
| S105        | kamali        | 11b   |
+-------------+---------------+-------+
5 rows in set (0.01 sec)

mysql> select *from teacher;
+-------------+---------------+----------+
| teacher_id  | teacher_name  | subject  |
+-------------+---------------+----------+
| 102         | navi          | maths    |
| S102        | lali          | 12C      |
| T10         | SRII          | CS       |
| T101        | kavi          | tamil    |
+-------------+---------------+----------+
4 rows in set (0.02 sec)
```

Result:

The College Management System was successfully implemented using MySQL and Java (JDBC). All functions like adding students, recording payments, and viewing details work correctly. The system stores and retrieves data efficiently, reduces manual work, and provides accurate results. Overall, the project meets its objective of managing student fees effectively.