IMPLEMENTED PROTOCOL · SCHEMATIC

Explicit messages resolve competing offers to an idle worker.

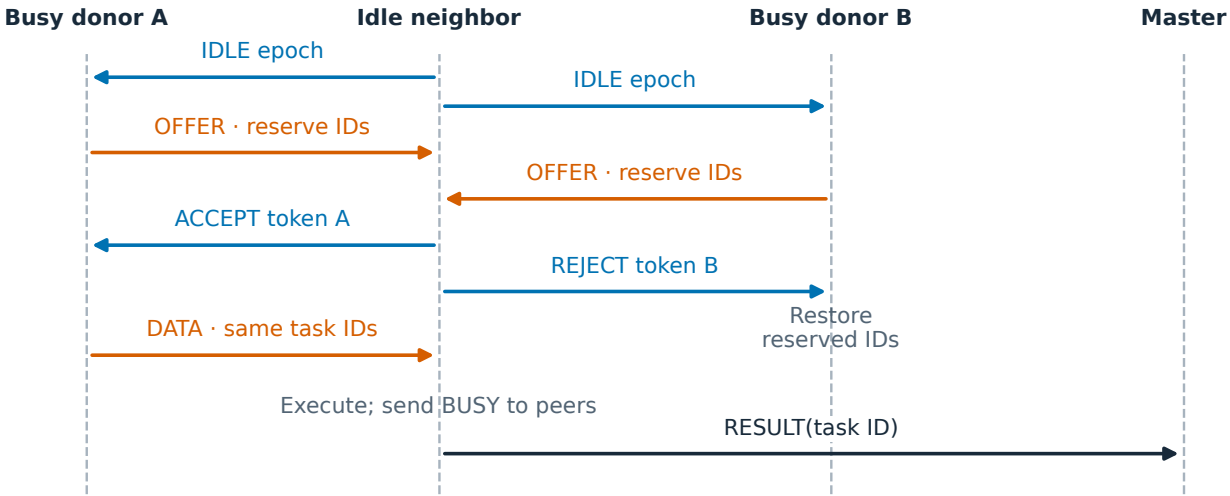

Schematic of the implemented neighbor-push protocol, not a timed trace. Donors reserve queued IDs before offering; the receiver accepts one offer and rejects a competing offer. Accepted inputs travel over a peer edge; identified results return directly to the master. No hub-assisted hint policy is implemented here.