EXPLORATORY SIMULATION

Local redistribution avoids extra master hops, not migration cost.

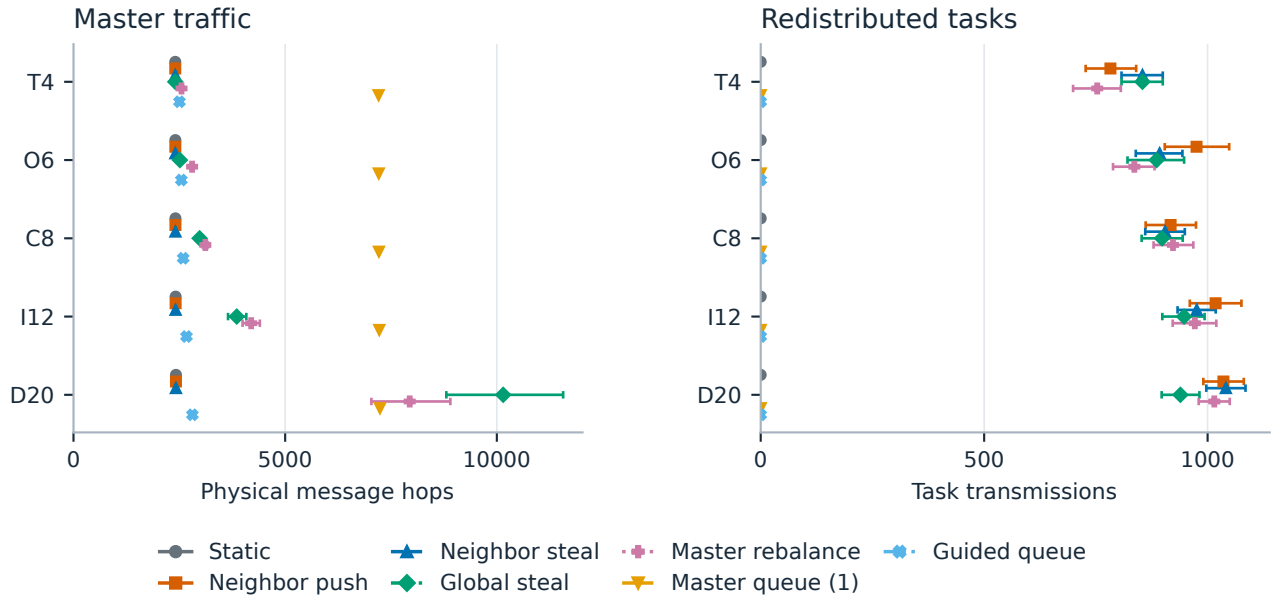

Clustered workload; 30 paired seeds. Means and uncorrected 95% bootstrap intervals. Master hops count initial transfers and all identified results. Migrations count transmissions, so the same ID can contribute repeatedly. Traffic includes control packets dispatched before the last-result stop.