


noted

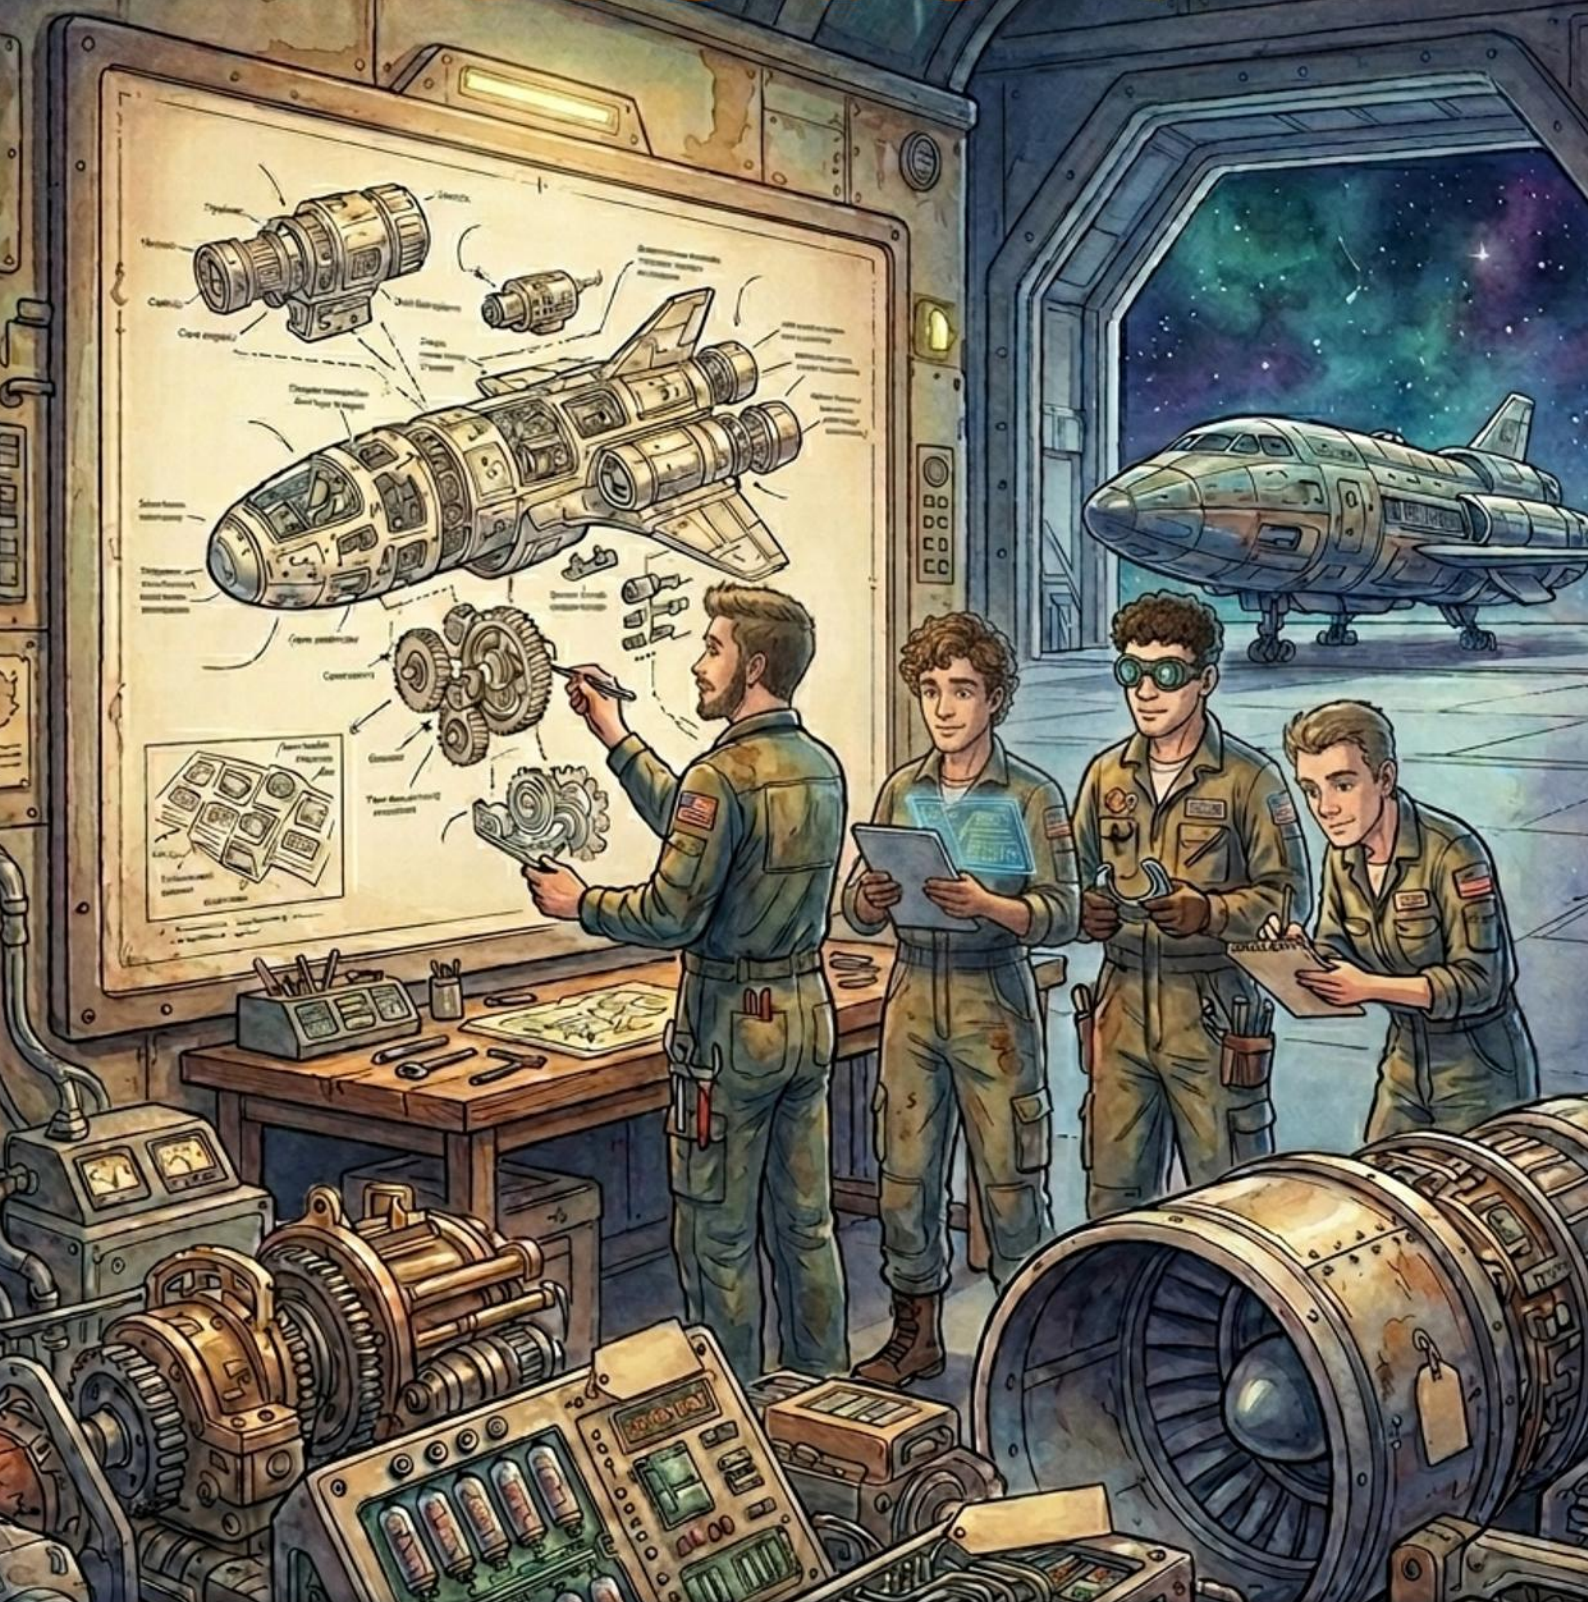

iscte

UNIVERSITY
INSTITUTE
OF LISBON

Engineering of Intelligent Models

FINAL DELIVERY

SETUP AND INSTALLATION MANUAL

NOTED PLATFORM

Table of Contents

1. Introduction	3
Quick links	3
2. Prerequisites.....	4
3. Clone the repositories	5
4. Configure environment variables	6
5. Configure project mounts	7
6. Launch noted and its dependencies	8
With GPU.....	8
CPU only	8
7. Open noted.....	9
8. First-run checklist	10
9. Stopping and cleaning up	11
Stop (preserves data and images)	11
Stop and wipe volumes (removes MLflow runs, MinIO objects,.....	11
Remove the noted image (frees disk)	11
10. Troubleshooting	12
11. Next steps.....	13

1. Introduction

This document is a short, focused walkthrough for getting **noted** running on your machine, with both demo projects (jena_weather and jena_client) configured as mounts, so you can exercise the full platform end-to-end.

If you only want to poke around without installing anything, a live instance is available at:

Live demo: <https://logus2k.com/noted>

For a permanent setup, follow the steps below.

Quick links

- **noted source:** <https://github.com/logus2k/noted>
- **jena_weather** (training project): clone from the tutorial materials you received.
- **jena_client** (serving client demo): clone from the tutorial materials you received.
- **User Manual:** documents/user-manual/ in the noted repo, or inside noted itself under **Knowledge Base > noted User Manual** once the platform is running.

2. Prerequisites

- **Docker** (Engine 24+ or Desktop 4.30+).
- **Docker Compose** plugin (docker compose subcommand).
- **NVIDIA Container Toolkit** (optional, required only if you want GPU acceleration for training). See: <https://docs.nvidia.com/datacenter/cloud-native/container-toolkit/latest/install-guide.html>
- **Git** for cloning the repositories.
- **~20 GB free disk** for Docker images and model artifacts.
- A **Linux host** is recommended. macOS and Windows work via Docker Desktop but the GPU path is Linux-only.

3. Clone the repositories

Clone all three repositories to a common parent directory, for example ~/noted-demo/:

```
mkdir -p ~/noted-demo && cd ~/noted-demo

# noted platform
git clone https://github.com/logus2k/noted.git

# Demo training project
git clone <your-jena_weather-repo-url> jena_weather

# Demo serving client
git clone <your-jena_client-repo-url> jena_client
```

Your layout should now look like:

```
~/noted-demo/
├─ noted/
├─ jena_weather/
└─ jena_client/
```

4. Configure environment variables

noted reads Docker Compose environment variables from `services/.env`. A template is provided.

```
cd ~/noted-demo/noted/services
cp .env.example .env
```

Open `.env` and set the following:

```
# Required: a shared secret the noted terminal uses to authenticate
# terminal sessions. Any non-empty string works for local review.
NOTED_TERMINAL_SECRET=changeme

# Optional: enables Claude models in the noted Assistant.
# Without this, only the local Gemma 4 model is available.
# Get a key at https://console.anthropic.com/
ANTHROPIC_API_KEY=

# Airflow credentials (default admin login for the Airflow UI)
_AIRFLOW_WWW_USER_USERNAME=airflow
_AIRFLOW_WWW_USER_PASSWORD=airflow

# MinIO credentials (the artifact store backing MLflow)
MINIO_ROOT_USER=admin
MINIO_ROOT_PASSWORD=password
```

The other fields in the template can be left at their defaults for a local review.

5. Configure project mounts

Important — read this whole section: the two demo projects (jena_weather and jena_client) must be configured as **mounts** in noted before you can test the platform end-to-end. Otherwise noted starts up empty and none of the tutorial flows work.

noted's mounts are configured in the file data/NOTED.md, which uses YAML frontmatter to declare host paths that will be bind-mounted into the noted container. Edit that file before the first launch:

```
cd ~/noted-demo/noted
nano data/NOTED.md # or your editor of choice
```

Replace the frontmatter section at the top so it matches the absolute host paths of the two cloned demo projects. For the example layout above:

```
---
mounts:
- name: jena_weather
  host_path: /home/youruser/noted-demo/jena_weather
- name: jena_client
  host_path: /home/youruser/noted-demo/jena_client
---

# Noted Configuration

Edit this file to manage your workspace mounts.
(rest of the file can stay as-is)
```

Replace /home/youruser/noted-demo/... with your real absolute paths. Relative paths are **not** supported - the file is read by Docker Compose, which needs absolute host paths.

When noted starts up, it auto-generates data/docker-compose.mounts.yml from NOTED.md. You do not need to edit that file by hand - it is regenerated on every start.

If you forget this step before the first launch, you can still add mounts later via the **Add Mount** action in the Explorer UI: open the Explorer sidebar, click **Mounts**, and use the context menu. The UI writes the new entry into data/NOTED.md for you. But for the demo projects specifically, configuring them before the first launch is faster and cleaner.

6. Launch noted and its dependencies

With GPU

```
cd ~/noted-demo/noted/services

docker compose \
  -f docker-compose.yml \
  -f docker-compose.gpu.yml \
  -f ../data/docker-compose.mounts.yml \
  up -d --build
```

CPU only

```
cd ~/noted-demo/noted/services

docker compose \
  -f docker-compose.yml \
  -f ../data/docker-compose.mounts.yml \
  up -d --build
```

The first launch builds several images and may take 5-15 minutes depending on your network and CPU. Subsequent launches reuse cached layers.

On success, docker compose ps shows the containers running:

```
noted                Up (healthy)
noted-serving        Up (healthy)
noted-graph           Up (healthy)
noted-evidently       Up (healthy)
noted-nginx           Up
mlflow                Up (healthy)
minio                 Up (healthy)
postgres              Up (healthy)
redis                 Up (healthy)
airflow-apiserver     Up (healthy)
airflow-scheduler     Up (healthy)
airflow-worker        Up (healthy)
... (more airflow workers)
```


7. Open noted

Open your browser at:

<http://localhost:8123>

You should see the noted interface with:

- An Explorer sidebar on the left with root sections (Projects, Experiments, Data, Orchestration, Models, Environments, Assistant, Knowledge Base).
- Under **Mounts** (inside the Projects tree), your jena_weather and jena_client projects, ready to explore.
- A **Knowledge Base > noted User Manual** category with 7 pages covering every aspect of the platform.

8. First-run checklist

A quick smoke test to confirm everything is wired up correctly:

1. Open **Knowledge Base > noted User Manual > 1. Your First Project** and follow Page 1. This verifies project creation, environment creation, notebook, and kernel are working.
2. Open **Mounts > jena_weather > notebooks > emi_tutorial3_jena_weather.ipynb** and run a single cell using the Run Manager. This verifies Hydra config injection, MLflow tracking, and DVC data lineage end-to-end.
3. Click **Experiments** in the icon bar, drill down to the run you just created, and verify that all 5 lineage badges (Data, Config, Code, Run, Model) are populated.
4. Register the run's model, deploy it via the **Deploy** button, and click **Try It** to send a synthetic prediction. This verifies the serving stack.
5. Launch the `jena_client` standalone web app from a noted terminal (see the `jena_client` README inside its repo) and load a model via its dropdown UI. This verifies the external client path.

If all 5 steps pass, your review environment is fully functional.

9. Stopping and cleaning up

Stop (preserves data and images)

```
cd ~/noted-demo/noted/services
docker compose \
  -f docker-compose.yml \
  -f docker-compose.gpu.yml \
  -f ../data/docker-compose.mounts.yml \
  down
```

Stop and wipe volumes (removes MLflow runs, MinIO objects, Airflow DB)

```
docker compose \
  -f docker-compose.yml \
  -f docker-compose.gpu.yml \
  -f ../data/docker-compose.mounts.yml \
  down -v
```

Remove the noted image (frees disk)

```
docker rmi logus2k/noted
```

The data/ directory on your host is **not** touched by any down command. It contains your projects, notebooks, environments, and the noted configuration. Delete it manually only when you want a completely fresh start.

10. Troubleshooting

noted is unreachable at <http://localhost:8123>

```
docker compose ps           # is the noted container running?
docker logs noted | tail -60 # what does it say?
```

Most commonly a port conflict: another process is already on 8123. Stop it or change the exposed port in docker-compose.yml.

“permission denied” on data/NOTED.md when editing

The file may be owned by root from a previous container run. `sudo chown $USER:$USER data/NOTED.md` or edit with `sudo`.

Mounts do not appear in the Explorer

Check that data/NOTED.md has absolute host paths and that the paths actually exist on the host. Run `docker exec noted ls /app/mounts/` to confirm noted sees them. If the mounts file was edited after the container started, restart the noted service:

```
docker compose \
  -f docker-compose.yml \
  -f docker-compose.gpu.yml \
  -f ../data/docker-compose.mounts.yml \
  up -d --force-recreate --no-deps noted
```

GPU not detected inside the noted container

Verify the NVIDIA Container Toolkit is installed and working on the host: `docker run --rm --gpus all nvidia/cuda:12.4.0-base-ubuntu22.04 nvidia-smi` should list your GPU. If that succeeds but noted still does not see the GPU, confirm you used the `-f docker-compose.gpu.yml` override on the docker compose up command.

Assistant dropdown shows only the local model

Set `ANTHROPIC_API_KEY` in `services/.env` and restart the noted container with `--force-recreate --no-deps noted`.

11. Next steps

- Follow the 7-page **User Manual** (Knowledge Base > noted User Manual) for a guided tour of every capability.
- Read the project documentation in documents/ for architectural and planning context: noted_plan.md, noted_vision.md, noted_scope.md, and README.md.
- Ask questions inside the platform using the **noted Assistant** panel - it has 40+ skills covering Airflow, DVC, Evidently, Hydra, MLflow, and noted itself.