Bid-Rigging Detection Benchmark: Project Report

2026-11-01

The main detector beats the standard collusion screens on a locked test (AUC 0.870 vs 0.803) and catches four of eight unseen cartel schemes, but it misses small, noisy, suppressing and intermittent cartels. Three further detector variants, tested the same way, land within noise of it (locked 0.856 and 0.862; the third, a bandit-selected screen subset, 0.863 on validation). On real cartel data it helps in Italy only.

1 Preface

This project asks one question: which bid-rigging schemes can a regulator detect from public bid data alone, including schemes the detector has never seen? It builds a benchmark of simulated procurement markets with eight imposed cartel schemes, a detector, and a locked evaluation protocol, then checks the detector on real cartel cases from three countries.

What the project does. It simulates repeated first-price procurement tenders in which the same firms meet again and again. A cartel scheme (rotation, cover bidding, price fixing and five others) is imposed on some markets; the rest are honest. The detector reads only what a buyer can see: each bid, who placed it, and the buyer's published cost estimate. It then gives each market a suspicion score. Its core idea is to look at *who moves with whom*: whether particular firms' bids rise and fall together, track each other closely, or avoid each other more than chance would allow in that market.

Why it pivoted from the earlier project. The earlier project trained 20 reinforcement-learning firms (one shared PPO policy) to bid while a Bayesian sequential regulator watched the bids and fined suspects. The aim was to see whether firms learn to collude and whether the regulator catches them. Cartels formed briefly and collapsed to about 0-2 members within roughly 10 training iterations. Measured payoffs explained why: against any competitive fringe, cartel members earned less than honest firms even with no fines, and only a cartel of all 20 firms gained, by about +0.5 per round. Changing frictions, pricing rules, the strategy menu and the number of firms did not change this. With almost no cartels to find, the detection question could not be answered.

The pivot separates the two questions. Whether agents learn to collude was answered (in that environment, no). Whether collusion can be detected matters regardless, because real authorities face cartels that already exist. The new project therefore imposes cartels directly, as forensic studies do, and puts the effort into a rigorous detection test.

	Earlier project	**This project**
Firms	20 learning agents (PPO) choosing strategies each round	Rule-based honest firms; cartels imposed by scheme
Collusion	Had to emerge; it did not persist	Eight schemes plus a negative control, randomised per market
Detector	Bayesian sequential regulator on price-level screens	Identity-based dependence features, screens and a sequential layer, combined by gradient boosting

	Earlier project	This project
Test	Mostly in-distribution	Each scheme held out, unseen market sizes and spreads, locked test run once
Main finding	Collusion did not pay, so cartels collapsed	Four schemes detected reliably; four are not

Lessons from the earlier project shaped the new design. A price-level screen had flagged honest firms with high markups, so the new features cancel the price level. A calibration mismatch had caused 70 % false alarms, so thresholds are now set on data from the same generator as the test. An earlier AUC bug led to every metric being tested on separated, reversed and tied data before use.

2 How the study was run

Simulated markets. Each market has 6-30 firms that meet in 20-60 sealed-bid tenders; the lowest bid wins. Every firm has a persistent cost efficiency, strengths for certain tender types, and a capacity backlog that raises its cost after recent wins. The backlog gives honest markets rotation-like patterns on purpose, so the detector cannot win by flagging any rotation. The buyer publishes a noisy cost estimate per tender, built from project size only, never from firms' costs. Honest firms bid cost times a market-wide markup of 0-25 %, plus a small firm-specific markup and competition shading.

Eight cartel schemes, each with randomised parameters and imposed on a share of firms (the rest stay honest):

1. Rotation: members take turns as the designated winner.
2. Cover bidding: the cheapest member wins; the others bid just above it.
3. Complementary bidding: losing members bid fixed multiples of the estimate.
4. Price fixing: members bid an agreed price, at low, mid or high levels.
5. Partial cartel with a fringe: only 2-3 firms collude among many honest ones.
6. Noisy or defecting cartel: cover bidding with noise; members sometimes undercut.
7. Intermittent cartel: active only in one window of 30-60 % of the tenders.
8. Bid suppression: members withdraw so the designated winner faces fewer bids.

A ninth scheme, uniform-markup collusion (every firm raises prices by 30-60 %), is kept as a negative control. Without cost data it looks the same as honest firms with higher costs, so no bid-only detector should catch it.

The detector. It turns a market's bids into four groups of features, then a gradient-boosted classifier combines them into one suspicion score:

- Literature screens: coefficient of variation, skewness, kurtosis, relative distance, bid gaps and spread, per tender, averaged over the market.
- Dependence features, the core. Each bid is expressed relative to the estimate and the tender's median bid, which removes price level and markups. The features then measure pair co-movement, cover-bid tracking, wins that are inconsistent with a firm's cost strength, and firms that avoid bidding together. Each is compared with the same market shuffled two ways (bids swapped between firms within a tender; each firm's bids reordered across tenders), so it asks whether the pattern is stronger than chance in this market.

- Change scans: whether behaviour shifts at some point in the market's history.
- A sequential layer: a two-state Bayesian filter and a CUSUM over the tenders.

The test protocol, fixed before any results were seen:

- Leave one scheme out: each scheme is scored by a model trained without it, so every result is for a cartel type the detector never saw.
- Market shifts: test markets have unseen sizes (6-7 and 25-30 firms) and unseen cost spreads, plus honest stress sets (markups of 20-25 %, strong capacity effects, noisy estimates).
- Three splits: tuning to fit models, validation to choose designs, and a locked test run once. The script refuses to run the same frozen design twice.
- 10 random seeds, and 95 % bootstrap confidence intervals on every headline number.
- The alarm threshold is set at 5 % false alarms on separate honest calibration markets from the same generator.

Reading the numbers.

- AUC: the probability that the detector ranks a randomly chosen cartel market above a randomly chosen honest one. 0.5 is a coin flip, 1.0 is perfect separation, and below 0.5 means honest markets look more suspicious than cartels. It does not depend on the alarm threshold.
- False-alarm rate: the share of honest markets flagged at the chosen threshold.
- Precision@10 %: of the 10 % of markets ranked most suspicious, the share that are truly cartels. This mirrors an authority that investigates the top of a list.
- Detector AUC means the proposed model's AUC; screens-only AUC is the same kind of model using only the literature screens.

3 Results at a glance


Three of the four criteria, fixed before the test was run, are met on the locked test; the strictest one, that every unseen scheme reaches AUC 0.85, is not. The locked run used the frozen design `full_gbm`, 10 seeds and 1,000 bootstrap resamples (95 % confidence intervals in brackets).

Criterion (fixed in advance)	Locked-test result	Met
Every held-out scheme reaches AUC $\geq$ 0.85, including unseen sizes and spreads	4 of 8 pass (worst condition $\geq$ 0.92); partial cartel 0.672, bid suppression 0.744, noisy cartel 0.823, intermittent 0.849 at unseen spreads	No
False alarms $\leq$ 10 % on every honest test set	Highest 0.075 [0.050, 0.105], on unseen market sizes	Yes
Beats the literature baselines, with the confidence interval excluding them	AUC 0.870 vs 0.803 for the screens model; difference +0.067 [0.060, 0.074]	Yes
Precision@10 % above the base rate, interval excluding it	Lowest 0.378 [0.335, 0.418] against a base rate of 0.167	Yes

Because one criterion failed, the result is presented as a benchmark with an honest partial negative finding rather than a solved detection problem. The negative control behaved as theory predicts: uniform-markup collusion scored AUC 0.478 [0.450, 0.503], and only 4.7 % of those markets were flagged.

4 Results by cartel scheme

Rotation, price fixing, complementary bidding and cover bidding are detected reliably even though the model never saw them; the four quieter schemes are not.

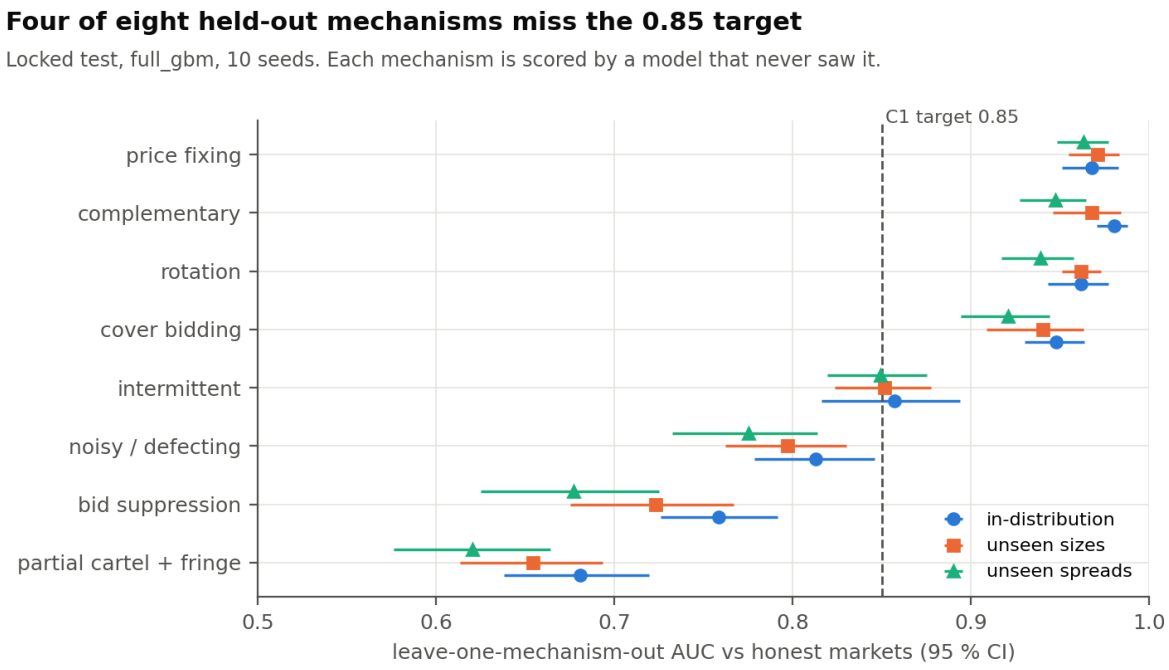

locked test, full_gbm, 10 seeds, 95 % bootstrap CIs


Each row is one scheme, scored by a model trained on the other seven. The three dots per row are the three market conditions: sizes and cost spreads seen in training, unseen market sizes, and unseen cost spreads. Unseen spreads are the hardest condition for every scheme, so the detector loses some accuracy when cost dispersion moves outside its training range.

The detected schemes all leave a strong trace between specific firms: covers that track the winner, bids at a common level, or wins that rotate against cost strength. The missed ones leave weak or diluted traces. A 2-3 firm cartel in a large market sits in one or two firm pairs. Noisy and defecting cartels blur the cover pattern. Bid suppression shows mainly as missing bids, which the model cannot learn when that scheme is held out. The intermittent cartel misses the target by 0.001, at unseen spreads only.

Ranking still works for every scheme. Among the 10 % of markets ranked most suspicious, the share that are truly cartels ranges from 0.378 (partial cartel) to 0.983 (price fixing), against a base rate of 0.167.

5 Against the standard collusion screens

The proposed detector beats the strongest literature baseline by 0.067 AUC, and the confidence interval of that gain, [0.060, 0.074], is well above zero.

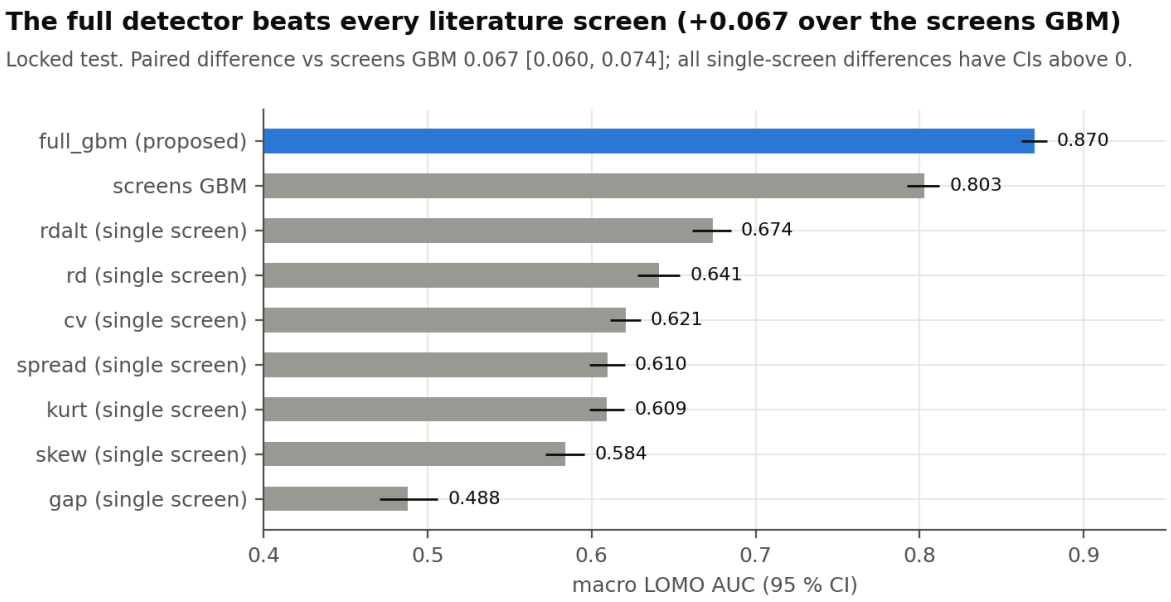


locked test, macro AUC over 8 held-out schemes, 10 seeds

Macro AUC is the average over the eight held-out schemes, each scored by a model that never saw it. The screens model is the fair comparison: the same gradient-boosting classifier, given only the seven literature screens. Its gap to the proposed detector is the value of the dependence features. Every single screen is also beaten, by 0.196 (RD-alt) to 0.382 (gap); every difference was paired on the same markets, and each confidence interval excludes zero.

Single screens do poorly here because they measure the spread and shape of one tender's bids. Those depend on cost dispersion and market size, which change between training and test markets. The dependence features compare each market with its own shuffled versions, so they hold up better under those shifts.

6 False alarms

The deployable detector flags at most 7.5 % of honest markets on any honest test set, inside the 10 % limit, including market sizes and cost spreads it never trained on.

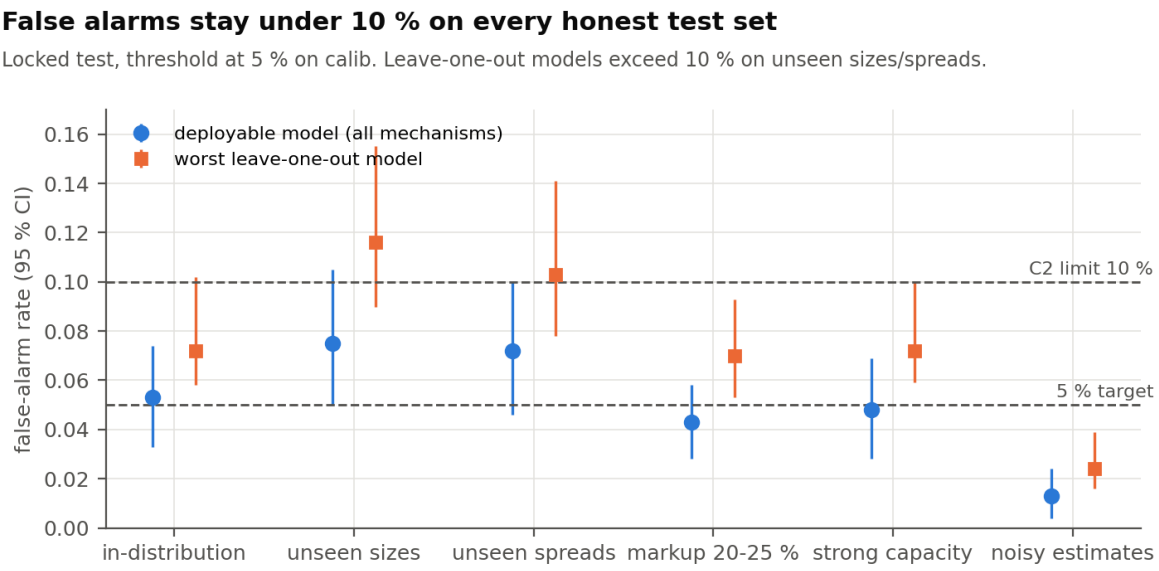

locked test, 100 honest markets per set per seed, 10 seeds, 95 % CIs

The threshold was set once, at 5 % false alarms on separate honest calibration markets, and then applied unchanged to six honest test sets. Three are the in-distribution and shifted conditions; three are stress tests that look suspicious to a naive screen: high honest markups (20-25 %), strong capacity effects that make honest wins rotate, and noisy estimates and costs. None of them pushes the deployable model past 10 %. High markups do not raise false alarms, which confirms that the features ignore the price level.

The deployable model is trained on all eight schemes. The grey dots show the worst of the eight leave-one-scheme-out models, which are trained on seven. Those exceed 10 % on unseen sizes (11.6 %) and unseen spreads (10.3 %), so the false-alarm guarantee holds for the full model, not for every partial one.

7 Precision among the most suspicious markets

If the regulator audits only the top 10 % of markets by score, how many of them are really rigged? The base rate is 0.167, so a useless score would land near that line.

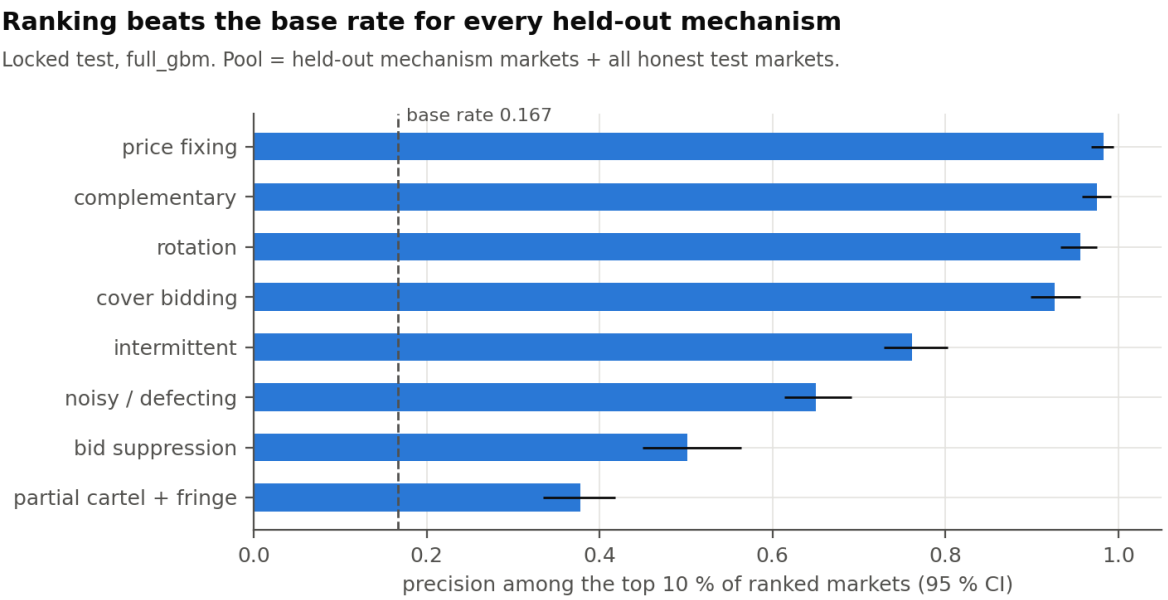


Figure A. Precision@10 % per scheme (locked test, full_gbm, 95 % bootstrap CIs, base rate 0.167). Price fixing (0.983), complementary bidding (0.975), rotation (0.956) and cover bidding (0.926) are almost always right when they are flagged. Intermittent cartels reach 0.761 and noisy or defecting cartels 0.650. The two weak schemes are bid suppression (0.501) and the partial cartel with a fringe (0.378). Even the weakest sits well above the base rate (its interval, 0.335 to 0.418, excludes 0.167), so criterion C4 holds, but an audit list built from it would be wrong about six times in ten.

8 What drove the result

The gain comes from the dependence features; the change scans and the Bayesian sequential layer add nothing measurable. These numbers are from the validation split (10 seeds), where designs were chosen; the locked test was not used for any choice.

Design (validation)	**Macro AUC [95 % CI]**
All feature groups	0.862 [0.853, 0.871]
Without change scans	0.864 [0.856, 0.873]
Without the sequential layer	0.862 [0.853, 0.871]
Without dependence features	0.801 [0.790, 0.811]
Dependence features only	0.826 [0.814, 0.836]
Literature screens only	0.806 [0.795, 0.816]
Sequential layer only	0.549 [0.530, 0.566]
Change scans only	0.494 [0.480, 0.506]

Improvement attempts. Each was tried on validation with a stated hypothesis and a test that could falsify it, and was kept only if validation improved. A pre-set rule stopped a line of work after three attempts without a gain.

Attempt	**Idea**	**Outcome**
I1	Add a second shuffle (each firm's bids reordered across tenders)	Kept: macro AUC 0.847 → 0.862
I2	Participation features plus a knowledge-directed tail score fused with the model	No gain (0.864); helped bid suppression, hurt noisy and intermittent cartels

Attempt	Idea	Outcome
I3	Use the single most suspicious firm pair instead of the top three	Dropped at prototype: no gain on small cartels
I4	Constrain the model to move in the expected collusion directions	No gain (0.867, within the confidence interval)
W2-1 to W2-3	Three ways to detect a cartel that starts and stops (pair-closeness scan, segment excess, window scan)	No gain; the last was reverted

Only I1 survived, so the frozen design is the model with I1 and nothing else. Both lines of work, the detector features and the change detection, ended under the stop rule.

8.1 How the design was reached (validation)

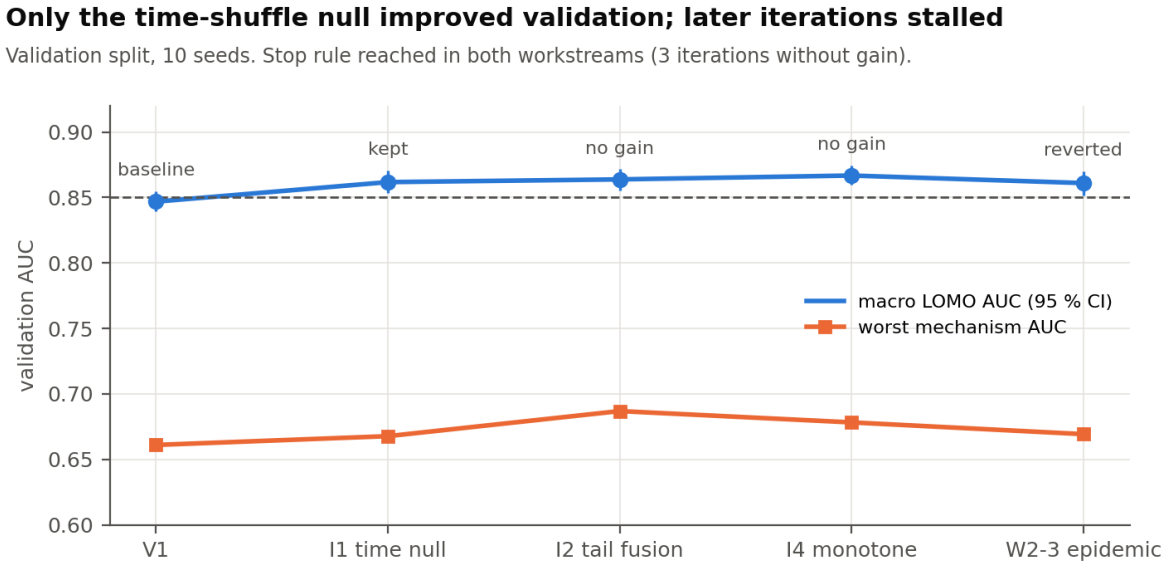


Figure B. Validation macro AUC across the design iterations (full_gbm; 95 % CIs). The first version scored 0.847. The one change that clearly helped was the second shuffle, the within-firm time null (I1), which raised it to 0.862. Tail fusion (I2, 0.864) and monotone constraints (I4, 0.867) moved the score by less than the width of the intervals, and the epidemic-style feature (W2-3, 0.861) did not help and was reverted. The worst single scheme stayed between 0.66 and 0.69 throughout, which is why no iteration closed the gap to the 0.85 target.

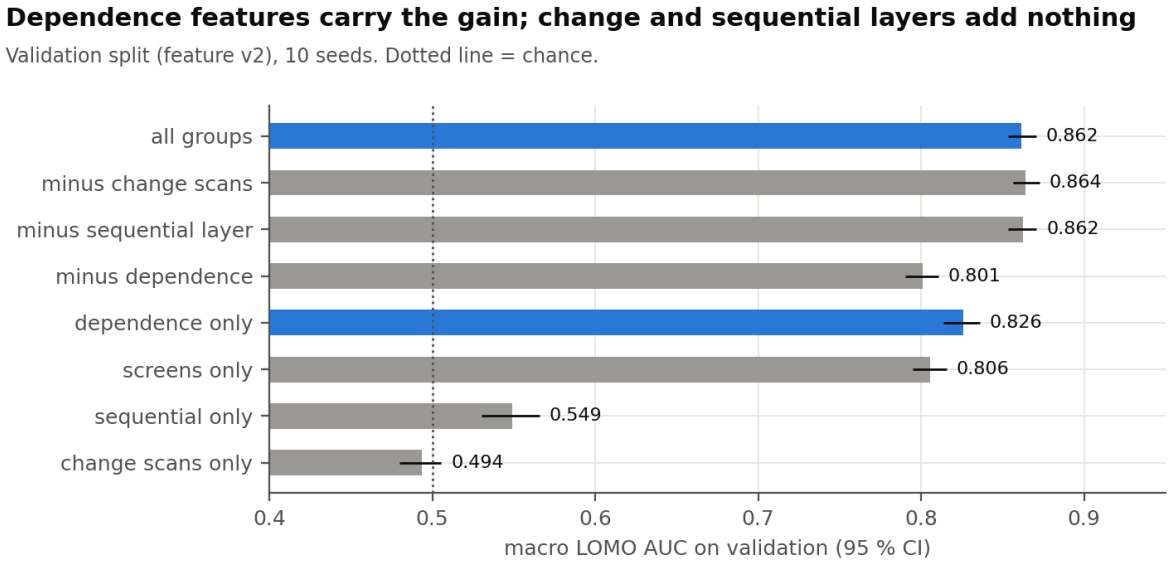


Figure C. Validation ablation of feature groups (macro AUC, 95 % CIs). Alone, the identity-dependence group scores 0.826 and the literature screens 0.806. The change scans (0.494) and the sequential layer (0.549) are near or barely above chance on their own. Removing the dependence group from the full model drops it from 0.862 to 0.801, while removing the sequential or change features leaves it unchanged (0.862, 0.864). So the gain over the standard screens comes from the dependence features, and the other two groups add nothing measurable.

9 Real-data test

On real cartel cases the detector beat the literature screens in Italy (+0.144 AUC) but not in Japan or Brazil, and an alarm threshold set on two countries did not carry over to the third.

The data. Real per-bid data from prosecuted bid-rigging cases, published with García Rodríguez et al. (2022) (supplementary file, checksum recorded in the experiment log). Each bid comes with the bidding firm's ID, the buyer's pre-tender estimate, and whether the bidder was a cartel member. Three of the six country sets have everything the detector needs:

Country	Case	Tenders	Collusive tenders	Auction format
Italy	Turin road construction	278	143	Average-bid (the winner is not the lowest bid)
Japan	Okinawa construction	1,080	123	Lowest bid wins, with a price floor
Brazil	Petrobras infrastructure	101	33	Lowest bid wins

The two Swiss sets have no firm IDs and the US set has no estimate, so they were left out.

Why tenders, not markets. The simulator scores whole markets of repeated tenders. Real tenders do not come grouped that way. Windows of consecutive tenders were checked first: in Japan no window of 20-40 tenders was mostly collusive, and no firm bid six or more times inside any window. Grouping tenders by shared bidders produced repeated markets only in Italy. So each tender was scored on its own.

How it was tested. The design was written down and approved before the run, and the run was done once; the script refuses to repeat it.

1. For each tender, compute the literature screens of its own bids.
2. For every pair of its bidders, measure how that pair behaved in all other tenders of the same country: whether their bids co-move, how often they bid within 3 % of each other, and how often they bid on the same tenders. Excluding the tender itself keeps the feature honest; a test checks this against a brute-force recomputation.
3. Convert every feature to a within-country percentile, so currencies and project sizes compare across countries. This uses each country's unlabelled data and is disclosed as a design choice.
4. Train on two countries and test on the third, three times over. Labels come from the source paper's tender labels.
5. Set the alarm threshold at 5 % false alarms on the training countries' competitive tenders, then measure false alarms on the held-out country.
6. Compute confidence intervals with a block bootstrap over tenders in time order (blocks of 20, 1,000 resamples), paired across methods.

Results (95 % confidence intervals in brackets):

Held-out country	**Detector AUC**	**Screens-only AUC**	**Difference**	**Best single screen**	**False alarms**	**Precision@10 % (base rate)**
Italy	0.779 [0.668, 0.876]	0.635	+0.144 [0.078, 0.234]	spread 0.676	0.7 %	0.93 (0.51)
Japan	0.691 [0.627, 0.758]	0.674	+0.018 [−0.032, 0.069]	CV 0.739	26.5 %	0.26 (0.11)
Brazil	0.742 [0.661, 0.850]	0.755	−0.013 [−0.109, 0.177]	CV 0.873	8.8 %	0.50 (0.33)

What it shows.

- Italy: the pair features clearly help, beat every single screen, and false alarms are near zero. Italy is the only country where the same firms meet repeatedly, which is the setting the method is built for.
- Japan: no gain over the screens, a plain CV screen is at least as good, and false alarms reach 26.5 % instead of 5 %.
- Brazil: no gain over the screens, and significantly worse than the CV screen alone (−0.131 [−0.247, −0.013]). Most firms bid only once, so pair features have almost no history to use.

Each country is one cartel case, so these are three case studies, not a general detection rate.

9.1 Real-data and old-environment figures

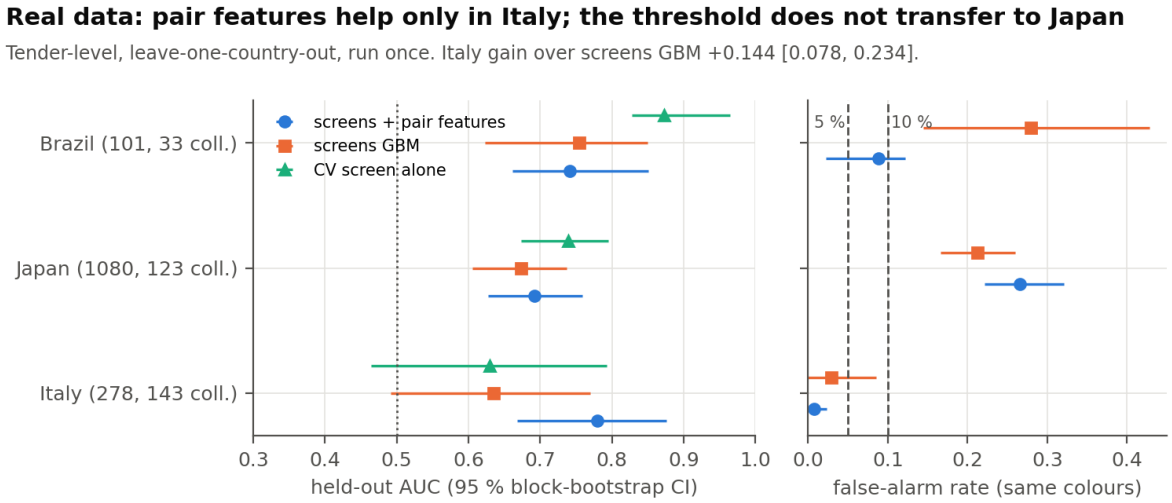


Figure D. Real data, tender-level leave-one-country-out (AUC and false-alarm rate, 95 % CIs). The full model reaches AUC 0.779 on Italy, 0.742 on Brazil and 0.691 on Japan. The false-alarm rate is 0.007 in Italy and 0.088 in Brazil, but 0.265 in Japan, far above the 5 % target, so a threshold set on the other countries does not carry over. The comparison with simpler models is the honest part: the literature-screens model is clearly worse in Italy (0.635), and the single coefficient-of-variation screen scores higher than the full model in Japan (0.739) and Brazil (0.873) with fewer false alarms (0.061 and 0.029). Each country is one cartel case, so these are three case studies, not a detection rate.

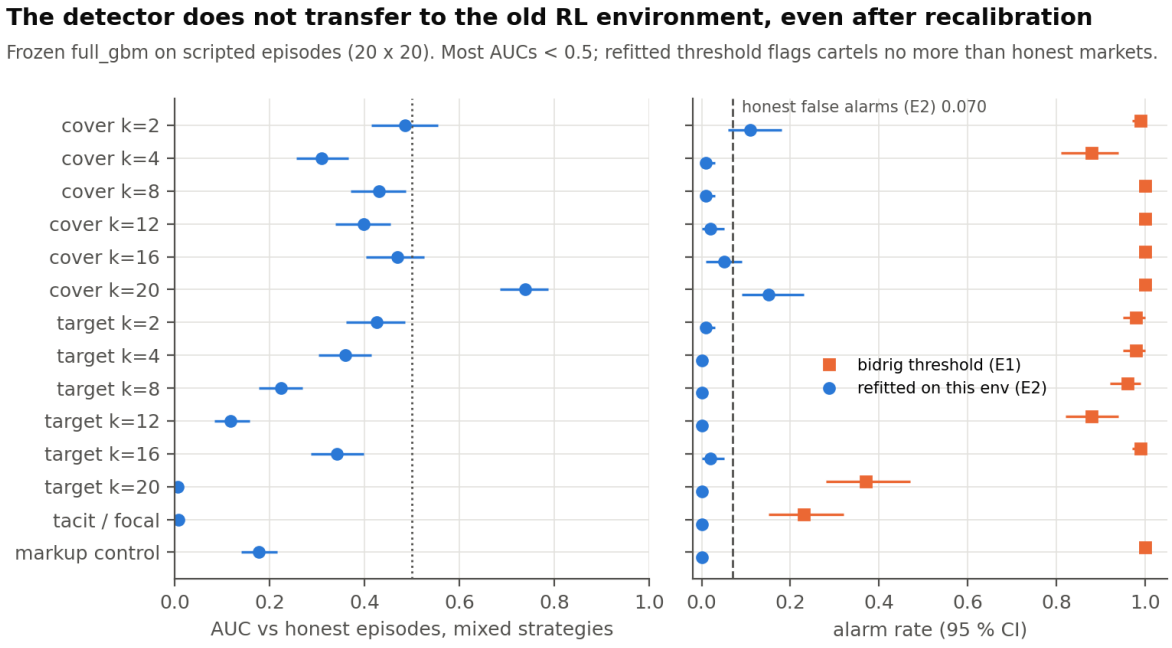


Figure E. The frozen detector on the old reinforcement-learning environment (AUC against honest episodes; alarm rates at the transferred and the refitted threshold). With the threshold transferred from this benchmark the detector alarmed on 99.7 % of honest episodes, so its high alarm rate on cartel episodes (0.88 to 1.00 in most conditions) carries no information. After refitting only the threshold on that environment's honest episodes, false alarms were fixed

but cartel alarms fell to between 0 and 0.15, and the AUCs did not change: most are below 0.5 (for example 0.006 for a full target-price cartel and 0.176 for the uniform-markup control), with the best at 0.74 (a 20-firm cover cartel). The cause is that honest firms in that environment anchor to the last winning price, so honest bids move together and look like collusion. That environment is therefore not a valid transfer test for this detector, and the failure is a ranking failure, not a calibration one.

10 Detector variants

Three further detectors, built and tested under the same protocol, land within noise of the main one: removing the within-firm null costs about 0.014 AUC, a plain logistic model matches the boosted one, and letting a bandit choose the screens changes nothing. All four locked runs (the reference and three variants) fail the same criterion (C1) and pass the other three.

Detector	What changes	Validation macro AUC	Locked macro AUC	Locked precision@10 %	Highest false-alarm rate	Weakest scheme (pooled AUC)
`full_gbm` (reference)	all four feature groups, gradient boosting	0.862 [0.853, 0.871]	0.870 [0.862, 0.878]	0.766	0.075	partial cartel 0.672
`previous`	drops the within-firm null columns	0.848 [0.839, 0.855]	0.856 [0.846, 0.866]	0.738	0.096	partial cartel 0.664
`stat_auc`	logistic model, settings tuned on validation	0.864 [0.856, 0.871] (tuned)	0.862 [0.854, 0.869]	0.805	0.055	partial cartel 0.636
`rl_screens`	a bandit chooses the screen subset	0.863 [0.855, 0.871]	0.872 [0.863, 0.880]	0.772	0.082 (0.106 in one leave-out model)	partial cartel 0.678

`previous` (the detector before the second null). The hypothesis was that the within-firm null helps. On validation the paired difference to `full_gbm` is −0.014 [−0.019, −0.008], so it does, but the effect on the full model is small. The earlier larger gain (0.771 to 0.826) was for the dependence-only model; the full model already gets most of that signal from the literature screens. The locked test agrees: every scheme's point estimate is lower, the biggest drop is the intermittent cartel at unseen spreads (0.796 against 0.849), and false alarms on unseen sizes rise to 0.096, with an interval up to 0.130, close to the 10 % limit.

`stat_auc` (validation-tuned logistic model). Sixteen configurations (four feature subsets, four penalties) were scored on validation only, and the chosen one is the literature plus dependence features at penalty C = 0.1, an interior point of the grid. Tuned on validation it scores 0.864; on the locked test it scores 0.862, so the optimism from tuning was about 0.002. Against `full_gbm` the point estimate is 0.008 lower and the intervals overlap, so the two are not separated. Precision@10 % is higher (0.805 against 0.766, intervals apart) and the highest false-alarm rate is the lowest of the three (0.055). Against that, the weakest scheme is lower (partial cartel 0.636) and complementary bidding drops by 0.032. On the uniform-markup control its AUC is 0.541 [0.515, 0.567], slightly above 0.5, but the alarm rate (4.9 %) equals the false-alarm target, so this is not detection. The practical reading: on these features the boosting step adds little, and a simple, readable model suffices.

`rl_screens` (screen-subset selection by a bandit). Successive halving over six screen subsets, rewarded by out-of-fold AUC on tuning data only; the choice is re-made inside every leave-one-scheme-out fold. This first version picks one subset for all markets and is not a PPO policy, which is a deviation from the original plan and is flagged as such. On validation it matches the reference

detector: 0.863 [0.855, 0.871] against 0.862, paired difference +0.001 [−0.001, 0.003], and no scheme differs. The bandit does not simply pick the full feature set: on the tuning split it chose the literature plus dependence features in 5 of 10 seeds and three other subsets in the rest. It makes no difference because the four subsets that contain both groups score within about 0.01 of each other on tuning data, in line with the earlier ablation that change scans and the sequential layer add nothing; subsets with only one group score clearly lower. So choosing the screens has no measurable value here. This is a negative result for that idea, and a per-market policy, which was not tried, remains open.

Locked result for rl_screens. Run once on the test split with the frozen design (hash 002a3d7267394d48, 1,529 seconds): macro AUC 0.872 [0.863, 0.880], precision@10 % 0.772 [0.757, 0.788], weakest scheme the partial cartel at 0.678 (pooled AUC); bid suppression is 0.747. It fails the 0.85 target on those two schemes, so C1 fails, and C2, C3 and C4 pass. The highest false-alarm rate is 0.082 for the model trained on all schemes and 0.106 for the worst leave-one-scheme-out model (honest markets of unseen size); the uniform-markup control sits at chance (AUC 0.478). The point estimate is the highest of the four locked runs, but the intervals overlap those of the full model (0.870), the runs were not paired, and the validation difference was +0.001, so the report does not claim it is better.

Caveats. There is no paired locked comparison between detectors: that would need `full_gbm` scored again on the test split, which is a repeat locked run. The four runs must therefore be read through their separate confidence intervals, and all four reported together.

11 Comparison with published work

Most published bid-rigging detectors report classification accuracy at coalition or tender level, not AUC, so a like-for-like AUC comparison is possible with only one paper so far, and even there the protocol differs from ours. Fourteen candidate papers were found; full-text numbers have been checked for one of them, and the rest were read as abstracts or secondary summaries and must be verified before they are cited.

Paper	Data	Unit and protocol	What it reports	Comparable to our AUC?
Gomes et al., 2024 (graph neural networks)	Japan, Italy, Brazil, USA, two Swiss sets	Bid level; train and test within one country, split by company (60/20/20); zero-shot transfer between countries	F1, balanced accuracy, precision, recall in tables; ROC AUC only in the text for one case: Japan, GNN 0.98 vs plain network 0.93, from the best-F1 run	No: within-country, bid level, best run
Imhof & Wallimann, 2021 (coalition screens with lasso, SVM, random forest, super learner)	Swiss, Japanese, Italian	Coalitions of bidders in a tender	One aggregate figure: 90 % correctly classified	No: accuracy, coalition unit
Huber, Imhof & Ishii, 2022 (*JRSS-A*)	Okinawa cartel and other cases	Tender level, screens plus machine learning	88–97 % correct classification on Okinawa, depending on model (from a secondary summary; text not read)	No: accuracy
Conley & Decarolis, 2016 (*AEJ: Micro*)	276 Turin road-works auctions, 2000–2003	Statistical tests for coordinated entry and bidding; checked against a court case	Test performance; no AUC	No: different method and metric

Paper	Data	Unit and protocol	What it reports	Comparable to our AUC?
Porter & Zona, 1993 (*JPE*)	US state highway contracts	Statistical tests from limited participation	Tests of rigging; no AUC	No

The 1993 date matters: an earlier note in this project said 1999, which was wrong. A separate 1999 Porter and Zona paper exists on school-milk auctions; its venue was not confirmed.

Cross-country transfer is hard for others too. Gomes et al. train on one country and test on another. In most transfers their balanced accuracy is close to 0.50, and the best case is the network trained on Japan and tested on the Ticino data (balanced accuracy 0.78, F1 0.76). That matches the direction of our own leave-one-country-out result, where pair features helped only in Italy and the alarm threshold did not carry over to Japan. This is worth stating in the paper as a shared weakness, not only ours.

What a fair AUC comparison needs. Run our detectors under their protocol (within-country training, company-level split, bid-level labels) and report AUC with confidence intervals, clearly marked as a different protocol from our main results. This has not been run. Until it is, no claim of beating a published method should be made.

Still to do. Verify the full text of the other papers (their numbers, splits and data licences), read the claims of the four papers found only by title (a graph-attention study, a Finnish competition-authority paper, a Russian-procurement paper, and an incomplete-cartel study), and add the Swiss railway paper, which uses proprietary data and so cannot be compared directly.

12 Code and reproducibility

The code is now modular, and a golden test shows the restructuring changed no feature value and no detector score. The full test suite has 90 passing tests and one that needs the real data.

Part	Layout
Features	A package with one module per feature group (literature screens, dependence, participation, change scans, sequential layer), plus the column order and one function that computes all features of a market
Detectors	A package with one registered module per detector family; every detector has `fit(X, y)` and `score(X)` and is built by name, and 42 designs are registered. No detector module imports another
Protocol	Leave-one-scheme-out folds, thresholds, metrics and bootstrap, unchanged by the restructuring
Scripts	One script per task, with an index; only the locked-test and real-data scripts touch the test split or the real data

Checks. Before any code moved, reference outputs were saved from the unmodified code: all 53 feature values for four simulated markets and the scores of 11 detectors. After the move, all of them match to 1e-8. Separate tests check that the design hash changes when any file under the package changes, and that no user-specific path or name remains in code (needed for an anonymous submission).

What changed and what did not. The real-data folder is now set by an environment variable, and the old-environment results the figures use are stored in this repository, so nothing depends on another folder. The protocol and metrics code is untouched. The locked-test and real-data scripts now hash the whole package, so any code move changes every design hash.

Open gaps.

- The earlier frozen hashes (`full_gbm`, `previous`, `stat_auc`) can no longer be recomputed from the current code. The locked results are unaffected, because they were produced by the earlier code.
- The one-run guard compares hashes only. A design name that already has a locked run is not refused by name, so a repeat run of an earlier design would not be stopped. A name-based check would close this and needs approval, because it edits the locked-test script.
- The first locked run used a `full_gbm` hash that no longer matches the current code for the same reason as above.

13 Limitations

The detector misses quiet cartels, cannot see uniform price-level collusion, and does not carry over to other bid-generating processes without recalibration.

- **Four schemes stay below AUC 0.85** (worst condition in brackets): partial cartel with a fringe 0.672 (0.621), bid suppression 0.744 (0.677), noisy or defecting cartel 0.823 (0.775), intermittent cartel 0.871 (0.849 at unseen spreads). A cartel of 2-3 firms leaves a trace in one or two of up to 435 firm pairs over only 20-60 tenders; this may be close to an information limit (a hypothesis, not proven). Bid suppression's own signal, missing bids, cannot be learned when that scheme is held out.
- **Uniform-markup collusion is invisible from bids alone** (AUC 0.478). Without cost data, a common price rise looks like higher costs. This is an identification limit, shown on purpose as a control.
- **Transfer to the old reinforcement-learning simulator fails.** The frozen detector was applied to scripted episodes of the earlier environment (20 rounds by 20 firms). With the benchmark's threshold it flagged 99.7 % of honest episodes, and against those honest episodes most cartel AUCs fell below 0.5 (cover cartels 0.31-0.74, target-pricing cartels 0.006-0.43). With the threshold refitted on that environment's own honest episodes, false alarms dropped to 7.0 % but cartels were flagged at 0-15 %, no better than honest markets. AUCs do not change with the threshold, so the failure is in how the model ranks markets, not in calibration. A likely cause (untested): honest bidders there all anchor to the last winning price, so their bids co-move, which the detector reads as coordination.
- **Thresholds need per-market calibration.** Both the real data (26.5 % false alarms in Japan) and the old simulator show that a threshold set elsewhere does not carry over.
- **Real-data evidence is three cases**, one cartel per country, scored tender by tender with the source paper's thresholded labels. Italy's average-bid auction changes what the gap and relative-distance screens mean.
- **The detector scores markets or tenders, not firms.** It does not name cartel members.
- **Cartels are imposed, not equilibrium behaviour.** The schemes and their parameter ranges are design choices, and honest firms follow rules rather than strategy.

Added since the first version of this report:

- **No variant fixed the weak schemes.** All four locked detectors fail the 0.85 target on the same schemes, and the partial cartel stays the weakest (0.636 to 0.678 pooled AUC).
- **No paired comparison between detectors on the locked test.** The four runs are compared through separate confidence intervals only.

- **The literature comparison is incomplete.** Full-text numbers were checked for one paper, and no matched-protocol AUC comparison has been run.
- **The one-run guard is hash-based.** A design name that already has a locked run is not refused by name, and the earlier frozen hashes no longer match the current code.

14 Future work

The most valuable next steps are better honest-behaviour modelling and calibration, more real cartel cases, and a strategic version in which the cartel chooses how to evade the detector. Any new design goes through the same protocol: validation first, then one locked run.

Toward a conference submission. The 2027 IJCAI call lists abstracts due January 4, 2027 and full papers due January 11, 2027 (anywhere on Earth), with 7 pages for the body plus 2 for references, double-blind review, and a reproducibility checklist. An AI for Social Good track shares the main-track deadlines.

- ☐ Run our detectors under the published within-country protocol and report AUC, then compare.
- ☐ Verify the other cited papers at source, including their data licences.
- ☐ Finish the `rl_screens` variant: its first version is locked-run (above); a per-market policy is untried.
- ☐ Decide on the name-based guard against repeat locked runs.
- ☐ Write an ethics statement (the false-alarm rate in Japan is the central concern) and cut the paper to 7 pages.
- ☐ Anonymise the repository and report, and check the data licence before releasing anything.

To finish the current paper

- ☐ Write the related-work section, with every citation checked against its source.
- ☐ Choose the venue (workshop or benchmark track) and fit the 4-6 page format.
- ☐ Decide whether the old-simulator result goes in the main text or the appendix.

To improve detection of the weak schemes

Work item	Why	Targets
Firm-level scoring: find the most suspicious group of firms, not just a market score	A 2-3 firm cartel is diluted in a market-level score; naming the group also makes results usable by an authority	Partial cartel, noisy cartel
Participation models that predict who should bid, then flag who is missing	Suppression's signal is absent bids; it needs an explicit model of expected participation	Bid suppression
Longer histories and window-aware features trained on intermittent patterns	Short markets (20-60 tenders) limit what a start-stop cartel reveals	Intermittent cartel
A measured information limit: how many tenders a k-firm cartel needs before any detector can see it	Tells whether the misses are fixable or a hard limit	All weak schemes

To make it robust across settings

- Richer honest-bidding models, including firms that anchor to the last winning price as in the old simulator, added to training so the detector stops reading honest co-movement as collusion.
- Per-market calibration: set the alarm threshold from each market's own honest history, or from a small labelled sample, instead of carrying one threshold over.
- Domain checks before deployment: a test that flags when a new market's honest bids look unlike the training data.

More real data

- Find further per-bid datasets with cartel labels and firm IDs (for example other national procurement cases), so that leave-one-cartel-out tests have more than three cases. Any download needs approval first.
- Score at market level wherever firms meet repeatedly, as in Italy, where the method worked.

A strategic follow-up (second paper)

- Turn detection into a leader-follower game: the regulator commits to the frozen detector, and the cartel chooses its scheme parameters (inflation, cover gap, defection rate, active share) to maximise profit while staying under the alarm. The result is an evasion frontier: how much profit a cartel must give up to stay hidden.
- This links back to the original project's Bayesian sequential regulator. It would need a payoff model in which collusion actually pays, which was the lesson of the reinforcement-learning work, so step one is a payoff check across schemes before any game is run.

15 Files and sources

All numbers in this report come from logged result files in the project repository (`Jayati ma'am project-v2`, branch `benchmark-v1`).

What	File
Locked test	`results/locked_1_full_gbm.md`, `results/locked_runs.jsonl`
Validation runs	`results/validation_v1` to `validation_v4` (`.md`, `.json`)
Real-data run	`results/real_lodo_1.md`, design in `docs/real_data_design.md`
Old-simulator transfer	earlier repo, branch `new-detector-check`: `results/new_detector_on_old_env/`, `results/new_detector_recalibrated/`
Every run with its hypothesis and outcome	`docs/experiment_log.md`
Claims and their evidence	`docs/claims_table.md`
Figures and their data tables	`docs/figures/`
Paper outline	`docs/paper_outline.md`

Added since the first version: variant results (`results/variant_*`, `results/locked_2_previous.*`, `results/locked_3_stat_auc.*`), the `stat_auc` selection record (`results/stat_auc_selection_stat_auc_select_v1.*`), frozen designs (`docs/frozen_design_previous.md`, `docs/frozen_design_stat_auc.md`), local copies of the old-environment results (`results/old_env/`), the golden reference (`tests/golden/reference.json`), and index files (`docs/README.md`, `scripts/README.md`, `CLAUDE.md`).

Real data: García Rodríguez, Rodríguez-Montequín, Ballesteros-Pérez, Love and Signor (2022), Collusion detection in public procurement auctions with machine learning algorithms, Automation in Construction 133, 104047, supplementary data.