

How to upload data on EDC

1-فتح SQL*Plus ٴ SYSDBA:

```
1 sqlplus / as sysdba
```

2. إنشاء اليوزر:

مثلاً هنعمل يوزر اسمه product وباسورد product123 :

```
CREATE USER product IDENTIFIED BY product;
```

الصلاحيات المطلوبة لرفع البيانات من يوزر Oracle إلى EDC:

1. الصلاحيات الأساسية المطلوبة لليوزر:

```
GRANT CONNECT, RESOURCE TO product;
```

دي بتسمح له بـ:

- الاتصال بقاعدة البيانات
- إنشاء جداول و-Views وIndexات وغيرها

2. صلاحية إنشاء Views:

```
GRANT CREATE VIEW TO product;
```

3. صلاحية إنشاء Materialized Views (لو هيرفع منها):

```
GRANT CREATE MATERIALIZED VIEW TO product;
```

رفع قيود المساحة التخزينية (علشان يقدر يخزن داتا كبيرة):

```
ALTER USER product QUOTA UNLIMITED ON users;
```

صلاحيات لقراءة الـ Metadata المطلوبة من EDC:

دي الصلاحيات الأساسية اللي لازم تتوفر علشان الـ EDC يقدر يقرأ الميتاداتا (جداول النظام):

```
1 -- Oracle system metadata الخاصة بـ views صلاحيات على --
2
3 GRANT SELECT ON v_$database TO product;
```

```

4 GRANT SELECT ON v_$instance TO product;
5
6 -- الخاصة بالجداول والماتيريال فيو views صلاحيات على
7
8 GRANT SELECT ON dba_objects TO product;
9 GRANT SELECT ON dba_tab_comments TO product;
10 GRANT SELECT ON dba_tab_columns TO product;
11 GRANT SELECT ON dba_col_comments TO product;
12 GRANT SELECT ON dba_mviews TO product;
13
14 -- صلاحيات على ملفات وأماكن البيانات الخارجية
15
16 GRANT SELECT ON dba_external_locations TO product;
17 GRANT SELECT ON dba_directories TO product;
18
19 -- السابقة views صلاحية عامة تشمل معظم
20
21 GRANT SELECT_CATALOG_ROLE TO product;

```

Very very very important 🔥

لازم تعمل الكود اللي فات كله عشان لما تفتح ال Scanner ونعمل test connection يبقى
Connection information is valid

Note

خلي بالك اسم اليوزر هنا product علشان ده اليوزر اللي عايزين نديله الصلاحيات دي لو هتدي الصلاحيات دي ليوزر ثاني غير اسم اليوزر

الصلاحية	وظيفتها في EDC
v_\$database	بيجيب اسم ال Database اللي شغالة عليه، عشان EDC يسجل ال source metadata صح
v_\$instance	بيجيب معلومات عن ال instance اللي قاعدة البيانات شغالة عليها (الاسم، الحالة، الخ)
dba_objects	بيعرض كل الكيانات (جداول، فيوزات، ...)، وده أساسي علشان EDC يقدر يعمل Catalog
dba_tab_comments	بيعرض وصف/تعليقات الجداول (Table Comments) — EDC بياخد منها metadata مهمة
dba_external_locations	لو فيه External Tables — بيشوف الأماكن المرتبطة بيها
dba_directories	External Tables المرتبطة ب Oracle Directories بيحتاج يعرف ال EDC

الصلاحية	وظيفتها في EDC
dba_mviews	عشان EDC يقدر يشوف تفاصيل الـ Materialized Views (أسماء، خصائص، ... إلخ)
dba_tab_columns	يعرض تفاصيل الأعمدة داخل الجداول — ده مهم جدًا علشان يظهر schema metadata في EDC
dba_col_comments	يعرض وصف/تعليقات الأعمدة نفسها — بيتم قراءته لعرضه في الـ Glossary داخل EDC

تشتغل من داخل اليوزر الجديد (product) وتبدأ تنفذ التالي:

1. تسجل دخول باليوزر الجديد:

```
1 sqlplus product/product
```

2. إنشاء الجدول اللي فيه البيانات اللي عايز ترفعها لـ EDC:

مثلاً:

```
1
2 CREATE TABLE product_data (
3     product_id      NUMBER,
4     product_name    VARCHAR2(100),
5     model           VARCHAR2(50),
6     make            VARCHAR2(50),
7     vin             VARCHAR2(50),
8     customer_id     NUMBER,
9     first_name       VARCHAR2(50),
10    last_name        VARCHAR2(50),
11    email            VARCHAR2(100)
12 );
```

3. لو عايز تشوف كل الجداول عندك:

```
SELECT table_name FROM user_tables;
```

هنعمل فايل علشان يعمل Load للڤايتا من ملف ال CSV لل sqlplus

هنعمل فايل ونكتب في اسكربت sql و يكون الامتداد بتاعه ctl علشان اقدر اعمل upload للڤايتا من ملف ال csv من علي الجهاز ل VM

هنروح للمكان اللي عايز اعمل فيه الفايل ده واكتب

```
1 nano product.ctl
```

واكتب

```
1 LOAD DATA
2 INFILE '/home/oracle/Data/product/Product_Data.csv'
3 BADFILE '/home/oracle/Data/product/Product_Data.bad'
4 DISCARDFILE '/home/oracle/Data/product/Product_Data.dsc'
5 INTO TABLE product_data
6 FIELDS TERMINATED BY ',' OPTIONALLY ENCLOSED BY '"'
7 TRAILING NULLCOLS
8 (
9     product_id,
10    product_name,
11    model,
12    make,
13    vin,
14    customer_id,
15    first_name,
16    last_name,
17    email NULLIF email=BLANKS
18 )
```

Note

لو في اعمدة مش مكتوب في ال cells بتاعتها داتا بتكتب جمبها السطر ده

NULLIF email=BLANKS

Note

افتكر غير ال Paths وخط الاماكن الجديده

وبعدين دوس علي

1- ctrl + o

- 2- Enter
- 3- ctrl + x

وبعدين اكتب الكوماند ده

```
1 sqlldr product/product control=/home/oracle/Data/product/product.ctl skip=1
```

```
[oracle@Cloudera Data]$ sqlldr product/product control=/home/oracle/Data/product/product.ctl skip=1

SQL*Loader: Release 19.0.0.0.0 - Production on Mon Jul 7 02:33:01 2025
Version 19.3.0.0.0

Copyright (c) 1982, 2019, Oracle and/or its affiliates. All rights reserved.

Path used:      Conventional
Commit point reached - logical record count 250
Commit point reached - logical record count 500
Commit point reached - logical record count 750
Commit point reached - logical record count 1000


Table PRODUCT_DATA:
  1000 Rows successfully loaded.

Check the log file:
  product.log
for more information about the load.
[oracle@Cloudera Data]$
```

upload on EDC

Open EDC Scanner:

1-

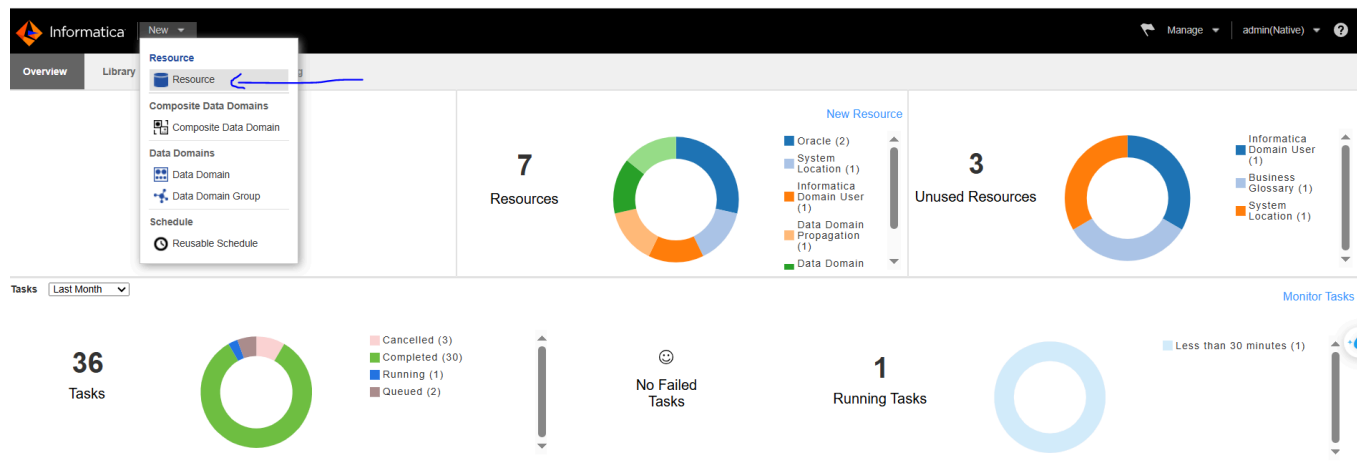

2-

Informatica

New

Manage

admin(Native)

Overview

Library

Resource

Monitoring

Home

Refresh

Close

1 General

2 Metadata Load Settings

3 Custom Attributes

4 Permissions

5 Schedule

< Back

Next >

Save

Cancel

Enter the basic information about the resource.

Name*

Description:

Resource type*

Choose...

Execute On*

☒ Default Catalog Server ☐ Offline

Additional properties

Data Owner:

Select

☐ Propagate

Select

Data Steward:

Select

☐ Propagate

Select

Department:

Enter an alphanumeric string

☐ Propagate

Select

Failure Notification Subscribers:

Select

Subject Matter Experts:

Select

☐ Propagate

Select

3-

General

Metadata Load Settings

Custom Attributes

Permissions

Schedule

Save

Cancel

Enter the basic information about the resource.

Name:

Product

Description:

product domain data

Resource type*:

Oracle

Execute On*:

☒ Default Catalog Server ☐ Offline

Connection Properties

User*:

product

Password*:

Host*:

cloudera.local

Port*:

1521

Service*:

orcl.local

Agent Miscellaneous Options:

Test Connection

4-

The screenshot shows the 'Resource' configuration page in a web application. The 'General' tab is active, and the 'Test Connection' dialog box is open, displaying the message 'Connection information is valid.' with an 'OK' button. The background form contains the following fields:

- Name*: Product
- Description*: product domain data
- Resource type*: Oracle
- Execute On*: ☒ Default Catalog Server ☐ Offline
- User*: product
- Password*: [masked]
- Host*: cloudera.local
- Port*: 1521
- Service*: orcl.local
- Agent Miscellaneous Options: [empty]

A red circle highlights the 'Test Connection' dialog box.

5-

Then go to text page and select the Schema

The screenshot shows the 'Metadata Load Settings' page in a web application. The 'General' tab is active, and the 'Metadata Load Settings' sub-tab is selected. The 'Source Metadata' section is expanded, and the 'Additional properties' section is visible. The 'Schema' field is set to 'PRODUCT x', and the 'Select...' button is highlighted. A red arrow points to the 'Schema' field, and another red arrow points to the 'Select...' button.

Source Metadata

- ☒ Enable Source Metadata

Additional properties

- Import system objects: ☐
- Schema: PRODUCT x Select...
- Source Metadata Filter: All
- Import stored procedures: ☐
- Import Private and Public Synonyms: ☐
- Case Sensitive: ☐
- Import Database Name:
- Agent Options:

Advanced Properties

- Memory*: Low
- Custom Options:

6- Scroll Down in same page and write the domain connection

GeneralMetadata Load SettingsCustom AttributesPermissionsSchedule

SaveCancel

☒ Enable Data Discovery

Discovery Types

Discover:

☐ Unique Key Inference☒ Profiling

Domain Connection Settings

☒ Custom☐ Global

Select the choice ...

Domain Name*:

Domain

Data Integration Service*:

Data_int_Service

Username*:

admin

Password*:

Security Domain*:

Native

Host*:

cloudera.local

Port*:

6005

Operating System Profile:

All

Select...

Common Discovery Options

Run on:

Native

7-

Common Discovery Options

Run on:

Native

Source Connection Name*:

hr

X

Select...

Basic Profile Settings

Profile Run Option*:

Column Profile

Sampling Option*:

First N Rows

Number of First N Sampling Rows:

10000

Priority:

☐ High☒ Low

Exclude Views:

☐

Incremental Profiling :

☐

Cumulative:

☒

Enable Profile validation:

☐

Data Profile Filter :

All

Similarity Profile Data Preparation and Value Frequency Settings

Business Term Association

☒ Enable Business Term Association

Settings

Glossaries*:

BG_DEFAULT_RESOURCE x

Select...

Use synonyms and stop words:

☐

Ignore Prefixes:

Ignore Suffixes:

Custom Options:

8-

OverviewLibraryResourceMonitoring

Product X

GeneralMetadata Load SettingsCustom AttributesPermissionsSchedule

Configure the load settings for source metadata and profile metadata.

Source Metadata

Enable Source Metadata

Additional properties

Import system objects:

Schema:PRODUCT XSelect...

Source Metadata Filter:All

Import stored procedures:

Import Private and Public Synonyms:

Case Sensitive:

Import Database Name:

Agent Options:

Advanced Properties

Memory:Low

SaveSave and RunCancel

https://cloudera.local:9086/ldmadmin/twstate=(%27\$obj%27;%27stringidentitycustomer@c...

9- DONE

OverviewLibraryResourceMonitoring

customer_copy XProduct X

Product

CloneEditRun

GeneralMetadata Load SettingsCustom AttributesPermissionsScheduleMonitoring

Tasks

Type	Schedule	Triggered By	Status	Start time	End time	Run time (HH:MM:SS)	Next Schedule	Log URL
SCAN_JOB (11)								
Metadata Load	---	Manual	Completed	Mon, Jul 7, 2025, 2:08:22 P...	Mon, Jul 7, 2025, 2:09:41 P...	00:01:19	---	Log Location
Auto-Connection Assignment	---	Manual	Completed	Mon, Jul 7, 2025, 2:13:13 P...	Mon, Jul 7, 2025, 2:13:43 P...	00:00:30	---	Log Location
Business Term Association	---	Manual	Completed	Mon, Jul 7, 2025, 2:13:43 P...	Mon, Jul 7, 2025, 2:14:13 P...	00:00:29	---	Log Location
Composite Domain Discovery	---	Manual	Completed	Mon, Jul 7, 2025, 2:13:43 P...	Mon, Jul 7, 2025, 2:14:13 P...	00:00:29	---	Log Location
Composite Domain Discove...	---	Manual	Completed	Mon, Jul 7, 2025, 2:16:14 P...	Mon, Jul 7, 2025, 2:17:14 P...	00:01:00	---	Log Location
Composite Domain Discove...	---	Manual	Completed	Mon, Jul 7, 2025, 2:14:43 P...	Mon, Jul 7, 2025, 2:15:44 P...	00:01:00	---	Log Location

10- Delete

 Informatica

New ▾

Manage ▾

admin(Native) ▾

Overview

Library

Resource

Monitoring

Library

Assets

Composite Data Domains

Data Domain Groups

Data Domains

Reference Resources

Resources

Schedule

Resources (9)

Sort By: Resource Name ▾

Filter

Resource Name	Description	Resource Type
▶  BQ_DEFAULT_RESOURCE	Default BG Resource	Business Glossary
▶  customer	Customer	Oracle
▶  DataDomain	Internal system job that synchronizes data domains between the Model reposi...	Data Domain
▶  DataDomainPropagation	Internal system job that propagates data domains based on system-inferred ru...	Data Domain Propagation
▶  DomainUsers	Domain User resource created by system.	Informatica Domain User
▶  HR		Oracle
▶  Product	product domain data	Oracle
▶  product_data	product domain data	Oracle
▶  SystemLocations	Internal system job that imports locations in the catalog	System Location

Run

Purge

Clone

Delete

Open...

Edit

Filter

Resource Filter

Created By

☒ All

☐ admin

☐ system

Resource Name

Atlas

Axon

Azure D

Azure D

Azure M

Azure M