
Wednesday, October 28, 2026 8:38 PM


Kafka (aka Messaging Queues)

F^n to add in the FB-Messenger

⇒ sendMessage

- ↳ send a notf^n to the receiver.
- ↳ If the receiver is not online for more than 72 hrs, send an email.
- ↳ Update some analytics sys

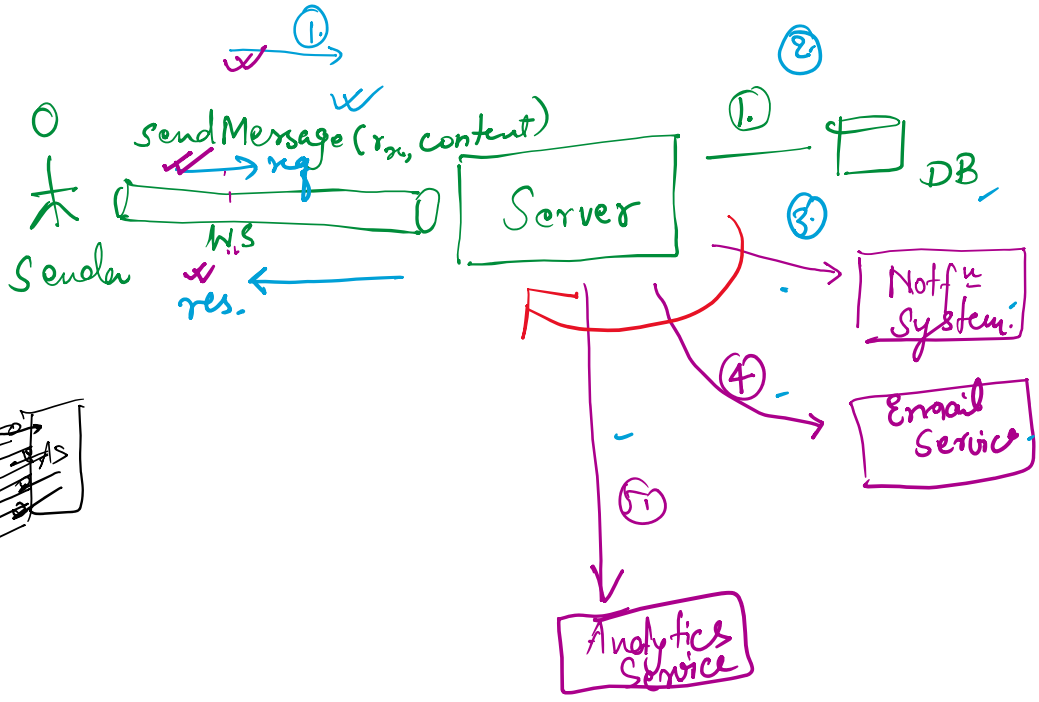



Opⁿ 1 :-

↳ update DB → MUST

↳ call. notifⁿ service → GOOD

↳ send email → GOOD

↳ updates analyzer → GOOD

⋮

(they all can happen later)

Message sent

↓

If all started getting done before sending res.

overall delay OR Timeout.

1) MUST-HAVE

Good-To-Have

→ save tasks we will want to do immediately.

→ other tasks that can afford delay

do delay for later (

okay if those tasks happen async.)


Flipkart

placeorder ( ) {

→ details will be save to DB → MUST
→ order confirm^n email
→ notify Warehouse
→ talk to logistics Provide API
→ Update analytics
→ genrate Invoice.

may happen → Later

}

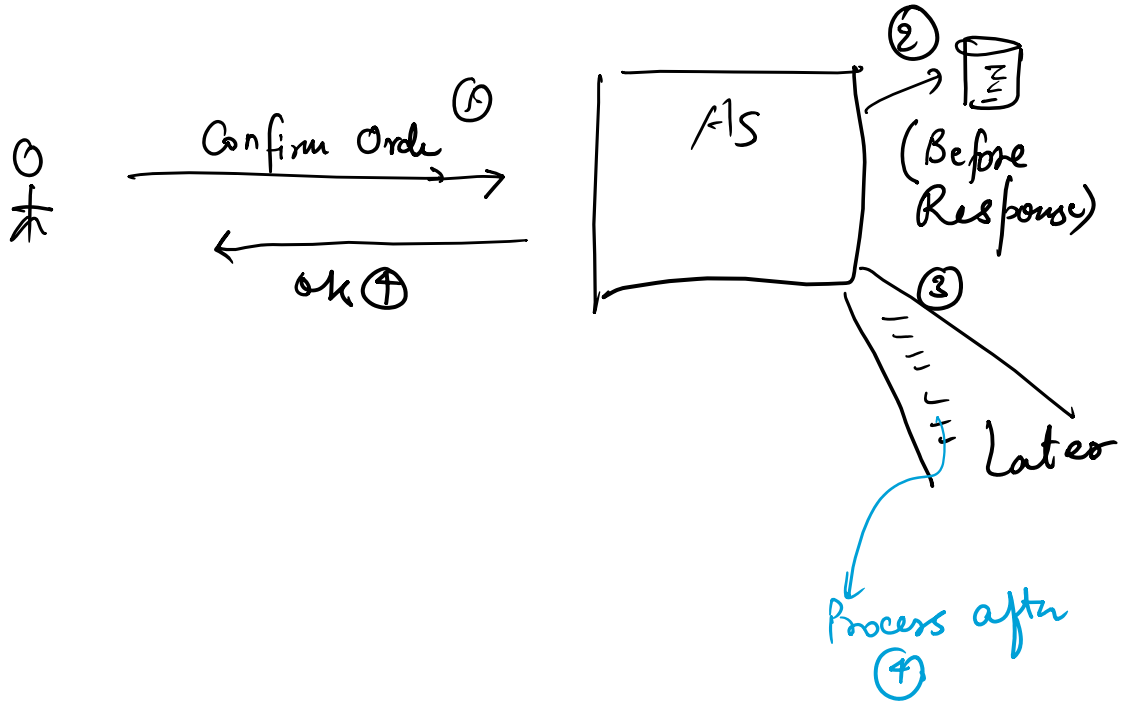

api ( ) {

Must to be done before respond

synchronous

Note :-

Do as less as possible synchronously

synch: before response

RESPOND


asynch: Can be done later


}


synchronously


⊛ Persistent Queue

↳ Pub-Sub / Publisher-Subscriber.

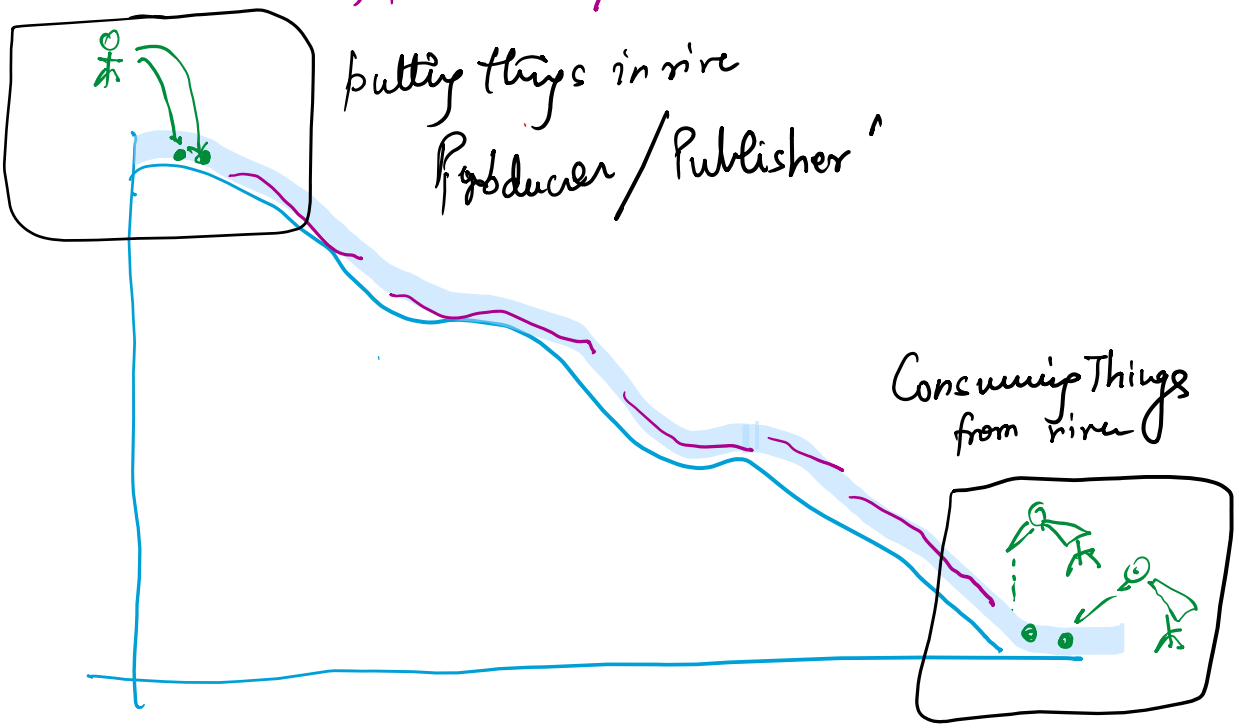

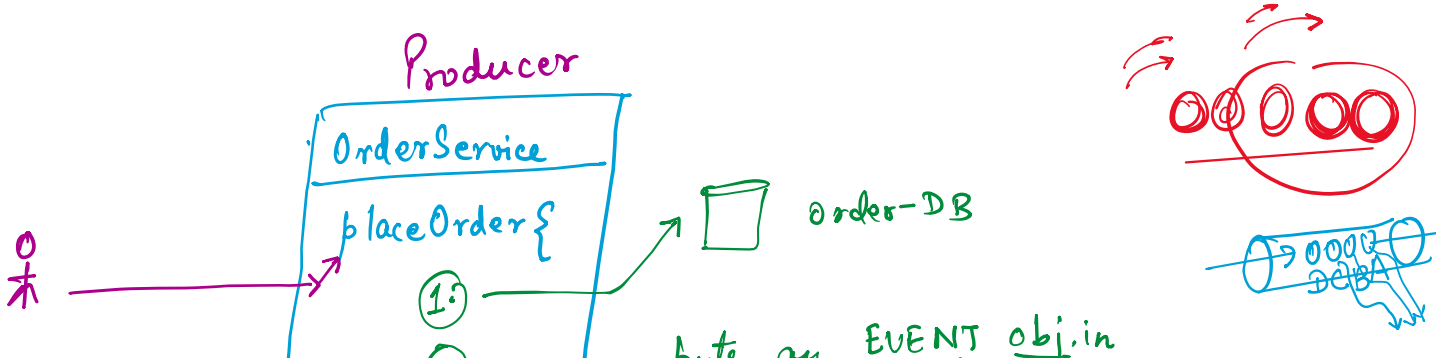

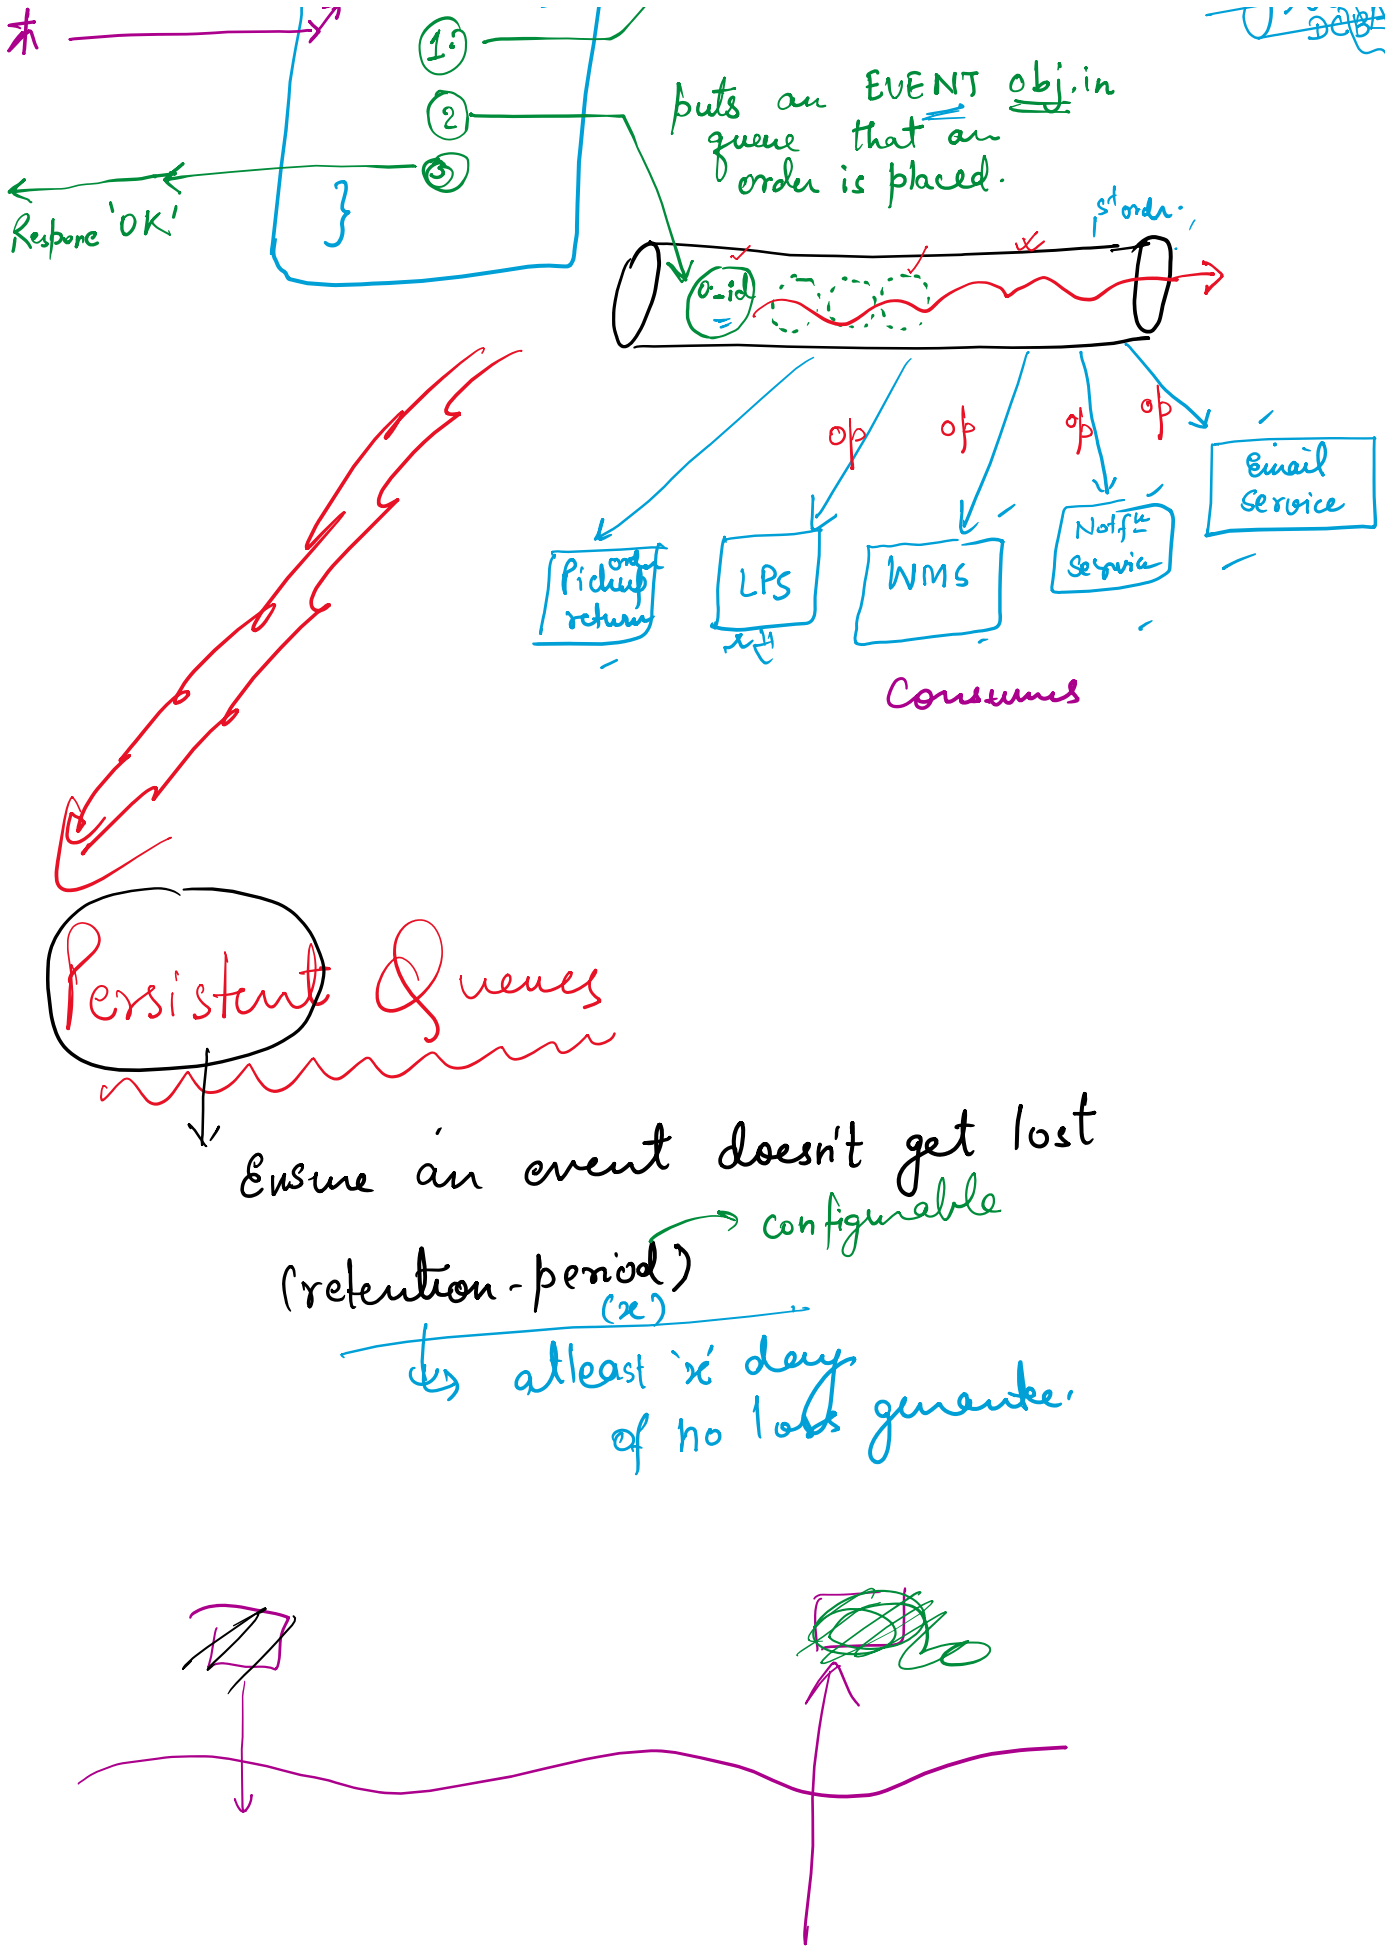

1
2
3
Respone 'OK'
puts an EVENT obj. in queue that an order is placed.
1st order.
o-id
op
op
op
op
Email Service
Pickup order return
LPS
WMS
Notf^n Service
Consumes
Persistent Queues
Ensure an event doesn't get lost
(retention-period)
configurable
(x)
atleast 'x' days of no loss guarantee.

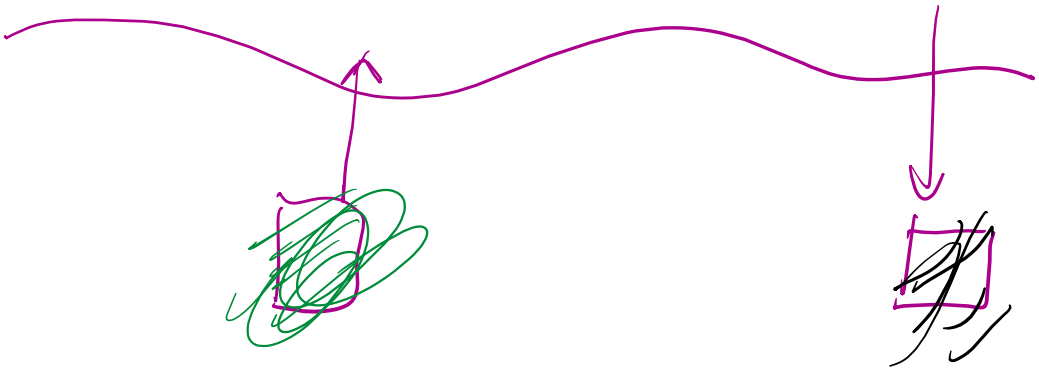


→ In the river (queue) multiple kind of events can be there

→ Every consumer will not be interested in every type of event

⇒ → We need a way to segregate diff. kinds of events **

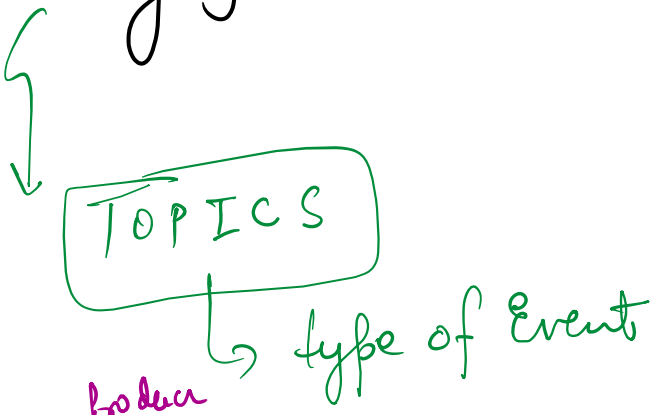




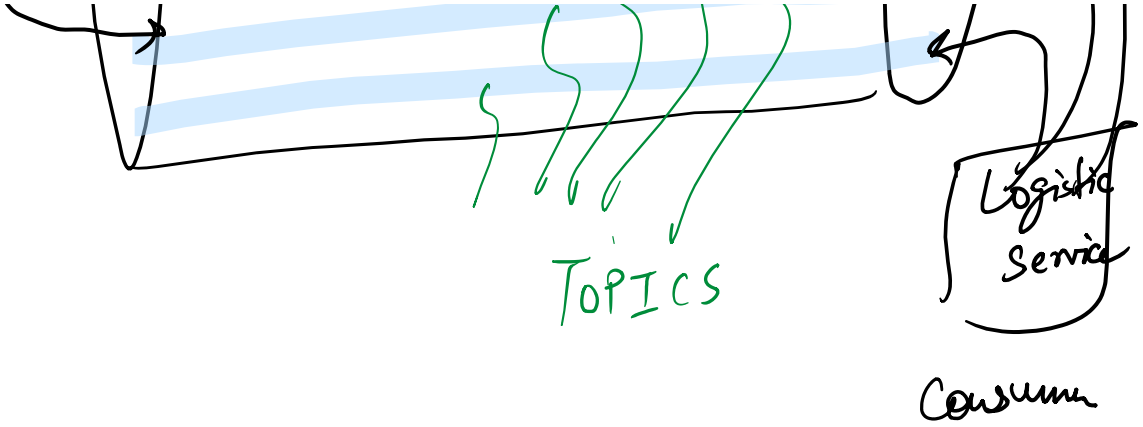


if MQ ≡ DB

then Topic ≡ Table

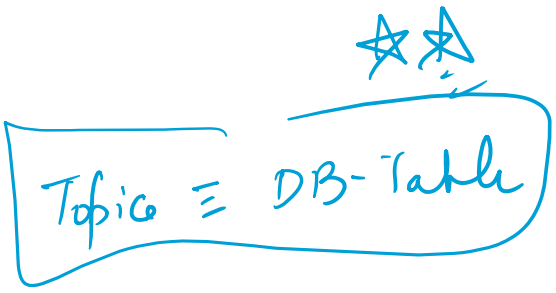

Pls. Note

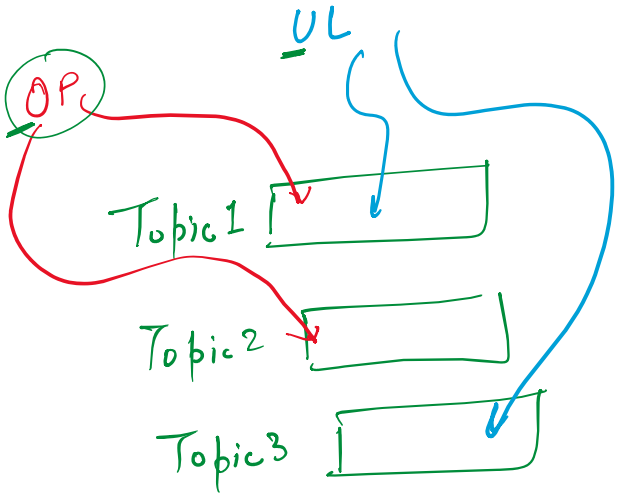

Event Type ≠ Topic