



Hochschule
Bonn-Rhein-Sieg
University of Applied Sciences

b-it Bonn-Aachen
International Center for
Information Technology



Master's Thesis

Out-of-distribution detection in 3D semantic segmentation

Lokesh Veeramacheneni

Submitted to Hochschule Bonn-Rhein-Sieg,
Department of Computer Science
in partial fulfilment of the requirements for the degree
of Master of Science in Autonomous Systems

Supervised by

Prof. Dr. Paul G Plöger
Dr. Matias Valdenegro
Prof. Dr. Sebastian Houben

April 2022

I, the undersigned below, declare that this work has not previously been submitted to this or any other university and that it is, unless otherwise stated, entirely my own work.

Date

Lokesh Veeramacheneni

Contents

1	Experiments and Results	1
1.1	Deep Ensembles-Semantic3D	1
1.2	Flipout-Semantic3D	3
1.3	OOD benchmark - Semantic3D vs S3DIS	4
1.3.1	Maximum Softmax Probability (MSP)	5
1.3.2	Entropy	5
1.4	OOD Benchmark - Semantic3D vs Semantic3D without color	7
1.4.1	Deep ensembles	7
1.4.2	Flipout	7
1.4.3	Maximum Softmax probability (MSP)	7
1.4.4	Entropy	7
1.5	OOD detection evaluation	7
	References	9

List of Figures

1.1	Output predictions of the RandLA-Net over the Semantic3D dataset (13 ensemble size) Legend spelling mistake.	2
1.2	Deep ensembles performance on RandLA-Net over the Semantic3D dataset.	3
1.3	Output predictions of the RandLA-Net over the Semantic3D dataset (10 forward passes) Legend spelling mistake.	4
1.4	Output predictions of the RandLA-Net over the S3DIS dataset.	6

List of Tables

1.1	Illustration of performance of RandLA-Net on Semantic3D over number of ensembles. meanIOU and IOU per-class and overall accuracy are represented here. C1 to C8 are the classes of Semantic3D which are Manmadeterrain, Naturalterrain, Highvegetation, Lowvegetation, Buildings, Hardscapes, Scanningartifacts, and Cars.	1
1.2	Illustration of performance of Flipout versioned RandLA-Net on Semantic3D. meanIOU and IOU per-class and overall accuracy are represented here. C1 to C8 are the classes of Semantic3D which are Manmadeterrain, Naturalterrain, Highvegetation, Lowvegetation, Buildings, Hardscapes, Scanningartifacts, and Cars.	3

1

Experiments and Results

This chapter discusses the experiments conducted for Out-Of-Distribution (OOD) detection on RandLA-Net using quantified uncertainty from Deep Ensembles and Flipout. In a detailed discussion about RandLA-Net, Deep Ensembles and Flipout can be found in Chapter [§]. In this chapter, we first discuss the training results of RandLA-Net using deep ensembles and flipout on Semantic3D as an In-Distribution (ID) dataset. Furthermore, we compare the Maximum Softmax Probability (MSP) as in [1] and entropy values for the proposed OOD benchmark datasets Semantic3D vs S3DIS and Semantic3D vs Semantic3D w/o colour. Finally, we visualize and evaluate the performance of OOD detection using the AUROC score.

1.1 Deep Ensembles-Semantic3D

In this experiment, we trained 20 models of RandLA-Net over the Semantic3D dataset using random initializations with the experimental setup described in Section [§]. The predictions from these 20 individual models are then averaged to compute the final predictions. The evaluation results of the Deep Ensembles are described in Table 1.1 using meanIoU, per-class IoU and accuracy. The predictions from the Deep Ensembles are depicted in Figure 1.1 and Figure 1.2.

Ensemble size	meanIoU	IoU per class								Accuracy
		C1	C2	C3	C4	C5	C6	C7	C8	
1	68.19	94.55	81.19	84.67	29.43	81.37	18.85	64.74	90.74	88.78
5	69.51	94.73	81.92	84.42	28.05	86.41	28.50	61.03	91.03	90.04
10	69.97	95.25	83.73	86.63	30.36	84.13	18.60	66.01	92.61	89.94
15	70.32	95.27	83.54	88.22	32.19	84.82	26.17	61.67	90.75	90.57
20	70.80	95.55	84.11	86.65	29.60	85.41	29.58	62.47	93.06	90.56

Table 1.1: Illustration of performance of RandLA-Net on Semantic3D over number of ensembles. meanIOU and IOU per-class and overall accuracy are represented here. C1 to C8 are the classes of Semantic3D which are Manmadeterrain, Naturalterrain, Highvegetation, Lowvegetation, Buildings, Hardscapes, Scanningartifacts, and Cars.

From the Table 1.1, we infer that the Deep Ensembles improve the model’s overall performance in terms of meanIoU and Accuracy. With an ensemble size of 10, we observe a 2% increment in meanIoU. An increase in ensemble size also results in an improvement in per-class IoU performance. Figure 1.2 depicts

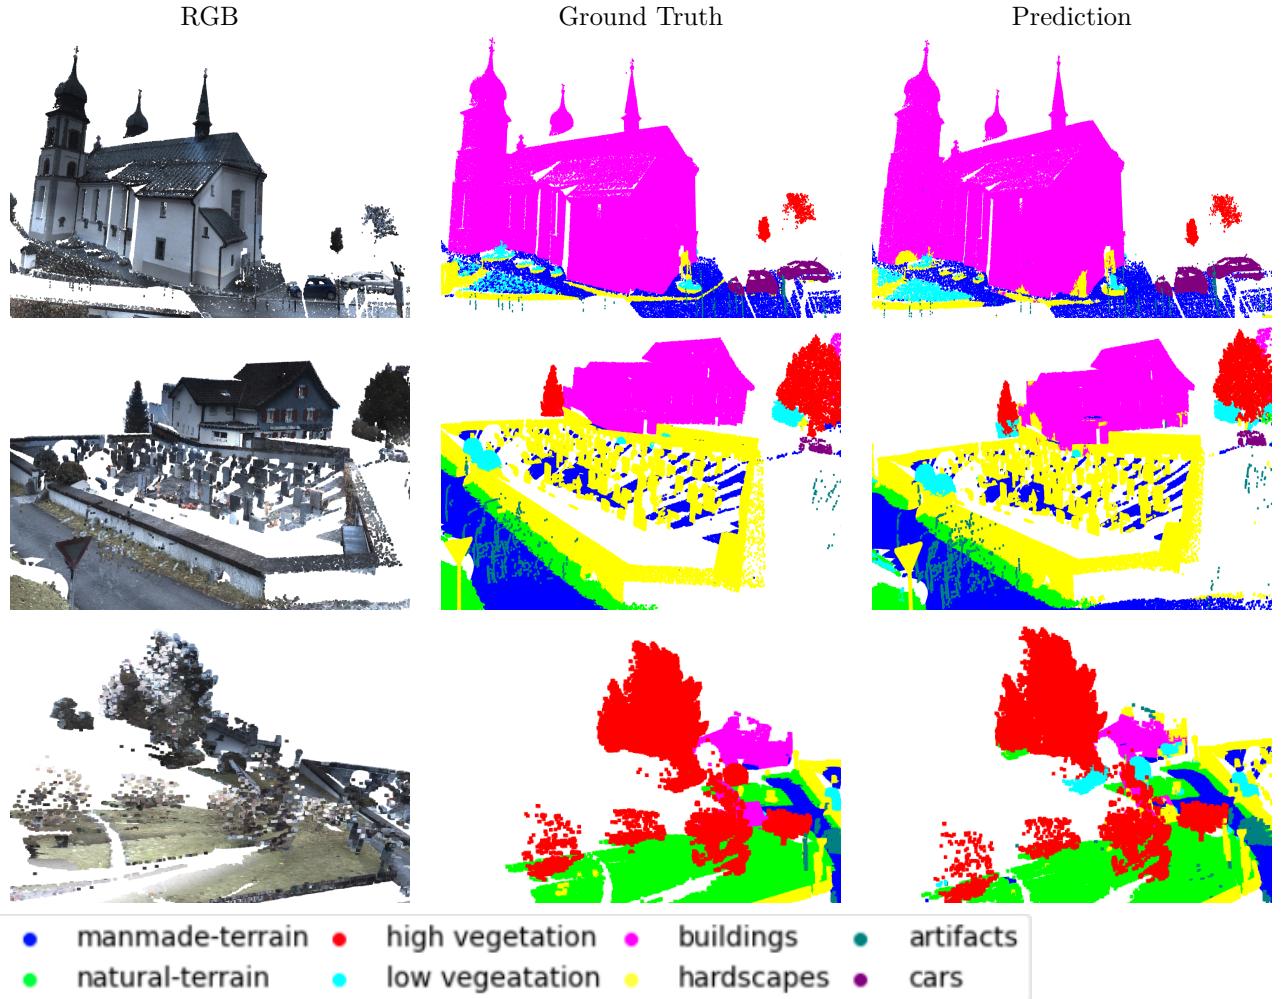


Figure 1.1: Output predictions of the RandLA-Net over the Semantic3D dataset (13 ensemble size) [Legend spelling mistake](#).

the improvement in model classifications visually with the increase in ensemble size. From Figure 1.1, we also observe the misclassifications along the edges of the church, trees and ground. The possible explanation for these misclassifications is ambiguity in the feature vector of RandLA-Net. For example, a feature vector for the point along the lower edge of the church contains the part of ground points as the feature vector.

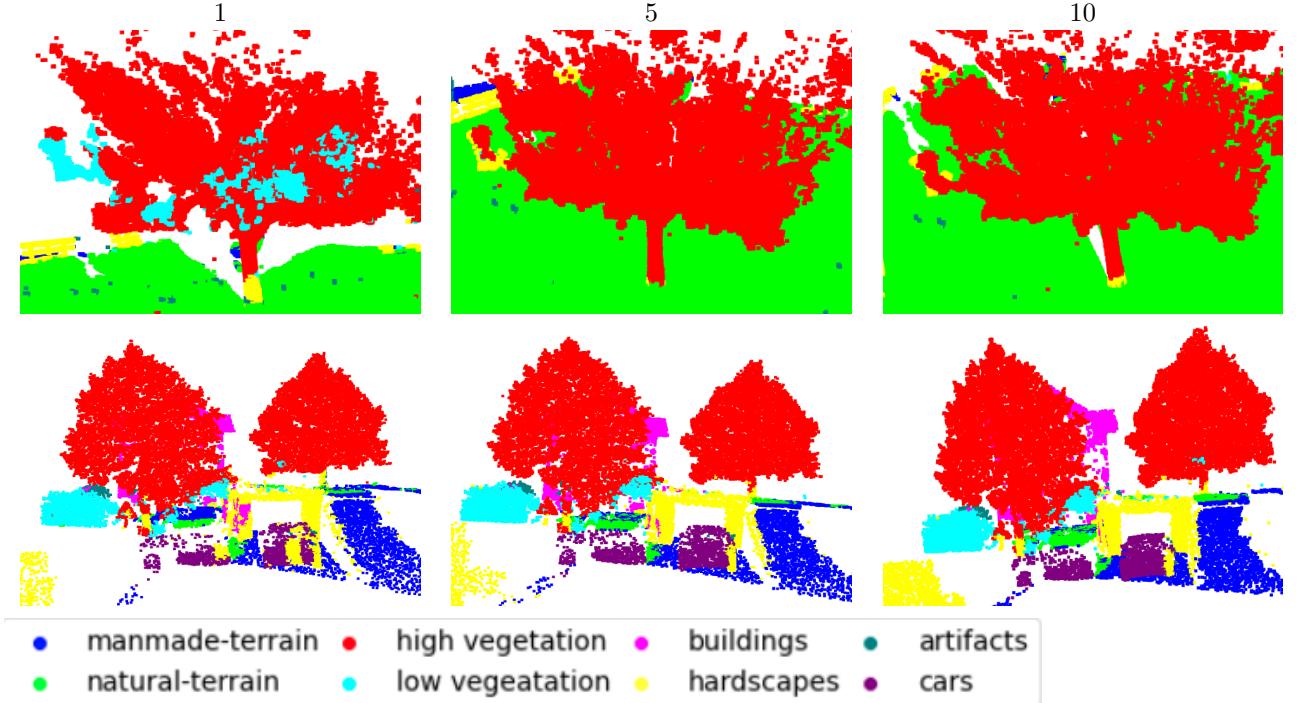


Figure 1.2: Deep ensembles performance on RandLA-Net over the Semantic3D dataset.

1.2 Flipout-Semantic3D

In this experiment, we trained a Flipout version of RandLA-Net as described in Section [§] over the Semantic3D dataset. Like Deep Ensembles, we performed 20 forward passes over the Flipout versioned RandLA-Net and averaged the predictions to obtain final predictions. Table 1.2 describes the performance of Flipout versioned RandLA-Net using meanIoU, per-class IoU and Accuracy. Figure 1.3 depicts the predictions of the Flipout versioned RandLA-Net visually.

#Passes	MeanIoU	IoU per class								Accuracy
		C1	C2	C3	C4	C5	C6	C7	C8	
1	69.95	94.24	80.09	86.16	22.48	88.70	39.41	57.42	91.12	90.71
5	69.83	94.38	80.21	84.10	23.32	87.80	39.68	57.75	91.43	90.43
10	69.84	94.38	80.16	83.90	23.46	87.73	39.75	57.83	91.47	90.40
15	69.86	94.38	80.17	83.80	23.48	87.73	39.82	57.96	91.57	90.40
20	69.87	94.38	80.18	83.80	23.57	87.72	39.84	57.92	91.57	90.40

Table 1.2: Illustration of performance of Flipout versioned RandLA-Net on Semantic3D. meanIOU and IOU per-class and overall accuracy are represented here. C1 to C8 are the classes of Semantic3D which are Manmadeterrain, Naturalterrain, Highvegetation, Lowvegetation, Buildings, Hardscapes, Scanningartifacts, and Cars.

From Table 1.2, we infer that the Flipout versioned RandLA-Net has a similar performance to the

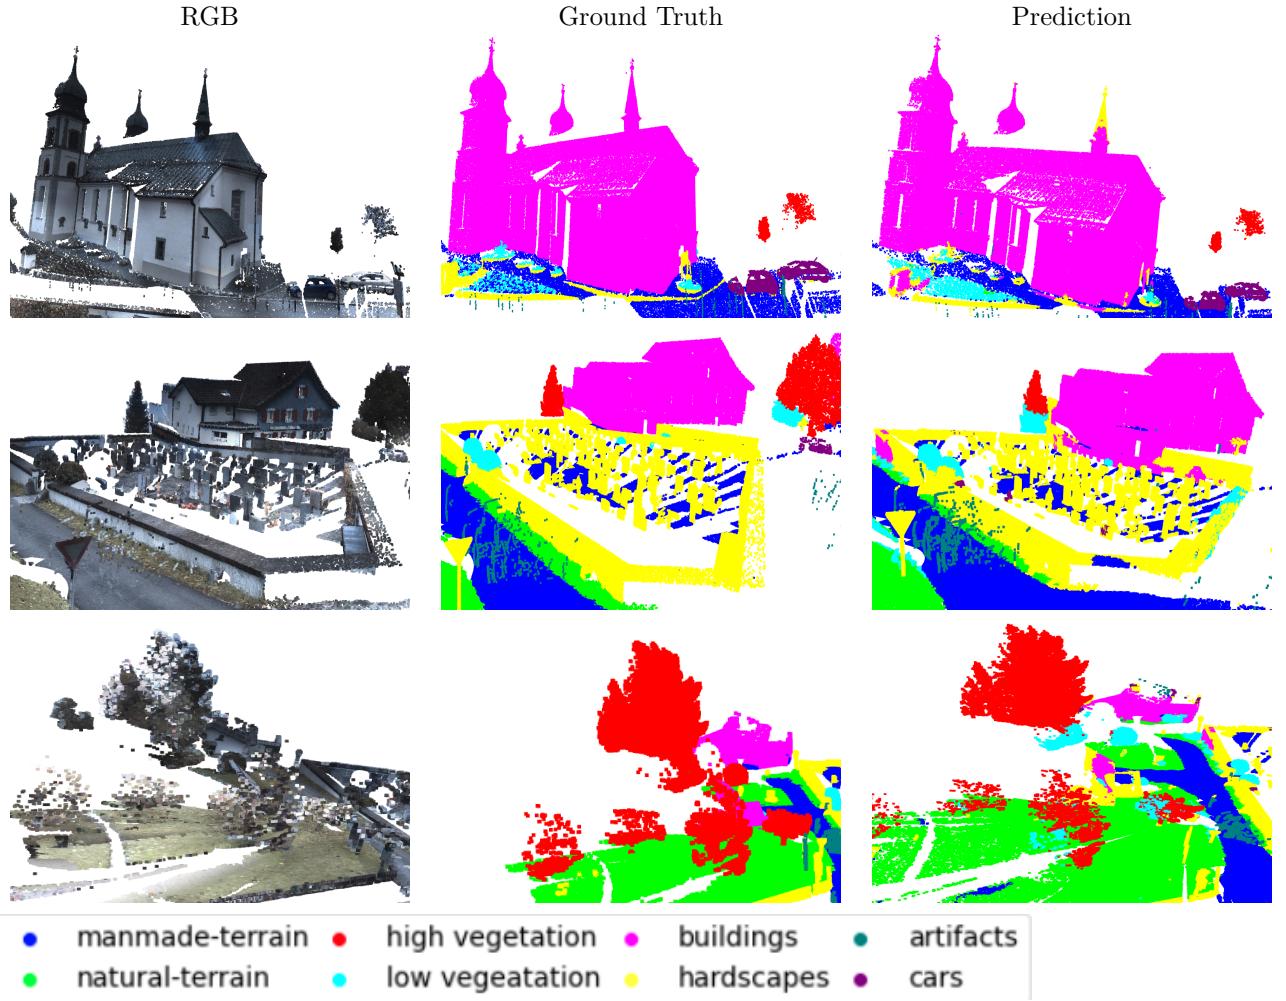


Figure 1.3: Output predictions of the RandLA-Net over the Semantic3D dataset (10 forward passes)
 Legend spelling mistake.

original RandLA-Net model proposed in [2] and also Deep Ensembles with ensemble size one . We also observe a significant improvement in the Hardscapes class represented as C6 in Table 1.2. There is a decrement in performance of classes Lowvegetation represented as C4 and Scanningartifacts represented as C7 in Table 1.2, keeping the overall meanIoU same.

1.3 OOD benchmark - Semantic3D vs S3DIS

In the previous section, we studied the performance of the Deep Ensembles and Flipout over the Semantic3D (In-Distribution) dataset. In this section, we study the predictions of the RandLA-Net model on the S3DIS (Out-Of-Distribution) dataset using Deep Ensembles and Flipout. We also compare the distribution of Maximum Softmax Probability (MSP) and entropy scores for Semantic3D and S3DIS datasets.

Figure 1.4 depicts the predictions of the RandLA-Net model and Flipout versioned RandLA-Net. We observe that most objects, such as ceiling and bookshelves, are labelled as building. The other classifications are in triangles because of the property of the scanner. As discussed in Section [§], data collected from the Matterport scanner is represented as triangular mesh, and then a point cloud is extracted from this mesh.

1.3.1 Maximum Softmax Probability (MSP)

1.3.2 Entropy

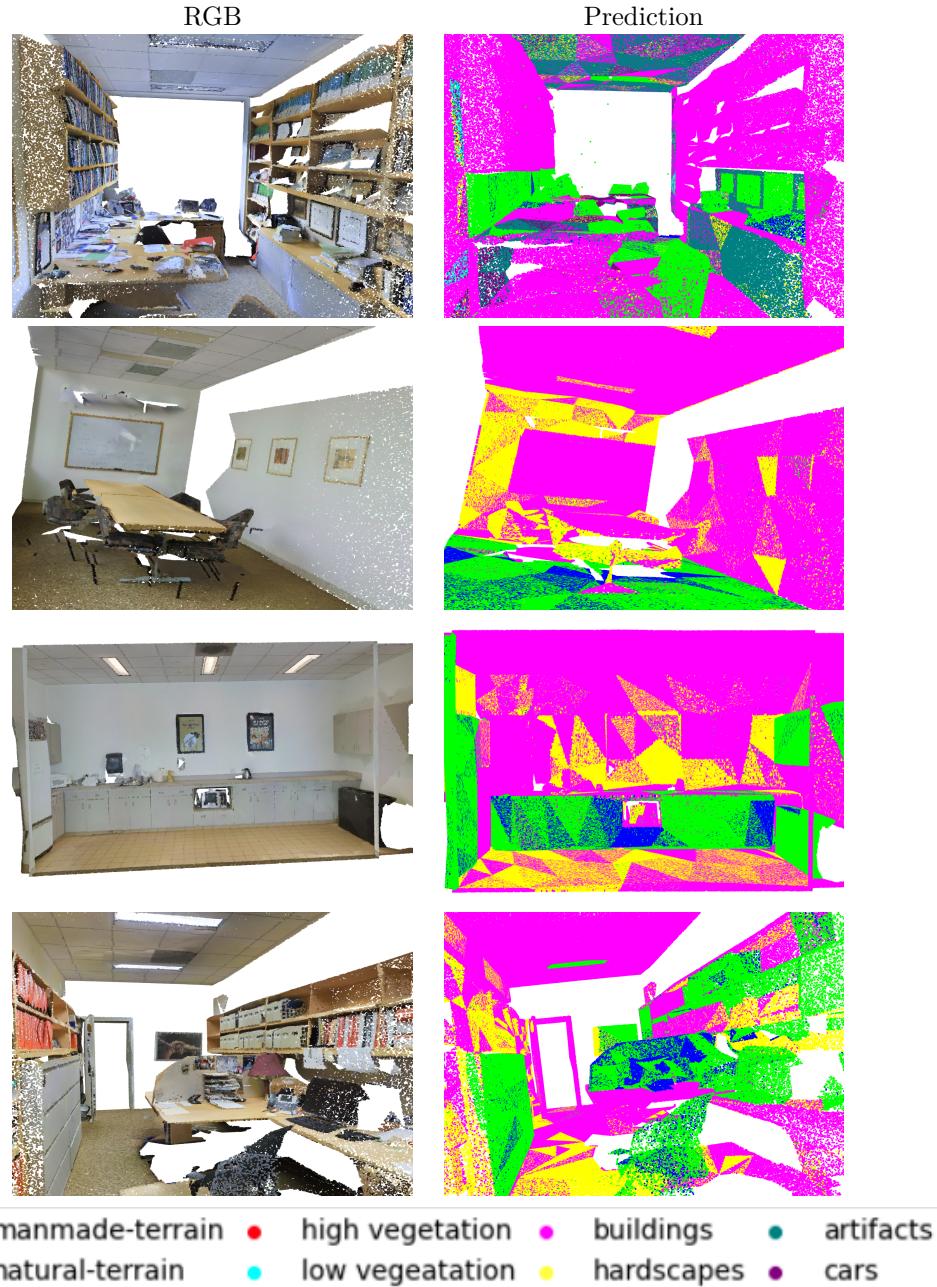


Figure 1.4: Output predictions of the RandLA-Net over the S3DIS dataset.

1.4 OOD Benchmark - Semantic3D vs Semantic3D without color

1.4.1 Deep ensembles

1.4.2 Flipout

1.4.3 Maximum Softmax probability (MSP)

1.4.4 Entropy

1.5 OOD detection evaluation

References

- [1] Dan Hendrycks and Kevin Gimpel. A baseline for detecting misclassified and out-of-distribution examples in neural networks. *arXiv preprint arXiv:1610.02136*, 2016.
- [2] Qingyong Hu, Bo Yang, Linhai Xie, Stefano Rosa, Yulan Guo, Zhihua Wang, Niki Trigoni, and Andrew Markham. Randla-net: Efficient semantic segmentation of large-scale point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.