

Liivv — Supabase inventory

For: IT / security

From: Liivv

Date: 9 September 2026


Ask: “Please provide all the tables, backend / Edge Functions on Supabase.”

PDF: [Supabase-Inventory.pdf](#)

Direct answer

Item	What Liivv has
Tables	13 Postgres tables in the public schema (listed below)
Supabase Edge Functions	None
Supabase database functions / triggers / cron	None in the application schema
Supabase Auth / Storage / Realtime	Not used by the app

Supabase is used as a **hosted Postgres database** in **Canada** (ca-central-1). Application logic runs in the **Next.js storefront on Vercel**, not as serverless functions inside Supabase.

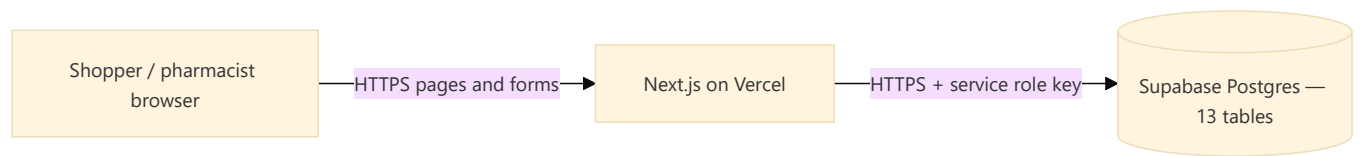

The browser never holds a Supabase key and never calls Supabase directly.

What “backend / Edge Functions” means here

In Supabase, **Edge Functions** are optional Deno serverless APIs you deploy *inside* the Supabase project (Dashboard → Edge Functions, or a supabase/functions/ folder in git). Typical uses: webhooks, scheduled jobs, custom APIs.

Liivv does **not** use that product.

Kind of “backend”	Hosted where	Used by Liivv?
Supabase Edge Functions	Supabase	No — none deployed, none in the repo
Postgres stored procedures / triggers	Supabase SQL	No for application tables

Kind of “backend”	Hosted where	Used by Liivv?
Next.js server code (pages, server actions, /api/*)	Vercel	Yes — this is the application backend

Webhooks (Stripe, BigCommerce) hit **Next.js routes on Vercel**, for example /api/stripe/webhook and /api/bigcommerce/webhook. They do not hit Supabase functions.

How the app connects

Fact	Detail
Region	Canada Central (ca-central-1)
Product used	Postgres + PostgREST HTTPS API
Client	Server-only module core/lib/supabase/client.ts
Credentials	SUPABASE_URL and SUPABASE_SERVICE_ROLE_KEY (Vercel env vars; never in the browser)
Auth on tables	Documented control: Row Level Security on , with no anon/authenticated policies (deny by default). The service role bypasses RLS by design — same class of risk as a privileged SQL login on an API.

Schema source (run in the Supabase SQL editor):

1. core/lib/supabase/schema.sql
2. core/lib/supabase/onboarding-schema.sql
3. core/lib/supabase/pharmacy-schema.sql

Tables (complete list)

Health and pharmacy (PHI / PII)

Table	Purpose	Data class	Key fields
profiles	One Liivv profile per BigCommerce customer	PII	id (uuid), bigcommerce_customer_id (unique), name, email, phone, onboarding timestamps, care_interests
health_profiles	Care questionnaire (diabetes, ostomy, catheter, wound, respiratory, clinician contacts)	PHI	id, profile_id → profiles (1:1), medications, allergies, device brands, care_details (jsonb)
insurance_info	Insurance card details	PHI	id, profile_id → profiles, provider, policy/group/member ids, card_image_url (column exists; app does not use Supabase Storage)

Table	Purpose	Data class	Key fields
prescriptions	Customer prescriptions	PHI	id, profile_id → profiles, medication, DIN, dosage, dates, status, approval, notes
refill_requests	Pharmacist refill queue	PHI	id, profile_id → profiles, prescription_ids (uuid[]), status, notes
carepack_requests	Pharmacist CarePack queue	PHI	id, profile_id → profiles, prescription_ids (uuid[]), status, notes
chat_conversations	One care-chat thread per profile	PHI (operational)	id, profile_id → profiles (unique), staff join/close/escalate timestamps
chat_messages	Care-chat messages	PHI	id, conversation_id → chat_conversations, sender_type (customer / staff / bot / system), body (max 8000 chars)


profiles is the parent. Deleting a profile **cascades** to health, insurance, prescriptions, refill/CarePack requests, and chat.

Shop / subscription operations (not modeled as PHI)

Table	Purpose	Data class	Key fields
cart_subscription_lines	Subscription line metadata on a cart (survives restarts)	Operational	cart_id (pk), lines (jsonb)
cart_kit_sessions	Build-your-own kit composition for packing notes	Operational	cart_id (pk), kits (jsonb)
saved_kits	Customer-saved custom kits	Operational	id, bigcommerce_customer_id, name, fingerprint, items (jsonb)
subscription_order_batches	Paid Stripe invoice lines waiting to combine into one BigCommerce order	Operational	storage_key (pk), customer_id, shipment day/address, items (jsonb)
finalized_shipment_records	Past subscription shipment history	Operational	storage_key (pk), customer_id, outcome, bigcommerce_order_id, charged/skipped items (jsonb)

Orders, products, and shopper login identity live in **BigCommerce**, not these tables. Card numbers live in **Stripe**, never in Supabase.

Relationships (health)

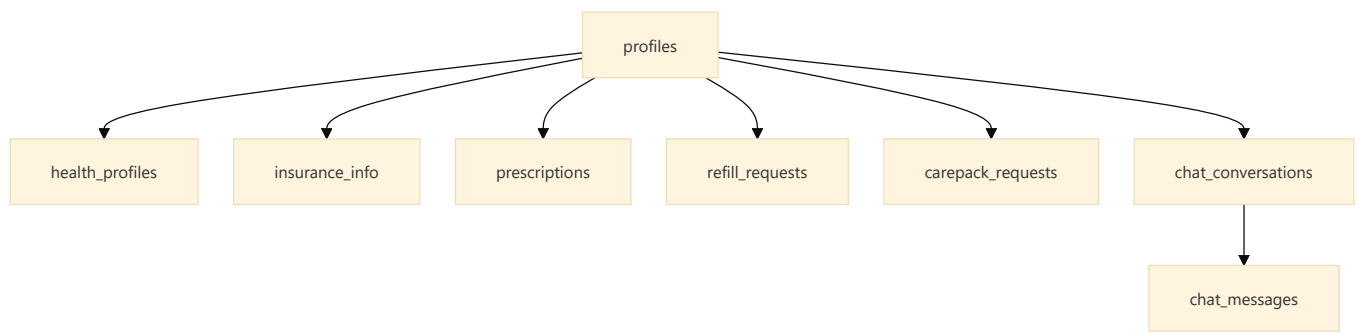

Shop tables (cart_*, saved_kits, subscription_order_batches, finalized_shipment_records) are keyed by BigCommerce cart id or customer id. They do not foreign-key to profiles.

What is **not** on Supabase

Feature	Status
Edge Functions	None
Database functions / stored procedures	None in application schema
Triggers	None in application schema
pg_cron / scheduled jobs	None
Supabase Auth (user accounts)	Not used — shopper login is BigCommerce
Storage buckets	Not used — avatar_url / card_image_url columns exist but files are not stored in Supabase Storage
Realtime subscriptions	Not used
Shop catalog, orders, payments	BigCommerce + Stripe

Confirm in the Supabase dashboard

This inventory is from the **application schema in git**. Please also confirm in the live project:

1. **Database → Tables** — the 13 tables above (no extras unexpected by Liivv)
2. **Edge Functions** — empty
3. **Database → Functions / Triggers** — no application functions
4. **Authentication / Storage** — unused by the storefront
5. **RLS** — enabled on these tables, with no policies for anon / authenticated

If the live project has extra tables or functions not listed here, they are not part of the Liivv storefront codebase.