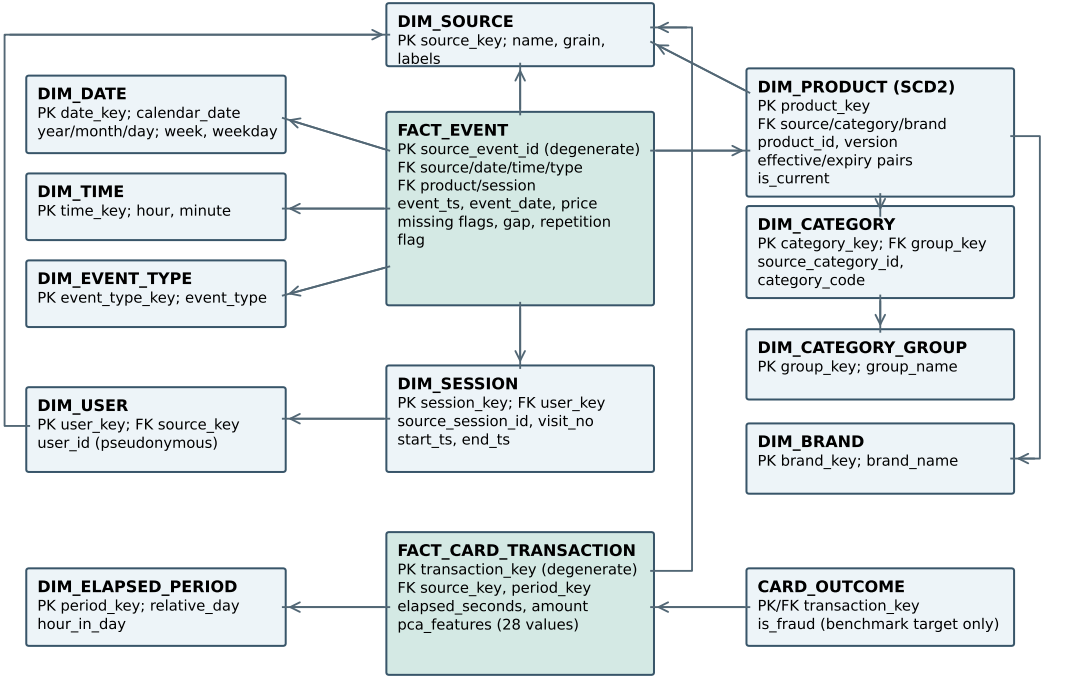

Arrow: child FK → parent PK (many-to-one); CARD_OUTCOME → card is one-to-one. Nullable attributes are permitted.