



ANDROID STATIC ANALYSIS REPORT



 (4.68.0)

File Name:

android-release-official_4.68.0_64815_202601091707.apk

Package Name:

global.longbridge.app.android


Scan Date:

Jan. 12, 2026, 8:33 a.m.

App Security Score:

46/100 (MEDIUM RISK)

Grade:




Trackers Detection:

8/432

 FINDINGS SEVERITY

 HIGH	 MEDIUM	 INFO	 SECURE	 HOTSPOT
--	--	--	--	---

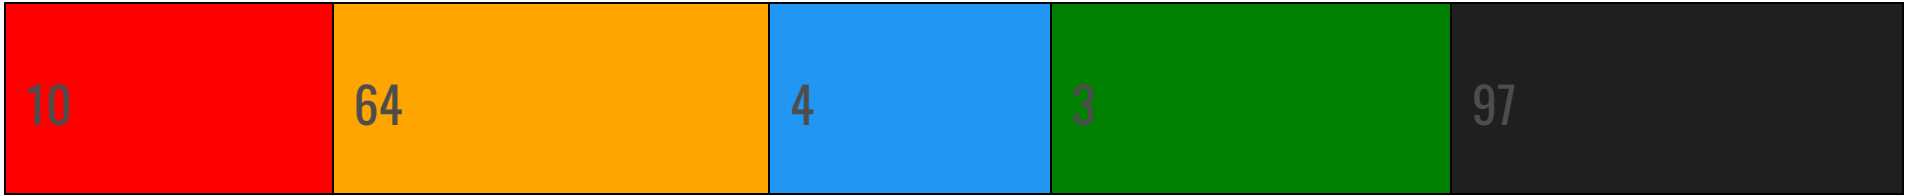

FILE INFORMATION

File Name: android-release-official_4.68.0_64815_202601091707.apk
Size: 116.4MB
MD5: 569cf93b7c4372ef1f64daae80dffcf6
SHA1: 98e3188af8a9b9379ce486f50b143b948a47785f
SHA256: 6b91879311b08b94440f9beeaffe05f89439b944c8912f5e47816a9f1d22adc4

APP INFORMATION

App Name: ☐☐
Package Name: global.longbridge.app.android
Main Activity: global.longbridge.android.LaunchActivity
Target SDK: 35
Min SDK: 24
Max SDK:
Android Version Name: 4.68.0
Android Version Code: 64815

APP COMPONENTS

Activities: 456
Services: 38
Receivers: 25
Providers: 17
Exported Activities: 33
Exported Services: 6
Exported Receivers: 7
Exported Providers: 2

CERTIFICATE INFORMATION

Binary is signed
v1 signature: False
v2 signature: True
v3 signature: False
v4 signature: False
X.509 Subject: CN=LongBridge
Signature Algorithm: rsassa_pkcs1v15
Valid From: 2019-08-01 07:27:34+00:00
Valid To: 2044-07-25 07:27:34+00:00
Issuer: CN=LongBridge
Serial Number: 0x2aa7c2d7
Hash Algorithm: sha256
md5: fe72726e2ee5dbb1916ec3a4fa763b1f
sha1: 278b36a629f6184ccaed60580c4d16a7b728fa89
sha256: 4756b851a41747f06ac052a748588875b935a99adced7457659b023b251c7766
sha512: 328eb252374ec5608ff99660089190c165c7107a509583155085de82c7455761eafc47a63c147837c170aaed23eee46bfe6d0137a378af0e80acc5bc6e0074c3
PublicKey Algorithm: rsa
Bit Size: 2048
Fingerprint: a87102b964b87f050a8c10a2f007e948f8c5911930b08c91502d94f4383f467b
Found 1 unique certificates

≡ APPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.ACCESS_WIFI_STATE	normal	view Wi-Fi status	Allows an application to view the information about the status of Wi-Fi.
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
android.permission.WRITE_EXTERNAL_STORAGE	dangerous	read/modify/delete external storage contents	Allows an application to write to external storage.
android.permission.READ_EXTERNAL_STORAGE	dangerous	read external storage contents	Allows an application to read from external storage.
android.permission.READ_PHONE_STATE	dangerous	read phone state and identity	Allows the application to access the phone features of the device. An application with this permission can determine the phone number and serial number of this phone, whether a call is active, the number that call is connected to and so on.

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.CHANGE_NETWORK_STATE	normal	change network connectivity	Allows applications to change network connectivity state.
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.
android.permission.REQUEST_INSTALL_PACKAGES	dangerous	Allows an application to request installing packages.	Malicious applications can use this to try and trick users into installing additional malicious packages.
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.
android.permission.CAMERA	dangerous	take pictures and videos	Allows application to take pictures and videos with the camera. This allows the application to collect images that the camera is seeing at any time.
android.permission.FLASHLIGHT	normal	control flashlight	Allows the application to control the flashlight.
android.permission.KILL_BACKGROUND_PROCESSES	normal	kill background processes	Allows an application to kill background processes of other applications, even if memory is not low.
android.permission.ACCESS_FINE_LOCATION	dangerous	fine (GPS) location	Access fine location sources, such as the Global Positioning System on the phone, where available. Malicious applications can use this to determine where you are and may consume additional battery power.
android.permission.ACCESS_COARSE_LOCATION	dangerous	coarse (network-based) location	Access coarse location sources, such as the mobile network database, to determine an approximate phone location, where available. Malicious applications can use this to determine approximately where you are.
android.permission.BLUETOOTH	normal	create Bluetooth connections	Allows applications to connect to paired bluetooth devices.
android.permission.CHANGE_WIFI_STATE	normal	change Wi-Fi status	Allows an application to connect to and disconnect from Wi-Fi access points and to make changes to configured Wi-Fi networks.
android.permission.MODIFY_AUDIO_SETTINGS	normal	change your audio settings	Allows application to modify global audio settings, such as volume and routing.

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.
android.permission.READ_SETTINGS	unknown	Unknown permission	Unknown permission from android reference
android.permission.SYSTEM_ALERT_WINDOW	dangerous	display system-level alerts	Allows an application to show system-alert windows. Malicious applications can take over the entire screen of the phone.
android.permission.USE_BIOMETRIC	normal	allows use of device-supported biometric modalities.	Allows an app to use device supported biometric modalities.
com.google.android.gms.permission.AD_ID	normal	application shows advertisements	This app uses a Google advertising ID and can possibly serve advertisements.
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications
android.permission.FOREGROUND_SERVICE_DATA_SYNC	normal	permits foreground services for data synchronization.	Allows a regular application to use Service.startForeground with the type "dataSync".
android.permission.FOREGROUND_SERVICE_MEDIA_PLAYBACK	normal	enables foreground services for media playback.	Allows a regular application to use Service.startForeground with the type "mediaPlayback".
BIND_GET_INSTALL_REFERRER_SERVICE	unknown	Unknown permission	Unknown permission from android reference
com.android.vending.CHECK_LICENSE	unknown	Unknown permission	Unknown permission from android reference
android.permission.READ_CALENDAR	dangerous	read calendar events	Allows an application to read all of the calendar events stored on your phone. Malicious applications can use this to send your calendar events to other people.

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.WRITE_CALENDAR	dangerous	add or modify calendar events and send emails to guests	Allows an application to add or change the events on your calendar, which may send emails to guests. Malicious applications can use this to erase or modify your calendar events or to send emails to guests.
MediaStore.Images.Media.INTERNAL_CONTENT_URI	unknown	Unknown permission	Unknown permission from android reference
MediaStore.Images.Media.EXTERNAL_CONTENT_URI	unknown	Unknown permission	Unknown permission from android reference
android.permission.RECORD_AUDIO	dangerous	record audio	Allows application to access the audio record path.
android.permission.ACCESS_LOCATION_EXTRA_COMMANDS	normal	access extra location provider commands	Access extra location provider commands. Malicious applications could use this to interfere with the operation of the GPS or other location sources.
android.permission.BLUETOOTH_ADMIN	normal	bluetooth administration	Allows applications to discover and pair bluetooth devices.
android.permission.NEARBY_WIFI_DEVICES	dangerous	required for advertising and connecting to nearby devices via Wi-Fi.	Required to be able to advertise and connect to nearby devices via Wi-Fi.
android.permission.USE_FINGERPRINT	normal	allow use of fingerprint	This constant was deprecated in API level 28. Applications should request USE_BIOMETRIC instead.
com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE	normal	permission defined by google	A custom permission defined by Google.
android.permission.ACCESS_AD_SERVICES_ATTRIBUTION	normal	allow applications to access advertising service attribution	This enables the app to retrieve information related to advertising attribution, which can be used for targeted advertising purposes. App can gather data about how users interact with ads, such as clicks or impressions, to measure the effectiveness of advertising campaigns.
android.permission.ACCESS_AD_SERVICES_AD_ID	normal	allow app to access the device's advertising ID.	This ID is a unique, user-resettable identifier provided by Google's advertising services, allowing apps to track user behavior for advertising purposes while maintaining user privacy.

PERMISSION	STATUS	INFO	DESCRIPTION
com.google.android.c2dm.permission.RECEIVE	normal	recieve push notifications	Allows an application to receive push notifications from cloud.
global.longbridge.app.android.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference
com.coloros.mcs.permission.RECIEVE_MCS_MESSAGE	unknown	Unknown permission	Unknown permission from android reference
com.heytap.mcs.permission.RECIEVE_MCS_MESSAGE	unknown	Unknown permission	Unknown permission from android reference
com.asus.msa.SupplementaryDID.ACCESS	unknown	Unknown permission	Unknown permission from android reference
android.permission.DETECT_SCREEN_RECORDING	normal	Grants an application the ability to receive notifications when audio or screen recording is in progress.	Allows an application to get notified when it is being recorded.
com.meizu.flyme.push.permission.RECEIVE	unknown	Unknown permission	Unknown permission from android reference
global.longbridge.app.android.push.permission.MESSAGE	unknown	Unknown permission	Unknown permission from android reference
com.meizu.c2dm.permission.RECEIVE	unknown	Unknown permission	Unknown permission from android reference
global.longbridge.app.android.permission.MIPUSH_RECEIVE	unknown	Unknown permission	Unknown permission from android reference
android.permission.GET_TASKS	dangerous	retrieve running applications	Allows application to retrieve information about currently and recently running tasks. May allow malicious applications to discover private information about other applications.
android.permission.REORDER_TASKS	normal	reorder applications running	Allows an application to move tasks to the foreground and background. Malicious applications can force themselves to the front without your control.
global.longbridge.app.android.AGOO	unknown	Unknown permission	Unknown permission from android reference
global.longbridge.app.android.ACCS	unknown	Unknown permission	Unknown permission from android reference
com.meizu.flyme.permission.PUSH	unknown	Unknown permission	Unknown permission from android reference

PERMISSION	STATUS	INFO	DESCRIPTION
com.hihonor.push.permission.READ_PUSH_NOTIFICATION_INFO	unknown	Unknown permission	Unknown permission from android reference
global.longbridge.app.android.permission.PROCESS_PUSH_MSG	unknown	Unknown permission	Unknown permission from android reference
global.longbridge.app.android.permission.PUSH_PROVIDER	unknown	Unknown permission	Unknown permission from android reference

 APKID ANALYSIS

FILE	DETAILS	
classes.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check SIM operator check network operator name check
	Compiler	r8
classes10.dex	FINDINGS	DETAILS
	Compiler	r8

FILE	DETAILS	
classes11.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check SIM operator check network operator name check possible VM check
	Anti Debug Code	Debug.isDebuggerConnected() check
	Compiler	r8
classes12.dex	FINDINGS	DETAILS
	Compiler	unknown (please file detection issue!)
classes13.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.TAGS check SIM operator check network operator name check device ID check possible VM check
	Compiler	r8

FILE	DETAILS	
classes14.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.MANUFACTURER check Build.BOARD check possible Build.SERIAL check
	Compiler	r8
classes15.dex	FINDINGS	DETAILS
	Compiler	r8
classes16.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check device ID check
	Compiler	r8
classes17.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.BOARD check
	Compiler	r8

FILE	DETAILS	
classes18.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.BOARD check possible Build.SERIAL check SIM operator check emulator file check possible VM check
	Compiler	r8
classes19.dex	FINDINGS	DETAILS
	Compiler	r8
classes2.dex	FINDINGS	DETAILS
	Compiler	r8
classes20.dex	FINDINGS	DETAILS
	Compiler	r8

FILE	DETAILS	
classes3.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.MANUFACTURER check
	Compiler	r8
classes4.dex	FINDINGS	DETAILS
	Anti-VM Code	Build.MANUFACTURER check
	Compiler	r8
classes5.dex	FINDINGS	DETAILS
	Compiler	r8
classes6.dex	FINDINGS	DETAILS
	Compiler	r8
classes7.dex	FINDINGS	DETAILS
	Compiler	r8
classes8.dex	FINDINGS	DETAILS
	Compiler	r8

FILE	DETAILS	
classes9.dex	FINDINGS	DETAILS
	Compiler	r8
lib/arm64-v8a/libbytehook.so	FINDINGS	DETAILS
	anti_hook	syscalls
lib/arm64-v8a/libgtc4core.so	FINDINGS	DETAILS
	Obfuscator	Obfuscator-LLVM version unknown (string encryption)
	anti_hook	syscalls
lib/arm64-v8a/libsaasCorePlayer.so	FINDINGS	DETAILS
	Obfuscator	Alipay
	anti_hook	syscalls
lib/arm64-v8a/libshadowhook.so	FINDINGS	DETAILS
	anti_hook	syscalls

FILE	DETAILS	
lib/armeabi-v7a/libgtc4core.so	FINDINGS	DETAILS
	Obfuscator	Obfuscator-LLVM version unknown (string encryption)
lib/armeabi-v7a/libsaasCorePlayer.so	FINDINGS	DETAILS
	Obfuscator	Alipay

 BROWSABLE ACTIVITIES

ACTIVITY	INTENT
com.sensorsdata.analytics.android.sdk.dialog.SchemeActivity	Schemes: sabebf2600://,
com.facebook.CustomTabActivity	Schemes: fb307237984310272://, fbconnect://, Hosts: cct.global.longbridge.app.android,
global.longbridge.android.LaunchActivity	Schemes: lb://,
net.openid.appauth.RedirectUriReceiverActivity	Schemes: appauthlb://, Hosts: my.info.lb,
com.tencent.tauth.AuthActivity	Schemes: tencent101909481://,

 NETWORK SECURITY

HIGH: 1 | WARNING: 1 | INFO: 0 | SECURE: 0

NO	SCOPE	SEVERITY	DESCRIPTION
1	*	high	Base config is insecurely configured to permit clear text traffic to all domains.
2	*	warning	Base config is configured to trust system certificates.

CERTIFICATE ANALYSIS

HIGH: 0 | WARNING: 0 | INFO: 1

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

MANIFEST ANALYSIS

HIGH: 1 | WARNING: 51 | INFO: 0 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	DESCRIPTION
1	App can be installed on a vulnerable unpatched Android version Android 7.0, [minSdk=24]	high	This application can be installed on an older version of android that has multiple unfixed vulnerabilities. These devices won't receive reasonable security updates from Google. Support an Android version => 10, API 29 to receive reasonable security updates.
2	App has a Network Security Configuration [android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.
3	Activity (com.sensorsdata.analytics.android.sdk.dialog.SchemeActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
4	Content Provider (com.facebook.FacebookContentProvider) is not Protected. [android:exported=true]	warning	A Content Provider is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
5	Activity (com.facebook.CustomTabActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
6	Activity (global.longbridge.android.share.ExternalShareInActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
7	Activity (com.longbridge.common.push.PopupPushActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
8	Activity (global.longbridge.android.urlConfig.view.ChangeHostActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
9	Activity (com.longbridge.account.mvp.ui.activity.PassportScanActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
10	Activity (com.longbridge.account.mvp.ui.activity.PassportPreviewActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
11	Activity (com.longbridge.account.ui.EggActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
12	Activity (net.openid.appauth.RedirectUriReceiverActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
13	Activity (com.longbridge.market.mvp.ui.activity.RequestRepeatActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
14	Activity (com.longbridge.market.mvp.ui.activity.RouterJumpActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
15	Activity (com.longbridge.market.mvp.ui.activity.FloatWindowLogActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
16	TaskAffinity is set for activity (com.longbridge.libnews.ui.activity.WxPayResultActivity)	warning	If taskAffinity is set, then other application could read the Intents sent to Activities belonging to another task. Always use the default setting keeping the affinity as the package name in order to prevent sensitive information inside sent or received Intents from being read by another application.
17	Activity (com.longbridge.libnews.ui.activity.WxPayResultActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
18	Activity-Alias (global.longbridge.app.android.wxapi.WXPayEntryActivity) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
19	Broadcast Receiver (com.longbridge.homewidget.ui.watchlist.WatchListAppWidget) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
20	Broadcast Receiver (com.longbridge.homewidget.ui.single.MarketAppWidget) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
21	Broadcast Receiver (com.longbridge.homewidget.ui.market.CountryMarketAppWidget) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
22	Activity (com.longbridge.libdebug.DebugActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
23	Activity (com.longbridge.common.uiLib.activity.GreySwtichActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
24	Activity (com.longbridge.libsocial.qq.uikit.QQActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
25	Activity (com.tencent.tauth.AuthActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
26	TaskAffinity is set for activity (com.longbridge.libsocial.wx.uikit.WxActionActivity)	warning	If taskAffinity is set, then other application could read the Intents sent to Activities belonging to another task. Always use the default setting keeping the affinity as the package name in order to prevent sensitive information inside sent or received Intents from being read by another application.
27	Activity (com.longbridge.libsocial.wx.uikit.WxActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
28	TaskAffinity is set for activity (global.longbridge.app.android.wxapi.WXEntryActivity)	warning	If taskAffinity is set, then other application could read the Intents sent to Activities belonging to another task. Always use the default setting keeping the affinity as the package name in order to prevent sensitive information inside sent or received Intents from being read by another application.
29	Activity-Alias (global.longbridge.app.android.wxapi.WXEntryActivity) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
30	Activity (com.longbridge.libsocial.wb.uikit.WbActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
31	Activity (com.longbridge.libsocial.dd.uikit.DDActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
32	Activity-Alias (global.longbridge.app.android.ddshare.DDShareActivity) is not Protected. [android:exported=true]	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
33	Activity (com.longbridge.libsocial.longbridge.uikit.LongBridgeActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
34	Activity (com.longbridge.libsocial.more.uikit.MoreActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
35	Activity (com.longbridge.libsocial.twitter.uikit.TwitterActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
36	Activity (com.longbridge.libsocial.facebook.FacebookActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
37	Activity (com.longbridge.libsocial.google.GoogleActionActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
38	Activity (com.sina.weibo.sdk.share.ShareResultActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
39	Service (com.google.android.gms.auth.api.signin.RevocationBoundService) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.google.android.gms.auth.api.signin.permission.REVOCATION_NOTIFICATION [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
40	Broadcast Receiver (com.google.firebase.iid.FirebaseInstanceIdReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.google.android.c2dm.permission.SEND [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
41	Service (com.heytao.msp.push.service.CompatibleDataMessageCallbackService) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.coloros.mcs.permission.SEND_MCS_MESSAGE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
42	Service (com.heytao.msp.push.service.DataMessageCallbackService) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.heytao.mcs.permission.SEND_PUSH_MESSAGE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.

NO	ISSUE	SEVERITY	DESCRIPTION
43	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
44	Service (com.vivo.push.sdk.service.CommandClientService) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.push.permission.UPSTAGESERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
45	Broadcast Receiver (com.alibaba.sdk.android.push.MeizuPushReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
46	Activity (com.xiaomi.mipush.sdk.NotificationClickedActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
47	Service (com.xiaomi.mipush.sdk.PushMessageHandler) is Protected by a permission, but the protection level of the permission should be checked. Permission: com.xiaomi.xmsf.permission.MIPUSH_RECEIVE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
48	Broadcast Receiver (com.alibaba.sdk.android.push.MiPushBroadcastReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
49	Activity (com.alipay.sdk.app.PayResultActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
50	Activity (com.alipay.sdk.app.AlipayResultActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
51	Activity (com.sina.weibo.sdk.share.ShareTransActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
52	Broadcast Receiver (com.huawei.hms.support.api.push.PushMsgReceiver) is Protected by a permission. Permission: global.longbridge.app.android.permission.PROCESS_PUSH_MSG protectionLevel: signature [android:exported=true]	info	A Broadcast Receiver is found to be exported, but is protected by permission.
53	Broadcast Receiver (com.huawei.hms.support.api.push.PushReceiver) is Protected by a permission. Permission: global.longbridge.app.android.permission.PROCESS_PUSH_MSG protectionLevel: signature [android:exported=true]	info	A Broadcast Receiver is found to be exported, but is protected by permission.
54	Service (com.huawei.hms.support.api.push.service.HmsMsgService) is not Protected. [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
55	Content Provider (com.huawei.hms.support.api.push.PushProvider) is not Protected. [android:exported=true]	warning	A Content Provider is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

</> CODE ANALYSIS

HIGH: 7 | WARNING: 11 | INFO: 3 | SECURE: 2 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	STANDARDS	FILES
				anet/channel/AccsSessionManager.java anet/channel/AwcnConfig.java anet/channel/Config.java anet/channel/GlobalAppRuntimeInfo.java anet/channel/Session.java anet/channel/SessionCenter.java anet/channel/SessionRequest.java anet/channel/TaobaoNetworkAdapter.java anet/channel/a.java anet/channel/a/a.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				anet/channel/a/b.java anet/channel/appmonitor/a.java anet/channel/b.java anet/channel/b/a.java anet/channel/c/a.java anet/channel/d/a.java anet/channel/detect/ExceptionDetector.java anet/channel/detect/c.java anet/channel/detect/d.java anet/channel/detect/e.java anet/channel/detect/f.java anet/channel/detect/h.java anet/channel/detect/i.java anet/channel/detect/k.java anet/channel/detect/m.java anet/channel/detect/n.java anet/channel/e/a.java anet/channel/f.java anet/channel/fulltrace/a.java anet/channel/g.java anet/channel/h.java anet/channel/heartbeat/b.java anet/channel/monitor/a.java anet/channel/monitor/b.java anet/channel/monitor/d.java anet/channel/request/Request.java anet/channel/request/b.java anet/channel/request/c.java anet/channel/security/b.java anet/channel/session/TnetSpdySession.java anet/channel/session/b.java anet/channel/session/d.java anet/channel/session/g.java anet/channel/session/h.java anet/channel/session/i.java anet/channel/session/j.java anet/channel/statist/SessionStatistic.java anet/channel/status/NetworkStatusHelper.java anet/channel/status/a.java anet/channel/status/b.java anet/channel/status/c.java anet/channel/strategy/StrategyCollection.java anet/channel/strategy/StrategyConfig.java anet/channel/strategy/StrategyInfoHolder.java anet/channel/strategy/StrategyList.java anet/channel/strategy/StrategyTable.java anet/channel/strategy/a.java anet/channel/strategy/b.java anet/channel/strategy/d iava

NO	ISSUE	SEVERITY	STANDARDS	FILES
				anet/channel/strategy/dispatch/AmdcRuntimeInfo.java anet/channel/strategy/g.java anet/channel/strategy/h.java anet/channel/strategy/l.java anet/channel/strategy/m.java anet/channel/strategy/utis/a.java anet/channel/strategy/utis/b.java anet/channel/strategy/utis/c.java anet/channel/thread/ThreadPoolExecutorFactory.java anet/channel/util/ALog.java anet/channel/util/AppLifecycle.java anet/channel/util/HMacUtil.java anet/channel/util/SerializeHelper.java anet/channel/util/Utils.java anet/channel/util/c.java anet/channel/util/e.java anet/channel/util/j.java anetwork/channel/aidl/NetworkResponse.java anetwork/channel/aidl/NetworkService.java anetwork/channel/aidl/ParcelableHeader.java anetwork/channel/aidl/ParcelableRequest.java anetwork/channel/aidl/adapter/ParcelableFutureResponse.java anetwork/channel/aidl/adapter/ParcelableNetworkListnerWrapper.java anetwork/channel/aidl/adapter/a.java anetwork/channel/aidl/adapter/b.java anetwork/channel/aidl/adapter/d.java anetwork/channel/aidl/adapter/e.java anetwork/channel/aidl/adapter/f.java anetwork/channel/cache/CacheManager.java anetwork/channel/config/NetworkConfigCenter.java anetwork/channel/cookie/CookieManager.java anetwork/channel/cookie/a.java anetwork/channel/cookie/b.java anetwork/channel/cookie/c.java anetwork/channel/download/DownloadManager.java anetwork/channel/entity/RequestImpl.java anetwork/channel/entity/c.java anetwork/channel/entity/f.java anetwork/channel/entity/g.java anetwork/channel/http/NetworkSdkSetting.java anetwork/channel/interceptor/InterceptorManager.java anetwork/channel/monitor/Monitor.java anetwork/channel/unified/UnifiedNetworkDelegate.java anetwork/channel/unified/a.java anetwork/channel/unified/c.java anetwork/channel/unified/e.java

NO	ISSUE	SEVERITY	STANDARDS	anetwork/channel/unified/h.java anetwork/channel/unified/i.java anetwork/channel/unified/k.java anetwork/channel/unified/n.java b0/g.java b0/j.java com/alibaba/sdk/android/push/AgooFirebaseMessagin gService.java com/alibaba/sdk/android/push/HonorPushMessageSer vice.java com/alibaba/sdk/android/push/HonorRegister.java com/alibaba/sdk/android/push/MeizuPushReceiver.jav a com/alibaba/sdk/android/push/MiPushBroadcastRecei ver.java com/alibaba/sdk/android/push/a/b.java com/alibaba/sdk/android/push/huawei/HuaWeiRegiste r.java com/alibaba/sdk/android/push/huawei/HuaweiPushMe ssageService.java com/alibaba/sdk/android/push/impl/HonorParserImpl.j ava com/alibaba/sdk/android/push/impl/HuaweiMsgParsel mpl.java com/alibaba/sdk/android/push/impl/MeizuMsgParselm pl.java com/alibaba/sdk/android/push/impl/OppoMsgParselm pl.java com/alibaba/sdk/android/push/impl/PushMessageRece iverImpl.java com/alibaba/sdk/android/push/impl/VivoMsgParselmpl. java com/alibaba/sdk/android/push/impl/XiaoMiMsgParsel mpl.java com/alibaba/sdk/android/push/popup/PopupNotifyClic k.java com/alibaba/sdk/android/push/register/GcmRegister.ja va com/alibaba/sdk/android/push/register/MeizuRegister.j ava com/alibaba/sdk/android/push/register/MiPushRegiste r.java com/alibaba/sdk/android/push/register/OppoRegister.j ava com/alibaba/sdk/android/push/register/ReporterFactor y.java com/alibaba/sdk/android/push/register/ThirdPushMan ager.java com/alibaba/sdk/android/push/register/VivoRegister.ia

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/aliyun/ams/emas/push/AgooInnerService.java com/aliyun/ams/emas/push/AgooMessageIntentService.java com/aliyun/ams/emas/push/AgooMessageReceiver.java com/aliyun/ams/emas/push/MsgService.java com/aliyun/ams/emas/push/NotificationActivity.java com/aliyun/ams/emas/push/b.java com/aliyun/ams/emas/push/e.java com/aliyun/ams/emas/push/f.java com/aliyun/ams/emas/push/notification/a.java com/aliyun/ams/emas/push/notification/b.java com/aliyun/ams/emas/push/notification/c.java com/aliyun/ams/emas/push/notification/f.java com/apm/insight/a/a.java com/bumptechnology/glide/Glide.java com/bumptechnology/glide/gifdecoder/c.java com/bumptechnology/glide/gifdecoder/d.java com/bumptechnology/glide/load/data/b.java com/bumptechnology/glide/load/data/j.java com/bumptechnology/glide/load/data/l.java com/bumptechnology/glide/load/data/mediastore/c.java com/bumptechnology/glide/load/data/mediastore/e.java com/bumptechnology/glide/load/engine/bitmap_recycle/j.java com/bumptechnology/glide/load/engine/bitmap_recycle/l.java com/bumptechnology/glide/load/engine/cache/e.java com/bumptechnology/glide/load/engine/cache/l.java com/bumptechnology/glide/load/engine/executor/a.java com/bumptechnology/glide/load/engine/executor/b.java com/bumptechnology/glide/load/engine/h.java com/bumptechnology/glide/load/engine/i.java com/bumptechnology/glide/load/engine/k.java com/bumptechnology/glide/load/engine/prefill/a.java com/bumptechnology/glide/load/engine/y.java com/bumptechnology/glide/load/model/c.java com/bumptechnology/glide/load/model/d.java com/bumptechnology/glide/load/model/f.java com/bumptechnology/glide/load/model/s.java com/bumptechnology/glide/load/model/t.java com/bumptechnology/glide/load/resource/bitmap/DefaultImageHeaderParser.java com/bumptechnology/glide/load/resource/bitmap/c0.java com/bumptechnology/glide/load/resource/bitmap/e.java com/bumptechnology/glide/load/resource/bitmap/g.java com/bumptechnology/glide/load/resource/bitmap/m0.java com/bumptechnology/glide/load/resource/bitmap/q0.java com/bumptechnology/glide/load/resource/bitmap/w.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/bumptech/glide/load/resource/bitmap/x.java com/bumptech/glide/load/resource/gif/a.java com/bumptech/glide/load/resource/gif/c.java com/bumptech/glide/load/resource/gif/i.java com/bumptech/glide/load/resource/j.java com/bumptech/glide/manager/SupportRequestManagerFragment.java com/bumptech/glide/manager/f.java com/bumptech/glide/manager/o.java com/bumptech/glide/manager/p.java com/bumptech/glide/manager/r.java com/bumptech/glide/manager/s.java com/bumptech/glide/module/e.java com/bumptech/glide/request/k.java com/bumptech/glide/request/target/f.java com/bumptech/glide/request/target/r.java com/bumptech/glide/util/b.java com/bumptech/glide/util/pool/a.java com/bytedance/android/monitor/webview/TTLiveWebViewMonitorJsBridge.java com/bytedance/android/monitor/webview/WebViewMonitorHelper.java com/daasuu/mp4compose/composer/n.java com/huawei/hms/aaid/HmsInstanceId.java com/huawei/hms/aaid/HmsInstanceIdEx.java com/huawei/hms/aaid/init/AutoInitHelper.java com/huawei/hms/aaid/utils/BaseUtils.java com/huawei/hms/aaid/utils/PushPreferences.java com/huawei/hms/activity/BridgeActivity.java com/huawei/hms/activity/ForegroundBusDelegate.java com/huawei/hms/activity/internal/ForegroundInnerHeader.java com/huawei/hms/adapter/AvailableAdapter.java com/huawei/hms/adapter/AvailableUtil.java com/huawei/hms/adapter/BaseAdapter.java com/huawei/hms/adapter/BinderAdapter.java com/huawei/hms/adapter/InnerBinderAdapter.java com/huawei/hms/adapter/OuterBinderAdapter.java com/huawei/hms/adapter/sysobs/ApkResolutionFailedManager.java com/huawei/hms/adapter/ui/BaseResolutionAdapter.java com/huawei/hms/adapter/ui/NotInstalledHmsAdapter.java com/huawei/hms/adapter/ui/UpdateAdapter.java com/huawei/hms/android/SystemUtils.java com/huawei/hms/api/BindingFailedResolution.java com/huawei/hms/api/FailedBinderCallBack.java com/huawei/hms/api/HuaweiApiAvailabilityImpl.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/huawei/hms/api/HuaweiApiClientImpl.java com/huawei/hms/api/HuaweiMobileServicesUtil.java com/huawei/hms/api/IPCCallback.java com/huawei/hms/api/IPCTransport.java com/huawei/hms/api/ResolutionDelegate.java com/huawei/hms/availableupdate/c.java com/huawei/hms/common/AccountPicker.java com/huawei/hms/common/HuaweiApi.java com/huawei/hms/common/api/AvailabilityException.java com/huawei/hms/common/data/DataHolder.java com/huawei/hms/common/internal/BaseHmsClient.java com/huawei/hms/common/internal/ConnectionErrorMessage.java com/huawei/hms/common/internal/DialogRedirect.java com/huawei/hms/common/internal/HmsClient.java com/huawei/hms/common/internal/RequestHeader.java com/huawei/hms/common/internal/RequestManager.java com/huawei/hms/common/internal/ResponseHeader.java com/huawei/hms/common/internal/ResponseWrap.java com/huawei/hms/common/internal/TaskApiCall.java com/huawei/hms/common/internal/TransactionIdCreator.java com/huawei/hms/common/util/AGCUtills.java com/huawei/hms/common/util/Base64Utills.java com/huawei/hms/device/a.java com/huawei/hms/framework/common/Logger.java com/huawei/hms/opendevic/OpenDeviceTaskApiCall.java com/huawei/hms/opendevic/b.java com/huawei/hms/opendevic/e.java com/huawei/hms/opendevic/f.java com/huawei/hms/opendevic/g.java com/huawei/hms/opendevic/i.java com/huawei/hms/opendevic/k.java com/huawei/hms/opendevic/l.java com/huawei/hms/opendevic/m.java com/huawei/hms/push/AttributionReporter.java com/huawei/hms/push/HmsMessageService.java com/huawei/hms/push/HmsMessaging.java com/huawei/hms/push/HmsProfile.java com/huawei/hms/push/NotificationSubscription.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/huawei/hms/push/RemoteMessage.java com/huawei/hms/push/b.java com/huawei/hms/push/c.java com/huawei/hms/push/d.java com/huawei/hms/push/e.java com/huawei/hms/push/g.java com/huawei/hms/push/h.java com/huawei/hms/push/l.java com/huawei/hms/push/n.java com/huawei/hms/push/o.java com/huawei/hms/push/p.java com/huawei/hms/push/r.java com/huawei/hms/push/s.java com/huawei/hms/push/t.java com/huawei/hms/push/task/AttributionReportTask.java com/huawei/hms/push/task/BaseVoidTask.java com/huawei/hms/push/task/SendUpStreamTask.java com/huawei/hms/push/task/SubscribeNotificationTask.java com/huawei/hms/push/u.java com/huawei/hms/push/ups/UPSService.java com/huawei/hms/push/utils/DateUtil.java com/huawei/hms/push/utils/JsonUtil.java com/huawei/hms/push/utils/PluginUtil.java com/huawei/hms/push/v.java com/huawei/hms/stats/HianalyticsExist.java com/huawei/hms/stats/a.java com/huawei/hms/support/api/AsyncResultImpl.java com/huawei/hms/support/api/PendingResultImpl.java com/huawei/hms/support/api/client/ResolvingResultCallbacks.java com/huawei/hms/support/api/client/ResultCallbacks.java com/huawei/hms/support/api/core/ConnectService.java com/huawei/hms/support/api/push/PushMsgReceiver.java com/huawei/hms/support/api/push/PushProvider.java com/huawei/hms/support/api/push/PushReceiver.java com/huawei/hms/support/api/push/service/HmsMsgService.java com/huawei/hms/support/common/ActivityMgr.java com/huawei/hms/support/hianalytics/HiAnalyticsClient.java com/huawei/hms/support/hianalytics/HiAnalyticsUtil.java com/huawei/hms/support/hianalytics/HiAnalyticsUtils.java com/huawei/hms/support/log/HMSDebugger.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/huawei/hms/ui/AbstractDialog.java com/huawei/hms/update/note/AppSpoofResolution.java com/huawei/hms/update/note/DoNothingResolution.java com/huawei/hms/update/note/NotInstalledHmsResolution.java com/huawei/hms/update/ui/NotInstalledHmsDialogHelper.java com/huawei/hms/utils/AgHmsUpdateState.java com/huawei/hms/utils/AnalyticsSwitchHolder.java com/huawei/hms/utils/FileUtil.java com/huawei/hms/utils/HMSBInitializer.java com/huawei/hms/utils/HMSPackageManager.java com/huawei/hms/utils/IOUtils.java com/huawei/hms/utils/JsonUtil.java com/huawei/hms/utils/PackageManagerHelper.java com/huawei/hms/utils/ReadApkFileUtil.java com/huawei/hms/utils/ResolutionFlagUtil.java com/huawei/hms/utils/ResourceLoaderUtil.java com/huawei/hms/utils/SHA256.java com/huawei/hms/utils/UIUtil.java com/huawei/hms/utils/Util.java com/longbridge/account/ui/dialog/EggDialog.java com/longbridge/common/service/VolcengineServiceImpl.java com/longbridge/performance/strictmode/StrictModeHookMonitor.java com/longbridge/performance/strictmode/StrictModeMonitor.java com/qiyukf/android/extension/e/a.java com/qiyukf/android/extension/g/a.java com/qiyukf/module/log/EncodeCompressor.java com/qiyukf/module/log/LogPulseClient.java com/qiyukf/module/log/UnicornLog.java com/qiyukf/module/log/UploadClient.java com/qiyukf/module/log/UploadPulseService.java com/qiyukf/nim/highavailable/LogUtils.java com/qiyukf/uikit/a.java com/qiyukf/uikit/common/a/d.java com/qiyukf/uikit/common/activity/BaseFragmentActivity.java com/qiyukf/uikit/common/fragment/TFragment.java com/qiyukf/uikit/common/media/a/a.java com/qiyukf/uikit/common/media/b/a.java com/qiyukf/uikit/common/media/picker/a/a.java com/qiyukf/uikit/common/media/picker/a/c.java com/qiyukf/uikit/common/media/picker/activity/Check

NO	ISSUE	SEVERITY	STANDARDS	FILES
				BoxImageView.java com/qiyukf/uikit/common/media/picker/activity/PickerAlbumActivity.java com/qiyukf/uikit/common/media/picker/adapter/PickerAlbumAdapter.java com/qiyukf/uikit/common/media/picker/adapter/PickerPhotoAdapter.java com/qiyukf/uikit/common/media/picker/fragment/PickerAlbumFragment.java com/qiyukf/uikit/common/ui/imageview/BaseZoomableImageView.java com/qiyukf/uikit/common/ui/imageview/MultiTouchZoomableImageView.java com/qiyukf/uikit/common/ui/imageview/ShapedImageView.java com/qiyukf/uikit/common/ui/listview/AutoRefreshListView.java com/qiyukf/uikit/session/activity/CaptureVideoActivity.java com/qiyukf/uikit/session/activity/PickImageActivity.java com/qiyukf/uikit/session/activity/WatchMessagePictureActivity.java com/qiyukf/uikit/session/activity/WatchVideoActivity.java com/qiyukf/uikit/session/emoji/EmojiManager.java com/qiyukf/uikit/session/emoji/EmoticonPickerView.java com/qiyukf/uikit/session/emoji/EmoticonView.java com/qiyukf/uikit/session/emoji/StickerManager.java com/qiyukf/uikit/session/helper/ClickMovementMethod.java com/qiyukf/uikit/session/helper/CustomURLSpan.java com/qiyukf/uikit/session/helper/PickImageAndVideoHelper.java com/qiyukf/uikit/session/helper/SendImageHelper.java com/qiyukf/uikit/session/helper/VideoMsgHelper.java com/qiyukf/uikit/session/module/a/a.java com/qiyukf/uikit/session/module/input/InputPanel.java com/qiyukf/uikit/session/module/input/QuickEntryHelper.java com/qiyukf/uikit/session/viewholder/MsgViewHolderBase.java com/qiyukf/unicorn/api/Unicorn.java com/qiyukf/unicorn/api/event/UnicornEventRegistered.java com/qiyukf/unicorn/api/helper/UnicornPickFileHelper.java com/qiyukf/unicorn/c.java com/qiyukf/unicorn/c/a.java

NO	ISSUE	SEVERITY	STANDARDS	Files
1	The App logs information. Sensitive information should never be logged.	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	com/qiyukf/unicorn/d.java com/qiyukf/unicorn/e/a.java com/qiyukf/unicorn/g/v.java com/qiyukf/unicorn/g/w.java com/qiyukf/unicorn/h/a.java com/qiyukf/unicorn/h/a/a/a.java com/qiyukf/unicorn/h/a/c.java com/qiyukf/unicorn/i/a.java com/qiyukf/unicorn/i/a/a.java com/qiyukf/unicorn/i/a/b.java com/qiyukf/unicorn/i/a/c.java com/qiyukf/unicorn/i/a/e.java com/qiyukf/unicorn/k/a.java com/qiyukf/unicorn/k/b.java com/qiyukf/unicorn/k/c.java com/qiyukf/unicorn/k/d.java com/qiyukf/unicorn/l/b.java com/qiyukf/unicorn/l/c.java com/qiyukf/unicorn/m/a.java com/qiyukf/unicorn/mediaselect/engine/impl/ImageEngineImpl.java com/qiyukf/unicorn/mediaselect/internal/ui/activity/MatisseActivity.java com/qiyukf/unicorn/mediaselect/internal/ui/widget/AlbumsSpinner.java com/qiyukf/unicorn/n/d.java com/qiyukf/unicorn/n/d/c.java com/qiyukf/unicorn/n/e/b.java com/qiyukf/unicorn/n/i.java com/qiyukf/unicorn/n/j.java com/qiyukf/unicorn/n/p.java com/qiyukf/unicorn/n/t.java com/qiyukf/unicorn/n/u.java com/qiyukf/unicorn/n/v.java com/qiyukf/unicorn/ui/activity/FileDownloadActivity.java com/qiyukf/unicorn/ui/activity/LeaveMessageActivity.java com/qiyukf/unicorn/ui/activity/LeaveMsgCustomFieldMenuActivity.java com/qiyukf/unicorn/ui/activity/ServiceMessageActivity.java com/qiyukf/unicorn/ui/activity/UrlImagePreviewActivity.java com/qiyukf/unicorn/ui/activity/WatchPictureActivity.java com/qiyukf/unicorn/ui/b/a.java com/qiyukf/unicorn/ui/botproductlist/BotProductTabEntry.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/qiyukf/unicorn/ui/botproductlist/ProductAndOrderListDialog.java com/qiyukf/unicorn/ui/fragment/ServiceMessageFragment.java com/qiyukf/unicorn/ui/viewholder/a/c.java com/qiyukf/unicorn/ui/viewholder/a/y.java com/qiyukf/unicorn/ui/viewholder/h.java com/qiyukf/unicorn/ui/viewholder/k.java com/qiyukf/unicorn/ui/viewholder/l.java com/qiyukf/unicorn/ui/viewholder/s.java com/qiyukf/unicorn/ui/worksheet/a.java com/qiyukf/unicorn/ui/worksheet/c.java com/qiyukf/unicorn/ui/worksheet/d.java com/qiyukf/unicorn/widget/StylableTextView.java com/qiyukf/unicorn/widget/pulltorefresh/PullToRefreshLayout.java com/sensorsdata/analytics/android/autotrack/core/AutoTrackContextHelper.java com/sensorsdata/analytics/android/autotrack/core/autotrack/ActivityLifecycleCallbacks.java com/sensorsdata/analytics/android/autotrack/core/autotrack/FragmentViewScreenCallbacks.java com/sensorsdata/analytics/android/autotrack/core/impl/AutoTrackProtocolImpl.java com/sensorsdata/analytics/android/autotrack/core/pageleave/FragmentPageLeaveCallbacks.java com/sensorsdata/analytics/android/sdk/AbstractSensorDataAPI.java com/sensorsdata/analytics/android/sdk/AnalyticsMessages.java com/sensorsdata/analytics/android/sdk/SensorsDataAPI.java com/sensorsdata/analytics/android/sdk/advert/deeplink/ChannelDeepLink.java com/sensorsdata/analytics/android/sdk/advert/deeplink/DeepLinkManager.java com/sensorsdata/analytics/android/sdk/advert/impl/SAAdvertProtocolImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/OAIDRom.java com/sensorsdata/analytics/android/sdk/advert/oaid/SAOaidHelper.java com/sensorsdata/analytics/android/sdk/advert/oaid/impl/AsusImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/impl/CoolpadImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/impl/HuaweiImpl.java

NO	ISSUE	SEVERITY	STANDARDS	com/sensorsdata/analytics/android/sdk/advert/oaid/im FILES com/sensorsdata/analytics/android/sdk/advert/oaid/im
				pl/MeizuiImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/NubiaImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/OAIDFactory.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/OppoImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/SamsungImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/VivoImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/XiaomiImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/im pl/ZTEImpl.java com/sensorsdata/analytics/android/sdk/advert/scan/Ch annelDebugScanHelper.java com/sensorsdata/analytics/android/sdk/advert/utis/SA AdvertUtils.java com/sensorsdata/analytics/android/sdk/aop/push/Pus hAutoTrackHelper.java com/sensorsdata/analytics/android/sdk/core/business/ SAPuginVersion.java com/sensorsdata/analytics/android/sdk/core/event/im p/BaseEventAssemble.java com/sensorsdata/analytics/android/sdk/core/event/im p/H5TrackAssemble.java com/sensorsdata/analytics/android/sdk/core/event/im p/ItemEventAssemble.java com/sensorsdata/analytics/android/sdk/core/event/im p/StoreDataImpl.java com/sensorsdata/analytics/android/sdk/core/event/im p/TrackEventAssemble.java com/sensorsdata/analytics/android/sdk/core/mediator/ SAModuleManager.java com/sensorsdata/analytics/android/sdk/data/SAProvid erHelper.java com/sensorsdata/analytics/android/sdk/data/SensorsD ataDBHelper.java com/sensorsdata/analytics/android/sdk/data/adapter/ DataOperation.java com/sensorsdata/analytics/android/sdk/data/adapter/E ncryptDataOperation.java com/sensorsdata/analytics/android/sdk/data/adapter/E ventDataOperation.java com/sensorsdata/analytics/android/sdk/data/adanter/T

NO	ISSUE	SEVERITY	STANDARDS	FILES
				ransportEncryption.java com/sensorsdata/analytics/android/sdk/data/persistent/ /PersistentSuperProperties.java com/sensorsdata/analytics/android/sdk/dialog/Scheme Activity.java com/sensorsdata/analytics/android/sdk/dialog/Sensors DataDialogUtils.java com/sensorsdata/analytics/android/sdk/encrypt/AESSe cretManager.java com/sensorsdata/analytics/android/sdk/encrypt/biz/Se cretKeyManager.java com/sensorsdata/analytics/android/sdk/encrypt/encryp tor/SAEEncrypt.java com/sensorsdata/analytics/android/sdk/encrypt/impl/S AEncryptAPIImpl.java com/sensorsdata/analytics/android/sdk/encrypt/utills/E ncryptUtils.java com/sensorsdata/analytics/android/sdk/exposure/App PageChange.java com/sensorsdata/analytics/android/sdk/exposure/Expo sedPage.java com/sensorsdata/analytics/android/sdk/exposure/Expo sedTransform.java com/sensorsdata/analytics/android/sdk/exposure/Expo sureVisible.java com/sensorsdata/analytics/android/sdk/exposure/SAEx posedProcess.java com/sensorsdata/analytics/android/sdk/exposure/Stay DurationRunnable.java com/sensorsdata/analytics/android/sdk/jsbridge/AppW ebViewInterface.java com/sensorsdata/analytics/android/sdk/jsbridge/H5Hel per.java com/sensorsdata/analytics/android/sdk/jsbridge/JSHoo kAop.java com/sensorsdata/analytics/android/sdk/network/HttpC onfig.java com/sensorsdata/analytics/android/sdk/network/RealR equest.java com/sensorsdata/analytics/android/sdk/plugin/encrypt /AbstractStoreManager.java com/sensorsdata/analytics/android/sdk/plugin/propert y/PropertyPluginManager.java com/sensorsdata/analytics/android/sdk/push/core/Pus hProcess.java com/sensorsdata/analytics/android/sdk/remote/BaseSe nsorsDataSDKRemoteManager.java com/sensorsdata/analytics/android/sdk/remote/Sensor

NO	ISSUE	SEVERITY	STANDARDS	sDataRemoteManager.java com/sensorsdata/analytics/android/sdk/remote/Sensor sDataRemoteManagerDebug.java com/sensorsdata/analytics/android/sdk/useridentity/Id entities.java com/sensorsdata/analytics/android/sdk/useridentity/Lo ginIDAndKey.java com/sensorsdata/analytics/android/sdk/useridentity/U serIdentityAPI.java com/sensorsdata/analytics/android/sdk/util/AppInfoUti ls.java com/sensorsdata/analytics/android/sdk/util/AppStateT ools.java com/sensorsdata/analytics/android/sdk/util/DeviceUtils .java com/sensorsdata/analytics/android/sdk/util/NetworkUt ils.java com/sensorsdata/analytics/android/sdk/util/Pathfinder. java com/sensorsdata/analytics/android/sdk/util/Permission Utils.java com/sensorsdata/analytics/android/sdk/util/SADataHel per.java com/sensorsdata/analytics/android/sdk/util/SAScheme Helper.java com/sensorsdata/analytics/android/sdk/util/SASpUtils.j ava com/sensorsdata/analytics/android/sdk/util/SAViewUtil s.java com/sensorsdata/analytics/android/sdk/util/SensorsDa taUtils.java com/sensorsdata/analytics/android/sdk/util/ThreadUtil s.java com/sensorsdata/analytics/android/sdk/util/ToastUtil.ja va com/sensorsdata/analytics/android/sdk/util/WebUtils.j ava com/sensorsdata/analytics/android/sdk/visual/Abstract NodesManager.java com/sensorsdata/analytics/android/sdk/visual/Abstract ViewCrawler.java com/sensorsdata/analytics/android/sdk/visual/HeatMa pService.java com/sensorsdata/analytics/android/sdk/visual/ViewSna pshot.java com/sensorsdata/analytics/android/sdk/visual/VisualID ebugHelper.java com/sensorsdata/analytics/android/sdk/visual/Visualiz edAutoTrackService.iava

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/sensorsdata/analytics/android/sdk/visual/WebViewVisualInterface.java com/sensorsdata/analytics/android/sdk/visual/impl/VisualProtocolImpl.java com/sensorsdata/analytics/android/sdk/visual/property/VisualConfigRequestHelper.java com/sensorsdata/analytics/android/sdk/visual/property/VisualPropertiesCache.java com/sensorsdata/analytics/android/sdk/visual/property/VisualPropertiesManager.java com/sensorsdata/analytics/android/sdk/visual/snap/Caller.java com/sensorsdata/analytics/android/sdk/visual/snap/ResourceReader.java com/sensorsdata/analytics/android/sdk/visual/utils/AlertMessageUtils.java com/sensorsdata/analytics/android/sdk/visual/view/PairingCodeEditDialog.java com/sensorsdata/analytics/android/sdk/visual/view/PairingCodeRequestHelper.java com/singular/sdk/internal/n0.java com/taobao/accs/ACCSClient.java com/taobao/accs/ACCSManager.java com/taobao/accs/ChannelService.java com/taobao/accs/a/a.java com/taobao/accs/b.java com/taobao/accs/b/a.java com/taobao/accs/base/AccsAbstractDataListener.java com/taobao/accs/base/BaseReceiver.java com/taobao/accs/base/BaseService.java com/taobao/accs/base/TaoBaseService.java com/taobao/accs/client/AdapterGlobalClientInfo.java com/taobao/accs/client/GlobalClientInfo.java com/taobao/accs/client/GlobalConfig.java com/taobao/accs/client/c.java com/taobao/accs/common/ThreadPoolExecutorFactory.java com/taobao/accs/data/Message.java com/taobao/accs/data/MsgDistributeService.java com/taobao/accs/data/a.java com/taobao/accs/data/c.java com/taobao/accs/data/d.java com/taobao/accs/data/g.java com/taobao/accs/data/i.java com/taobao/accs/data/j.java com/taobao/accs/dispatch/IntentDispatch.java com/taobao/accs/flowcontrol/FlowControl.java com/taobao/accs/internal/AccsJobService.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/taobao/accs/internal/ReceiverImpl.java com/taobao/accs/internal/ServiceImpl.java com/taobao/accs/internal/d.java com/taobao/accs/messenger/a.java com/taobao/accs/net/a.java com/taobao/accs/net/b.java com/taobao/accs/net/c.java com/taobao/accs/net/d.java com/taobao/accs/net/e.java com/taobao/accs/net/f.java com/taobao/accs/net/g.java com/taobao/accs/net/l.java com/taobao/accs/net/m.java com/taobao/accs/net/n.java com/taobao/accs/net/o.java com/taobao/accs/net/q.java com/taobao/accs/net/r.java com/taobao/accs/net/s.java com/taobao/accs/net/w.java com/taobao/accs/ut/a/a.java com/taobao/accs/ut/a/b.java com/taobao/accs/ut/a/c.java com/taobao/accs/ut/a/d.java com/taobao/accs/ut/a/e.java com/taobao/accs/ut/monitor/TrafficMonitor.java com/taobao/accs/utl/AdapterUtilityImpl.java com/taobao/accs/utl/OrangeAdapter.java com/taobao/accs/utl/UtilityImpl.java com/taobao/accs/utl/Utils.java com/taobao/accs/utl/f.java com/taobao/agoo/BaseNotifyClick.java com/taobao/agoo/BaseNotifyClickActivity.java com/taobao/agoo/TaobaoRegister.java com/taobao/agoo/a/a.java com/taobao/agoo/a/a/a.java com/taobao/agoo/a/a/c.java com/taobao/agoo/a/a/d.java com/taobao/agoo/a/b.java com/taobao/agoo/b.java com/taobao/agoo/c.java com/tencent/connect/a/a.java com/tencent/connect/api/QQAuthManage.java com/tencent/connect/auth/AuthAgent.java com/tencent/connect/auth/QQToken.java com/tencent/connect/auth/a.java com/tencent/connect/auth/c.java com/tencent/connect/avatar/QQAvatar.java com/tencent/connect/common/AssistActivity.java com/tencent/connect/common/BaseApi.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/tencent/connect/common/UIListenerManager.java com/tencent/connect/emotion/QQEmotion.java com/tencent/connect/share/QQShare.java com/tencent/connect/share/QzonePublish.java com/tencent/connect/share/QzoneShare.java com/tencent/connect/share/a.java com/tencent/mm/opensdk/channel/MMessageActV2.java com/tencent/mm/opensdk/channel/a/a.java com/tencent/mm/opensdk/diffdev/DiffDevOAuthFactory.java com/tencent/mm/opensdk/diffdev/a/a.java com/tencent/mm/opensdk/diffdev/a/b.java com/tencent/mm/opensdk/diffdev/a/c.java com/tencent/mm/opensdk/modelbiz/AddCardToWXCardPackage.java com/tencent/mm/opensdk/modelbiz/ChooseCardFromWXCardPackage.java com/tencent/mm/opensdk/modelbiz/SubscribeMessage.java com/tencent/mm/opensdk/modelbiz/SubscribeMiniProgramMsg.java com/tencent/mm/opensdk/modelbiz/WXChannelBaseJumpInfo.java com/tencent/mm/opensdk/modelbiz/WXChannelJumpMiniProgramInfo.java com/tencent/mm/opensdk/modelbiz/WXChannelJumpUrlInfo.java com/tencent/mm/opensdk/modelbiz/WXChannelOpenFeed.java com/tencent/mm/opensdk/modelbiz/WXChannelOpenLive.java com/tencent/mm/opensdk/modelbiz/WXChannelOpenProfile.java com/tencent/mm/opensdk/modelbiz/WXChannelShareVideo.java com/tencent/mm/opensdk/modelbiz/WXInvoiceAuthInsert.java com/tencent/mm/opensdk/modelbiz/WXLaunchMiniProgram.java com/tencent/mm/opensdk/modelbiz/WXLaunchMiniProgramWithToken.java com/tencent/mm/opensdk/modelbiz/WXNontaxPay.java com/tencent/mm/opensdk/modelbiz/WXOpenBusinessView.java com/tencent/mm/opensdk/modelbiz/WXPayInsurance.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/tencent/mm/opensdk/modelbiz/WXPreloadMiniProgram.java com/tencent/mm/opensdk/modelmsg/GetMessageFromWX.java com/tencent/mm/opensdk/modelmsg/LaunchFromWX.java com/tencent/mm/opensdk/modelmsg/SendAuth.java com/tencent/mm/opensdk/modelmsg/SendMessageToWX.java com/tencent/mm/opensdk/modelmsg/WXAppExtendObject.java com/tencent/mm/opensdk/modelmsg/WXDesignerSharedObject.java com/tencent/mm/opensdk/modelmsg/WXDynamicVideoMiniProgramObject.java com/tencent/mm/opensdk/modelmsg/WXEmojiObject.java com/tencent/mm/opensdk/modelmsg/WXEmojiPageSharedObject.java com/tencent/mm/opensdk/modelmsg/WXEmojiSharedObject.java com/tencent/mm/opensdk/modelmsg/WXEnterpriseCardObject.java com/tencent/mm/opensdk/modelmsg/WXFileObject.java com/tencent/mm/opensdk/modelmsg/WXGameVideoFileObject.java com/tencent/mm/opensdk/modelmsg/WXImageObject.java com/tencent/mm/opensdk/modelmsg/WXLiteAppObject.java com/tencent/mm/opensdk/modelmsg/WXMediaMessage.java com/tencent/mm/opensdk/modelmsg/WXMiniProgramObject.java com/tencent/mm/opensdk/modelmsg/WXMusicObject.java com/tencent/mm/opensdk/modelmsg/WXMusicVideoObject.java com/tencent/mm/opensdk/modelmsg/WXStateJumpChannelProfileInfo.java com/tencent/mm/opensdk/modelmsg/WXStateJumpMiniProgramInfo.java com/tencent/mm/opensdk/modelmsg/WXStateJumpUrlInfo.java com/tencent/mm/opensdk/modelmsg/WXStateSceneDataObject.java com/tencent/mm/opensdk/modelmsg/WXTextObject.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com.tencent/mm/opensdk/modelmsg/WXVideoFileObject.java com.tencent/mm/opensdk/modelmsg/WXVideoObject.java ava com.tencent/mm/opensdk/modelmsg/WXWebpageObject.java com.tencent/mm/opensdk/modelpay/PayReq.java com.tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com.tencent/mm/opensdk/openapi/MMSharedPreferences.java com.tencent/mm/opensdk/openapi/WXAPIFactory.java com.tencent/mm/opensdk/openapi/WXApiImplComm.java ava com.tencent/mm/opensdk/utls/Log.java com.tencent/mm/opensdk/utls/b.java com.tencent/open/SocialApiml.java com.tencent/open/SocialOperation.java com.tencent/open/TDialog.java com.tencent/open/a.java com.tencent/open/a/a.java com.tencent/open/a/c.java com.tencent/open/b.java com.tencent/open/b/a.java com.tencent/open/b/b.java com.tencent/open/b/e.java com.tencent/open/b/g.java com.tencent/open/b/h.java com.tencent/open/c.java com.tencent/open/c/b.java com.tencent/open/c/c.java com.tencent/open/log/SLog.java com.tencent/open/log/a.java com.tencent/open/log/b.java com.tencent/open/miniapp/MiniApp.java com.tencent/open/utls/HttpUtls.java com.tencent/open/utls/a.java com.tencent/open/utls/c.java com.tencent/open/utls/e.java com.tencent/open/utls/g.java com.tencent/open/utls/h.java com.tencent/open/utls/i.java com.tencent/open/utls/k.java com.tencent/open/web/security/JniInterface.java com.tencent/open/web/security/SecureJsInterface.java com.tencent/open/web/security/a.java com.tencent/open/web/security/b.java com.tencent/open/web/security/c.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/tencent/tauth/AuthActivity.java com/tencent/tauth/Tencent.java com/vivo/push/util/h0.java com/xiaomi/push/et.java com/xiaomi/push/service/ac.java com/xiaomi/push/service/bd.java com/yalantis/ucrop/util/ImageHeaderParser.java hj/c.java net/openid/appauth/internal/a.java o1/b.java org/android/agoo/accs/AgooService.java org/android/agoo/common/Config.java org/android/agoo/control/AgooFactory.java org/android/agoo/control/BaseIntentService.java org/android/agoo/control/NotifManager.java org/android/agoo/control/a.java org/android/agoo/control/c.java org/android/agoo/control/d.java org/android/agoo/control/f.java org/android/agoo/control/g.java org/android/agoo/control/h.java org/android/agoo/control/m.java org/android/agoo/message/MessageService.java r1/b.java r5/a.java top/zibin/luban/f.java uk/co/senab/photoview/d.java x4/b.java y1/a.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
2	The App uses an insecure Random Number Generator.	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	a0/a.java anet/channel/appmonitor/a.java anet/channel/bytes/a.java anet/channel/strategy/dispatch/a.java com/alibaba/sdk/android/push/common/global/b.java com/alibaba/sdk/android/push/notification/e.java com/alipay/sdk/data/b.java com/alipay/sdk/tid/a.java com/alipay/sdk/util/k.java com/aliyun/ams/emas/push/h.java com/aliyun/ams/emas/push/notification/c.java com/apm/insight/g.java com/geetest/gtc4/Utils.java com/longbridge/core/uitls/w.java com/longbridge/libnews/media/e.java com/longbridge/libnews/mvp/presenter/n.java com/longbridge/libnews/ui/fragment/FindDynamicMainFragment.java com/longbridge/libtrack/expourse/b.java com/longbridge/performance/event/ProfileEventTracker.java com/obsez/android/lib/filechooser/permissions/a.java com/qiyukf/httpdns/a/d.java com/qiyukf/httpdns/util/f.java com/qiyukf/module/zip4j/tasks/AbstractModifyFileTask.java com/qiyukf/nimlib/push/b/c.java com/qiyukf/nimlib/push/packet/symmetry/d.java com/qiyukf/share/media/a.java com/ta/utdid2/a/a/c.java com/ta/utdid2/device/d.java com/tencent/open/b/h.java com/xiaomi/push/bc.java com/xiaomi/push/bi.java com/xiaomi/push/bx.java com/xiaomi/push/fy.java j/f.java org/android/spdy/SpdyBytePool.java org/java_websocket/drafts/b.java org/jsoup/helper/c.java org/junit/runner/manipulation/f.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
3	App uses SQLite Database and execute raw SQL query. Untrusted user input in raw SQL queries can cause SQL Injection. Also sensitive information should be encrypted and written to the database.	warning	CWE: CWE-89: Improper Neutralization of Special Elements used in an SQL Command ('SQL Injection') OWASP Top 10: M7: Client Code Quality	a4/a.java a4/f.java com/apm/insight/e/b/a.java com/apm/insight/e/b/b.java com/bytedance/frameworks/core/apm/contentprovider/MonitorContentProvider.java com/liulishuo/filedownloader/database/d.java com/liulishuo/filedownloader/database/e.java com/nirvana/tools/logger/cache/db/AbstractDatabase.java com/nirvana/tools/logger/cache/db/DBHelper.java com/qiyukf/httpdns/i/a/a/a.java com/qiyukf/httpdns/i/a/a/b.java com/qiyukf/nimlib/g/c/a.java com/qiyukf/nimlib/g/c/c.java com/qiyukf/nimlib/g/c/d.java com/qiyukf/unicorn/e/a.java com/qiyukf/unicorn/e/b.java com/sensorsdata/analytics/android/sdk/data/OldDBData baseHelper.java com/sensorsdata/analytics/android/sdk/data/SensorsD ataDBHelper.java com/singular/sdk/internal/h0.java com/singular/sdk/internal/l.java com/taobao/accs/a/a.java com/tencent/open/b/g.java com/xiaomi/push/providers/a.java f4/a.java lc/a.java o/d.java org/android/agoo/message/MessageService.java
				ab/c.java anet/channel/strategy/dispatch/DispatchConstants.java anetwork/channel/util/RequestConstant.java com/alibaba/android/arouter/utils/Consts.java com/alibaba/fastjson/JSON.java com/bumptech/glide/load/engine/d.java com/bumptech/glide/load/engine/p.java com/bumptech/glide/load/engine/w.java com/bumptech/glide/load/h.java com/huawei/hms/framework/common/hianalytics/Hia nalyticsBaseData.java com/huawei/hms/push/constant/RemoteMessageConst

NO	ISSUE	SEVERITY	STANDARDS	.java Huawei/hms/support/hianalytics/HiAnalyticsConst ant.java com/jeremyliao/liveeventbus/ipc/consts/IpcConst.java com/longbridge/account/mvp/model/entity/StatementL ang.java com/longbridge/account/mvp/ui/activity/SplashGuideA ctivity.java com/longbridge/account/mvp/ui/fragment/WatchListH eaderDataChildSettingFragment.java com/longbridge/account/service/SingularServiceImplKt. java com/longbridge/android/mdcomment/export/entity/Ar ticlePostSource.java com/longbridge/android/mdmarket/export/entity/Fund UserRule.java com/longbridge/android/mdmarket/export/entity/Mark etTabHotListBean.java com/longbridge/android/mdmarket/export/entity/SanK eyNode.java com/longbridge/android/mdmarket/export/market/Mo duleJsonItem.java com/longbridge/common/dataCenter/entity/ColumnHe ader.java com/longbridge/common/global/constant/SMSType.jav a com/longbridge/common/global/entity/CommonFilter Group.java com/longbridge/common/global/entity/CurrencyExcha ngeBean.java com/longbridge/common/global/entity/CurrencyExcha ngeMix.java com/longbridge/common/global/entity/LegView.java com/longbridge/common/global/entity/SLRelevantInfo. java com/longbridge/common/global/entity/StockGroup.jav a com/longbridge/common/global/entity/StockIndustryE vent.java com/longbridge/common/manager/ChangeDomainHel per.java com/longbridge/common/quoteCenter/HoldGroup.java com/longbridge/common/quoteCenter/entity/DataKV.ja va com/longbridge/common/router/p.java com/longbridge/common/uiLib/dialog/Choice.java com/longbridge/common/uiLib/dialog/ChoiceGroup.jav a

NO	ISSUE	SEVERITY	STANDARDS	Files com/longbridge/common/utls/t.java com/longbridge/common/webview/offlinepkg/helper/OfflinePackageVersionHelper.java com/longbridge/libcomment/entity/ShareListStockHeader.java com/longbridge/libcomment/service/CommentServiceImpl.java com/longbridge/libcomment/util/LBTopicMakerEngine.java com/longbridge/libcomment/util/n1.java com/longbridge/libnews/manager/ReadCacheManager.java com/longbridge/libsocial/core/a.java com/longbridge/libsocial/wx/a.java com/longbridge/market/mvp/model/data/CombineChartDataCenter.java com/longbridge/market/mvp/model/entity/DataKV.java com/longbridge/market/mvp/model/entity/HotRankTagBean.java com/longbridge/market/mvp/model/entity/HotRankTagBeanNew.java com/longbridge/market/mvp/model/entity/HotRankTagListBeanNew.java com/longbridge/market/mvp/model/entity/RankTagsItem.java com/longbridge/market/mvp/model/entity/ScreenerResultItemIndicator.java com/longbridge/market/mvp/model/entity/StockABRandListBean.java com/longbridge/market/mvp/model/entity/SubIndicator.java com/longbridge/market/mvp/model/entity/TechIndicator.java com/longbridge/market/mvp/model/entity/TechItemModel.java com/longbridge/market/mvp/ui/activity/FloatWindowLogActivity.java com/longbridge/market/mvp/ui/activity/MarketLBHotListActivity.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketETFRankFilterItemRequest.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketETFRankFilterItemWrapper.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketETFRankTitleItem.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketETFRankTitleItemWrapper.java com/longbridge/market/mvp/ui/fragment/market/entity
----	-------	----------	-----------	---

NO	ISSUE	SEVERITY	STANDARDS	FILES
4	Files may contain hardcoded sensitive information like usernames, passwords, keys etc.	warning	CWE: CWE-312: Cleartext Storage of Sensitive Information OWASP Top 10: M9: Reverse Engineering OWASP MASVS: MSTG-STORAGE-14	y/MarketOptionsListIndexItem.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketRankDefaultConfig.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketRankFirstTag.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketRankIndicator.java com/longbridge/market/mvp/ui/fragment/market/entity/MarketRankSecTag.java com/longbridge/market/mvp/ui/stockshare/g.java com/longbridge/market/mvvm/entity/ChartItem.java com/longbridge/market/mvvm/entity/DeepChartDataItemValueEntity.java com/longbridge/market/mvvm/entity/DeepDataBindChart.java com/longbridge/market/mvvm/entity/DeepDataKeyFactorNode.java com/longbridge/market/mvvm/entity/EtfStockHeader.java com/longbridge/market/mvvm/entity/FinancialRecentReportDetail.java com/longbridge/market/mvvm/entity/FinancialRecentReportItem.java com/longbridge/market/mvvm/entity/GroupEntranceEntry.java com/longbridge/market/mvvm/entity/GroupEntranceTip.java com/longbridge/market/mvvm/entity/IndustryIndexItem.java com/longbridge/market/mvvm/entity/Key.java com/longbridge/market/mvvm/entity/KeyData.java com/longbridge/market/mvvm/entity/NoQuoteTradeTime.java com/longbridge/market/mvvm/entity/ScreeenerMainCondition.java com/longbridge/market/mvvm/entity/ScreeenerSearchResultItemValue.java com/longbridge/performance/model/EvilMethodModel.java com/longbridge/search/ui/result/all/view/r.java com/longbridge/search/ui/result/stock/i.java com/longbridge/search/viewmodel/GlobalSearchViewModel.java com/longbridge/wealth/mvp/model/entity/KeyValue.java com/longbridge/wealth/mvp/model/entity/MMFStatus.java com/longbridge/wealth/service/AgreementSimple.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
				com/longbridge/wealth/service/wealthdata/g.java com/meizu/cloud/pushsdk/c/b.java com/mobile/auth/BuildConfig.java com/mobile/auth/gatewayauth/Constant.java com/mobile/auth/gatewayauth/ResultCode.java com/mobile/auth/gatewayauth/detectnet/DetectResult.java com/mobile/auth/gatewayauth/manager/base/CacheKey.java com/mobile/auth/gatewayauth/model/TerminalInfo.java com/mobile/auth/gatewayauth/model/VendorConfig.java com/mobile/auth/gatewayauth/network/CmOperatorInfoRequest.java com/mobile/auth/gatewayauth/network/CmOperatorRequest.java com/mobile/auth/gatewayauth/network/UTSharedPreferencesHelper.java com/nirvana/tools/logger/UaidTracker.java com/nirvana/tools/logger/utls/LocalDeviceUtil.java com/nirvana/tools/logger/utls/UTSharedPreferencesHelper.java com/qiyukf/httpdns/b/b.java com/qiyukf/nimlib/c/a.java com/qiyukf/nimlib/d/d.java com/qiyukf/nimlib/d/f/d.java com/qiyukf/nimlib/g/b/c.java com/qiyukf/nimlib/ipc/NIMContentProvider.java com/qiyukf/nimlib/ipc/cp/b/c.java com/qiyukf/nimlib/ipc/cp/c/a.java com/qiyukf/nimlib/m/f.java com/qiyukf/nimlib/mixpush/b/b.java com/qiyukf/nimlib/net/trace/a.java com/qiyukf/nimlib/push/net/lbs/d.java com/qiyukf/nimlib/r/u.java com/qiyukf/nimlib/sdk/auth/LoginInfo.java com/qiyukf/nimlib/sdk/mixpush/MixPushConfig.java com/qiyukf/nimlib/session/u.java com/sensorsdata/analytics/android/sdk/advert/utls/ChannelUtils.java com/sensorsdata/analytics/android/sdk/core/mediator/Modules.java com/sensorsdata/analytics/android/sdk/data/adapter/DbParams.java com/sensorsdata/analytics/android/sdk/encrypt/biz/SecretKeyManager.java com/sensorsdata/analytics/android/sdk/encrypt/impl/S

NO	ISSUE	SEVERITY	STANDARDS	AEncryptAPIImpl.java FileSensorsdata/analytics/android/sdk/plugin/encrypt/AbstractStoreManager.java
				com/sensorsdata/analytics/android/sdk/plugin/encrypt/SAStoreManager.java com/sensorsdata/analytics/android/sdk/useridentity/Identities.java com/sensorsdata/analytics/android/sdk/util/SADataHelper.java com/singular/sdk/internal/i.java com/taobao/accs/ACCSManager.java com/taobao/accs/AccsClientConfig.java com/taobao/accs/ChannelService.java com/taobao/accs/common/Constants.java com/taobao/accs/utl/OrangeAdapter.java com/tencent/connect/common/Constants.java com/tencent/mm/opensdk/constants/ConstantsAPI.java com/tencent/open/SocialConstants.java com/xiaomi/clientreport/data/Config.java com/xiaomi/mipush/sdk/Constants.java com/xiaomi/mipush/sdk/t.java dg/b.java ee/MarketETFSecTypeChanged.java fd/a.java ka/H5NotifyEvent.java org/android/agoo/common/AgooConstants.java org/android/agoo/common/Config.java org/android/spdy/SpdyProtocol.java p/f.java pd/b.java
				tf/WealthVisibleEvent.java anetwork/channel/download/DownloadManager.java unifi/engine/RelevantInfo.java com/apm/insight/entity/d.java com/apm/insight/nativecrash/b.java com/apm/insight/o/w.java com/apm/insight/runtime/p.java com/geetest/captcha/m.java com/liulishuo/filedownloader/util/h.java com/longbridge/android/libui/charting/charts/Chart.java com/longbridge/android/libui/charting/utls/d.java com/longbridge/common/utls/f3.java com/longbridge/common/utls/h3.java com/longbridge/common/utls/k5.java com/longbridge/core/cache/s.java com/longbridge/core/utls/e.java com/longbridge/core/utls/l.java com/longbridge/core/utls/r.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
5	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	com/longbridge/core/uitls/statusbar/b.java com/longbridge/crop/util/d.java com/longbridge/libcomment/dialog/InputTextMsgDialog.java com/longbridge/libcomment/ui/CommonTopicView.java com/longbridge/libcomment/ui/CommonTopicViewBase.java com/longbridge/libcomment/ui/fragment/RichSpanEditFragment.java com/longbridge/libcomment/ui/view/CommentFoldItemView.java com/longbridge/libcomment/ui/view/CommentItemView.java com/longbridge/libcomment/ui/view/topic/TopicItemPhotoView.java com/longbridge/libdebug/DebugActivity.java com/longbridge/libdebug/remote/a.java com/longbridge/performance/uitls/MemoryUtils.java com/meizu/cloud/pushsdk/f/d.java com/obsez/android/lib/filechooser/internals/b.java com/qiyukf/module/log/FileLogUtils.java com/qiyukf/module/log/LogPulseClient.java com/qiyukf/module/log/UnicornLog.java com/qiyukf/nimlib/log/a.java com/qiyukf/nimlib/r/b/a.java com/qiyukf/nimlib/sdk/util/NIMUtil.java com/qiyukf/unicorn/f/a.java com/qiyukf/unicorn/fileselect/ui/activity/FilePickerActivity.java com/qiyukf/unicorn/mediaselect/internal/uitls/MediaStoreCompat.java com/qiyukf/unicorn/mediaselect/internal/uitls/PathUtils.java com/qiyukf/unicorn/n/b/e.java com/qiyukf/unicorn/n/e/a.java com/qiyukf/unicorn/n/e/d.java com/sina/weibo/sdk/l.java com/sina/weibo/sdk/w.java com/taobao/accs/utl/UtilityImpl.java com/tencent/open/b/d.java com/tencent/open/b/h.java com/tencent/open/log/SLog.java com/tencent/open/log/d.java com/tencent/open/uitls/c.java com/tencent/open/uitls/k.java com/yalantis/ucrop/util/FileUtils.java com/zhihu/matisse/internal/uitls/b.java

NO	ISSUE	SEVERITY	STANDARDS	com/zhihu/matisse/internal/utlis/c.java FILES l4/d.java
				qh/a.java skin/support/utlis/e.java tb/a.java
6	Weak Encryption algorithm used	high	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	x1/g.java com/heytao/mcsdk/utlis/c.java com/nirvana/tools/core/CryptUtil.java
7	MD5 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/longbridge/core/utlis/h0.java com/qiyukf/httpdns/j/b/a.java com/vivo/push/util/j.java
8	The file or SharedPreferences is World Readable. Any App can read from the file	high	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	com/bytedance/apm/util/MultiProcessSharedPreference.s.java com/bytedance/frameworks/core/apm/contentprovider/MonitorContentProvider.java
9	This App copies data to clipboard. Sensitive data should not be copied to clipboard as other applications can access it.	info	OWASP MASVS: MSTG-STORAGE-10	com/longbridge/android/mdcomment/export/util/a0.java com/longbridge/common/uiLib/share/CommonSharePlatformView.java com/longbridge/common/uiLib/share/CommonSharePlatformViewNew.java com/longbridge/common/webview/f4.java com/longbridge/common/webview/offlinepkg/k.java com/longbridge/core/utlis/r0.java com/longbridge/libcomment/ui/CommonTopicDetailView.java com/longbridge/libsocial/core/platform/system/a.java com/qiyukf/uikit/session/helper/CustomURLSpan.java com/qiyukf/unicorn/ui/viewholder/a/h.java com/qiyukf/unicorn/ui/viewholder/m.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
10	This App uses SSL certificate pinning to detect or prevent MITM attacks in secure communication channel.	secure	OWASP MASVS: MSTG-NETWORK-4	com/huawei/secure/android/common/ssl/SecureX509Tru rustManager.java com/longbridge/common/certificate/b.java com/qiyukf/httpdns/d/a.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/unicorn/i/a/e.java com/ta/a/b/c.java com/ta/a/b/f.java com/ta/a/b/g.java com/tencent/open/a/c.java o0/b.java org/rustls/platformverifier/CertificateVerifier.java
11	IP Address disclosure	warning	CWE: CWE-200: Information Exposure OWASP MASVS: MSTG-CODE-2	anet/channel/detect/ExceptionDetector.java com/alibaba/sdk/android/push/register/ThirdPushManager.java com/alibaba/sdk/android/push/vivo/BuildConfig.java com/alibaba/sdk/thirdpush/impl/BuildConfig.java com/geetest/gtc4/u0.java com/longbridge/common/tracker/l.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnosticService/LDNetDiagnosticService.java com/mobile/auth/z/u.java com/mobile/auth/z/v.java com/qiyukf/httpdns/b/a.java com/qiyukf/httpdns/j/b/a.java com/qiyukf/nimlib/f/e.java com/sensorsdata/analytics/android/sdk/AbstractSensorDataAPI.java com/sensorsdata/analytics/android/sdk/BuildConfig.java com/sensorsdata/analytics/android/sdk/SensorsDataAPI.java com/xiaomi/push/fc.java com/xiaomi/push/service/XMPushService.java com/xiaomi/push/service/q.java org/android/spdy/SpdyAgent.java org/android/spdy/SpdyRequest.java qc/a.java u2/g.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
12	The file or SharedPreferences is World Writable. Any App can write to the file	high	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	com/alipay/sdk/tid/a.java com/geetest/captcha/k.java com/geetest/captcha/o.java com/mobile/auth/gatewayauth/network/UTSharedPreferencesHelper.java com/mobile/auth/l/k.java com/nirvana/tools/core/UTSharedPreferencesHelper.java com/nirvana/tools/logger/utls/UTSharedPreferencesHelper.java com/xiaomi/push/service/l.java
13	Ensure that user controlled URLs never reaches the Webview. Enabling file access from URLs in WebView can leak sensitive information from the file system.	warning	CWE: CWE-200: Information Exposure OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/longbridge/common/webview/p4.java
14	The App uses the encryption mode CBC with PKCS5/PKCS7 padding. This configuration is vulnerable to padding oracle attacks.	high	CWE: CWE-649: Reliance on Obfuscation or Encryption of Security-Relevant Inputs without Integrity Checking OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-3	com/huawei/agconnect/config/impl/j.java com/mobile/auth/c/a.java com/mobile/auth/l/a.java com/mobile/auth/l/b.java com/mobile/auth/z/i.java com/qiyukf/unicorn/n/d.java com/vivo/push/util/h.java com/xiaomi/push/h.java org/android/agoo/common/a.java
15	Insecure WebView Implementation. Execution of user controlled code in WebView is a critical Security Hole.	warning	CWE: CWE-749: Exposed Dangerous Method or Function OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/apmplus/hybrid/webview/HybridMonitorManager.java com/bytedance/android/monitor/webview/WebViewMonitorHelper.java com/sensorsdata/analytics/android/webview/impl/SAWebViewProtocolImpl.java wendu/dsbridge/DWebView.java
16	App creates temp file. Sensitive information should never be written into a temp file.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	cn/bingoogleapple/photopicker/util/d.java com/qiyukf/nimlib/g/b/d.java com/sun/jna/Native.java org/aspectj/util/b.java org/junit/rules/j.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
17	This App uses SQL Cipher. SQLCipher provides 256-bit AES encryption to sqllite database files.	info	OWASP MASVS: MSTG-CRYPTO-1	com/qiyukf/nimlib/g/b/b.java com/qiyukf/nimlib/g/b/c.java com/qiyukf/nimlib/g/b/d.java
18	Insecure Implementation of SSL. Trusting all the certificates or accepting self signed certificates is a critical Security Hole. This application is vulnerable to MITM attacks	high	CWE: CWE-295: Improper Certificate Validation OWASP Top 10: M3: Insecure Communication OWASP MASVS: MSTG-NETWORK-3	anet/channel/util/j.java com/qiyukf/nim/highavailable/lava/base/http/TlsSniSocketFactory.java com/qiyukf/unicorn/i/a/b.java com/ta/a/b/f.java
19	Remote WebView debugging is enabled.	high	CWE: CWE-919: Weaknesses in Mobile Applications OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-RESILIENCE-2	com/geetest/captcha/views/GTC4WebView.java com/longbridge/libdebug/DebugActivity.java
20	SHA-1 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/huawei/hms/common/internal/TransactionIdCreator.java com/huawei/secure/android/common/encrypt/utills/EncryptUtil.java com/huawei/secure/android/common/util/EncryptUtil.java
21	The App uses ECB mode in Cryptographic encryption algorithm. ECB mode is known to be weak as it results in the same ciphertext for identical blocks of plaintext.	high	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-2	b0/k.java com/qiyukf/unicorn/n/d.java i0/c.java y2/g.java
22	This App may have root detection capabilities.	secure	OWASP MASVS: MSTG-RESILIENCE-1	com/alipay/sdk/sys/b.java com/apm/insight/nativecrash/b.java com/mobile/auth/gatewayauth/manager/SystemManager.java com/mobile/auth/gatewayauth/utills/security/CheckRoot.java
23	This App may request root (Super User) privileges.	warning	CWE: CWE-250: Execution with Unnecessary Privileges OWASP MASVS: MSTG-RESILIENCE-1	com/longbridge/common/security/h.java

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libtnet-3.1.14.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strchr_chk', '__strlen_chk', '__sprintf_chk', '__strchr_chk', '__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	arm64-v8a/libengine_uniffi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	arm64-v8a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	arm64-v8a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/libapminsightb.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	arm64-v8a/libmodpng.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	arm64-v8a/libqiyutraceroute.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk', '_strlen_chk', '_memcpy_chk', '_read_chk', '_strchr_chk', '_memset_chk', '_strncpy_chk', '_strcpy_chk', '_fgets_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	arm64-v8a/libshadowhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__read_chk', '__strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	arm64-v8a/liblbhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	arm64-v8a/libsecurity.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	arm64-v8a/libmodpdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strlen_chk', '__read_chk', '__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	arm64-v8a/libapminsight.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	arm64-v8a/libqiyuhigh_available_android.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsprintf_chk', '__memmove_chk', '__strchr_chk', '__memcpy_chk', '__strcpy_chk', '__vsnprintf_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	arm64-v8a/libmodft2.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	arm64-v8a/libjnidispatch.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	False warning Symbols are available.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	arm64-v8a/liblivcffmpeg.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strchr_chk', ['__memset_chk', ['__memcpy_chk', ['__strcpy_chk', ['__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	arm64-v8a/libjniPdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__pread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	arm64-v8a/libsaasCorePlayer.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strncpy_chk', ['__strlen_chk', ['__snprintf_chk', ['__strcat_chk', ['__sprintf_chk', ['__strchr_chk', ['__memcpy_chk', ['__FD_SET_chk', ['__memset_chk', ['__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
19	arm64-v8a/libvolc_log.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memmove_chk', '__memset_chk', '__strncpy_chk', '__strcpy_chk', '__vsnprintf_chk', '__strlen_chk', '__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
20	arm64-v8a/libnative-render.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memmove_chk', '__memset_chk', '__memcpy_chk', '__strcpy_chk', '__vsprintf_chk', '__strcat_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
21	arm64-v8a/libshadowhook_nothing.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
22	arm64-v8a/libsaasDownloader.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
23	arm64-v8a/libqiyune_audio.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '__vsprintf_chk', '__memmove_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
24	arm64-v8a/libglibc4core.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_fgets_chk', '_vsprintf_chk', '_read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
25	arm64-v8a/libbytehook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__read_chk', '__vsprintf_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
26	arm64-v8a/libEncryptorP.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
27	armeabi-v7a/libtnet-3.1.14.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
28	armeabi-v7a/libengine_uniffl.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
29	armeabi-v7a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
30	armeabi-v7a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
31	armeabi-v7a/libapminsightb.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
32	armeabi-v7a/libmodpng.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
33	armeabi-v7a/libqiyutraceroute.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
34	armeabi-v7a/libshadowhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
35	armeabi-v7a/liblbhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
36	armeabi-v7a/libsecurity.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
37	armeabi-v7a/libmodpdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk', '__strlen_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
38	armeabi-v7a/libapminsight.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
39	armeabi-v7a/libqiyuhigh_available_android.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strcpy_chk', '__strchr_chk', '__vsprintf_chk', '__vsnprintf_chk', '__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
40	armeabi-v7a/libmodft2.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
41	armeabi-v7a/libjnidispatch.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	False warning Symbols are available.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
42	armeabi-v7a/liblivcffmpeg.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
43	armeabi-v7a/libjniPdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk', '__pread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
44	armeabi-v7a/libsaasCorePlayer.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
45	armeabi-v7a/libvolc_log.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
46	armeabi-v7a/libnative-render.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memset_chk', '__memcpy_chk', '__vsnprintf_chk', '__strcat_chk', '__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
47	armeabi-v7a/libshadowhook_nothing.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
48	armeabi-v7a/libsaasDownloader.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
49	armeabi-v7a/libqiyune_audio.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
50	armeabi-v7a/libglibc4core.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
51	armeabi-v7a/libbytehook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
52	armeabi-v7a/libEncryptorP.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
53	arm64-v8a/libtnet-3.1.14.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strchr_chk', '__strlen_chk', '__sprintf_chk', '__strchr_chk', '__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
54	arm64-v8a/libengine_unifffi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
55	arm64-v8a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
56	arm64-v8a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
57	arm64-v8a/libapminsightb.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
58	arm64-v8a/libmodpng.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
59	arm64-v8a/libqiyutraceroute.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk', '_strlen_chk', '_memcpy_chk', '_read_chk', '_strchr_chk', '_memset_chk', '_strncpy_chk', '_strcpy_chk', '_fgets_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
60	arm64-v8a/libshadowhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__read_chk', '__strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
61	arm64-v8a/liblbhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
62	arm64-v8a/libsecurity.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
63	arm64-v8a/libmodpdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strlen_chk', '__read_chk', '__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
64	arm64-v8a/libapminsight.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
65	arm64-v8a/libqiyuhigh_available_android.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsprintf_chk', '__memmove_chk', '__strchr_chk', '__memcpy_chk', '__strcpy_chk', '__vsnprintf_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
66	arm64-v8a/libmodft2.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
67	arm64-v8a/libjnidispatch.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	False warning Symbols are available.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
68	arm64-v8a/liblivcffmpeg.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strchr_chk', ['__memset_chk', ['__memcpy_chk', ['__strcpy_chk', ['__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
69	arm64-v8a/libjniPdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__pread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
70	arm64-v8a/libsaasCorePlayer.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strncpy_chk', '__strlen_chk', '__snprintf_chk', '__strcat_chk', '__sprintf_chk', '__strchr_chk', '__memcpy_chk', '__FD_SET_chk', '__memset_chk', '__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
71	arm64-v8a/libvolc_log.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memmove_chk', '__memset_chk', '__strncpy_chk', '__strcpy_chk', '__vsnprintf_chk', '__strlen_chk', '__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
72	arm64-v8a/libnative-render.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memmove_chk', '__memset_chk', '__memcpy_chk', '__strcpy_chk', '__vsprintf_chk', '__strcat_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
73	arm64-v8a/libshadowhook_nothing.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
74	arm64-v8a/libsaasDownloader.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
75	arm64-v8a/libqiyune_audio.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_vsprintf_chk', '_memmove_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
76	arm64-v8a/libgtc4core.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_fgets_chk', '__vsprintf_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
77	arm64-v8a/libbytehook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__read_chk', '__vsprintf_chk', '__strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
78	arm64-v8a/libEncryptorP.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
79	armeabi-v7a/libtnet-3.1.14.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
80	armeabi-v7a/libengine_uniffi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
81	armeabi-v7a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
82	armeabi-v7a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
83	armeabi-v7a/libapminsightb.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Position Independent Executable (PIE) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
84	armeabi-v7a/libmodpng.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
85	armeabi-v7a/libqiyutraceroute.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
86	armeabi-v7a/libshadowhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
87	armeabi-v7a/liblbhook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
88	armeabi-v7a/libsecurity.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
89	armeabi-v7a/libmodpdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk', '__strlen_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
90	armeabi-v7a/libapminsight.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
91	armeabi-v7a/libqiyuhigh_available_android.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__strcpy_chk', '__strchr_chk', '__vsprintf_chk', '__vsnprintf_chk', '__memcpy_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
92	armeabi-v7a/libmodft2.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memcpy_chk', '__vsprintf_chk', '__read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
93	armeabi-v7a/libjnidispatch.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	False warning Symbols are available.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
94	armeabi-v7a/liblivcffmpeg.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
95	armeabi-v7a/libjniPdfium.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk', '__pread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
96	armeabi-v7a/libsaasCorePlayer.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
97	armeabi-v7a/libvolc_log.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
98	armeabi-v7a/libnative-render.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__memset_chk', '__memcpy_chk', '__vsnprintf_chk', '__strcat_chk', '__strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
99	armeabi-v7a/libshadowhook_nothing.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
100	armeabi-v7a/libsaasDownloader.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
101	armeabi-v7a/libqiyune_audio.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
102	armeabi-v7a/libglibc4core.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['__vsprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
103	armeabi-v7a/libbytehook.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
104	armeabi-v7a/libEncryptorP.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option -D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NIAP ANALYSIS v1.3

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
----	------------	-------------	---------	-------------

BEHAVIOUR ANALYSIS

RULE ID	BEHAVIOUR	LABEL	FILES
00191	Get messages in the SMS inbox	sms	c4/a.java com/alipay/sdk/util/j.java com/geetest/gtc4/t5.java com/geetest/gtc4/x7.java com/github/gzuliuyjiang/oaid/impl/MeizuDeviceIdImpl.java com/github/gzuliuyjiang/oaid/impl/VivoDeviceIdImpl.java com/longbridge/common/utlis/v.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/entity/Album.java com/sensorsdata/analytics/android/sdk/advert/oaid/impl/MeizulImpl.java com/sensorsdata/analytics/android/sdk/advert/oaid/impl/VivolImpl.java com/singular/sdk/internal/d0.java com/singular/sdk/internal/s.java com/tencent/open/b/a.java com/xiaomi/push/ar.java com/zhihu/matisse/internal/entity/Album.java q/k.java q/q.java
			a0/a.java anet/channel/util/SerializeHelper.java b0/k.java com/airbnb/lottie/network/g.java com/airbnb/lottie/network/h.java com/alibaba/sdk/android/crashdefend/c/a.java com/apm/insight/a/a.java com/apm/insight/g/n.java com/apm/insight/n/b.java com/apm/insight/o/d.java com/apm/insight/o/j.java com/bumptech/glide/disklruache/b.java com/bumptech/glide/load/e.java com/bumptech/glide/load/model/f.java com/bumptech/glide/load/resource/bitmap/d0.java com/bytedance/apm/common/utility/j.java com/dovar/dtoast/b.java com/huawei/hms/framework/common/CreateFileUtil.java com/huawei/hms/hatool/k1.java com/huawei/hms/opendevise/e.java com/huawei/hms/opendevise/m.java com/huawei/hms/utlis/SHA256.java com/huawei/secure/android/common/encrypt/hash/FileSHA256.java com/huawei/secure/android/common/ssl/SecureX509TrustManager.java com/huawei/secure/android/common/ssl/util/BksUtil.java

RULE ID	BEHAVIOUR	LABEL	FILES
00013	Read file and put it into a stream	file	com/huawei/secure/android/common/util/ZipUtil.java com/jkewharton/disklrucache/a.java com/longbridge/common/security/a.java com/longbridge/common/webview/offlinepkg/helper/h.java com/longbridge/core/uitls/h0.java com/longbridge/core/uitls/m0.java com/longbridge/core/uitls/r.java com/longbridge/core/uitls/stutusbar/a.java com/longbridge/core/uitls/y0.java com/longbridge/libdebug/remote/a.java com/longbridge/performance/cpu/CpuKtExtensions.java com/longbridge/performance/cpu/monitor/ThreadsCpuSampleMonitor.java com/longbridge/performance/cpu/util/ProcPseudoUtil.java com/longbridge/performance/monitor/CpuMonitor.java com/mobile/auth/b/c.java com/nirvana/tools/crash/CrashUploadUtils.java com/nirvana/tools/crash/FileUtils.java com/qiyukf/module/log/FileLogUtils.java com/qiyukf/module/zip4j/tasks/AbstractAddFileToZipTask.java com/qiyukf/module/zip4j/util/CrcUtil.java com/qiyukf/nimlib/k/d/b.java com/qiyukf/nimlib/k/d/c.java com/qiyukf/nimlib/log/c/a/a.java com/qiyukf/nimlib/log/d/a.java com/qiyukf/nimlib/net/a/c/a.java com/qiyukf/nimlib/push/packet/asymmetric/c.java com/qiyukf/nimlib/push/packet/asymmetric/e.java com/qiyukf/nimlib/push/packet/asymmetric/f.java com/qiyukf/nimlib/r/b.java com/qiyukf/nimlib/r/j.java com/qiyukf/nimlib/r/y.java com/qiyukf/nimlib/sdk/util/NIMUtil.java com/qiyukf/share/media/b.java com/qiyukf/uikit/common/media/picker/a/b.java com/qiyukf/unicorn/n/e/b.java com/sensorsdata/analytics/android/sdk/util/AppInfoUtils.java com/sensorsdata/analytics/android/sdk/util/FileUtils.java com/sina/weibo/sdk/y.java com/ta/a/c/a.java com/tencent/open/utls/k.java com/xiaomi/clientreport/processor/a.java com/xiaomi/push/Cdo.java com/xiaomi/push/av.java com/xiaomi/push/ch.java com/xiaomi/push/db.java com/xiaomi/push/gc.java com/xiaomi/push/service/ae.java com/xiaomi/push/x.java

RULE ID	BEHAVIOUR	LABEL	com/yalantis/ucrop/util/FileUtils.java f1/e.java f3/h.java
			i0/b.java i0/d.java j4/a.java junit/runner/a.java k1/a.java k5/a.java okio/Okio__JvmOkioKt.java org/aspectj/apache/bcel/classfile/e.java org/aspectj/apache/bcel/util/d.java org/aspectj/asm/a.java org/aspectj/util/b.java org/aspectj/util/l.java org/aspectj/weaver/bcel/b0.java org/aspectj/weaver/bcel/y.java org/aspectj/weaver/tools/cache/c.java org/aspectj/weaver/tools/cache/m.java org/aspectj/weaver/tools/cache/p.java org/aspectj/weaver/u0.java org/jsoup/helper/c.java org/junit/experimental/max/b.java q6/c.java sd/b.java top/zibin/luban/f.java v1/a.java wa/a.java wa/c.java wa/d.java x3/a.java

RULE ID	BEHAVIOUR	LABEL	FILES
00012	Read data and put it into a buffer stream	file	a0/a.java anet/channel/util/SerializeHelper.java com/huawei/hms/utis/SHA256.java com/huawei/secure/android/common/util/ZipUtil.java com/longbridge/core/uitls/y0.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/nimlib/r/j.java com/qiyukf/nimlib/r/y.java com/qiyukf/share/media/b.java com/sensorsdata/analytics/android/sdk/util/FileUtils.java com/tencent/open/utis/k.java com/xiaomi/push/ch.java com/xiaomi/push/gc.java com/xiaomi/push/x.java i0/d.java k5/a.java org/aspectj/apache/bcel/classfile/e.java
			anet/channel/strategy/m.java cn/bingogolapple/photopicker/activity/BGAPhotoPreviewActivity.java cn/bingogolapple/photopicker/util/c.java cn/bingogolapple/photopicker/util/d.java cn/bingogolapple/photopicker/util/f.java com/airbnb/lottie/network/g.java com/airbnb/lottie/network/h.java com/alibaba/android/arouter/utis/ClassUtils.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/aliyun/player/videoview/displayView/IDisplayView.java com/aliyun/utis/DeviceInfoUtils.java com/apm/insight/b/b.java com/apm/insight/h/a.java com/apm/insight/i/b.java com/apm/insight/i/c.java com/apm/insight/log/VLog.java com/apm/insight/log/a.java com/apm/insight/log/a/a.java com/apm/insight/log/c.java com/apm/insight/n/c.java com/apm/insight/nativecrash/NativeCrashCollector.java com/apm/insight/nativecrash/NativeImpl.java com/apm/insight/nativecrash/a.java com/apm/insight/nativecrash/b.java com/apm/insight/nativecrash/c.java com/apm/insight/o/g.java

RULE ID	BEHAVIOUR	LABEL	FILES
00022	Open a file from given absolute path of the file	file	com/apm/insight/o/j.java com/apm/insight/o/p.java com/apm/insight/runtime/h.java com/apm/insight/runtime/i.java com/apm/insight/runtime/l.java com/apm/insight/runtime/p.java com/apm/insight/runtime/t.java com/geetest/captcha/m.java com/liulishuo/filedownloader/d.java com/liulishuo/filedownloader/f0.java com/liulishuo/filedownloader/util/h.java com/longbridge/android/libui/charting/charts/Chart.java com/longbridge/common/dialog/SharePictureDialog.java com/longbridge/common/pdf/PDFViewerActivity.java com/longbridge/common/utis/h3.java com/longbridge/common/utis/k5.java com/longbridge/common/utis/m.java com/longbridge/common/viewmodel/FileViewModel.java com/longbridge/common/webview/LBjsApi.java com/longbridge/common/webview/helper/c.java com/longbridge/core/rust/b.java com/longbridge/core/utis/e.java com/longbridge/core/utis/r.java com/longbridge/core/utis/z.java com/longbridge/crop/util/d.java com/longbridge/libcomment/dragablePhotoPreview/extension/d.java com/longbridge/libsocial/core/a.java com/longbridge/libsocial/core/manager/ShareManager.java com/longbridge/libsocial/core/util/b.java com/longbridge/libsocial/core/util/i.java com/longbridge/libsocial/wx/a.java com/longbridge/performance/cpu/sysfs/CpuPolicy.java com/longbridge/performance/cpu/util/CpuPseudoUtil.java com/longbridge/performance/strictmode/StrictModeHookMonitor.java com/longbridge/performance/utis/MemoryUtils.java com/nirvana/tools/crash/CrashUcSdk.java com/nirvana/tools/crash/FileUtils.java com/obsez/android/lib/filechooser/internals/b.java com/obsez/android/lib/filechooser/k.java com/obsez/android/lib/filechooser/s.java com/qiyukf/module/log/LogPulseClient.java com/qiyukf/module/zip4j/io/outputstream/SplitOutputStream.java com/qiyukf/module/zip4j/tasks/AbstractAddFileToZipTask.java com/qiyukf/module/zip4j/tasks/AbstractExtractFileTask.java com/qiyukf/nimlib/a.java com/qiyukf/nimlib/g/b/d.java com/qiyukf/nimlib/g/f.java com/qiyukf/nimlib/k/d/b.java

RULE ID	BEHAVIOUR	LABEL	FILES
			com/qiyukf/nimlib/log/a/a.java com/qiyukf/nimlib/r/b/a.java com/qiyukf/nimlib/sdk/media/record/AudioRecorder.java com/qiyukf/nimlib/sdk/util/NIMUtil.java com/qiyukf/uikit/common/media/picker/activity/PreviewImageFromCameraActivity.java com/qiyukf/uikit/session/helper/SendImageHelper.java com/qiyukf/unicorn/fileselect/ui/a/a.java com/qiyukf/unicorn/fileselect/ui/activity/FilePickerActivity.java com/qiyukf/unicorn/mediaselect/internal/utls/MediaStoreCompat.java com/qiyukf/unicorn/n/b/e.java com/qiyukf/unicorn/n/d/a.java com/qiyukf/unicorn/n/e/a.java com/qiyukf/unicorn/n/e/d.java com/sina/weibo/sdk/l.java com/sina/weibo/sdk/w.java com/sun/jna/Native.java com/sun/jna/NativeLibrary.java com/ta/a/b/e.java com/tencent/connect/share/QQShare.java com/tencent/connect/share/a.java com/tencent/open/log/d.java com/tencent/open/utls/c.java com/tencent/open/utls/k.java com/xiaomi/clientreport/processor/a.java com/xiaomi/clientreport/processor/b.java com/xiaomi/push/bm.java com/xiaomi/push/bx.java com/xiaomi/push/u.java com/xiaomi/push/x.java com/zhihu/matisse/internal/utls/b.java gd/b.java j4/a.java j5/d.java j5/e.java l4/c.java l4/d.java n4/b.java org/aspectj/asm/internal/a.java org/aspectj/asm/internal/d.java org/aspectj/util/b.java org/aspectj/util/g.java org/aspectj/weaver/bcel/y.java org/aspectj/weaver/c0.java org/aspectj/weaver/tools/cache/b.java org/aspectj/weaver/tools/cache/c.java org/aspectj/weaver/tools/cache/d.java org/aspectj/weaver/tools/cache/m.java org/aspectj/weaver/tools/cache/n.java

RULE ID	BEHAVIOUR	LABEL	FILES
			org/aspectj/weaver/tools/cache/p.java org/aspectj/weaver/tools/cache/s.java org/jsoup/b.java
			r1/b.java skin/support/load/a.java skin/support/utis/e.java top/zibin/luban/f.java u2/d.java wendu/dsbridge/DWebView.java x1/g.java x2/c.java
00004	Get filename and put it to JSON object	file collection	x4/a.java a0/a.java com/alipay/sdk/util/k.java com/apm/insight/a/a.java com/apm/insight/b/b.java com/apm/insight/g/n.java com/apm/insight/n/c.java com/apm/insight/n/e.java com/apm/insight/n/f.java com/apm/insight/nativecrash/NativeCrashCollector.java com/apm/insight/nativecrash/b.java com/apm/insight/o/j.java com/apm/insight/o/v.java com/apm/insight/runtime/t.java com/longbridge/common/webview/LBJSApi.java com/longbridge/libcomment/ui/fragment/RichSpanEditFragment.java com/longbridge/libcomment/util/n1.java com/qiyukf/nimlib/sdk/msg/MessageBuilder.java com/qiyukf/unicorn/ui/worksheet/b.java com/qiyukf/unicorn/ui/worksheet/d.java com/tencent/open/utis/k.java j5/d.java n4/b.java r1/b.java x0/a.java x1/h.java y2/f.java
00023	Start another application from current application	reflection control	com/longbridge/homewidget/ui/single/MarketAppWidget.java com/longbridge/homewidget/ui/watchlist/WatchListAppWidget.java com/longbridge/libsocial/core/util/k.java

RULE ID	BEHAVIOUR	LABEL	FILES
00091	Retrieve data from broadcast	collection	com/alipay/sdk/app/H5PayActivity.java com/heytao/mccsdk/PushService.java com/huawei/hms/support/api/push/PushReceiver.java com/longbridge/common/router/RedirectRouterInterceptor.java com/longbridge/common/uiLib/dialog/SelectStockCoverDialog.java com/longbridge/homewidget/ui/single/MarketAppWidget.java com/longbridge/market/mvp/ui/activity/deal/DealPointOrderListActivity.java com/longbridge/wealth/mvp/ui/fragment/LabelsListFragment.java com/longbridge/wealth/mvp/ui/fragment/OngoingDividendsFragment.java com/longbridge/wealth/mvp/ui/fragment/ShortOccupiedFragment.java com/qiyukf/uikit/common/media/picker/activity/PreviewImageFromCameraActivity.java com/qiyukf/uikit/session/activity/CaptureVideoActivity.java com/qiyukf/unicorn/fileselect/ui/activity/FilePickerActivity.java com/sensorsdata/analytics/android/sdk/aop/push/PushAutoTrackHelper.java com/sina/weibo/sdk/e0.java com/sina/weibo/sdk/web/WebActivity.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com/vivo/push/l.java com/xiaomi/mipush/sdk/f.java com/xiaomi/mipush/sdk/t.java com/xiaomi/push/service/XMPushService.java com/xiaomi/push/service/ad.java net/openid/appauth/AuthorizationManagementActivity.java
00014	Read file into a stream and put it into a JSON object	file	a0/a.java com/alibaba/sdk/android/crashdefend/c/a.java com/apm/insight/a/a.java com/apm/insight/g/n.java com/apm/insight/o/j.java com/tencent/open/utis/k.java com/xiaomi/push/ch.java k1/a.java
			bj/b.java c7/a.java com/alibaba/sdk/android/push/util/a.java com/alipay/sdk/app/PayResultActivity.java com/alipay/sdk/app/PayTask.java com/alipay/sdk/util/e.java com/alipay/sdk/util/k.java com/alipay/sdk/widget/d.java com/alipay/sdk/widget/e.java com/aliyun/ams/emas/push/notification/b.java com/geetest/captcha/views/GTC4WebView.java

RULE ID	BEHAVIOUR	LABEL	FILES
00063	Implicit intent(view a web page, make a phone call, etc.)	control	com/huawei/hms/push/HmsMessaging.java com/longbridge/account/helper/g.java com/longbridge/account/mvp/ui/activity/VerifyIdcardActivity.java com/longbridge/account/mvvm/ui/widget/mine/AccountMineServiceView.java com/longbridge/account/utils/o.java com/longbridge/account/utils/u.java com/longbridge/common/events/c.java com/longbridge/common/router/PathRouterServiceImpl.java com/longbridge/common/router/RedirectRouterInterceptor.java com/longbridge/common/router/u.java com/longbridge/common/uiLib/share/CommonSharePlatformView.java com/longbridge/common/uiLib/share/y.java com/longbridge/common/utils/f3.java com/longbridge/common/utils/k5.java com/longbridge/common/utils/webview/b.java com/longbridge/common/webview/LBJSApi.java com/longbridge/common/webview/WebViewActivity.java com/longbridge/common/webview/e.java com/longbridge/common/webview/h.java com/longbridge/common/webview/p4.java com/longbridge/core/uitls/a.java com/longbridge/homewidget/ui/watchlist/WatchListAppWidget.java com/longbridge/libcomment/ui/view/CommentListBottomLongPortPlaceView.java com/longbridge/libnews/service/LiveSmallWindowImpl.java com/longbridge/libnews/ui/activity/NewsNoticePreviewActivity.java com/longbridge/libnews/ui/newslive/LiveSmallWindowUtils.java com/longbridge/libsocial/core/platform/system/c.java com/longbridge/libsocial/core/platform/system/e.java com/longbridge/libsocial/core/util/j.java com/longbridge/libsocial/facebook/c.java com/longbridge/libsocial/instagram/a.java com/longbridge/libsocial/more/a.java com/longbridge/libsocial/twitter/b.java com/longbridge/libsocial/whatsApp/a.java com/longbridge/market/mvp/ui/widget/stockDetail/StockDetailMartBaseInfoView.java com/longbridge/market/mvp/ui/widget/stocknoquote/StockDetailNoQuoteGroupQueryView.java com/lzf/easyfloat/permission/PermissionUtils.java com/meizu/cloud/pushsdk/response/handler/c.java com/qiyukf/nimlib/service/NimService.java com/qiyukf/uikit/session/activity/WatchVideoActivity.java com/qiyukf/uikit/session/helper/CustomURLSpan.java com/qiyukf/uikit/session/helper/WorkSheetHelper.java com/qiyukf/uikit/session/module/input/InputPanel.java com/qiyukf/unicorn/api/customization/action/LinkClickAction.java com/qiyukf/unicorn/ui/viewholder/a/h.java com/qiyukf/unicorn/ui/viewholder/m.java com/qiyukf/unicorn/video/UnicornServiceImpl.java com/qiyukf/unicorn/video/VideoSignProtocolDialog.java

RULE ID	BEHAVIOUR	LABEL	FILES
			com/sensorsdata/analytics/android/sdk/util/NetworkUtils.java com/sensorsdata/analytics/android/sdk/visual/view/PairingCodeRequestHelper.java com/singular/sdk/internal/InstallReferrer/c.java com/singular/sdk/internal/e0.java com/tencent/connect/api/QQAuthManage.java com/tencent/connect/auth/a.java com/tencent/connect/avatar/ImageActivity.java com/tencent/connect/avatar/QQAvatar.java com/tencent/connect/emotion/QQEmotion.java com/tencent/connect/share/QQShare.java com/tencent/connect/share/QzonePublish.java com/tencent/connect/share/QzoneShare.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com/tencent/open/SocialOperation.java com/tencent/open/TDialog.java com/tencent/open/im/IM.java com/tencent/open/miniapp/MiniApp.java com/tencent/open/utils/k.java com/tencent/tauth/Tencent.java com/vivo/push/h/o.java com/vivo/push/h/p.java com/vivo/push/util/y.java com/xiaomi/push/service/ag.java com/xiaomi/push/service/x.java com/zxing/decoding/a.java net/openid/appauth/AuthorizationException.java
00003	Put the compressed bitmap data into JSON object	camera	com/longbridge/common/utils/h3.java com/sensorsdata/analytics/android/sdk/visual/ViewSnapshot.java com/tencent/connect/avatar/ImageActivity.java
00005	Get absolute path of file and put it to JSON object	file	com/aliyun/utils/DeviceInfoUtils.java com/apm/insight/b/b.java com/apm/insight/n/c.java com/apm/insight/nativecrash/NativeCrashCollector.java com/apm/insight/nativecrash/b.java com/apm/insight/o/j.java com/apm/insight/runtime/t.java com/longbridge/common/utils/h3.java com/longbridge/common/webview/LBJSApi.java com/tencent/open/utils/k.java j5/d.java n4/b.java r1/b.java wendu/dsbridge/DWebView.java x1/g.java

RULE ID	BEHAVIOUR	LABEL	FILES
00001	Initialize bitmap object and compress data (e.g. JPEG) into bitmap object	camera	com/longbridge/common/utls/h3.java com/longbridge/common/utls/m.java com/longbridge/core/cache/s.java com/longbridge/core/uitls/e.java com/longbridge/libsocial/core/util/b.java

RULE ID	BEHAVIOUR	LABEL	FILES
00096	Connect to a URL and set request method	command network	a0/a.java anet/channel/session/b.java com/airbnb/lottie/network/b.java com/alibaba/sdk/android/ams/common/util/a.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/alipay/sdk/net/a.java com/aliyun/thumbnail/ThumbnailHelper.java com/aliyun/utis/AbsHttpHelper.java com/aliyun/utis/HttpClientHelper.java com/apm/insight/n/h.java com/apm/insight/n/m.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/geetest/gtc4/c6.java com/huawei/hms/hatool/w.java com/liulishuo/filedownloader/connection/c.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetDiagnoService.java com/meizu/cloud/pushsdk/g/a.java com/mobile/auth/b/a.java com/mobile/auth/c/i.java com/mobile/auth/h/a.java com/mobile/auth/w/a.java com/mobile/auth/z/n.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/httpdns/d/a.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/nimlib/net/a/c/b.java com/qiyukf/unicorn/i/a/e.java com/sensorsdata/analytics/android/sdk/AnalyticsMessages.java com/sensorsdata/analytics/android/sdk/advert/utis/SAAadvertUtils.java com/sensorsdata/analytics/android/sdk/dialog/SensorsDataDialogUtils.java com/sensorsdata/analytics/android/sdk/network/RealRequest.java com/sensorsdata/analytics/android/sdk/visual/AbstractViewCrawler.java com/sina/weibo/sdk/p.java com/singular/sdk/internal/b0.java com/singular/sdk/internal/j0.java com/singular/sdk/internal/q0.java com/singular/sdk/internal/u.java com/ta/a/b/b.java com/tencent/mm/opensdk/channel/a/a.java com/xiaomi/push/av.java h/a.java org/jsoup/helper/d.java v1/b.java

RULE ID	BEHAVIOUR	LABEL	FILES
00123	Save the response to JSON after connecting to the remote server	network command	com/aliyun/Utils/HttpClientHelper.java com/mobile/auth/z/n.java com/singular/sdk/internal/b0.java com/singular/sdk/internal/j0.java com/singular/sdk/internal/q0.java com/singular/sdk/internal/u.java net/openid/appauth/k.java o0/a.java

RULE ID	BEHAVIOUR	LABEL	FILES
00089	Connect to a URL and receive input stream from the server	command network	a0/a.java anet/channel/session/b.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/alipay/sdk/net/a.java com/aliyun/thumbnail/ThumbnailHelper.java com/aliyun/utis/AbsHttpHelper.java com/aliyun/utis/HttpClientHelper.java com/apm/insight/n/h.java com/apm/insight/n/m.java com/bumptech/glide/load/data/j.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/geetest/gtc4/c6.java com/huawei/hms/hatool/w.java com/liulishuo/filedownloader/connection/c.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetDiagnoService.java com/meizu/cloud/pushsdk/g/a.java com/mobile/auth/b/a.java com/mobile/auth/c/i.java com/mobile/auth/h/a.java com/mobile/auth/w/a.java com/mobile/auth/z/n.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/httpdns/d/a.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/unicorn/i/a/e.java com/sensorsdata/analytics/android/sdk/AnalyticsMessages.java com/sensorsdata/analytics/android/sdk/advert/utis/SAAadvertUtils.java com/sensorsdata/analytics/android/sdk/network/RealRequest.java com/sensorsdata/analytics/android/sdk/visual/AbstractViewCrawler.java com/sina/weibo/sdk/p.java com/singular/sdk/internal/b0.java com/singular/sdk/internal/q0.java com/singular/sdk/internal/u.java com/ta/a/b/b.java com/tencent/mm/opensdk/channel/a/a.java com/tencent/open/utis/c.java com/vivo/push/util/e0.java com/xiaomi/push/av.java com/xiaomi/push/service/ae.java h/a.java org/jsoup/helper/d.java v1/b.java

RULE ID	BEHAVIOUR	LABEL	FILES
00030	Connect to the remote server through the given URL	network	anet/channel/session/b.java com/airbnb/lottie/network/b.java com/alibaba/sdk/android/ams/common/util/a.java com/aliyun/utis/AbsHttpHelper.java com/aliyun/utis/HttpClientHelper.java com/bumptech/glide/load/data/j.java com/liulishuo/filedownloader/connection/c.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetDiagnoService.java com/mobile/auth/b/a.java com/mobile/auth/c/i.java com/mobile/auth/h/a.java com/mobile/auth/w/a.java com/mobile/auth/z/n.java com/sensorsdata/analytics/android/sdk/network/RealRequest.java com/sina/weibo/sdk/p.java com/singular/sdk/internal/b0.java com/singular/sdk/internal/j0.java com/singular/sdk/internal/q0.java com/singular/sdk/internal/u.java com/ta/a/b/b.java com/tencent/open/utis/c.java com/vivo/push/util/e0.java com/xiaomi/push/service/ae.java org/jsoup/helper/d.java

RULE ID	BEHAVIOUR	LABEL	FILES
00109	Connect to a URL and get the response code	network command	a0/a.java anet/channel/session/b.java com/alibaba/sdk/android/ams/common/util/a.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/aliyun/thumbnail/ThumbnailHelper.java com/aliyun/utis/AbsHttpHelper.java com/aliyun/utis/HttpClientHelper.java com/apm/insight/n/h.java com/apm/insight/n/m.java com/bumptech/glide/load/data/j.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/geetest/gtc4/c6.java com/huawei/hms/hatool/w.java com/liulishuo/filedownloader/connection/c.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetDiagnoService.java com/meizu/cloud/pushsdk/g/a.java com/mobile/auth/b/a.java com/mobile/auth/c/i.java com/mobile/auth/h/a.java com/mobile/auth/w/a.java com/mobile/auth/z/n.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/httpdns/d/a.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/unicorn/i/a/e.java com/sensorsdata/analytics/android/sdk/AnalyticsMessages.java com/sensorsdata/analytics/android/sdk/advert/utis/SAAdvertUtils.java com/sensorsdata/analytics/android/sdk/dialog/SensorsDataDialogUtils.java com/sensorsdata/analytics/android/sdk/network/RealRequest.java com/sensorsdata/analytics/android/sdk/visual/AbstractViewCrawler.java com/sina/weibo/sdk/p.java com/singular/sdk/internal/b0.java com/singular/sdk/internal/j0.java com/singular/sdk/internal/q0.java com/singular/sdk/internal/u.java com/ta/a/b/b.java com/tencent/mm/opensdk/channel/a/a.java com/vivo/push/util/e0.java com/xiaomi/push/av.java com/xiaomi/push/service/ae.java h/a.java org/jsoup/helper/d.java v1/b.java

RULE ID	BEHAVIOUR	LABEL	FILES
00183	Get current camera parameters and change the setting.	camera	cn/bingoogolapple/qrcode/core/CameraPreview.java cn/bingoogolapple/qrcode/core/QRCodeView.java cn/bingoogolapple/qrcode/core/c.java com/longbridge/common/utlis/i1.java com/qiyukf/uikit/session/activity/CaptureVideoActivity.java com/zxing/camera/b.java com/zxing/camera/c.java

RULE ID	BEHAVIOUR	LABEL	FILES
00051	Implicit intent(view a web page, make a phone call, etc.) via setData	control	com/alipay/sdk/app/PayResultActivity.java com/alipay/sdk/util/e.java com/alipay/sdk/widget/d.java com/aliyun/ams/emas/push/notification/b.java com/geetest/captcha/views/GTC4WebView.java com/huawei/hms/push/HmsMessaging.java com/longbridge/account/mvp/ui/activity/VerifyIdcardActivity.java com/longbridge/account/utis/o.java com/longbridge/common/events/c.java com/longbridge/common/router/PathRouterServiceImpl.java com/longbridge/common/uiLib/share/CommonSharePlatformView.java com/longbridge/common/uiLib/share/y.java com/longbridge/common/webview/LBjsApi.java com/longbridge/common/webview/h.java com/longbridge/common/webview/p4.java com/longbridge/core/utis/a.java com/longbridge/homewidget/ui/watchlist/WatchListAppWidget.java com/longbridge/libcomment/ui/view/CommentListBottomLongPortPlaceView.java com/longbridge/libsocial/core/platform/system/c.java com/longbridge/libsocial/core/util/j.java com/longbridge/market/mvp/ui/widget/stocknoquote/StockDetailNoQuoteGroupQueryView.java com/lzf/easyfloat/permission/PermissionUtils.java com/qiyukf/uikit/session/activity/WatchVideoActivity.java com/sensorsdata/analytics/android/sdk/visual/view/PairingCodeRequestHelper.java com/tencent/connect/api/QQAuthManage.java com/tencent/connect/avatar/QQAvatar.java com/tencent/connect/emotion/QQEmotion.java com/tencent/connect/share/QQShare.java com/tencent/connect/share/QzonePublish.java com/tencent/connect/share/QzoneShare.java com/tencent/open/SocialOperation.java com/tencent/open/im/IM.java com/tencent/open/miniapp/MiniApp.java com/tencent/open/utis/k.java com/vivo/push/h/o.java com/xiaomi/push/service/x.java

RULE ID	BEHAVIOUR	LABEL	FILES
00153	Send binary data over HTTP	http	a0/a.java com/apm/insight/n/h.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/meizu/cloud/pushsdk/g/a.java com/mobile/auth/b/a.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/nimlib/net/a/c/b.java com/qiyukf/unicorn/i/a/e.java com/sina/weibo/sdk/p.java com/ta/a/b/b.java com/xiaomi/push/av.java h/a.java
00094	Connect to a URL and read data from it	command network	a0/a.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/alipay/sdk/net/a.java com/aliyun/thumbnail/ThumbnailHelper.java com/aliyun/utis/HttpClientHelper.java com/apm/insight/n/h.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/geetest/gtc4/c6.java com/mobile/auth/h/a.java com/mobile/auth/z/n.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/nimlib/net/a/c/b.java com/qiyukf/unicorn/i/a/e.java com/sensorsdata/analytics/android/sdk/visual/AbstractViewCrawler.java com/tencent/mm/opensdk/channel/a/a.java com/xiaomi/push/av.java com/xiaomi/push/service/ae.java

RULE ID	BEHAVIOUR	LABEL	FILES
00108	Read the input stream from given URL	network command	a0/a.java com/alibaba/sdk/android/push/common/util/a/c.java com/alibaba/sdk/android/push/e/i.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/alipay/sdk/net/a.java com/aliyun/thumbnaill/ThumbnailHelper.java com/aliyun/utills/HttpClientHelper.java com/apm/insight/n/h.java com/bytedance/apm/net/DefaultHttpServiceImpl.java com/geetest/gtc4/c6.java com/huawei/hms/hatool/k1.java com/mobile/auth/h/a.java com/mobile/auth/z/n.java com/nirvana/tools/crash/CrashUploadUtils.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/qiyukf/unicorn/i/a/e.java com/sensorsdata/analytics/android/sdk/visual/AbstractViewCrawler.java com/tencent/mm/opensdk/channel/a/a.java com/xiaomi/push/av.java com/xiaomi/push/service/ae.java
00189	Get the content of a SMS message	sms	com/longbridge/account/utills/screencap/h.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/utills/PhotoMetadataUtils.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java com/zhihu/matisse/internal/utills/d.java zg/a.java
00188	Get the address of a SMS message	sms	com/longbridge/account/utills/screencap/h.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/utills/PhotoMetadataUtils.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java com/zhihu/matisse/internal/utills/d.java zg/a.java

RULE ID	BEHAVIOUR	LABEL	FILES
00200	Query data from the contact list	collection contact	com/longbridge/account/utils/screenshot/h.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/utils/PhotoMetadataUtils.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java com/zhihu/matisse/internal/utils/d.java zg/a.java
00187	Query a URI and check the result	collection sms callog calendar	com/mobile/auth/f/a.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java zg/a.java
00201	Query data from the call log	collection callog	com/longbridge/account/utils/screenshot/h.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/utils/PhotoMetadataUtils.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java com/zhihu/matisse/internal/utils/d.java zg/a.java
00077	Read sensitive data(SMS, CALLLOG, etc)	collection sms callog calendar	com/bumptech/glide/load/data/mediastore/c.java com/mobile/auth/f/a.java com/qiyukf/unicorn/mediaselect/internal/utils/PhotoMetadataUtils.java com/sensorsdata/analytics/android/sdk/data/SAProviderHelper.java com/sensorsdata/analytics/android/sdk/data/adapters/DataOperation.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com/tencent/mm/opensdk/openapi/MMSharedPreferences.java com/vivo/push/util/i.java com/vivo/push/util/p.java com/zhihu/matisse/internal/utils/d.java zg/a.java
00054	Install other APKs from file	reflection	cn/bingogolapple/photopicker/util/d.java com/longbridge/core/uitls/a.java com/longbridge/libdebug/DebugActivity.java com/qiyukf/uikit/session/activity/WatchVideoActivity.java com/qiyukf/unicorn/ui/activity/FileDownloadActivity.java com/qiyukf/unicorn/ui/activity/WatchPictureActivity.java

RULE ID	BEHAVIOUR	LABEL	FILES
00125	Check if the given file path exist	file	cn/bingoogolapple/photopicker/util/d.java com/hihonor/push/sdk/f.java com/longbridge/libcomment/dialog/InputTextMsgDialog.java com/nirvana/tools/crash/CrashUcSdk.java com/qiyukf/uikit/common/media/picker/fragment/PickerAlbumFragment.java com/qiyukf/uikit/session/activity/CaptureVideoActivity.java com/qiyukf/uikit/session/activity/WatchVideoActivity.java com/sina/weibo/sdk/y.java com/tencent/connect/share/QQShare.java com/tencent/open/utils/k.java g2/d.java

RULE ID	BEHAVIOUR	LABEL	FILES
00036	Get resource file from res/raw directory	reflection	c4/a.java com/alibaba/sdk/android/push/notification/CustomNotificationBuilder.java com/alibaba/sdk/android/push/notification/a.java com/alibaba/sdk/android/push/notification/d.java com/alibaba/sdk/android/push/util/a.java com/alipay/sdk/app/PayTask.java com/alipay/sdk/util/e.java com/alipay/sdk/util/k.java com/aliyun/ams/emas/push/notification/b.java com/hihonor/push/sdk/o0.java com/huawei/hms/push/HmsMessaging.java com/longbridge/common/router/PathRouterServiceImpl.java com/longbridge/common/utills/f3.java com/longbridge/common/utills/k5.java com/longbridge/core/utills/a.java com/longbridge/homewidget/ui/watchlist/WatchListAppWidget.java com/longbridge/libnews/service/LiveSmallWindowImpl.java com/longbridge/libnews/ui/newslive/LiveSmallWindowUtils.java com/longbridge/libsocial/core/util/j.java com/longbridge/libsocial/instagram/a.java com/longbridge/libsocial/more/a.java com/longbridge/libsocial/twitter/b.java com/longbridge/libsocial/whatsApp/a.java com/lzf/easyfloat/permission/PermissionUtils.java com/qiyukf/nimlib/ipc/cp/c/a.java com/qiyukf/nimlib/push/a.java com/qiyukf/nimlib/push/b/c.java com/singular/sdk/internal/InstallReferrer/c.java com/singular/sdk/internal/s.java com/tencent/connect/share/QQShare.java com/tencent/connect/share/QzonePublish.java com/tencent/connect/share/QzoneShare.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com/tencent/open/miniapp/MiniApp.java com/tencent/open/utills/k.java com/tencent/tauth/Tencent.java com/vivo/push/util/y.java com/xiaomi/push/ch.java com/xiaomi/push/service/ac.java com/xiaomi/push/service/x.java h0/d.java

RULE ID	BEHAVIOUR	LABEL	FILES
00202	Make a phone call	control	com/longbridge/account/mvp/ui/activity/VerifyIdcardActivity.java com/longbridge/account/utlis/o.java
00203	Put a phone number into an intent	control	com/longbridge/account/mvp/ui/activity/VerifyIdcardActivity.java com/longbridge/account/utlis/o.java
00192	Get messages in the SMS inbox	sms	com/longbridge/common/utlis/f3.java com/longbridge/common/webview/LBjsApi.java com/longbridge/common/webview/WebViewActivity.java com/qiyukf/unicorn/mediaselect/internal/utlis/PathUtils.java com/tencent/open/utlis/k.java com/yalantis/ucrop/util/FileUtils.java com/zhihu/matisse/internal/utlis/c.java qh/a.java
00031	Check the list of currently running applications	reflection collection	com/alipay/ams/emas/push/notification/f.java com/apm/insight/o/a.java com/heytao/mcsdk/PushService.java com/longbridge/libnews/ui/newslive/v.java
00078	Get the network operator name	collection telephony	com/apm/insight/entity/Header.java com/qiyukf/nimlib/r/m.java l/i.java q1/a.java
00130	Get the current WIFI information	wifi collection	anet/channel/status/b.java com/alipay/sdk/data/b.java com/alipay/sdk/util/a.java com/longbridge/common/utlis/k1.java com/longbridge/core/utlis/b0.java

RULE ID	BEHAVIOUR	LABEL	FILES
00009	Put data in cursor to JSON object	file	com/longbridge/common/webview/LBJSApi.java com/sensorsdata/analytics/android/sdk/data/adapter/EncryptDataOperation.java com/sensorsdata/analytics/android/sdk/data/adapter/EventDataOperation.java com/sensorsdata/analytics/android/sdk/data/adapter/PersistentDataOperation.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java com/tencent/open/utls/k.java o/b.java o/e.java o/f.java o/g.java o/h.java o/j.java o/k.java org/android/agoo/message/MessageService.java
00024	Write file after Base64 decoding	reflection file	com/longbridge/common/utls/m.java com/longbridge/core/uitls/e.java com/tencent/open/utls/k.java com/xiaomi/clientreport/processor/a.java
00075	Get location of the device	collection location	com/longbridge/common/utls/LocationUtil.java
00015	Put buffer stream (data) to JSON object	file	a0/a.java com/qiyukf/nim/highavailable/lava/base/http/HttpStack.java com/tencent/open/utls/k.java
00072	Write HTTP input stream into a file	command network file	a0/a.java com/alibaba/sdk/android/push/util/DownloadUtil.java com/huawei/hms/hatool/k1.java com/xiaomi/push/service/ae.java

RULE ID	BEHAVIOUR	LABEL	FILES
00163	Create new Socket and connecting to it	socket	anet/channel/detect/d.java anet/channel/session/b.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetSocket.java com/mobile/auth/c/i.java com/mobile/auth/w/a.java com/qiyukf/nimlib/net/b/d/a.java com/qiyukf/nimlib/r/l.java com/xiaomi/push/fi.java com/xiaomi/push/service/ae.java com/xiaomi/push/service/z.java org/java_websocket/client/a.java org/java_websocket/d.java
00011	Query data from URI (SMS, CALLLOGS)	sms calllog collection	com/mobile/auth/f/a.java com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java
00112	Get the date of the calendar event	collection calendar	com/alibaba/fastjson/util/TypeUtils.java com/longbridge/common/quoteCenter/c0.java com/longbridge/market/mvp/model/data/CombineChartDataCenter.java com/longbridge/market/mvp/ui/widget/stockDetail/option/OptionDetailCalculator.java j0/e.java
00079	Hide the current app's icon	evasion	com/taobao/accs/uti/UtilityImpl.java com/vivo/push/h/u.java com/xiaomi/mipush/sdk/u.java com/xiaomi/push/service/XMPushService.java
00088	Create a secure socket connection to the given host address	command network	com/huawei/secure/android/common/SecureSSLSocketFactory.java com/huawei/secure/android/common/ssl/SSFCompatibleSystemCA.java com/huawei/secure/android/common/ssl/SecureSSLSocketFactory.java com/huawei/secure/android/common/ssl/SecureSSLSocketFactoryNew.java
00034	Query the current data network type	collection network	com/bytedance/apm/common/utility/f.java com/longbridge/common/utlis/k1.java com/longbridge/core/utlis/i0.java com/sensorsdata/analytics/android/sdk/util/NetworkUtils.java

RULE ID	BEHAVIOUR	LABEL	FILES
00162	Create InetAddress object and connecting to it	socket	anet/channel/session/b.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetSocket.java com/mobile/auth/w/a.java com/qiyukf/nimlib/r/l.java org/java_websocket/client/a.java
00065	Get the country code of the SIM card provider	collection	com/huawei/hms/framework/network/grs/local/model/CountryCodeBean.java l/u.java
00043	Calculate WiFi signal strength	collection wifi	com/huawei/hms/framework/common/NetworkUtil.java
00033	Query the IMEI number	collection	com/longbridge/core/deviceid/IMEIUtils.java
00102	Set the phone speaker on	command	com/qiyukf/nimlib/sdk/media/player/AudioPlayer.java
00080	Save recorded audio/video to a file	record file	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00101	Initialize recorder	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00199	Stop recording and release recording resources	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00198	Initialize the recorder and start recording	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00136	Stop recording	record command	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00194	Set the audio source (MIC) and recorded file format	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00090	Set recorded audio/video file format	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00197	Set the audio encoder and initialize the recorder	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00138	Set the audio source (MIC)	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00196	Set the recorded file format and output path	record file	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java

RULE ID	BEHAVIOUR	LABEL	FILES
00133	Start recording	record command	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00041	Save recorded audio/video to file	record	com/qiyukf/uikit/session/activity/CaptureVideoActivity.java
00134	Get the current WiFi IP address	wifi collection	com/longbridge/common/utis/k1.java
00121	Create a directory	file command	cn/bingoogolapple/photopicker/util/d.java com/tencent/open/utis/k.java
00002	Open the camera and take picture	camera	com/longbridge/common/utis/i1.java
00016	Get location info of the device and put it to JSON object	location collection	com/longbridge/common/webview/LBJSApi.java
00175	Get notification manager and cancel notifications	notification	com/qiyukf/nimlib/mixpush/c/c.java
00092	Send broadcast	command	com/huawei/hms/adapters/BaseAdapter.java
00104	Check if the given path is directory	file	com/qiyukf/unicorn/fileselect/ui/activity/FilePickerActivity.java
00132	Query The ISO country code	telephony collection	com/huawei/hms/framework/network/grs/local/model/CountryCodeBean.java com/longbridge/libdebug/debug/net/netease/LDNetDiagnoService/LDNetDiagnoService.java
00010	Read sensitive data(SMS, CALLLOG) and put it into JSON object	sms calllog collection	com/tencent/mm/opensdk/openapi/BaseWXApiImplV10.java

FIREBASE DATABASES ANALYSIS

TITLE	SEVERITY	DESCRIPTION
App talks to a Firebase database	info	The app talks to Firebase database at https://longbridgeapp-9876a.firebaseio.com

TITLE	SEVERITY	DESCRIPTION
Firebase Remote Config disabled	secure	Firebase Remote Config is disabled for https://firebaseremoteconfig.googleapis.com/v1/projects/55435324937/namespaces/firebase:fetch?key=AlzaSyD_NwybwYqT2aHFUgHqFvY7S9mjaC60tzl. This is indicated by the response: {'state': 'NO_TEMPLATE'}

🔴 ABUSED PERMISSIONS

TYPE	MATCHES	PERMISSIONS
Malware Permissions	15/25	android.permission.ACCESS_WIFI_STATE, android.permission.INTERNET, android.permission.WRITE_EXTERNAL_STORAGE, android.permission.READ_EXTERNAL_STORAGE, android.permission.READ_PHONE_STATE, android.permission.ACCESS_NETWORK_STATE, android.permission.REQUEST_INSTALL_PACKAGES, android.permission.VIBRATE, android.permission.CAMERA, android.permission.ACCESS_FINE_LOCATION, android.permission.ACCESS_COARSE_LOCATION, android.permission.WAKE_LOCK, android.permission.SYSTEM_ALERT_WINDOW, android.permission.RECORD_AUDIO, android.permission.GET_TASKS
Other Common Permissions	12/44	android.permission.CHANGE_NETWORK_STATE, android.permission.FLASHLIGHT, android.permission.BLUETOOTH, android.permission.CHANGE_WIFI_STATE, android.permission.MODIFY_AUDIO_SETTINGS, android.permission.FOREGROUND_SERVICE, com.google.android.gms.permission.AD_ID, android.permission.READ_CALENDAR, android.permission.ACCESS_LOCATION_EXTRA_COMMANDS, android.permission.BLUETOOTH_ADMIN, com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE, com.google.android.c2dm.permission.RECEIVE

Malware Permissions:

Top permissions that are widely abused by known malware.

Other Common Permissions:

Permissions that are commonly abused by known malware.

🚫 OFAC SANCTIONED COUNTRIES

This app may communicate with the following OFAC sanctioned list of countries.

DOMAIN	COUNTRY/REGION
www.baidu.com	IP: 180.101.51.73 Country: China Region: Jiangsu City: Nanjing

DOMAIN	COUNTRY/REGION
performance-data.lbkrs.com	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong
api-e189.21cn.com	IP: 222.93.106.185 Country: China Region: Jiangsu City: Suzhou
px.ucweb.com	IP: 111.63.205.165 Country: China Region: Beijing City: Beijing
card.e.189.cn	IP: 222.93.107.242 Country: China Region: Jiangsu City: Suzhou
api.whalesit.xyz	IP: 18.163.90.150 Country: Hong Kong Region: Hong Kong City: Hong Kong
long.open.weixin.qq.com	IP: 109.244.216.15 Country: China Region: Beijing City: Beijing
service.weibo.com	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming
nisportal.10010.com	IP: 124.64.196.20 Country: China Region: Beijing City: Beijing

DOMAIN	COUNTRY/REGION
support.longbridge.global	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong
openmobile.qq.com	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai
app-pre.lbkrs.com	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong
riskct.geetest.com	IP: 180.188.25.23 Country: China Region: Zhejiang City: Taizhou
www.163.com	IP: 8.147.229.175 Country: China Region: Zhejiang City: Hangzhou
m.alipay.com	IP: 203.209.245.120 Country: China Region: Zhejiang City: Hangzhou
45.127.128.25	IP: 45.127.128.25 Country: China Region: Guangdong City: Guangzhou
mobilegw.alipaydev.com	IP: 47.235.24.196 Country: Hong Kong Region: Hong Kong City: Hong Kong

DOMAIN	COUNTRY/REGION
opencloud.wostore.cn	IP: 210.22.123.92 Country: China Region: Shanghai City: Shanghai
prod-lb-geotest.oss-cn-shenzhen.aliyuncs.com	IP: 47.113.74.114 Country: China Region: Zhejiang City: Hangzhou
appsupport.qq.com	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai
imtest.netease.im	IP: 111.124.202.79 Country: China Region: Guizhou City: Zunyi
dypnsapi-dualstack.aliyuncs.com	IP: 106.11.211.236 Country: China Region: Zhejiang City: Hangzhou
45.127.128.24	IP: 45.127.128.24 Country: China Region: Guangdong City: Guangzhou
e.189.cn	IP: 42.123.76.65 Country: China Region: Beijing City: Beijing
activity.longbridge.global	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong

DOMAIN	COUNTRY/REGION
mcgw.alipay.com	IP: 60.163.128.8 Country: China Region: Zhejiang City: Jiaxing
da.qiyukf.com	IP: 111.124.204.225 Country: China Region: Guizhou City: Zunyi
wap.cmpassport.com	IP: 112.33.111.233 Country: China Region: Beijing City: Beijing
imtest4.netease.im	IP: 59.111.241.163 Country: China Region: Guangdong City: Guangzhou
wanproxy-hz.127.net	IP: 122.228.79.56 Country: China Region: Shanghai City: Shanghai
mpush-api.aliyun.com	IP: 106.11.243.160 Country: China Region: Zhejiang City: Hangzhou
nosup-hz1.127.net	IP: 60.188.114.206 Country: China Region: Zhejiang City: Taizhou
activity-pre.lbkrs.com	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong

DOMAIN	COUNTRY/REGION
rtlog.snssdk.com	IP: 106.225.217.60 Country: China Region: Jiangxi City: Nanchang
dr.netease.im	IP: 111.124.204.212 Country: China Region: Guizhou City: Zunyi
open.weibo.cn	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming
manual.sensorsdata.cn	IP: 8.147.229.169 Country: China Region: Zhejiang City: Hangzhou
m-pre.lbkrs.com	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou
rtapplog.snssdk.com	IP: 106.225.217.61 Country: China Region: Jiangxi City: Nanchang
cgi.connect.qq.com	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai
statistic.live.126.net	IP: 220.197.34.76 Country: China Region: Sichuan City: Leshan

DOMAIN	COUNTRY/REGION
sns.whalecloud.com	IP: 203.119.169.82 Country: China Region: Beijing City: Beijing
api.weibo.com	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming
lbs-qiyu.netease.im	IP: 111.124.216.100 Country: China Region: Guizhou City: Zunyi
wappaygw.alipay.com	IP: 60.163.128.5 Country: China Region: Zhejiang City: Jiaxing
vpp-license-proxy.aliyuncs.com	IP: 139.196.135.171 Country: China Region: Zhejiang City: Hangzhou
videocloud.cn-hangzhou.log.aliyuncs.com	IP: 47.111.48.239 Country: China Region: Zhejiang City: Hangzhou
render.alipay.com	IP: 220.185.164.196 Country: China Region: Zhejiang City: Taizhou
lbs.netease.im	IP: 111.124.216.100 Country: China Region: Guizhou City: Zunyi

DOMAIN	COUNTRY/REGION
longportapp.cn	IP: 139.196.26.110 Country: China Region: Zhejiang City: Hangzhou
qiyukf.netease.com	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi
detect.longbridge-inc.com	IP: 27.152.185.87 Country: China Region: Fujian City: Quanzhou
mclient.alipay.com	IP: 114.80.179.135 Country: China Region: Shanghai City: Shanghai
crbt.i139.cn	IP: 112.35.183.229 Country: China Region: Beijing City: Beijing
www.xueleyun.com	IP: 183.136.221.99 Country: China Region: Zhejiang City: Hangzhou
cloud-config-service rtc.aliyuncs.com	IP: 47.93.95.208 Country: China Region: Zhejiang City: Hangzhou
verify.cmpassport.com	IP: 112.33.110.6 Country: China Region: Beijing City: Beijing

DOMAIN	COUNTRY/REGION
event-tracking.lbkrs.com	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong
longbridge-uat.app.lbkrs.com	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong
api.lbkrs.com	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou
qydev.netease.com	IP: 59.111.48.68 Country: China Region: Guangdong City: Guangzhou
live.aliyuncs.com	IP: 59.82.44.229 Country: China Region: Zhejiang City: Hangzhou
longbridge.app.wbrks.com	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong
imtest-gy.netease.im	IP: 111.124.202.90 Country: China Region: Guizhou City: Zunyi
ap1.qiyukf.com	IP: 111.124.204.226 Country: China Region: Guizhou City: Zunyi

DOMAIN	COUNTRY/REGION
help.aliyun.com	IP: 203.119.145.39 Country: China Region: Beijing City: Beijing
api-ack.lbkrs.com	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou
ichannel.snssdk.com	IP: 101.89.125.220 Country: China Region: Shanghai City: Shanghai
msv6.wosms.cn	IP: 124.64.196.28 Country: China Region: Beijing City: Beijing
api.weixin.qq.com	IP: 101.91.34.103 Country: China Region: Shanghai City: Shanghai
h5.m.taobao.com	IP: 47.96.203.81 Country: China Region: Zhejiang City: Hangzhou
id6.me	IP: 42.123.77.138 Country: China Region: Beijing City: Beijing
cn.register.xmpush.xiaomi.com	IP: 220.181.106.176 Country: China Region: Beijing City: Beijing

DOMAIN	COUNTRY/REGION
www.googleapis.cn	IP: 114.250.64.34 Country: China Region: Beijing City: Beijing
longbridge-uat.activity.lbkrs.com	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong
applog.snssdk.com	IP: 106.225.217.62 Country: China Region: Jiangxi City: Nanchang
da.qiyukf.netease.com	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi
nos.netease.com	IP: 111.124.197.17 Country: China Region: Guizhou City: Zunyi
h.trace.qq.com	IP: 180.109.192.73 Country: China Region: Jiangsu City: Nanjing
loggw-exsdk.alipay.com	IP: 110.76.6.75 Country: China Region: Zhejiang City: Hangzhou
aq1.qytest.netease.com	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi

DOMAIN	COUNTRY/REGION
api-push.meizu.com	IP: 14.152.79.165 Country: China Region: Guangdong City: Guangzhou
log.snssdk.com	IP: 106.225.217.65 Country: China Region: Jiangxi City: Nanchang
mobilegw.alipay.com	IP: 203.209.247.65 Country: China Region: Zhejiang City: Hangzhou
lbs.chatnos.com	IP: 111.124.216.99 Country: China Region: Guizhou City: Zunyi
pre-api.lbkrs.com	IP: 47.106.103.141 Country: China Region: Zhejiang City: Hangzhou
longbridge.activity.wbrks.com	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong
cloud-config-service-pre rtc.aliyuncs.com	IP: 47.93.95.208 Country: China Region: Zhejiang City: Hangzhou
mon.snssdk.com	IP: 106.225.217.61 Country: China Region: Jiangxi City: Nanchang

DOMAIN	COUNTRY/REGION
yunxin.163.com	IP: 1.95.20.156 Country: China Region: Beijing City: Beijing
support.longbridgehk.com	IP: 47.57.3.206 Country: Hong Kong Region: Hong Kong City: Hong Kong
da.qytest.netease.com	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi
imgcache.qq.com	IP: 124.163.196.108 Country: China Region: Shanxi City: Taiyuan
dns.alidns.com	IP: 223.6.6.6 Country: China Region: Zhejiang City: Hangzhou
resolver.msg.xiaomi.net	IP: 110.43.0.169 Country: China Region: Beijing City: Beijing
open.weixin.qq.com	IP: 116.128.169.212 Country: China Region: Shanghai City: Shanghai

 DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
support.longbridge.hk	ok	IP: 43.199.245.231 Country: Australia Region: Queensland City: Brisbane Latitude: -27.467939 Longitude: 153.028091 View: Google Map
www.baidu.com	ok	IP: 180.101.51.73 Country: China Region: Jiangsu City: Nanjing Latitude: 32.061668 Longitude: 118.777779 View: Google Map
ns.adobe.com	ok	No Geolocation information available.
event-forward.longbridge.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
performance-data.lbkrs.com	ok	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map

DOMAIN	STATUS	GEOLOCATION
api-e189.21cn.com	ok	IP: 222.93.106.185 Country: China Region: Jiangsu City: Suzhou Latitude: 31.311390 Longitude: 120.618057 View: Google Map
api.longbridge.xyz	ok	IP: 13.35.185.50 Country: India Region: Delhi City: Delhi Latitude: 28.666670 Longitude: 77.216667 View: Google Map
10.38.162.35	ok	IP: 10.38.162.35 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map
activity.lbkrs.com	ok	IP: 8.218.30.161 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
px.ucweb.com	ok	IP: 111.63.205.165 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
card.e.189.cn	ok	IP: 222.93.107.242 Country: China Region: Jiangsu City: Suzhou Latitude: 31.311390 Longitude: 120.618057 View: Google Map
xmlpull.org	ok	IP: 185.199.111.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
api.whalesit.xyz	ok	IP: 18.163.90.150 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
exceptions.singular.net	ok	No Geolocation information available.
huatuocode.huatuo.qq.com	ok	No Geolocation information available.
long.open.weixin.qq.com	ok	IP: 109.244.216.15 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
service.weibo.com	ok	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming Latitude: 25.038891 Longitude: 102.718330 View: Google Map
longbridge-lts-sit.support.longbridge.hk	ok	No Geolocation information available.
nisportal.10010.com	ok	IP: 124.64.196.20 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
support.longbridge.global	ok	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
ping.lbkrs.com	ok	IP: 155.102.181.146 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map

DOMAIN	STATUS	GEOLOCATION
openmobile.qq.com	ok	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
app.longbridge.global	ok	IP: 8.218.30.161 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
app-pre.lbkrs.com	ok	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
app.whalesit.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
riskct.geetest.com	ok	IP: 180.188.25.23 Country: China Region: Zhejiang City: Taizhou Latitude: 28.666668 Longitude: 121.349998 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.163.com	ok	IP: 8.147.229.175 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
m.alipay.com	ok	IP: 203.209.245.120 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
45.127.128.25	ok	IP: 45.127.128.25 Country: China Region: Guangdong City: Guangzhou Latitude: 23.116671 Longitude: 113.250000 View: Google Map
activity.longbridge.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
longbridge.activity.longbridge.xyz	ok	IP: 8.217.172.8 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map

DOMAIN	STATUS	GEOLOCATION
mobilegw.alipaydev.com	ok	IP: 47.235.24.196 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
wspeed.qq.com	ok	No Geolocation information available.
vpp-license-proxy.taobao.net	ok	No Geolocation information available.
opencloud.wostore.cn	ok	IP: 210.22.123.92 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
api.longbridge.xyzvalid	ok	No Geolocation information available.
longbridge-sit.support.whalesit.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
app-nightly.lbkrs.com	ok	IP: 3.175.207.22 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
longbridge-uat.activity.longbridge.global	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
prod-lb-geotest.oss-cn-shenzhen.aliyuncs.com	ok	IP: 47.113.74.114 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
appsupport.qq.com	ok	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
imtest.netease.im	ok	IP: 111.124.202.79 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
longbridge-uat.support.longbridgeapp.com	ok	No Geolocation information available.
dypnsapi-dualstack.aliyuncs.com	ok	IP: 106.11.211.236 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
45.127.128.24	ok	IP: 45.127.128.24 Country: China Region: Guangdong City: Guangzhou Latitude: 23.116671 Longitude: 113.250000 View: Google Map
performance-data.longbridge.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
support.longbridgeapp.com	ok	IP: 13.35.185.4 Country: India Region: Delhi City: Delhi Latitude: 28.666670 Longitude: 77.216667 View: Google Map
e.189.cn	ok	IP: 42.123.76.65 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
api-status-test.lbkrs.com	ok	IP: 155.102.181.183 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map

DOMAIN	STATUS	GEOLOCATION
activity.longbridge.global	ok	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
mcgw.alipay.com	ok	IP: 60.163.128.8 Country: China Region: Zhejiang City: Jiaxing Latitude: 30.752199 Longitude: 120.750000 View: Google Map
longportapp.com	ok	IP: 170.33.12.239 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
da.qiyukf.com	ok	IP: 111.124.204.225 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
imtest6.netease.im	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
wap.cmpassport.com	ok	IP: 112.33.111.233 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
imtest4.netease.im	ok	IP: 59.111.241.163 Country: China Region: Guangdong City: Guangzhou Latitude: 23.116671 Longitude: 113.250000 View: Google Map
wanproxy-hz.127.net	ok	IP: 122.228.79.56 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
api-gl.lbkrs.com	ok	IP: 13.35.185.101 Country: India Region: Delhi City: Delhi Latitude: 28.666670 Longitude: 77.216667 View: Google Map
mpush-api.aliyun.com	ok	IP: 106.11.243.160 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
m.longbridge.xyz	ok	IP: 13.33.183.71 Country: India Region: Tamil Nadu City: Chennai Latitude: 13.087840 Longitude: 80.278473 View: Google Map
m-gl.lbkrs.com	ok	IP: 3.175.207.59 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
nosup-hz1.127.net	ok	IP: 60.188.114.206 Country: China Region: Zhejiang City: Taizhou Latitude: 28.666668 Longitude: 121.349998 View: Google Map
activity-pre.lbkrs.com	ok	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
geotest.lbkrs.com	ok	IP: 155.102.181.183 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map

DOMAIN	STATUS	GEOLOCATION
rtlog.snssdk.com	ok	IP: 106.225.217.60 Country: China Region: Jiangxi City: Nanchang Latitude: 28.683331 Longitude: 115.883331 View: Google Map
dr.netease.im	ok	IP: 111.124.204.212 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
open.weibo.cn	ok	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming Latitude: 25.038891 Longitude: 102.718330 View: Google Map
manual.sensorsdata.cn	ok	IP: 8.147.229.169 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
m-pre.lbkrs.com	ok	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
rtapplog.snssdk.com	ok	IP: 106.225.217.61 Country: China Region: Jiangxi City: Nanchang Latitude: 28.683331 Longitude: 115.883331 View: Google Map
ob-gl.lbkrs.com	ok	IP: 43.199.245.231 Country: Australia Region: Queensland City: Brisbane Latitude: -27.467939 Longitude: 153.028091 View: Google Map
cgi.connect.qq.com	ok	IP: 101.89.49.221 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
statistic.live.126.net	ok	IP: 220.197.34.76 Country: China Region: Sichuan City: Leshan Latitude: 29.562281 Longitude: 103.763863 View: Google Map
docs.rs	ok	IP: 151.101.193.91 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
m.whalesit.xyz	ok	IP: 8.217.172.8 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
sns.whalecloud.com	ok	IP: 203.119.169.82 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
activity.whalesit.xyz	ok	IP: 8.217.172.68 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
api.weibo.com	ok	IP: 106.63.15.10 Country: China Region: Yunnan City: Kunming Latitude: 25.038891 Longitude: 102.718330 View: Google Map
lbs-qiyu.netease.im	ok	IP: 111.124.216.100 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map

DOMAIN	STATUS	GEOLOCATION
wappaygw.alipay.com	ok	IP: 60.163.128.5 Country: China Region: Zhejiang City: Jiaxing Latitude: 30.752199 Longitude: 120.750000 View: Google Map
app.lbkrs.com	ok	IP: 8.218.30.161 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
vpp-license-proxy.aliyuncs.com	ok	IP: 139.196.135.171 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
longbridgeapp.com	ok	IP: 13.35.185.69 Country: India Region: Delhi City: Delhi Latitude: 28.666670 Longitude: 77.216667 View: Google Map
apmplus.volces.com	ok	IP: 155.102.4.4 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.example.com	ok	IP: 104.18.26.120 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
videocloud.cn-hangzhou.log.aliyuncs.com	ok	IP: 47.111.48.239 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
render.alipay.com	ok	IP: 220.185.164.196 Country: China Region: Zhejiang City: Taizhou Latitude: 28.666668 Longitude: 121.349998 View: Google Map
lbs.netease.im	ok	IP: 111.124.216.100 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
longportapp.cn	ok	IP: 139.196.26.110 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
qiyukf.netease.com	ok	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
detect.longbridge-inc.com	ok	IP: 27.152.185.87 Country: China Region: Fujian City: Quanzhou Latitude: 24.913891 Longitude: 118.585831 View: Google Map
xml.org	ok	IP: 104.239.142.8 Country: United States of America Region: Texas City: Windcrest Latitude: 29.499678 Longitude: -98.399246 View: Google Map
toblog-alink.ctobsnssdk.com	ok	IP: 163.181.77.220 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map
api-status.longbridgeapp.com	ok	IP: 155.102.181.147 Country: United States of America Region: California City: San Mateo Latitude: 37.547424 Longitude: -122.330589 View: Google Map

DOMAIN	STATUS	GEOLOCATION
mclient.alipay.com	ok	IP: 114.80.179.135 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
crbt.i139.cn	ok	IP: 112.35.183.229 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
www.xueleyun.com	ok	IP: 183.136.221.99 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
cloud-config-service.rtc.aliyuncs.com	ok	IP: 47.93.95.208 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
verify.cmpassport.com	ok	IP: 112.33.110.6 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
event-tracking.lbkrs.com	ok	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
longbridge-uat.app.lbkrs.com	ok	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
chls.pro	ok	IP: 104.26.5.131 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
api.lbkrs.com	ok	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
qydev.netease.com	ok	IP: 59.111.48.68 Country: China Region: Guangdong City: Guangzhou Latitude: 23.116671 Longitude: 113.250000 View: Google Map

DOMAIN	STATUS	GEOLOCATION
pub.lbkrs.com	ok	IP: 13.35.185.79 Country: India Region: Delhi City: Delhi Latitude: 28.666670 Longitude: 77.216667 View: Google Map
twitter.com	ok	IP: 172.66.0.227 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
en.wikipedia.org	ok	IP: 208.80.153.224 Country: United States of America Region: California City: San Francisco Latitude: 37.791256 Longitude: -122.400810 View: Google Map
cdn-support-canary.lbkrs.com	ok	No Geolocation information available.
www.google.com	ok	IP: 198.18.2.6 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map

DOMAIN	STATUS	GEOLOCATION
live.aliyuncs.com	ok	IP: 59.82.44.229 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
longbridge.app.wbrks.com	ok	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
imtest-gy.netease.im	ok	IP: 111.124.202.90 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
ap1.qiyukf.com	ok	IP: 111.124.204.226 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
help.aliyun.com	ok	IP: 203.119.145.39 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
api-ack.lbkrs.com	ok	IP: 120.77.37.195 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
ichannel.snssdk.com	ok	IP: 101.89.125.220 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
activity-nightly.lbkrs.com	ok	IP: 54.230.71.63 Country: India Region: Karnataka City: Bengaluru Latitude: 12.976230 Longitude: 77.603287 View: Google Map
msv6.wosms.cn	ok	IP: 124.64.196.28 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
longbridge.app.longbridge.xyz	ok	IP: 8.217.172.68 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.googleapis.com	ok	IP: 198.18.2.31 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map
api.weixin.qq.com	ok	IP: 101.91.34.103 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
h5.m.taobao.com	ok	IP: 47.96.203.81 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
id6.me	ok	IP: 42.123.77.138 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
sdk-api-v1.singular.net	ok	IP: 54.230.71.129 Country: India Region: Karnataka City: Bengaluru Latitude: 12.976230 Longitude: 77.603287 View: Google Map

DOMAIN	STATUS	GEOLOCATION
app.longbridge.xyz	ok	IP: 8.217.172.8 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
mikepenz.com	ok	IP: 172.67.141.197 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
longbridge-lts-sit.activity.whalesit.xyz	ok	IP: 8.217.172.68 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
app.singpass.gov.sg	ok	IP: 3.175.207.109 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
cn.register.xmpush.xiaomi.com	ok	IP: 220.181.106.176 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.googleapis.cn	ok	IP: 114.250.64.34 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
longbridge-uat.activity.lbkrs.com	ok	IP: 47.243.107.98 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
applog.snssdk.com	ok	IP: 106.225.217.62 Country: China Region: Jiangxi City: Nanchang Latitude: 28.683331 Longitude: 115.883331 View: Google Map
cdn-support.lbkrs.com	ok	IP: 3.175.207.2 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
da.qiyukf.netease.com	ok	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.slf4j.org	ok	IP: 31.97.181.89 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Bowness-on-Windermere Latitude: 54.363312 Longitude: -2.918590 View: Google Map
support.longbridge.xyz	ok	IP: 8.217.172.68 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
nos.netease.com	ok	IP: 111.124.197.17 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
h.trace.qq.com	ok	IP: 180.109.192.73 Country: China Region: Jiangsu City: Nanjing Latitude: 32.061668 Longitude: 118.777779 View: Google Map
loggw-exsdk.alipay.com	ok	IP: 110.76.6.75 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
aq1.qytest.netease.com	ok	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
m.lbkrs.com	ok	IP: 3.175.207.30 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
api-push.meizu.com	ok	IP: 14.152.79.165 Country: China Region: Guangdong City: Guangzhou Latitude: 23.116671 Longitude: 113.250000 View: Google Map
log.snssdk.com	ok	IP: 106.225.217.65 Country: China Region: Jiangxi City: Nanchang Latitude: 28.683331 Longitude: 115.883331 View: Google Map
mobilegw.alipay.com	ok	IP: 203.209.247.65 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map

DOMAIN	STATUS	GEOLOCATION
longbridge-lts-sit.longportapp.cn	ok	No Geolocation information available.
github.com	ok	IP: 140.82.114.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
longbridge.xyz	ok	IP: 13.33.183.57 Country: India Region: Tamil Nadu City: Chennai Latitude: 13.087840 Longitude: 80.278473 View: Google Map
longbridgeapp-9876a.firebaseio.com	ok	IP: 34.120.206.254 Country: United States of America Region: Missouri City: Kansas City Latitude: 39.099731 Longitude: -94.578568 View: Google Map
9x7fbw7pn6.execute-api.ap-east-1.amazonaws.com	ok	No Geolocation information available.
lbs.chatnos.com	ok	IP: 111.124.216.99 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
www.singpassmobile.sg	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
pre-api.lbkrs.com	ok	IP: 47.106.103.141 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
longbridge.activity.wbrks.com	ok	IP: 47.243.118.180 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
cloud-config-service-pre.rtc.aliyuncs.com	ok	IP: 47.93.95.208 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
mon.snssdk.com	ok	IP: 106.225.217.61 Country: China Region: Jiangxi City: Nanchang Latitude: 28.683331 Longitude: 115.883331 View: Google Map
cgi.qplus.com	ok	No Geolocation information available.
longbridge-uat.app.longbridge.global	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
longbridge-lts-sit.app.whalesit.xyz	ok	IP: 8.217.171.213 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
www.w3.org	ok	IP: 104.18.22.19 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
vod-license-proxy-pre.aliyun-inc.com	ok	IP: 100.64.26.218 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map
play.google.com	ok	IP: 198.18.2.28 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map
yunxin.163.com	ok	IP: 1.95.20.156 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
support.longbridgehk.com	ok	IP: 47.57.3.206 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
ar5xmqa02l.execute-api.ap-east-1.amazonaws.com	ok	IP: 43.198.161.92 Country: Australia Region: Queensland City: Brisbane Latitude: -27.467939 Longitude: 153.028091 View: Google Map
da.qytest.netease.com	ok	IP: 111.124.202.64 Country: China Region: Guizhou City: Zunyi Latitude: 27.686670 Longitude: 106.907219 View: Google Map
databyterangers.com.cn	ok	No Geolocation information available.
imgcache.qq.com	ok	IP: 124.163.196.108 Country: China Region: Shanxi City: Taiyuan Latitude: 37.869438 Longitude: 112.560280 View: Google Map

DOMAIN	STATUS	GEOLOCATION
dns.alidns.com	ok	IP: 223.6.6.6 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
longbridge-lts-sit.support.longbridgeapp.com	ok	No Geolocation information available.
resolver.msg.xiaomi.net	ok	IP: 110.43.0.169 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map
open.weixin.qq.com	ok	IP: 116.128.169.212 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map

EMAILS

EMAIL	FILE
editorial@longbridge.global example@gmail.com	Android String Resource
appro@openssl.org	apktool_out/lib/arm64-v8a/libengine_uniffi.so
ftp@example.com	apktool_out/lib/arm64-v8a/libsaasCorePlayer.so

EMAIL	FILE
field@typetype.googleapis	apktool_out/lib/armeabi-v7a/libengine_unifffi.so
ftp@example.com	apktool_out/lib/armeabi-v7a/libsaasCorePlayer.so
appro@openssl.org	lib/arm64-v8a/libengine_unifffi.so
ftp@example.com	lib/arm64-v8a/libsaasCorePlayer.so
field@typetype.googleapis	lib/armeabi-v7a/libengine_unifffi.so
ftp@example.com	lib/armeabi-v7a/libsaasCorePlayer.so

TRACKERS

TRACKER	CATEGORIES	URL
Facebook Analytics	Analytics	https://reports.exodus-privacy.eu.org/trackers/66
Facebook Login	Identification	https://reports.exodus-privacy.eu.org/trackers/67
Facebook Share		https://reports.exodus-privacy.eu.org/trackers/70
Google Firebase Analytics	Analytics	https://reports.exodus-privacy.eu.org/trackers/49
Huawei Mobile Services (HMS) Core	Location, Advertisement, Analytics	https://reports.exodus-privacy.eu.org/trackers/333
Pangle	Advertisement	https://reports.exodus-privacy.eu.org/trackers/363
Sensors Analytics	Analytics	https://reports.exodus-privacy.eu.org/trackers/248
Singular	Analytics	https://reports.exodus-privacy.eu.org/trackers/251

POSSIBLE SECRETS
"comment_topic_private_title" : "□□□□"
"wealth_card_no_auth" : "□□□"
"account_set_trade_password" : "□□□□□□"
"wealth_authorized_guide" : "□□□□"
"test_app_key" : "ba2fcf22f83637bb835e54ecf5d9c9ae"
"wealth_function_nt_auth" : "□□□□□"
"wealth_start_authing" : "□□□□..."
"wealth_card_auth_success" : "□□□□□□□□"
"forget_password" : "□□□□"
"comment_barcode_login_auth_button" : "Confirm"
"account_wealth_setting_tip_set_pwd" : "□□□□□□□□□□□□□□□□"
"com_facebook_device_auth_instructions" : "□□facebook.com/device□□□□□□□□□□□□"
"wealth_second_set_trade_pwd_tip_line" : "□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□"
"account_check_login_password" : "□□□□□□□□"
"supply_desc4_key" : "□□□"
"market_trade_session_overnight" : "□□□□"
"account_reset_trade_password" : "□□□□□□"
"account_auth" : "□□"
"account_original_trade_password" : "□□□□□□□□"

POSSIBLE SECRETS

[illegible]

POSSIBLE SECRETS

[illegible]

POSSIBLE SECRETS

```
"security_public_key": "MIIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQC8hzUoJzHX8jDL+97pqr7CaLiKsZ0aOES7FucX7vh9PoEDbCKNCTakRXdSSEiurPk3QpvsAGbfyls7jWKm4py9KcldJsZRh9onknVeAVIU++jnrGFGEYfQb8iKzCIN059gYeeJBS9mwi7RGU9tj0KHUG659v5sMBxv7Znse3fjQIDAQAB"
```

```
"supply_desc5_key" : "          "
```

```
"account_pass" : ""
```

```
"account_totp_setting_pwd_change": "000000"
```

```
"account_wealth_setting_tip_set_pwd": "XXXXXXXXXXXXXXXXXXXX"
```

[illegible]

```
"wealth_card_authed": "000"
```

```
"live_trading_member_auth": "000"
```

```
"test_app_key_lts_sit" : "917c2c8131955cda2898bbf1d5529293"
```

```
"ysf_dialog_close_session": "00000000"
```

```
"account_reset_pwd_channel": "0000000000"
```

```
"wealth_bill_pwd_tip": "████"
```

```
"account_notify_follow_user": "00000000000000000000"
```

```
"wealth_card_authing" : "0000"
```

```
"wealth_card_out_cash_none_auth": "0000"
```

```
"account_statement_pwd_item_label" : "□□□□□□"
```

```
"supply_desc3_key" : "            "
```

```
"account_recommend_community_user": "00000000"
```

POSSIBLE SECRETS
"wealth_card_withdrawal_auth" : "0000"
"ysf_already_quit_session" : "000000"
"account_login_verify_2fa_with_trade_pwd" : "00000000000000000000000000000000"
"trade_to_authorize" : "0000"
"market_check_trade_pwd" : "000000"
"account_verify_authenticator_sub" : "000000000000000000000000"
"wealth_card_auth_fail" : "00000000"
"account_auth_fail" : "0000000000000000"
"comment_private_circle_applying" : "000000000000"
"wealth_bill_pwd_tip_detail" : "00000000000000000000000000000000+0000000000"
"account_verify_authenticator_sub" : "0000000000000000000000000000"
"tips_start_authing" : "0000....."
"market_trade_session_total" : "0000"
"account_verify_login_password" : "000000"
"wealth_card_auth_dismiss_tip" : "0000000000"
"comment_barcode_login_auth_desc" : "0000000000"
"comment_barcode_login_auth_failure_title" : "0000"
"account_totp_setting_pwd_change" : "000000"
"account_recommend_community_user" : "000000"

POSSIBLE SECRETS

"account_login_password" : "0000"

"account_wealth_setting_tip_verify_pwd" : "00000000000000000000"

"comment_barcode_login_auth_failure_title" : "0000"

"market_trade_session_before" : "0000"

"ysf_session_close_cannot_evaluation" : "0000000000"

"account_none_auth" : "000"

"supply_desc4_key" : "000"

"account_password" : "Password"

"account_verify_login_password" : "0000000"

"account_check_login_password" : "00000000"

"account_password" : "00"

"common_input_password" : "0000"

"account_modify_trade_password" : "0000000"

"comment_topic_private_title" : "0000"

"wealth_card_auth_dismiss" : "0000"

"wealth_card_auth_dismiss" : "Deauthorize"

"ysf_work_sheet_auth" : "0000"

"wealth_card_out_cash_auth" : "000"

POSSIBLE SECRETS

"account_modify_login_password" : "000000"
"supply_desc2_key" : "000000"
"wealth_card_auth_add_bank" : "00000000000000000000000000000000"
"ysf_already_quit_session" : "000000"
"comment_topic_comment_block_user" : "0000000000"
"market_deep_data_key_factor" : "0000"
"account_verify_authenticator_main" : "00000000"
"account_set_login_password" : "000000"
"wealth_card_auth_fail" : "0000000000"
"common_set_trade_pwd" : "00000000"
"ysf_dialog_close_session" : "00000000"
"comment_barcode_login_auth_logging_tip" : "0000..."
"ysf_session_already_end" : "000000"
"account_reset_password" : "00000000"
"account_set_password" : "00000000"
"library_AndroidIconics_authorWebsite" : "http://mikepenz.com/"
"account_auth" : "Authenticate"
"wealth_card_out_cash_auth_right_now" : "0000"

POSSIBLE SECRETS

"market_deep_data_key_factor_secondary" : ""

"account_none_auth" : "Unverified"

"account_third_authenticator" : ""

"comment_topic_comment_author" : "Author"

"wealth_card_auth_now" : ""

"comment_barcode_login_auth_button" : ""

"wealth_card_auth_agree" : ""

"ysf_work_sheet_session_change" : ""

"article_reward_pay_desc_author" : ""

"account_none_auth" : ""

"account_verify_authenticator_disabled" : ""

"wealth_card_authed" : "Authorized"

"market_trade_session_ing" : ""

"ysf_session_ing_and_end_again_request" : ""

"account_name_auth" : ""

"tips_start_authing" : ""....."

"wealth_card_auth_now" : ""

"account_notify_follow_user" : ""

POSSIBLE SECRETS

"account_forget_trade_password" : "000000"
"trade_to_authorize" : "0000"
"comment_barcode_login_auth_title" : "0000"
"account_auth_fail" : "0000000000000000"
"ysf_close_session_fail" : "000000"
"account_verify_authenticator_disabled" : "000000"
"account_check_trade_pwd" : "000000"
"account_verify_authenticator_disable" : "0000"
"account_reset_login_password" : "000000"
"account_auth" : "00"
"comment_topic_comment_author" : "00"
"account_reset_pwd_phone" : "0000"
"common_user" : "User"
"comment_barcode_login_auth_logging_tip" : "0000..."
"supply_desc3_key" : "000000000000"
"wealth_private_stock_not_supported" : "000000000000000000000000"
"comment_blocked_user" : "00000000"
"wealth_card_auth_dismiss" : "0000"

POSSIBLE SECRETS

[illegible]

POSSIBLE SECRETS

[illegible]

POSSIBLE SECRETS

"market_deep_data_key_factor_important" : "Important"

"market_one_key_clear" : "Clear"

"account_password" : "□□"

"wealth_card_auth_success" : "□□□□□□□□"

"common_stock_key_word" : "□□□"

"market_fund_shortcut_private_fund" : "□□□□"

"wealth_please_authenticate_your_card" : "□□□□□□"

"comment_recommend_user" : "□□□□"

"account_verify_authenticator_disable" : "□□□□"

"wealth_function_nt_auth" : "□□□□□□"

"common_user" : "□□"

"supply_desc2_key" : "□□□□□□"

"comment_topic_private" : "□□"

"account_trade_pwd_duration" : "□□□□□□□□"

"ysf_work_sheet_session_change" : "□□□□□□"

"wealth_card_out_cash_auth" : "Verified"

"ysf_back_close_session" : "□□□□"

"account_totp_authenticator_close" : "□□□□"

POSSIBLE SECRETS

"market_deep_data_key_factor_secondary": "Secondary"
"market_trade_session_ing": ""
"account_already_set_trade_password": ""
"wealth_card_no_auth": ""
"account_set_login_password": ""
"common_stock_key_word": "Keyword"
"google_api_key": "AlzaSyD_NwybwYqT2aHFUgHqFvY7S9mjaC60tzi"
"ysf_session_already_quit": ""
"test_app_key_sit": "5b89af1ebc08ef269e49dace47f3c381"
"wealth_card_auth_agree": ""
"account_totp_authenticator_tip": ""
"account_totp_authenticator_tip": ""
"market_fund_key_point": ""
"wealth_card_withdrawal_auth": ""
"account_please_input_trade_pwd": ""
"common_dialog_guest_tip_auth": ""
"market_trade_session_after": ""
"wealth_card_out_cash_none_auth": "Unverified"

POSSIBLE SECRETS

"google_crash_reporting_api_key" : "AlzaSyD_NwybwYqT2aHFUgHqFvY7S9mjaC60tzi"

"wealth_second_set_trade_pwd_tip_line" : "00000000000000000000 00000000000000000000"

"wealth_card_out_cash_auth" : "0000"

"comment_topic_comment_author_like" : "00000"

"wealth_please_authenticate_your_card" : "0000000"

"market_trade_session_before" : "00000"

"wealth_second_verify_trade_pwd" : "00000000"

"trade_continuous_trading_session" : "00000000"

"account_reset_password" : "00000000"

"live_trading_member_auth" : "Authentication:"

"ysf_back_close_session" : "00000"

"wealth_card_withdrawal_auth" : "Status"

"account_verify_authenticator_title" : "00000"

"account_verify_authenticator_title" : "00000"

"ysf_session_ing_and_end_again_request" : "00000000000000000000000000000000"

"wealth_bank_certificate_authorized" : "0000000"

"account_totp_authenticator_close" : "00000"

"comment_topic_transform_private_success" : "0000000"

POSSIBLE SECRETS

"common_stock_key_word" : "□□□"

"wealth_card_authing" : "Authorizing"

"account_original_trade_password" : "□□□□□□□□"

"comment_topic_transform_private" : "□□□□"

"test_app_secret" : "45e528b9bfbd20bb88885a345a02cba391d8cb8507e60173a565256edd7c2dd2"

"ysf_menu_close_session" : "Exit"

"wealth_start_authing" : "□□□□..."

"test_app_secret_sit" : "80df77123b4fa5a658aa5e92549b5fc6f9e2915429a0e8221bc8d71e15306a2a"

"common_verify_trade_pwd" : "□□□□□□"

"market_one_key_clear" : "□□□□"

"supply_desc1_key" : "□□□□□□"

"trade_to_authorize" : "Authorize"

"account_totp_authenticator_pwd" : "□□□□"

"ysf_session_close_cannot_evaluation" : "□□□□□□□□□□"

"account_token_expire" : "□□□□□□□□□□□□"

"account_wealth_setting_tip_verify_pwd" : "□□□□□□□□□□□□□□□□"

"wealth_card_out_cash_auth_right_now" : "□□□□"

"account_reset_pwd_channel" : "□□□□□□□□□□"

POSSIBLE SECRETS

[illegible]

POSSIBLE SECRETS

"comment_topic_comment_block_user" : "□□□□□□□□"

"trade_continuous_trading_session" : "□□□□□□"

"account_statement_pwd_item_label" : "□□□□□□"

"comment_barcode_login_auth_button" : "□□□□"

"trade_pre_and_regular_trading_session" : "□□□□□□+□□□□□□"

"comment_recommend_user" : "□□□□"

f8183668ba5fc5bb06b5981e6d8b795d30b8978d43ca0ec572e37e09939a9773

d93165086cac17950237975e853d5116

MIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQC/YHP9utFGOhGk7Xf5L7jOgQz5

014a06685f0jVDULT/MIGfMA0GCSqGSIb3DQEBAQUAA4G

16a09e667f3bcc908b2fb1366ea957d3e3adec17512775099da2f590b0667322a

95475cf5d93e596c3fcd1d902add02f427f5f3c7210313bb45fb4d5bb2e5fe1cbd678cd4bbdd84c9836be1f31c0777725aeb6c2fc38b85f48076fa76bcd8146cc89a6fb2f706dd719898c2083dc8d896f84062e2c9c94d137b054a8d8096adb8d51952398eeca852a0af12df83e475aa65d4ec0c38a9560d5661186ff98b9fc9eb60eee8b030376b236bc73be3acdbd74fd61c1d2475fa3077b8f080467881ff7e1ca56fee066d79506ade51edbb5443a563927dbc4ba520086746175c8885925ebc64c6147906773496990cb714ec667304e261faee33b3cbdf008e0c3fa90650d97d3909c9275bf4ac86ffcb3d03e6dfc8ada5934242dd6d3bcca2a406cb0b

sha1/u8I+KQuzKHcdrT6iTb30I70GsD0=

edef8ba9-79d6-4ace-a3c8-27dcd51d21ed

POSSIBLE SECRETS
308203523082023aa00302010202044fd0006b300d06092a864886f70d0101050500306b310b3009060355040613025553310b3009060355040813024341311630140603550407130d53616e204672616e636973636f3110300e060355040a130754776974746572310f300d060355040b13064d6f62696c65311430120603550403130b4a6f6e617468616e204c65301e170d3132303630373031313431395a170d3339313032343031313431395a306b310b3009060355040613025553310b3009060355040813024341311630140603550407130d53616e204672616e636973636f3110300e060355040a130754776974746572310f300d060355040b13064d6f62696c65311430120603550403130b4a6f6e617468616e204c6530820122300d06092a864886f70d01010105000382010f003082010a028201010089e6cbdfed4288a9c0a215d33d4fa978a5bdd20be426ef4b497d358a9fd1c6efec9684f059f6955e60e5fda1b5910bb2d097e7421a78f9c81e95cd8ef3bf50add7f8d9f073c0478736a6c7fd38c5871559783a76420d37f3f874f2114ec02532e85587791d24037485b1b95ec8cbc75b52042867988b51c7c3589d5b5972fd20a2e8a7c9ced986873f5008a418b2921daa7cfb78afc174eecdb8a79dc0961bea9740d09c4656ac9b8c86263a788e35af1d4a3f86ce053a1aefb5369def91614a390219f896f378712376baa05934a341798950e229f4f735b86004952b259f23cc9fc3b8c1bc8171984884dc92940e91f2e9a78a84a78f0c2946b7e37bbf3b9b0203010001300d06092a864886f70d010105050003820101001cf15250365e66cc87bb5054de1661266cf87907841016b20dfa1f9f59842020cbc33f9b4d41717db0428d11696a0bade6a4950a48cc4fa8ae56c850647379a5c2d977436b644162c453dd36b7745ccb9ff0b5fc070125024de73dab6dcda5c69372e978a49865f569927199ed0f61d7cbee1839079a7da2e83f8c90f7421a8c81b3f17f1cc05d52aedac9acd6e092ffd9ad572960e779a5b91a78e1aeb2b3c7b24464bd223c745e40abd74fc586310809520d183443fcca3c6ade3be458afedbd3325df9c0e552636e35bb55b240eb8c0ba3973c4fb81213f22363be2d70e85014650c2f4fc679747a7ec31ea7b08da7dd9b9ba279a7fbbc1bd440fbe831bf4
2A57086C86EF54970C1E6EB37BFC72B1
df6b721c8b4d3b6eb44c861d4415007e5a35fc95
9fb028c29acb421cb634c77cf4ebe078
ca82949b0ba1a4017c162f9cd385912018c8ed71a78a6f64f0fc8f8f17d9c290
6b647f0794b7065adc35551577f5939f
ChNjb20uYW5kcm9pZC52ZW5kaW5nCiBjb20uZ29vZ2xlLmFuZlJvaWQuYXhwcw5tZWV0aW5ncwohY29tLmdvb2dsZS5hbmlRyY2lLmFwcHMubWVzc2FnaW5n
4230baa077b401374d0fc012375047e79ea0790d58d095ef18d97d95470c738d
sha1/lvGeLsbqzPxdl0b0wuj2xVTdXgc=
fdc882b8d287a74c6b820119627bb675
30470ad5a005fb14ce2d9dcd87e38bc7d1b1c5facbaecbe95f190aa7a31d23c4dbbcbe06174544401a5b2c020965d8c2bd2171d3668445771f74ba084d2029d83c1c158547f3a9f1a2715be23d51ae4d3e5a1f6a7064f316933a346d3f529252
e9702f1e92e97fce49cdf81a5fa730a4e913554d09b3fe41e1d8a7fba00a8459
32C4AE2C1F1981195F9904466A39C9948FE30BBFF2660BE1715A4589334C74C7
7fmduHKTDHHrImVldEqAIlSfii1tl35bxj1OXN5Ve8c4IU6URVu4xtSHc3BVZxS6WWJnxMDhlfQN0N0K2NDJg==

POSSIBLE SECRETS
2438bce1ddb7bd026d5ff89f598b3b5e5bb824b3
54847f3301740c85982a1d3d566bd24e
QrMgt8GGYl6T52ZY5AnhtxkLzb8egpFn
3081a0adab3018d57165e6dd24074bdbac640f6dbe21a9e24d3474a87ebf38b8
b0b4417601b59cbc9d8ac8f935cadaec4f5fbb2f23785609ae466748d9b5a536
sha1/aDMOYTWfIVkpg6PI0tLhQG56s8E=
42debb9da5b3d88cc956e08787ec3f3a09bba5f48b889a74aaf53174aa0fbe7e3c5b8fcd7a53bef563b0e98560328960a9517f4014d3325fc7962bf1e049370d76d1314a76137e792f3f0db859d095e4a5b932024f079ecf2ef09c797452b0770e1350782ed57ddf794979dcef23cb96f183061965c4ebc93c9c71c56b925955a75f94cccf1449ac43d586d0beee43251b0b2287349d68de0d144403f13e802f4146d882e057af19b6f6275c6676c8fa0e3ca2713a3257fd1b27d0639f695e347d8d1cf9ac819a26ca9b04cb0eb9b7b035988d15bbac65212a55239cfc7e58fae38d7250ab9991ffbc97134025fe8ce04c4399ad96569be91a546f4978693c7a
ec96e9ac1149251acbb1b0c5777cae95
n+APJWeelsUEJHi0F5f3EmwAtNgcjwLYed8Lrem+2+qvFY8RRjH3w4jT/wl2HKGEY
MIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQCVC1ecjpc5k7TkabF935iQONDZ0/E5XWPVv9FEsI59XTRW0+BCMK1MODRSWMvHFrPMh9ZiInRr7qXuAKCBEynQEghmplVvMYhFu48FAI9bKfkI5IKuQK+tc4X0+zTbNrpedNoKXK4C7dDJTETBH6prwWE9j5WsAf0gbjUbls3FxlDAQAB
sha1/VRmyeKyygdf6vBg5nDu2kEJLU=
MIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQC5se07mkN71qsSJHjZ2Z0+Z+4LlVf2sz7Md38VAa3EmAOvl7vZp3hbAxicL724ylcmisTPtZQhT/9C+25AELqy9PN9JmzKpwoVTUojvxG4BoyT49+gGVI6s6zo1byNoHUzTfkmRfmC9MC53HvG8GwkP5xtcdptFjAlcglR7oAWQIDAQAB
e33764b4-a953-44fe-a3db-d4713e15a15b
PHByb3BlcnRpZXMgeG1sbnM9Imh0dHA6Ly93d3cuamli2ZXNvZnR3YXJlLnNvbS94bWxucy94bXBwL3Byb3BlcnRpZXMiPg==
ludfbyUrSHugzRqAtHWslFvHT0PTvLMsEKLUIgv7ZZbVxygWy
173cf86fe9894a0f70dadd09d4fd88c380836099d4939f8c3754361bdc16a32b

POSSIBLE SECRETS

b368b110e3b565fe97c91f786e11bc48754cc8e4e6f21d8a94a68ac6ad67aaaf

77d0f8c4dad15eb8c4f2f8d6726cefd96d5bb399

92974c6802419e4d18b5ec536cbfa167b8e8eff09ec4c8510a5b95750b1e0c82

fd7f53811d75122952df4a9c2eece4e7f611b7523cef4400c31e3f80b6512669455d402251fb593d8d58fabfc5f5ba30f6cb9b556cd7813b801d346ff26660b76b9950a5a49f9fe8047b1022c24fba9d7feb7c61bf83b57e7c6a8a6150f04fb83f6d3c51ec3023554135a169132f675f3ae2b61d72aeff22203199dd14801c7

2fbbb782cd5263e0e08502f12bd31a3d

962eddcc369cba8ebb260ee6b6a126d9346e38c5

b869c82b35d70e1b1ff91b28e37a62ecdc34409b

f8d927750a0952ffb5bd87dfb83d781ae65f7bed043a7886d1d3cdcf94bb77a

0123456789ABCDEFabcdef

d80f18e8081b624cc64985f87f70118f1702985d2e10dbc985ee7be334fd3c7d

e9e642599d355f37c97ffd3567120b8e25c9cd43e927b3a9670fbec5d890141922d2c3b3ad2480093799869d1e846aab49fab0ad26d2ce6a22219d470bce7d777d4a21fbe9c270b57f607002f3cef8393694cf45ee3688c11a8c56ab127a3daf

onDeH8v6x3xeciVDOOrpuw0An4PYc22xH4HM2iXEEDlg1UBJcB

308202eb30820254a00302010202044d36f7a4300d06092a864886f70d01010505003081b9310b300906035504061302383631123010060355040813094775616e67646f6e73111300f060355040713085368656e7a68656e31353033060355040a132c54656e63656e7420546563686e6f6c6f6779285368656e7a68656e2920436fd70616e79204c696d69746564313a3038060355040b133154656e63656e74204775616e677a686f7520526573656172636820616e6420446576656c6f706d656e742043656e7465723110300e0603550403130754656e63656e74301e170d3131303131393134333933325a170d3431303131313134333933325a3081b9310b300906035504061302383631123010060355040813094775616e67646f6e73111300f060355040713085368656e7a68656e31353033060355040a132c54656e63656e7420546563686e6f6c6f6779285368656e7a68656e2920436fd70616e79204c696d69746564313a3038060355040b133154656e63656e74204775616e677a686f7520526573656172636820616e6420446576656c6f706d656e742043656e7465723110300e0603550403130754656e63656e7430819f300d06092a864886f70d0101050003818d0030818902818100c05f34b231b083fb1323670bfb7e7bdab40c0c0a6efc87ef2072a1ff0d60cc67c8edb0d0847f210bea6cbfaa241be70c86daf56be08b723c859e52428a064555d80db448cdcacc1aea2501eba06f8bad12a4fa49d85cadc7abeb68945a5cb5e0e162b5f5c3254c7373550ee4ad0cb7c8ae64b151ccd8df582d446f39ae0c5e930203010001300d06092a864886f70d010105050003818109c8d9d7f2f908c42081b4c764c377109a8b2c70582422125ce545842d5520a6a695506bd8bf4de987b75a3077eb04ad341f481aac266e89d3864456e69fba13df018acd168b9a19dfd7ad9d9cc6f6ace57c746515f71234df3a053e33ba93ece5cd0fc15f3e389a3f365588a9fcb439e069d3629cd7732a13fff7b891499

sha1/nKmNAK90Dd2BgNITRaWLjy6UONY=

POSSIBLE SECRETS
8a3c4b262d721acd49a4bf97d5213199c86fa2b9
sha1/sYEIGhmkwJQf+uiVKMEkyZs0rMc=
ec3c134d7c4e4245bd6522babee5a3ed
dZozdop5rgKNxjbrQAd5nntAGpgh9w84O1Xgg==
caa74d7639baad05256f319bfa51ddaa
fca682ce8e12caba26efccf7110e526db078b05edecbcd1eb4a208f3ae1617ae01f35b91a47e6df63413c5e12ed0899bcd132acd50d99151bdc43ee737592e17
b874142c438d4e8258b59c29b89df98a
NwybwYqT2aHFUgHqFvY7S9mjaC60tzi
fS8GfJlL0Y3NevGbrapV4SyD9tNqcVV
4bdecdf772491e35c4e8b48f88aee22bae1311984f2e1da4dfad0b78ee7f5163
D4AE7FD636304DC7BDAD5DAB0CE3B319
a8011ba95ad448f88d0b4c38f240bba5
sha1/wHqYal2J+6sFZAwRfap9ZbjKzE4=
db48223fd9e143f7e133c57f5d08a4e38549ce3ebd921fe3b4003c26e5e35bed
ngZlTTem7Pjdm1V9bjgQ6iQvFHsvT+vNgJ3wAIRd+iCMXm8y96yZhD2+SH5odBYS2
678471b27a9cf44ee91a49c5147db1a9aaf244f05a434d6486931d2d14271b9e35030b71fd73da179069b32e2935630e1c2062354d0da20a6c416e50be794ca4
aa77e9b33b8b45a3ab7c8efb94728a31
sha1/1S4TwavjSdrotjWU73w4Q2BkZr0=
sha1/cTg28glxU0crbrplRqkQFVggBQk=

POSSIBLE SECRETS

ABi2fbt8vkzj7SJ8aD5jc4xJFTDFntdkMrYXL3itsvqY1Qlw

9cdbd84c9f1ac2f38d0f80f42ab952e7338bf511

07ff9b7aeeff969173c45b285fe0fecdbaee244576ff7a2796a36f1c0c11adb4

24fbae40bcd50b759b26e3ba0f46aa25e932fa7da05f226d75ec507bcf53bce5

e2f856b9f9a4fd4cb2795aeaf83268e4bff189aaec05d691ffde76e075b82648

3517262215D8D3008CBF888750B6418EDC4D562AC33ED6874E0D73ABA667BC3C

e34d9afe0142313bc8f33e205fb8a2ac

8d5155894229d5e689ee01e6018a237e2cae64cd

236e7ec1d4b721c997c1a5f549ebbce8

28E9FA9E9D9F5E344D5A9E4BCF6509A7F39789F515AB8F92DDBCBD414D940E93

BC3736A2F4F6779C59BDCEE36B692153D0A9877CC62A474002DF32E52139F0A0

QrMgt8GGYI6T52ZY5AnhtxkLzb8egpFn3j5JELI8H6wtACbUnZ5cc3aYTSTRbmKAKRJeYbtX92LPBWm7nBO9Ull7y5i5MQNmUZNF5QENurR5tGyo7yj2G0MBjWvy6iAtIAbacKP0SwOUeUWx5dsBdyhxa7Id1APtybSdDgicBDuNjl0mlZFUzZSS9dmN8IBD0WTVOMz0pRZbR3cysomRXOO1ghqjldTcyDlxzpNAEsZn8RMGjrzyU7Hjbmwi6YNK

f7e1a085d69b3ddecbbcab5c36b857b97994afbbfa3aea82f9574c0b3d0782675159578ebad4594fe67107108180b449167123e84c281613b7cf09328cc8a6e13c167a8b547c8d28e0a3ae1e2bb3a675916ea37f0bfa213562f1fb627a01243bcc4f1bea8519089a883dfe15ae59f06928b665e807b552564014c3bfecf492a

b6598591c0b6aeebf27a3834f44c1696da04882c

d8391a394d4a179e6fe7bdb8a301258b

71537df99e777b3672dc38215d6b977e

sha1/gzF+YoVCU9bXeDGQ7JGQVumRueM=

POSSIBLE SECRETS
ee06dd4b897f35c6a5e0b0b05963b2d9
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEA6YCzxZS0FaWDOdtwgcHJ
f6040d0e807aaec325ecf44823765544e92905158169f694b282bf17388632cf95a83bae7d2d235c1f039b0df1dcca5fda619b6f7f459f2ff8d70ddb7b601592fe29fcae58c028f319b3b12495e67aa5390942a997a8cb572c8030b2df5c2b622608bea02b0c3e5d4dff3f72c9e3204049a45c0760cd3604af8d57f0e0c693cc
8138e8a0fcf3a4e84a771d40fd305d7f4aa59306d7251de54d98af8fe95729a1f73d893fa424cd2edc8636a6c3285e022b0e3866a565ae8108eed8591cd4fe8d2ce86165a978d719ebf647f362d33fca29cd179fb42401cbaf3df0c614056f9c8f3cfd51e474afb6bc6974f78db8aba8e9e517fded658591ab7502bd41849462f
9b8f518b086098de3d77736f9458a3d2f6f95a37
BCC35D4D3606F154F0402AB7634E8490C0B244C2675C3C6238986987024F0C02
23456789abcdefghijklmnopqrstuvwxyz
B92825C2BD5D6D6D1E7F39EECD17843B7D9016F611136B75441BC6F4D3F00F05
n4aw0AoExz4atTkUIZJlf9eNLj7ogTIQGANNzE2R/uskFse2GsCqJKFTk4UraBkzf
sha1/I0PRSKjViZuUfUYaeX7ATP7RcLc=
MIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQCLShWjAtxjv3g2VPIYOOAv4rnVDdLkdseKm7+KOkCBLV9SKY5oqksFaXcLZ+nRnjnczhze5eGKhevwliUyag6x96GyXI2WagKloB7Uwl2byl0xB5bNvYzf+x/DKHTSoGJshU6shXWXcjGFq+mUiPhM3WGGZoqdY+vvqOWD+tga8XQIDAQAB
f81630b5764841ffbc0320ee2361b090
sha1/PANDaGiVHPNpKri0Jtq6j+ki5b0=
amF2YXguY3J5cHRvLnNwZWMuSXZQYXJhbWV0ZXJTcGVj
sha1/GiG0IStik84Ys2XsnA6TTLOB5tQ=
8b1ac7f34d508bf569c488f776483981
c56fb7d591ba6704df047fd98f535372fea00211

POSSIBLE SECRETS
c3edf5f1f69d9bf76a4373508915a257
d2cef93010963d9273440efe6a05dd8d
9760508f15230bccb292b982a2eb840bf0581cf5
e6b1bdc b890370f2f2419fe06d0fdf7628ad0083d52da1ecfe991164711bbf9297e75353de96f1740695d07610567b1240549af9cbd87d06919ac31c859ad37ab6907c311b4756e1e208775989a4f691bff4bbbc58174d2a96b1d0d970a05114d7ee57dfc33b1bafaf6e0d820e838427018b6435f903df04ba7fd34d73f843df9434b164e0220baabb10c8978c3f4c6b7da79d8220a968356d15090dea07df9606f665cbe c14d218dd3d691cce2866a58840971b6a57b76af88b1a65fdffd2c080281a6ab20be5879e0330eb7ff70871ce684e7174ada5dc3159c461375a0796b17ce7beca83cf34f65976d237aee993db48d34a4e344f4d8b7e99119168bdd7
5fed96c85bd58c58aadbd465c172a4c9a794d8eb2f86cbc7bcee6caf4c7a2c5f
UINBL0VDQi9PQUVQV2l0aFNIQS0xQW5kTudGMVBhZGRpbmc=
E49D5C2C0E11B3B1B96CA56C6DE2A14EC7DAB5CCC3B5F300D03E5B4DBA44F539
403f14ad2f0e5eb3c4f3a0bcd5c1592cc4492662ad53191c92905255d4990656
18da2bf10352443a00a5e046d9fca6bd
sha1/7WYxNdMb1OymFMQp4xkGn5TBJIA=
EA23F5B8C7577CDC744ABD1C6D7E143D5123F8F282BF4E7853C1EC86BD2EDD22
258EAFa5-E914-47DA-95CA-C5AB0DC85B11
b6cbad6cbd5ed0d209afc69ad3b7a617efaae9b3c47eabe0be42d924936fa78c8001b1fd74b079e5ff9690061dacfa4768e981a526b9ca77156ca36251cf2f906d105481374998a7e6e6e18f75ca98b8ed2eaf86ff402c874cca0a263053f22237858206867d210020daa38c48b20cc9dfd82b44a51aeb5db459b22794e2d649
2d0767f1-196e-410e-8fe1-d48082871733
amF2YXguY3J5cHRvLnNwZWMuU2VjcmV0S2V5U3BIYw==
01360240043788015936020505
a4b7452e2ed8f5f191058ca7bbfd26b0d3214bfc

POSSIBLE SECRETS
44817d17adcfd1bc735c022b368acfe0465c4bdbc5c77ca8efd6b578dad1177a65f83813d3f3da839778719efbb83d982737c55597b1a074f105d828a8163b42
db53fcdc9ab71e9bdd4eab257fe1aba7989ad2b24fbe3a85dfef72ea1dd6bae2
cc2751449a350f668590264ed76692694a80308a
2f3c0a1c896db07a7b138360c9dc678f
f2ca50674cda498981d3a4b7ba78626a
e1983876ef85d2473cbd48a14f053517
ad948bd9a4f55c90e46ffad2fa252938996cd057
nsjV57o+phSlqM0B5aPiMScxWJmCzFRX4NKcjt6KGP+3GpzmTyrpavnYQtHasperH
3082025d308201c6a00302010202044bd76cce300d06092a864886f70d01010505003073310b3009060355040613025553310b3009060355040813024341311630140603550407130d53616e204672616e636973636f31163014060355040a130d547769747465722c20496e632e310f300d060355040b13064d6f62696c65311630140603550403130d4c656c616e6420526563686973301e170d3130303432373233303133345a170d3438303832353233303133345a3073310b3009060355040613025553310b3009060355040813024341311630140603550407130d53616e204672616e636973636f31163014060355040a130d547769747465722c20496e632e310f300d060355040b13064d6f62696c65311630140603550403130d4c656c616e642052656368697330819f300d06092a864886f70d010101050003818d003081890281810086233c2e51c62232d49cc932e470713d63a6a1106b38f9e442e01bc79ca4f95c72b2cb3f1369ef7dea6036bff7c4b2828cb3787e7657ad83986751ced5b131fcc6f413efb7334e32ed9787f9e9a249ae108fa66009ac7a7932c25d37e1e07d4f9f66aa494c270dbac87d261c9668d321c2fba4ef2800e46671a597ff2eac5d7f0203010001300d06092a864886f70d0101050500038181003e1f01cb6ea8be8d2cecef5cd2a64c97ba8728aa5f08f8275d00508d64d139b6a72c5716b40a040df0eeeda04de9361107e123ee8d3dc05e70c8a355f46dbadf1235443b0b214c57211afd4edd147451c443d49498d2a7ff27e45a99c39b9e47429a1dae843ba233bf8ca81296dbe1dc5c5434514d995b0279246809392a219b
Y29tLm1jcy5hY3Rpb24uUkVDRUIWRV9TREtftUVtU0FHRQ==
30820122300d06092a864886f70d01010105000382010f003082010a0282010100a3d269348ac59923f65e8111c337605e29a1d1bc54fa96c1445050dd14d8d63b10f9f0230bb87ef348183660bedcabfdec045e235ed96935799fcdb4af5c97717ff3b0954eaf1b723225b3a00f81cbd67ce6dc5a4c07f7741ad3bf1913a480c6e267ab1740f409edd2dc33c8b718a8e30e56d9a93f321723c1d0c9ea62115f996812ceef186954595e39a19b74245542c407f7dddb1d12e6eedcfc0bd7cd945ef7255ad0fc9e796258e0fb5e52a23013d15033a32b4071b65f3f924ae5c5761e22327b4d2ae60f4158a5eb15565ba079de29b81540f5fbb3be101a95357f367fc661d797074ff3826950029c52223e4594673a24a334cae62d63b838ba3df9770203010001
c3de6f84c7e915fc4706da13985e5216

 PLAYSTORE INFORMATION

Title: Longbridge

Score: 4.2 **Installs:** 100,000+ **Price:** 0 **Android Version Support:** Category: Finance **Play Store URL:** [global.longbridge.app.android](https://play.google.com/store/apps/details?id=com.longbridge)

Developer Details: LONG BRIDGE TECHNOLOGY HK LIMITED, 5823094970455878484, None, <https://longbridge.hk>, service@longbridge.hk,

Release Date: Apr 15, 2020 **Privacy Policy:** [Privacy link](#)

Description:

[Latest News] • Hong Kong Economic Times: ""Excellence in Fintech Securities Firm"" at HKET Excellence Awards 2023 • Lifetime Commission-Free: Truly daring to offer ""Lifetime Commission-Free"" for HK & US stocks. [Special Features] • Overview: We simplify complexities by transforming intricate financial data into visual charts and making professional analytical terms more engaging and accessible. • Supply Chain Details: Unique supply chain industry graph analysis feature for in-depth stock screening and strategy customization. • Live Trading: Engaging with numerous ""Longbridger Friends"" in real-time discussions about every second's fluctuation in candlestick charts. • Longbridge Community: Learn from experts and exchange investment ideas and strategies within the community. • PortAI: Industry's first financial GPT, an ""AI Analyst""with answers at all times. • Diverse trading tools: Grid Trading, US Stock Options, Leveraged ETFs, etc., empowering accurate navigation through diverse market conditions. [Fundamental Features] • Fast and seamless account opening: Register in 30 seconds, open an account in just 3 minutes. • US and HK Markets: Our HK & US stock market data enable you to seize investment opportunities. • Speedy Executions: With our microsecond level of refresh rates, we provide ultra-low market latency for a more secure and stable investment experience. • HK and US IPO: Supporting subscription for HK and US IPO, offering more allocation shares and greater chances of being allocated. • Margin Financing: Up to 33x leverage for IPO financing, and up to 10x leverage for stocks. • Fast deposit: Real-time asset access, supporting methods such as bank certificates, eDDA, FPS, etc. FPS provides 7×24 service. [Market Data Service - Automatic Monthly Subscription Renewal] • Service & Price a) SGX L1 Quotes: HKD 103/month b) HKEX L2 Quotes: HKD 158/month c) L2 Quotes - Plus: HKD 338/month d) L1 + National BBO (For Non-Professional User): HKD 46/month e) OPRA Option: HKD 20/month f) Nasdaq Basic (Open API): HKD 558/month g) OPRA US Stock Option (Open API): HKD 22/month h) L2 Quotes (Open API): HKD 269/month i) L2 Quotes - Plus (Open API): HKD 558/month • Payment: Deducted via iTunes account upon user confirmation. • Renewal: iTunes bills 24 hours before expiration, extending the subscription by one period upon successful payment. • Cancellation: To cancel renewal, go to ""Settings"" on your Apple device -> ""iTunes Store & App Store"" -> ""Apple ID"" -> ""View Apple ID"" -> ""Account Settings"" -> ""Subscriptions"" , and cancel auto-renewal 24 hours before the billing cycle ends. • Service Agreement: <https://support.longbridgehk.com/topics/marketing/subs> [About Us] Longbridge Securities is a new-generation internet brokerage for global investors. It focuses on connecting the ""Discovery → Learning → Trading"" stages of assets, delivering a secure, reliable, and efficient global investment experience. Longbridge Securities (Hong Kong) Limited (CE No.: BPX066), holds Type 1, 2, 4, and 9 licenses issued by the Hong Kong Securities and Futures Commission (SFC). Driven by technological innovation, it aims to build a seamless global trading network, enabling investors to access global securities markets at minimal costs through a single account. Terms & conditions apply. Please be cautious as all investments carry risks. [Contact Us] • Official Website: <https://longbridge.com> • Customer Service Hotline: +852 3851 1777 • Customer Service Operating Hours: 9:00-18:00* (GMT+8) * Beyond the above timing, please contact our online customer service; operating hours are as follows: - Mon – Fri (excluding Public Holidays): 24 hours - Sat & Sun (including Public Holidays): 9:00-18:00 (GMT+8) • Customer Service Email: service@longbridge.hk • Official WhatsApp: +852 5223 6373 • Company address: Suites 1801-1804 & 1815-1816, 18/F, One International Finance Centre, 1 Harbour View Street, Central, Kong Kong

☰ SCAN LOGS

Timestamp	Event	Error
2026-01-12 08:33:57	Generating Hashes	OK
2026-01-12 08:33:58	Extracting APK	OK
2026-01-12 08:33:58	Unzipping	OK

2026-01-12 08:33:59	Parsing APK with androguard	OK
2026-01-12 08:33:59	Extracting APK features using aapt/aapt2	OK
2026-01-12 08:34:00	Getting Hardcoded Certificates/Keystores	OK
2026-01-12 08:34:03	Parsing AndroidManifest.xml	OK
2026-01-12 08:34:03	Extracting Manifest Data	OK
2026-01-12 08:34:03	Manifest Analysis Started	OK
2026-01-12 08:34:03	Reading Network Security config from network_security_config.xml	OK
2026-01-12 08:34:03	Parsing Network Security config	OK
2026-01-12 08:34:03	Performing Static Analysis on: [] (global.longbridge.app.android)	OK
2026-01-12 08:34:05	Fetching Details from Play Store: global.longbridge.app.android	OK
2026-01-12 08:34:06	Checking for Malware Permissions	OK
2026-01-12 08:34:06	Fetching icon path	OK
2026-01-12 08:34:07	Library Binary Analysis Started	OK

2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libtnet-3.1.14.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libengine_uniffi.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libc++_shared.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libapminsightb.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libmodpng.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libqiyutraceroute.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libshadowhook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/liblbhook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libsecurity.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libmodpdfium.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libapminsighta.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libqiyuhigh_available_android.so	OK

2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libmodft2.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libjniidispach.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libalivcffmpeg.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libjniPdfium.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libsaasCorePlayer.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libvolc_log.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libnative-render.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libshadowhook_nothing.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libsaasDownloader.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libqiyune_audio.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libgtc4core.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libbytehook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/arm64-v8a/libEncryptorP.so	OK

2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libtnet-3.1.14.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libengine_uniffi.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libc++_shared.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libapminsightb.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libmodpng.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libqiyutraceroute.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libshadowhook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/liblbhook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libsecurity.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libmodpdfium.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libapminsighta.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libqiyuhigh_available_android.so	OK

2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libmodft2.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libjnidispatch.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libilvccffmpeg.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libjniPdfium.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libsaasCorePlayer.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libvolc_log.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libnative-render.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libshadowhook_nothing.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libsaasDownloader.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libqiyune_audio.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libgtc4core.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libbytehook.so	OK
2026-01-12 08:34:07	Analyzing apktool_out/lib/armeabi-v7a/libEncryptorP.so	OK

2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libtnet-3.1.14.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libengine_uniffi.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libc++_shared.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libapminsightb.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libmodpng.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libqiyutraceroute.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libshadowhook.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/liblbhook.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libsecurity.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libmodpdfium.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libapminsighta.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libqiyuhigh_available_android.so	OK

2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libmodft2.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libjnidispatch.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libalivcffmpeg.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libjniPdfium.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libsaasCorePlayer.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libvolc_log.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libnative-render.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libshadowhook_nothing.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libsaasDownloader.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libqiyune_audio.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libgtc4core.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libbytehook.so	OK
2026-01-12 08:34:07	Analyzing lib/arm64-v8a/libEncryptorP.so	OK

2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libtnet-3.1.14.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libengine_uniffi.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libpns-2.14.15-LogOnlineStandardCuumRelease_alijtca_plus.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libc++_shared.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libapminsightb.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libmodpng.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libqiyutraceroute.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libshadowhook.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/liblbhook.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libsecurity.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libmodpdfium.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libapminsighta.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libqiyuhigh_available_android.so	OK

2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libmodft2.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libjnidispatch.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libalivcffmpeg.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libjniPdfium.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libsaasCorePlayer.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libvolc_log.so	OK
2026-01-12 08:34:07	Analyzing lib/armeabi-v7a/libnative-render.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libshadowhook_nothing.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libsaasDownloader.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libqiyune_audio.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libgtc4core.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libbytehook.so	OK
2026-01-12 08:34:08	Analyzing lib/armeabi-v7a/libEncryptorP.so	OK

2026-01-12 08:34:08	Reading Code Signing Certificate	OK
2026-01-12 08:34:08	Running APKiD 3.0.0	OK
2026-01-12 08:34:21	Detecting Trackers	OK
2026-01-12 08:34:27	Decompiling APK to Java with JADX	OK
2026-01-12 08:36:27	Converting DEX to Smali	OK
2026-01-12 08:36:27	Code Analysis Started on - java_source	OK
2026-01-12 08:36:50	Android SBOM Analysis Completed	OK
2026-01-12 08:37:13	Android SAST Completed	OK
2026-01-12 08:37:13	Android API Analysis Started	OK
2026-01-12 08:37:38	Android API Analysis Completed	OK
2026-01-12 08:37:38	Android Permission Mapping Started	OK
2026-01-12 08:39:02	Android Permission Mapping Completed	OK
2026-01-12 08:39:03	Android Behaviour Analysis Started	OK

2026-01-12 08:39:35	Android Behaviour Analysis Completed	OK
2026-01-12 08:39:35	Extracting Emails and URLs from Source Code	OK
2026-01-12 08:40:03	Email and URL Extraction Completed	OK
2026-01-12 08:40:03	Extracting String data from APK	OK
2026-01-12 08:40:04	Extracting String data from SO	OK
2026-01-12 08:40:04	Extracting String data from Code	OK
2026-01-12 08:40:04	Extracting String values and entropies from Code	OK
2026-01-12 08:40:13	Performing Malware check on extracted domains	OK
2026-01-12 08:41:11	Saving to Database	OK

Report Generated by - MobSF v4.4.4

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2026 Mobile Security Framework - MobSF | [Ajin Abraham](#) | [OpenSecurity](#).