


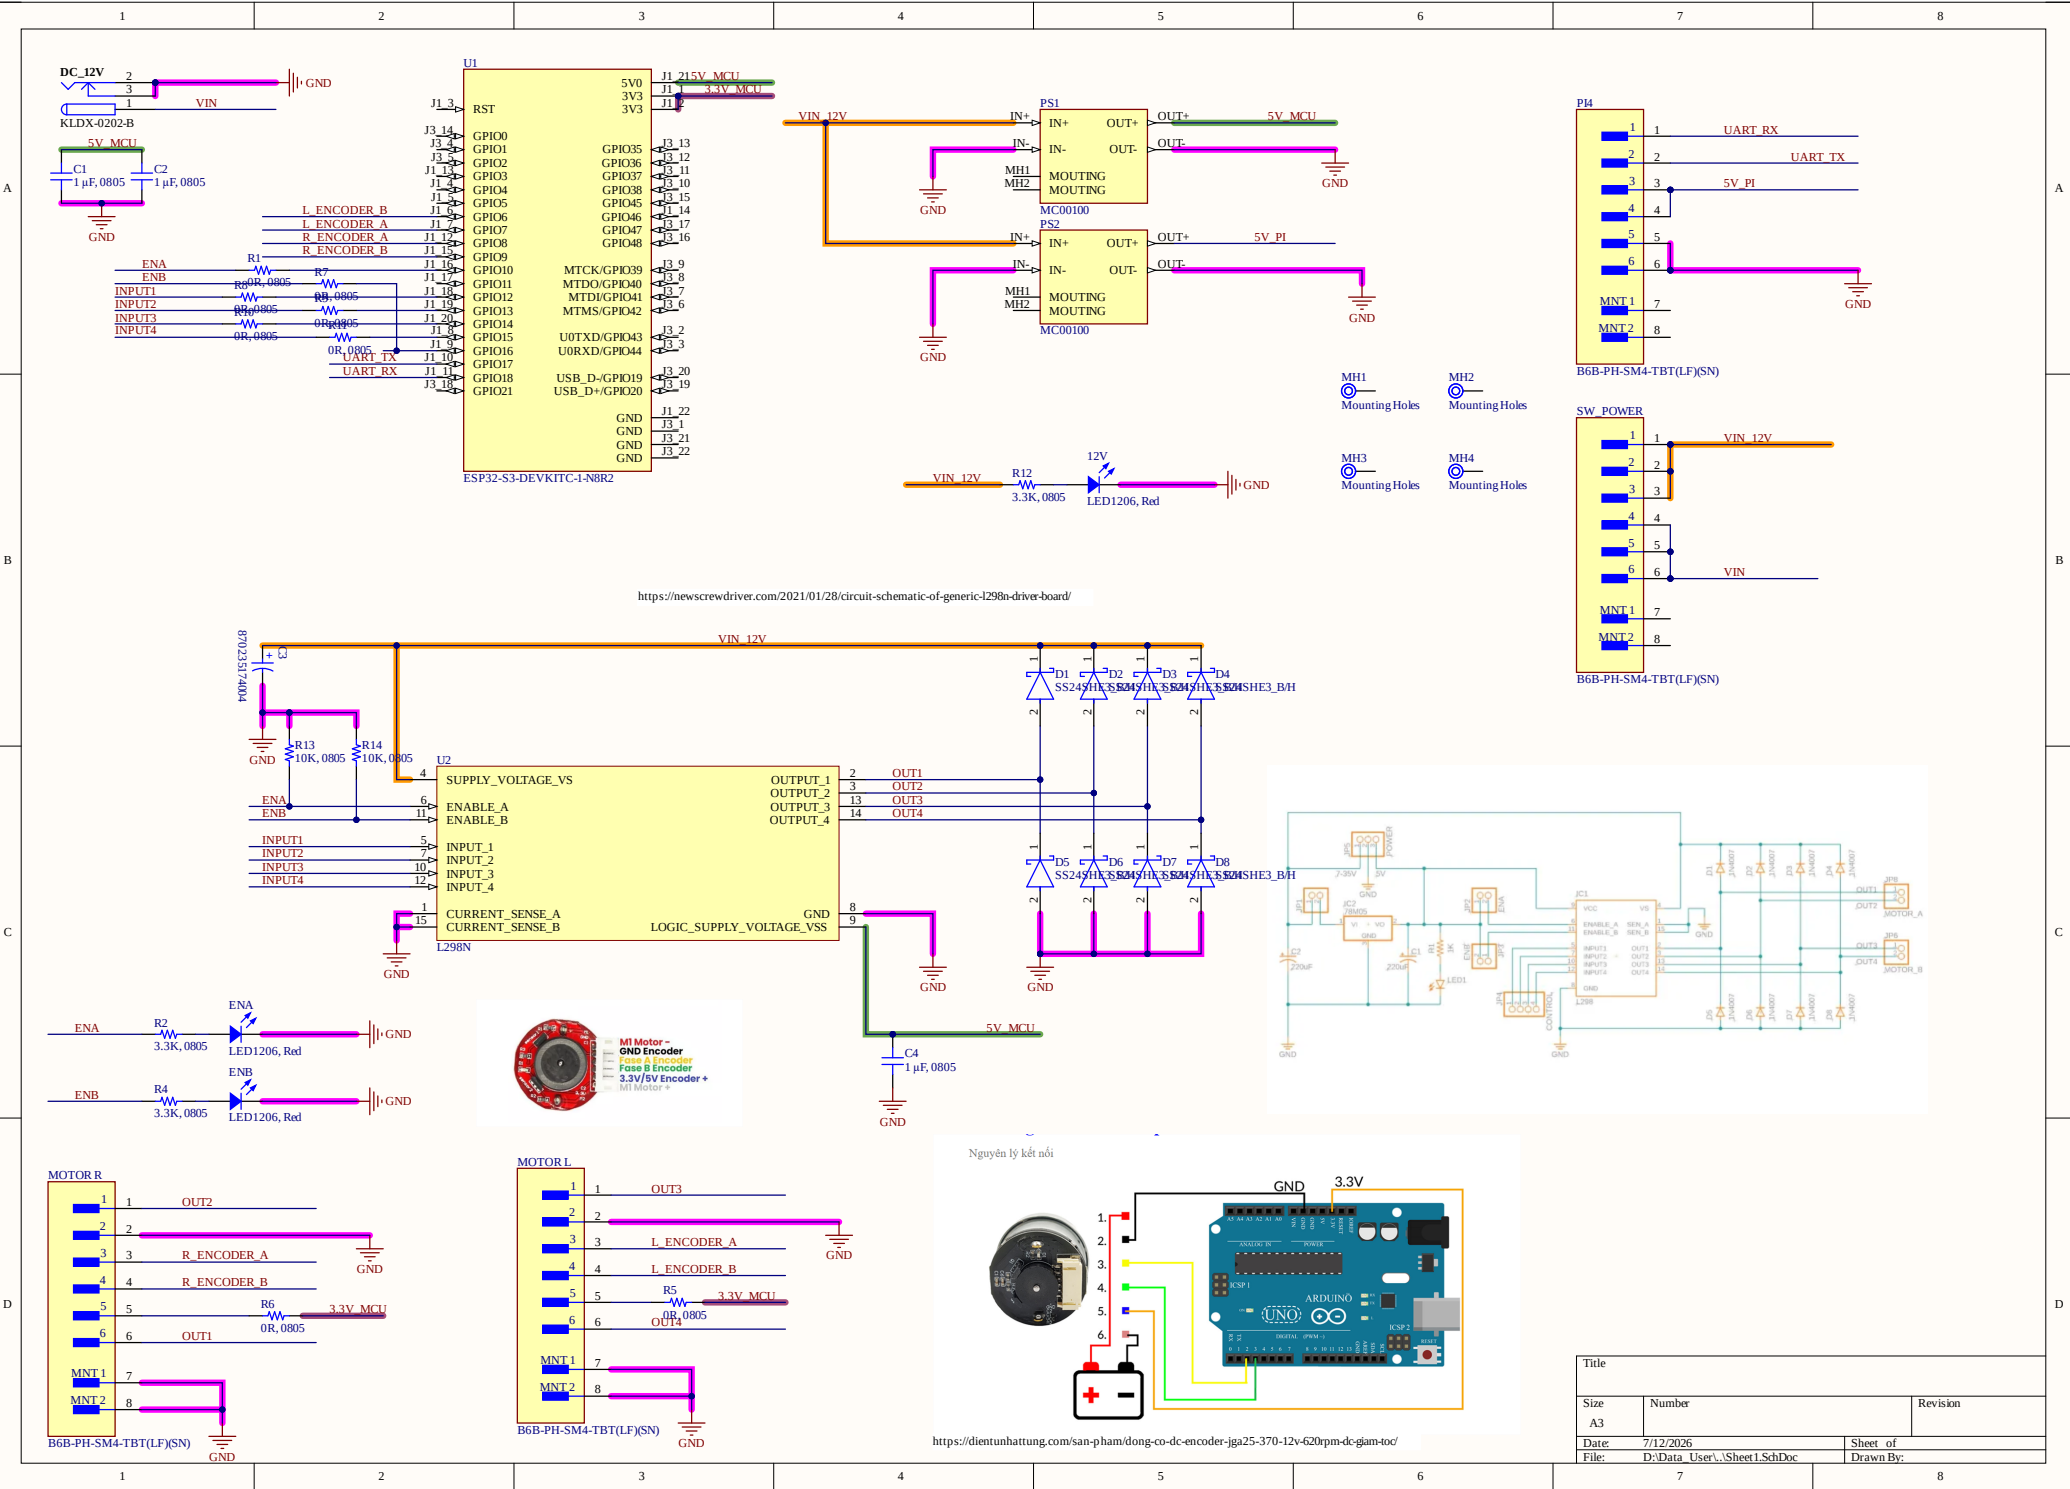

Comment	Description	Designator	Footprint	LibRef	Quantity
LED1206, Red	LED RED 1206 SMD	12V, ENA, ENB	LED 1206_3216 RED	5990210007F	3
1 μ F	CAP CER 1UF 50V X7R 0805	C1, C2, C4	CAP 0805_2012	CC0805KKX7R9BB105	3
870235174004	WCAP-PT5H Aluminum Polymer Capacitors	C3	WCAP-PT5H_D8H11.5	CMP-03913-54202634-2	1
SS24SHE3_B/H	DIODE SCHOTTKY 2A 40V DO-214AC	D1, D2, D3, D4, D5, D6, D7, D8	FP-95400-MFG	CMP-02539-000047-1	8
KLDX-0202-B	3 Conductor Power Jack, 2 break 2 aux contacts	DC_12V	KYCN-KLDX-0202-B_V	CMP-0256-00001-1	1
B6B-PH-SM4-TBT(LF)(SN)	CONN HEADER SMD 6POS 2MM	MOTORL, MOTORR, P14, SW_POWER	FP-B6B-PH-SM4-TBT_LF_SN-MFG	CMP-17439-000069-1	4
MC00100	DC-DC LM2596 Step Down Adjustable Converter Power Supply Module 1.3V-35V	PS1, PS2	CONV_MC00100	MC00100	2
0R, 0805	RES 0 OHM 1% 1/8W 0805	R1, R5, R6, R7, R8, R9, R10, R11	YAGEO RES 0805_2012	RC0805FR-07470RL_3	8
3.3K, 0805	RES 470 OHM 1% 1/8W 0805	R2, R4, R12	YAGEO RES 0805_2012	RC0805FR-07470RL	3
10K, 0805	RES 470 OHM 1% 1/8W 0805	R13, R14	YAGEO RES 0805_2012	RC0805FR-07470RL	2
ESP32-S3-DEVKITC-1-N8R2	WiFi Development Tools - 802.11 (Engineering Samples Only) ESP32-S3 General-Purpose Development Board, ESP32-S3-WROOM-1-N8R2, with Pin Header	U1	XCVR_ESP32-S3-DEVKITC-1-N8R2	ESP32-S3-DEVKITC-1-N8R2	1
L298N	Motor Driver, DC Brush, Full Bridge, 4 Outputs, 4.8V to 46V Supply, 2A Out, Multiwatt-15	U2	L298N_MFG	CMP-2000-06526-2	1