

Send Email OTP

Your OTP Code  Inbox x

 **khcamtech@gmail.com**
to me ▾
Hello,

Your OTP code is: 487078

This code will expire soon.
Please do not share this code with anyone.

Thank you.

POST http://localhost:8080/api/v1/owners

Docs Params Authorization Headers 9 Body Scripts Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON

```
1 {
2   "email" : "vibollong@gmail.com"
3 }
```

Body Cookies Headers 2 Test Results 1/1 ↻

{ } JSON Preview Visualize ▾

```
1 {
2   "createdAt": "2026-04-06T08:09:50.598281300Z",
3   "email": "vibollong@gmail.com",
4   "emailVerifiedAt": null,
5   "id": "65823dbc-9419-4a43-8230-6d276634c65c",
6   "phone": null,
7   "phoneVerifiedAt": null,
8   "status": "PENDING",
9   "updatedAt": "2026-04-06T08:09:50.598281300Z"
10 }
```

owners owner_verifications <ownerservice> Script-1 X

```
select * from owners ;
select * from owner_verifications ov ;
delete from owners ;
delete from owner_verifications ;
```

owners 1 X

select * from owners Enter a SQL expression to filter results (use Ctrl+Space)

	id	AZ email	AZ phone	AZ status	created_at	updated_at	email_verified_at
1	de1a8fa1-3dc2-4bf2-a020-1dfa83edbf06	vibollong@gmail.com	[NULL]	ACTIVE	2026-04-06 15:31:46.749 +0700	2026-04-06 15:32:33.182 +0700	2026-04-06 15:32:33.182

1- Add dependency

<!-- Send Email -->

<dependency>

<groupId>org.springframework.boot</groupId>

<artifactId>spring-boot-starter-mail</artifactId>

</dependency>

2- Application.property

mail:

host: smtp.gmail.com

port: 587

username: khcamtech@gmail.com

password: oute slce smmr ypyd

properties:

mail:

smtp:

auth: true

starttls:

enable: true

```

1= spring:
2=   application:
3=     name: ownerservice
4=
5=   # Reactive runtime connection
6=   r2dbc:
7=     url: r2dbc:postgresql://localhost:5445/ownerservice
8=     username: ownerservice
9=     password: ownerservice
10=
11=   # JDBC connection only for Liquibase
12=   datasource:
13=     url: jdbc:postgresql://localhost:5445/ownerservice
14=     username: ownerservice
15=     password: ownerservice
16=   liquibase:
17=     change-log: classpath:db/changelog/db.changelog-master.yaml
18=
19=   mail:
20=     host: smtp.gmail.com
21=     port: 587
22=     username: khcamtech@gmail.com
23=     password: outc slcc smmr ypjd
24=   properties:
25=     mail:
26=       smtp:
27=         auth: true
28=         starttls:
29=           enable: true
30=

```

3-Setup email to get app password

← App passwords

App passwords help you sign into your Google Account on older apps and services that don't support modern security standards.

App passwords are less secure than using up-to-date apps and services that use modern security standards. Before you create an app password, you should check to see if your app needs this in order to sign in.

[Learn more](#)

Your app passwords


SystemReactive

Created on 3:07 PM



To create a new app specific password, type a name for it below...

App name

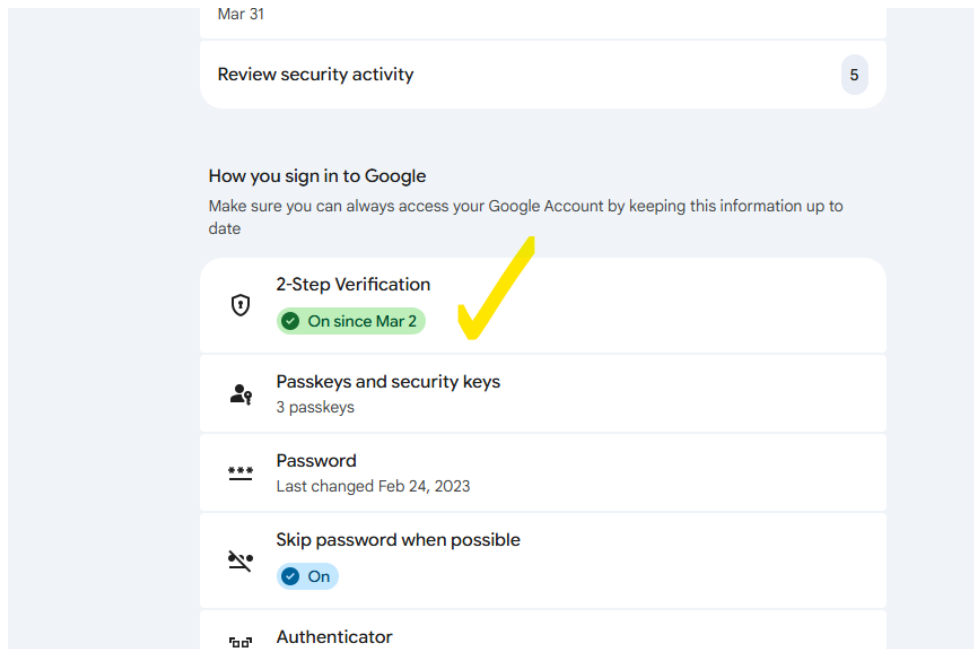

Then after we get the 2-step verification → we can create app password