1-Create user and client applications

2-Create Realm under Root (login to admin first)

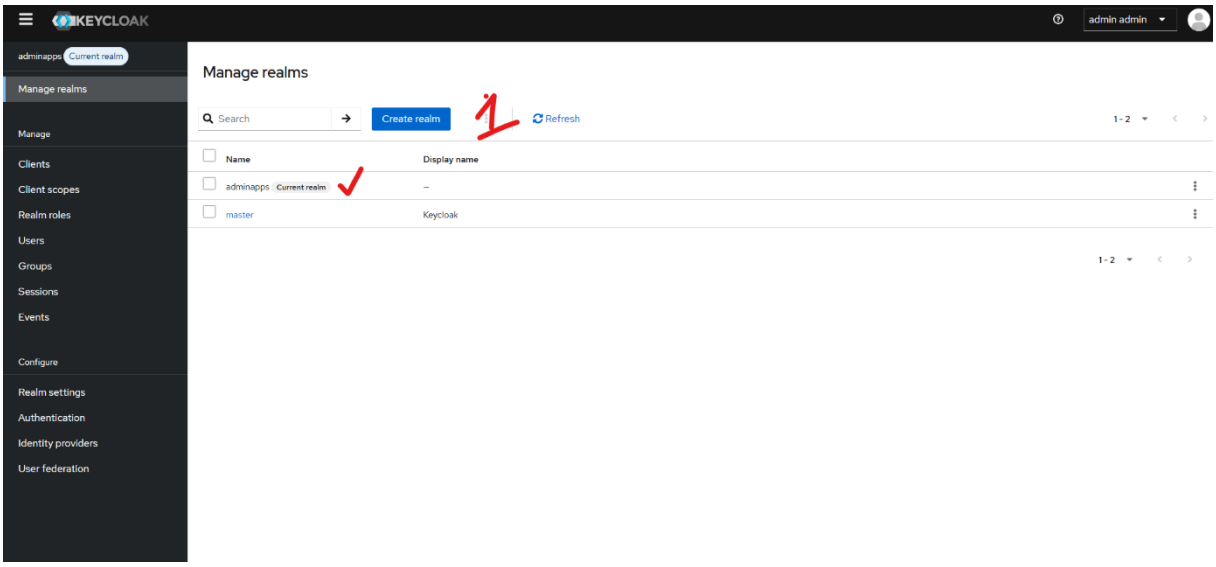

3- Selected as new Ream then create the client application

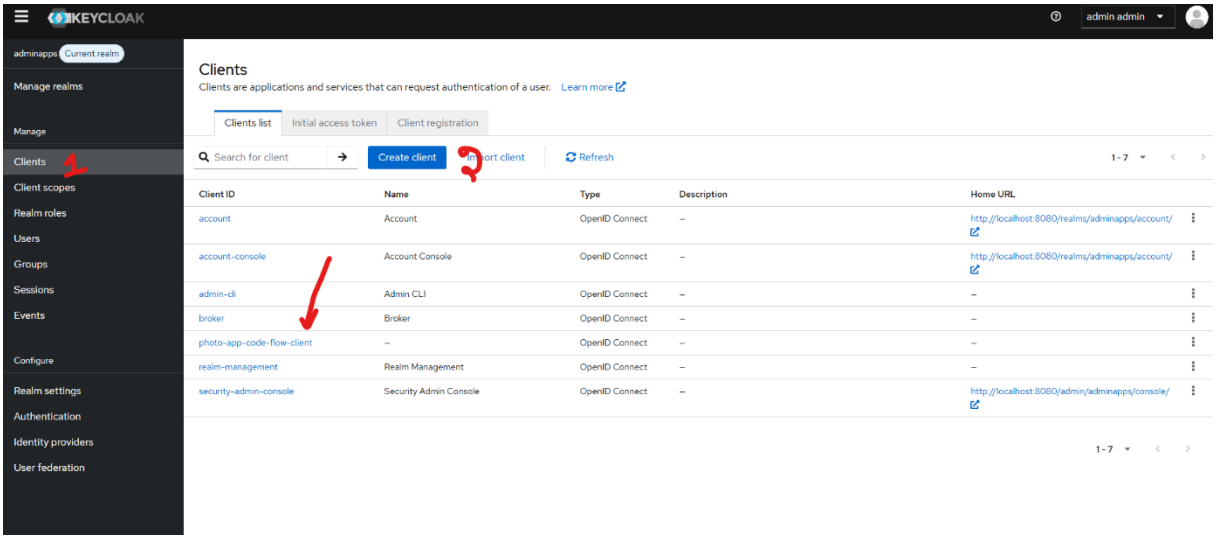

4-Create the client ID

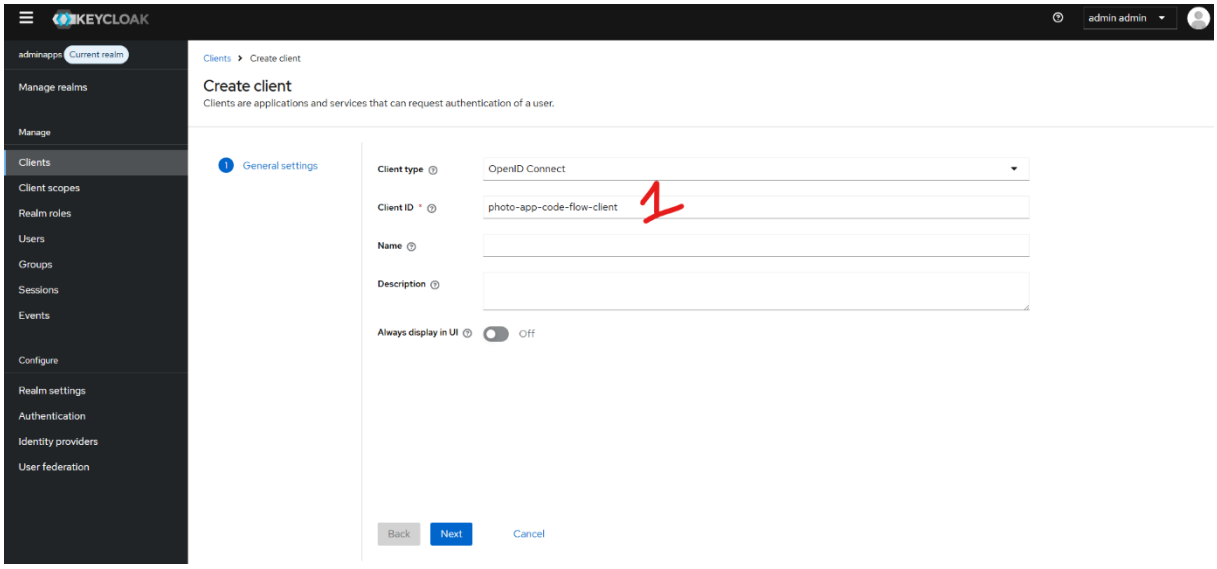

5- Capability config (to use the client app)

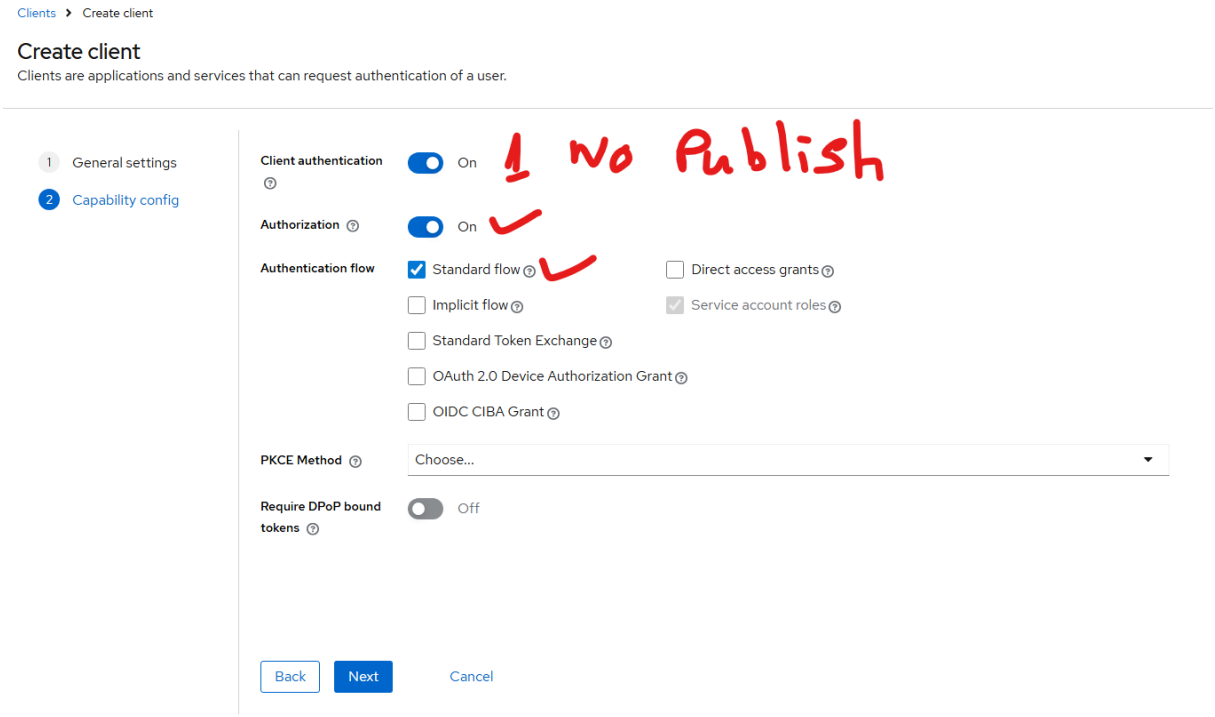

2- URL to get the code verification

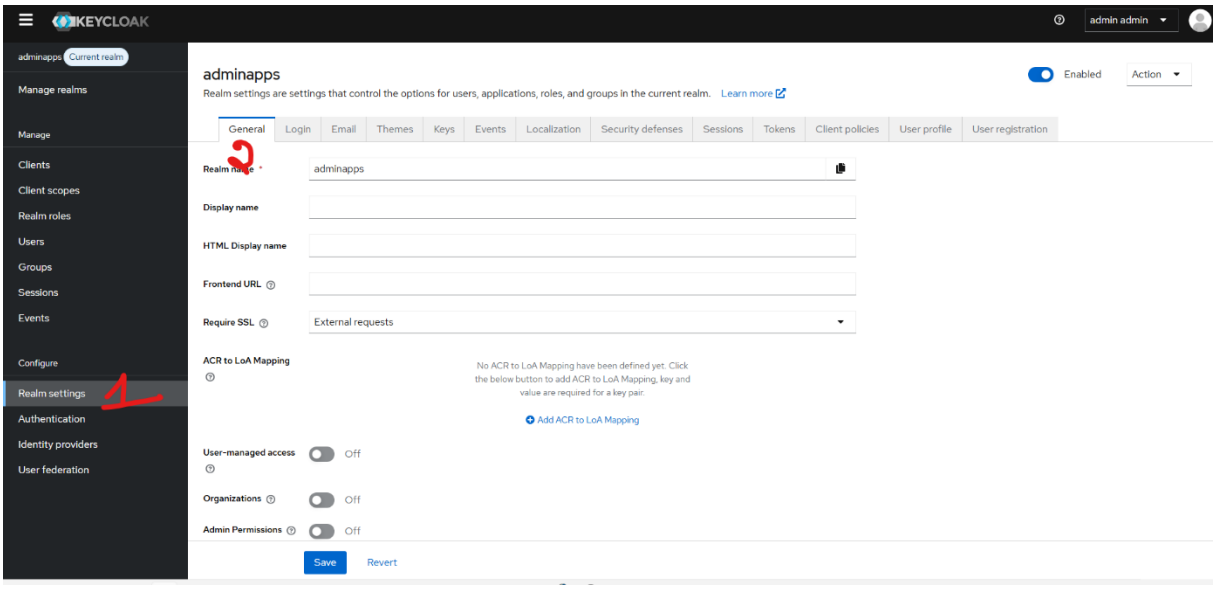

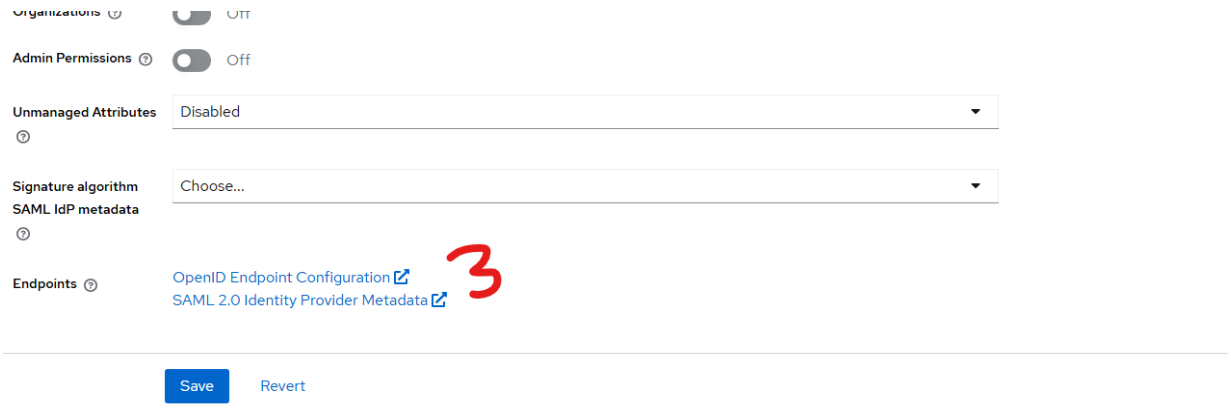

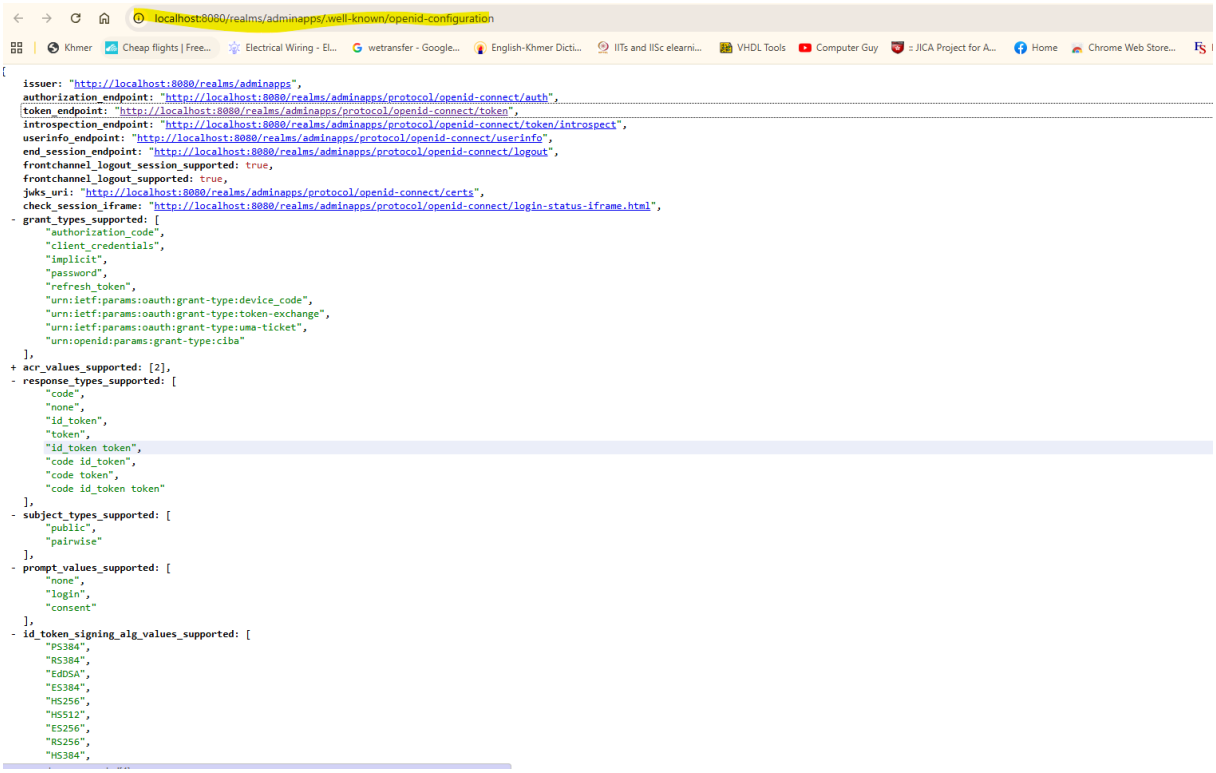

How to find your Endpoints in Keycloak

You won't find that specific "get code" URL in the table shown in your screenshot. Instead, Keycloak provides a **Discovery Endpoint** that lists all the base URLs for your realm.

1. The OpenID Endpoint Configuration

To find the base for your login URL, follow these steps in your Keycloak Admin Console:

1. Go to **Realm Settings** (usually the first item in the left-hand sidebar).
2. In the **General** tab, look for a link labeled **OpenID Endpoint Configuration**.
3. Click that link. It will open a JSON file in a new tab.

2. Identifying the "authorization_endpoint"

In that JSON file, look for the key: `"authorization_endpoint"`.
It will look like this:

```
"authorization_endpoint":
"http://localhost:8080/realms/adminapps/protocol/openid-connect/auth"
```

This is the base URL you were looking for. The rest of the parameters (`client_id`, `response_type`, etc.) are added by your application to tell Keycloak *who* is asking and *what* they want.

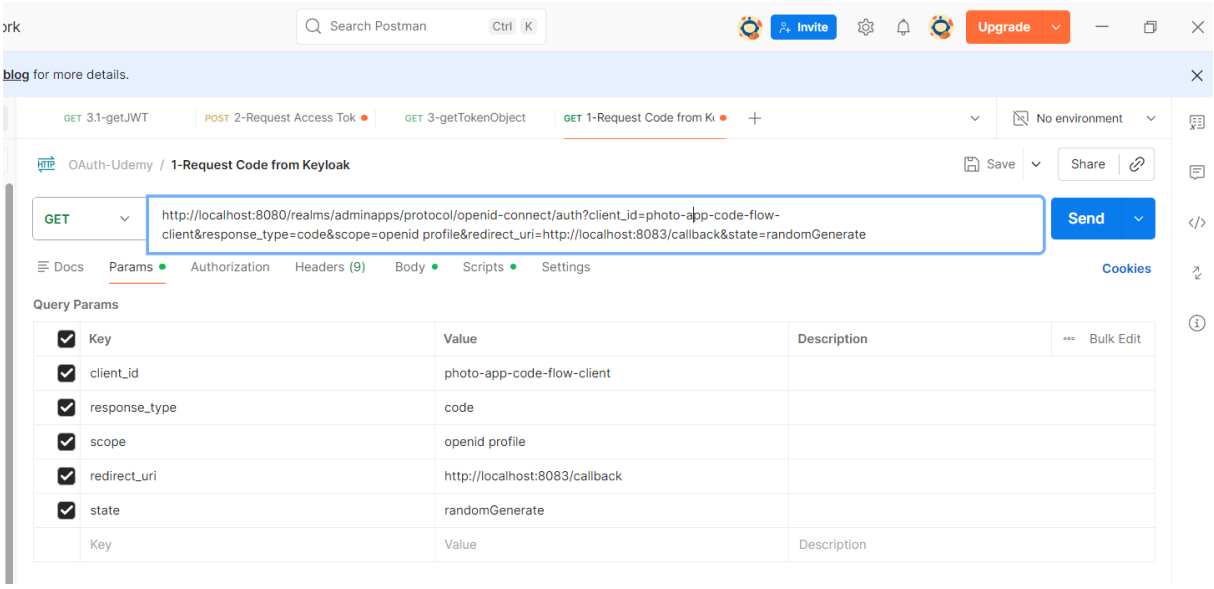

What we request from POSTMain:

http://localhost:8080/realms/adminapps/protocol/openid-connect/auth?client_id=photo-app-code-flow-client&response_type=code&scope=openid profile&redirect_uri=http://localhost:8083/callback&state=randomGenerate

Breakdown of the URL you are using

Since you are learning from a course, it helps to know exactly what each "ingredient" in that URL does:

Parameter	Value	What it tells Keycloak
Base URL	`.../protocol/openid-connect/auth`	"I want to start an authentication flow."
client_id	`photo-app-code-flow-client`	"I am the specific app you see in your screenshot."
response_type	`code`	"I'm using the **Authorization Code Flow.** Send me a temporary code."
scope	`openid profile`	"I want the user's ID and basic profile info."
redirect_uri	`http://localhost:8083/callback`	"After the user logs in, send them back here."