

Template Driven Forms

Template Driven Forms

First Name

Last Name

Email

Address

Street City Country

Gender

- Import FormsModule : `import { FormsModule } from '@angular/forms';`

```
src > app > app.module.ts > AppModule
1  import { NgModule } from '@angular/core';
2  import { BrowserModule } from '@angular/platform-browser';
3
4  import { AppComponent } from './app.component';
5  import { FormsModule } from '@angular/forms';
6
7  @NgModule({
8    declarations: [
9      AppComponent
10   ],
11   imports: [
12     BrowserModule,
13     FormsModule
14   ],
15   providers: [],
16   bootstrap: [AppComponent]
17 })
18 export class AppModule { }
19
```

- HTML

```
app.component.html X app.module.ts
src > app > app.component.html > div
1  <div>
2    <form #personForm="ngForm">
3
4    </form>
5
6    {{ personForm.value | json }}
7  </div>
```

1-step create object FormGroup object

- To Create form object: #personForm="ngForm" the same as model driven form it will create the object

ស្ទើរ នឹងខាងក្រោម ៖

- public personForm!:FormGroup;
- personForm = new FormGroup({})

2- Create FormControlName : is the field type for the from

```
<div>
  <label>First Name</label>
  <input type="text" name="firstName" ngModel>
</div>
```

- name is the directive that means the name field.
- ngModel : binding the the name field to the model
- <input type="text" name="lastName" ngModel> == **lastName: new FormControl(),**

3- Add Sub FormGroup fields

Address

Street City Country

```
<div ngModelGroup="address">
```

```
</div>
```

វាស្ទើរនឹង address: new FormGroup({})

- **ngModelGroup = FormGroup = យើងគិតវាដូចជា container ចឹងដែលយើងធ្វើការដាក់ field inside**

```
<div ngModelGroup="address">

</div>
```

3-1. add sub field to the FormGroup

```
src > app > app.component.html > div > form > div
1  <div>
2  <form #personForm="ngForm">
8  <div>
10 |   <input type="text" name="lastName" ngModel>
11 | </div>
12 |
13 |   <div>
14 |     <label>Email</label>
15 |     <input type="text" name="email" ngModel>
16 |   </div>
17 |
18 |   <div>
19 |     <label>Gender</label><br>
20 |     <input type="radio" name="gender" value="male">Male
21 |     <input type="radio" name="gender" value="female">Female
22 |   </div>
23 |
24 |   <div ngModelGroup="address">
25 |     <div>
26 |       <label>Street</label><br>
27 |       <input type="text" name="street" ngModel>Street
28 |     </div>
29 |
30 |     <div>
31 |       <label>City</label><br>
32 |       <input type="text" name="city" ngModel>City
33 |     </div>
34 |
35 |     <div>
36 |       <label>Country</label><br>
37 |       <select name="country" ngModel>
38 |         <option *ngFor="let country of countries" [value]="country">{{ country }}</option>
39 |       </select>
40 |     </div>
41 |   </div>
42 |
43 | </div>
44 |
45 | </form>
46 |
47 | </div>
```

First Name

Last Name

Email

Gender

☐ Male ☐ Female

Street

Street

City

City

Country

▼

4-handle submit form

```
<form #personForm="ngForm" (ngSubmit)="onSubmit(personForm.value)">
```

- (ngSubmit)="onSubmit(personForm.value) យើងធ្វើការ submit event from the
personForm.value : it sent the JSON file
- personForm.value : it will return entire object to the

```
<div>
```

```
<form #personForm="ngForm" (ngSubmit)="onSubmit(personForm.value)">
```

```
// button submit:
```


```
<div>
```

```
<button type="submit" value="Submit">Submit</button>
```

```
</div>
```

```
</form>
```

```
</div>
```

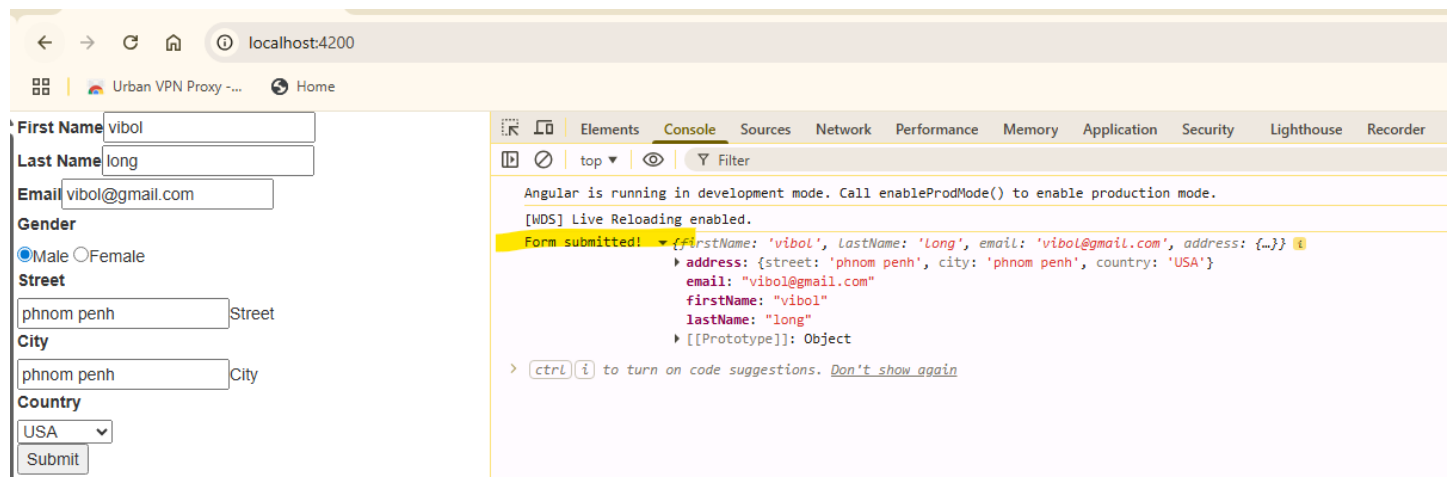

II. Two-Way Binding

- យើងចង់បង្ហាញ តម្លៃ ទៅ Template and from Template to the field (pre populate from model to field) :

Public firstName:string="Jonh"

```
<div>
  <label>First Name</label>
  <input type="text" name="firstName" [(ngModel)]="firstName">
</div>
```

- [(ngModel)]="firstName" = binding from ngModel to the field name

```
app.component.html X app.component.ts
src > app > app.component.html > div
1 <div>
2   <form #personForm="ngForm" (ngSubmit)="onSubmit(personForm.value)">
45   <div>
46     <button type="submit" value="Submit">Submit</button>
47   </div>
48
49 </form>
50 </div>
```

```
app.component.html app.component.ts X
src > app > app.component.ts > AppComponent > onSubmit
1 import { Component } from '@angular/core';
2
3 @Component({
4   selector: 'app-root',
5   templateUrl: './app.component.html',
6   styleUrls: ['./app.component.css']
7 })
8 export class AppComponent {
9
10   public firstName: string = 'vibol';
11   public lastName: string='long';
12   public email!: string;
13   public gender: string='male';
14   public street!: string;
15   public city!: string;
16   public country!: string;
17
18   countries = ['India', 'USA', 'UK', 'Germany', 'France'];
19
20   public onSubmit(data: any) {
21     console.log('Form submitted!', data);
22   }
23 }
24
```