

2-Create POST Request

1-Create service

>> ng g s services/uppercaseConverter

```
import { Injectable } from '@angular/core';
import { HttpClient } from '@angular/common/http';
import { Observable } from 'rxjs';

@Injectable({
  providedIn: 'root'
})
export class UppercaseConverterService {

  private apiUrl = 'http://localhost:8080/api/uppercase';

  constructor(private _httpClient: HttpClient) { }

  public convertToUpperCase(message: { message: string }): Observable<string> {
    return this._httpClient.post(this.apiUrl, message, {
      responseType: 'text'
    });
  }
}
```

Code:

```
import { Injectable } from '@angular/core';
import { HttpClient } from '@angular/common/http';
import { Observable } from 'rxjs';

@Injectable({
  providedIn: 'root'
})
export class UppercaseConverterService {

  private apiUrl = 'http://localhost:8080/api/uppercase';

  constructor(private _httpClient: HttpClient) { }

  public convertToUpperCase(message: { message: string }): Observable<string> {
    return this._httpClient.post(this.apiUrl, message, {
      responseType: 'text'
    });
  }
}
```

2-Create Component

>> ng g c components/countriesUpdate

```
import { HttpResponse } from '@angular/common/http';
import { Component, OnInit } from '@angular/core';
import { UppercaseConverterService } from 'src/app/services/uppercase-converter.service';

@Component({
  selector: 'app-uppercase-converter',
  templateUrl: './uppercase-converter.component.html',
  styleUrls: ['./uppercase-converter.component.css']
})
export class UppercaseConverterComponent implements OnInit {

  public result: string = '';
  public my_message: string = '';

  constructor(private _service: UppercaseConverterService) { }

  ngOnInit(): void {
  }

  public convert(data: { message: string }): void {
    this._service.convertToUpperCase(data).subscribe({
      next: (res: string) => {
        this.result = res;
      },
      error: (err: HttpResponse) => {
        console.error(err);
      }
    });
  }
}
```

Code:

```
import { HttpResponse } from '@angular/common/http';
import { Component, OnInit } from '@angular/core';
import { UppercaseConverterService } from 'src/app/services/uppercase-converter.service';

@Component({
  selector: 'app-uppercase-converter',
  templateUrl: './uppercase-converter.component.html',
  styleUrls: ['./uppercase-converter.component.css']
})
export class UppercaseConverterComponent implements OnInit {

  public result: string = "";
  public my_message: string = "";

  constructor(private _service: UppercaseConverterService) { }

  ngOnInit(): void {
  }

  public convert(data: { message: string }): void {
    this._service.convertToUpperCase(data).subscribe({
      next: (res: string) => {
        this.result = res;
      },
      error: (err: HttpResponse) => {
        console.error(err);
      }
    });
  }
}
```

3-HTML

```
1 <input type="text" [(ngModel)]="my_message" />
2
3 <button (click)="convert({ message: my_message })">
4   Convert to Uppercase
5 </button>
6
7 <br>
8
9 <h1 style="color: red">{{ result }}</h1>
10
```

Code:

```
<input type="text" [(ngModel)]="my_message" />

<button (click)="convert({ message: my_message })">
  Convert to Uppercase
</button>

<br>

<h1 style="color: red">{{ result }}</h1>
```

Package.json

```
{
  "name": "post-service",
  "version": "0.0.0",
  "scripts": {
    "ng": "ng",
    "start": "ng serve",
    "build": "ng build",
    "test": "ng test",
    "lint": "ng lint",
    "e2e": "ng e2e"
  },
  "private": true,
  "dependencies": {
    "@angular/animations": "11.1.2",
    "@angular/common": "11.1.2",
    "@angular/compiler": "11.1.2",
    "@angular/core": "11.1.2",
    "@angular/forms": "11.1.2",
    "@angular/platform-browser": "11.1.2",
    "@angular/platform-browser-dynamic": "11.1.2",
    "@angular/router": "11.1.2",
    "rxjs": "6.6.0",
    "tslib": "2.0.0",
    "zone.js": "0.11.3"
  },
  "devDependencies": {
    "@angular-devkit/build-angular": "0.1101.2",
    "@angular/cli": "11.1.4",
    "@angular/compiler-cli": "11.1.2",
```


```

"@types/jasmine": "3.6.0",
"@types/node": "12.11.1",
"codelyzer": "6.0.0",
"jasmine-core": "3.6.0",
"jasmine-spec-reporter": "5.0.0",
"karma": "5.2.0",
"karma-chrome-launcher": "3.1.0",
"karma-coverage": "2.0.3",
"karma-jasmine": "4.0.0",
"karma-jasmine-html-reporter": "1.5.0",
"protractor": "7.0.0",
"ts-node": "8.3.0",
"tslint": "6.1.0",
"typescript": "4.1.2"
}
}
}

```

Backend

- Request responds

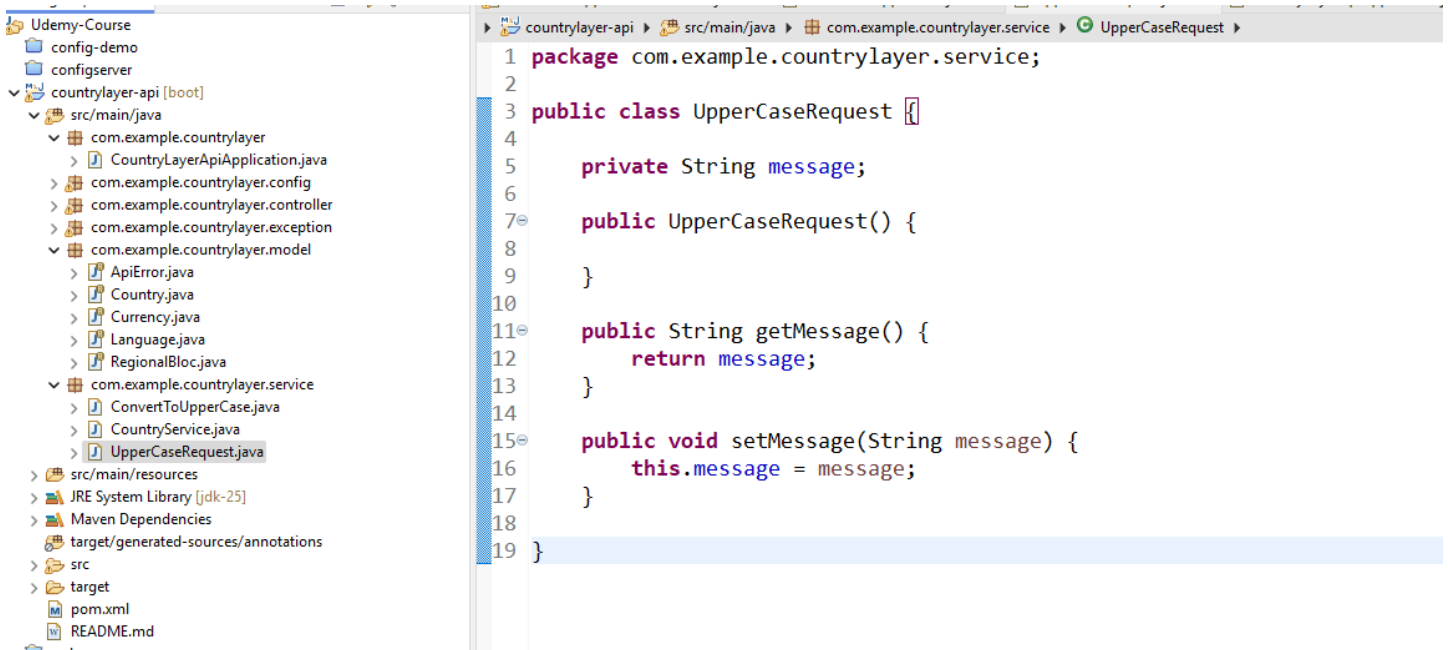

- Service

```

1 package com.example.countrylayer.service;
2
3 import org.springframework.stereotype.Service;
4
5 @Service
6 public class ConvertToUpperCase {
7
8     public String convertToUpperCase(String text) {
9         return text.toUpperCase();
10    }
11
12 }

```

- Controller

```
1 package com.example.countrylayer.controller;
2
3 import org.springframework.web.bind.annotation.CrossOrigin;
12
13 @RestController
14 @RequestMapping("/api/uppercase")
15 @CrossOrigin(origins = "*")
16 public class ConvertToUpperCaseController {
17
18     private final ConvertToUpperCase upperCase;
19
20     public ConvertToUpperCaseController(ConvertToUpperCase upperCase) {
21         this.upperCase = upperCase;
22     }
23
24     @PostMapping
25     public String ToUpperCase(@RequestBody UpperCaseRequest message) {
26         return upperCase.convertToUpperCase(message.getMessage());
27     }
28
29 }
```

Code:

```
package com.example.countrylayer.controller;
```

```
import org.springframework.web.bind.annotation.CrossOrigin;
import org.springframework.web.bind.annotation.PostMapping;
import org.springframework.web.bind.annotation.RequestBody;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RequestParam;
import org.springframework.web.bind.annotation.RestController;
```

```
import com.example.countrylayer.service.ConvertToUpperCase;
import com.example.countrylayer.service.UpperCaseRequest;
```

```
@RestController
@RequestMapping("/api/uppercase")
@CrossOrigin(origins = "*")
public class ConvertToUpperCaseController {

    private final ConvertToUpperCase upperCase;

    public ConvertToUpperCaseController(ConvertToUpperCase upperCase) {
        this.upperCase = upperCase;
    }

    @PostMapping
    public String ToUpperCase(@RequestBody UpperCaseRequest message) {
        return upperCase.convertToUpperCase(message.getMessage());
    }

}
```