Add Platform user id to JWT

- Add custom field to the keyloak
- គោលបំណង់យើងចង់ Add PlateUser Id to the keyload so keyloak can create jwt to us

then from our service can get it from there to save the request login

1- យើងថែម keycloakUserClient : ដើម្បីអោយវាធ្វើការ រក្សាទុក field មួយទៀតនឹង

org.springframework.boot.autoconfigure.AutoConfiguration.imports | KeycloakUserClient.java | KeycloakUserClientImpl.java | UserCommandServiceImpl.java

user-service ▸ src/main/java ▸ com.pisethjavaschool.userservice.authentication.keycloak ▸ KeycloakUserClient ▸

```java
package com.pisethjavaschool.userservice.authentication.keycloak;

import java.util.UUID;

import reactor.core.publisher.Mono;

public interface KeycloakUserClient {
    Mono<String> createUser(String username, String email, String firstName, String lastName, String password,
            boolean enabled);

    Mono<Void> updateUser(String keycloakUserId, String email, String firstName, String lastName, boolean enabled);

    Mono<Void> setPlatformUserId(String keycloakUserId, UUID platformUserId);

    Mono<Void> resetPassword(String keycloakUserId, String password);

    Mono<Void> disableUser(String keycloakUserId);

    Mono<KeycloakTokenResponse> login(String username, String password);

    Mono<KeycloakTokenResponse> refreshToken(String refreshToken);
}
```


```java

@Slf4j
@Component
@RequiredArgsConstructor
public class KeycloakUserClientImpl implements KeycloakUserClient {
    private final WebClient.Builder webClientBuilder;
    private final KeycloakProperties properties;

    private static final String PLATFORM_USER_ID_ATTRIBUTE = "platform_user_id";
    private static final ParameterizedTypeReference<Map<String, Object>> USER_TYPE =
            new ParameterizedTypeReference<>() {};


```


Here is the new filed inside our service

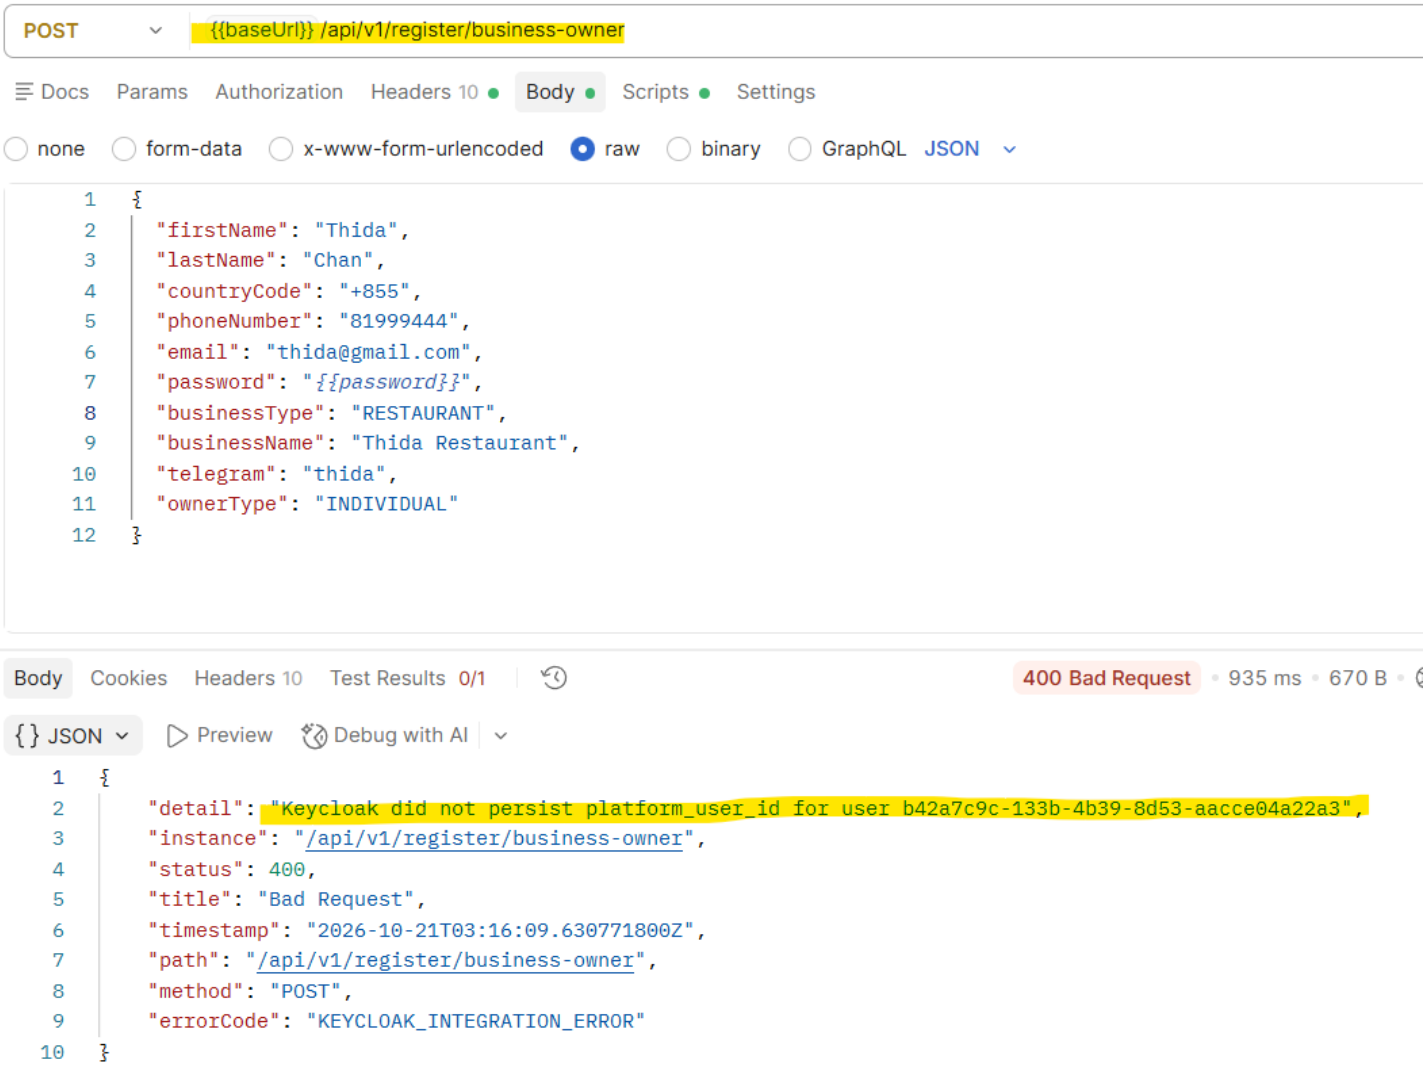


វាប្រាប់ថានៅក្នុង Keycloak អត់មាន Field ដែលយើងបង្កើតថ្មីនឹងនោះទេ ចឹងយើងត្រូវធ្វើការបង្កើត New field in the keyloak platform


1-Creating new field in keyloak

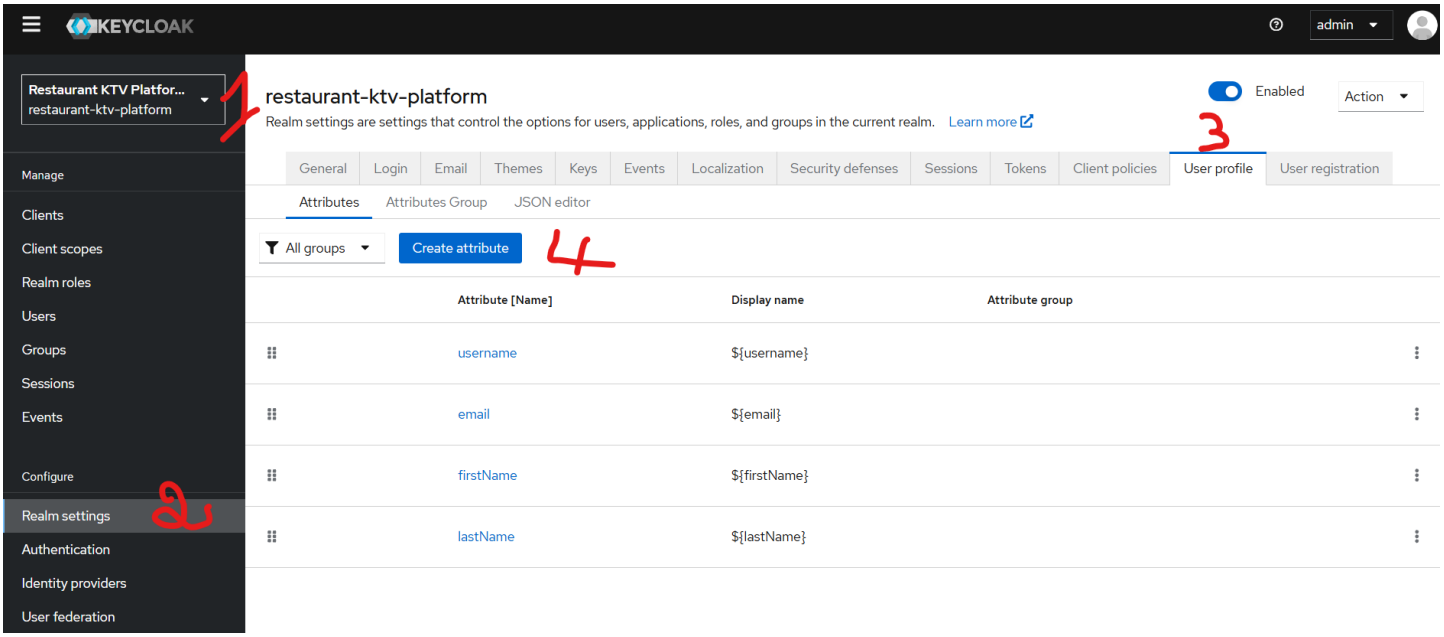


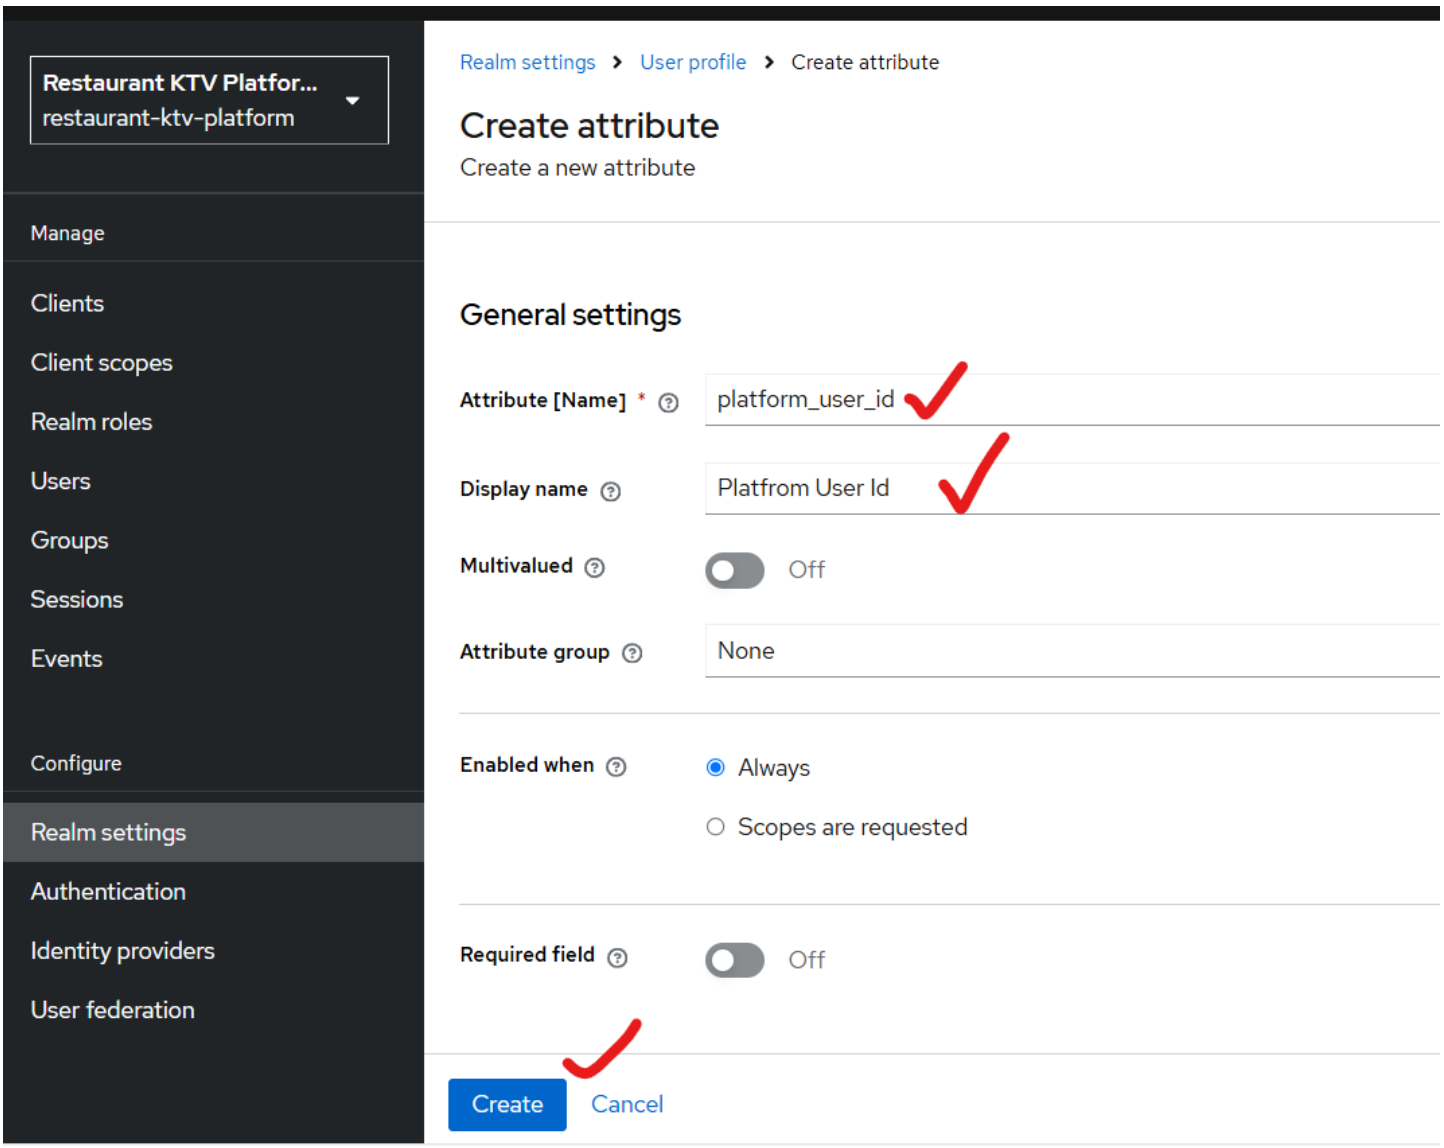


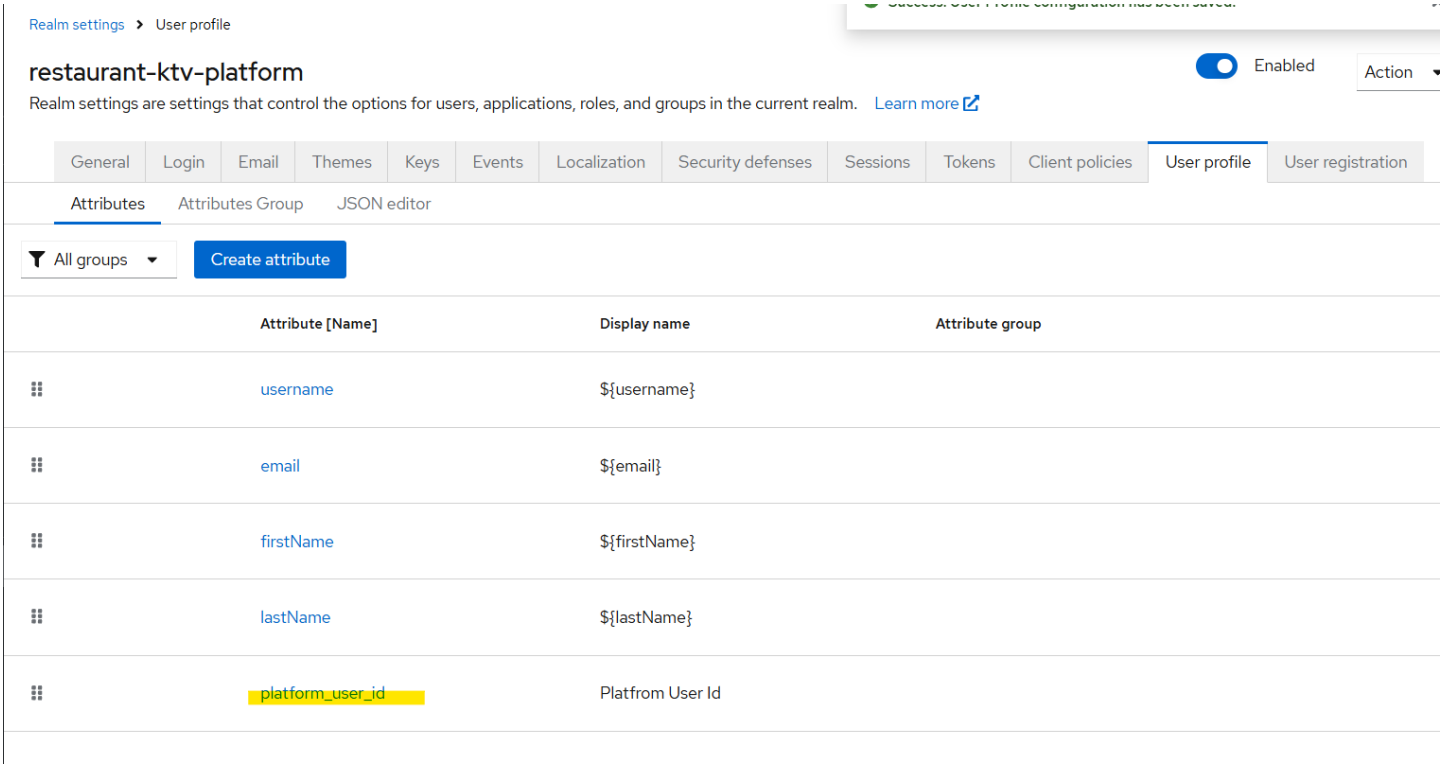

When we create new user, it will have the new filed that store this information:

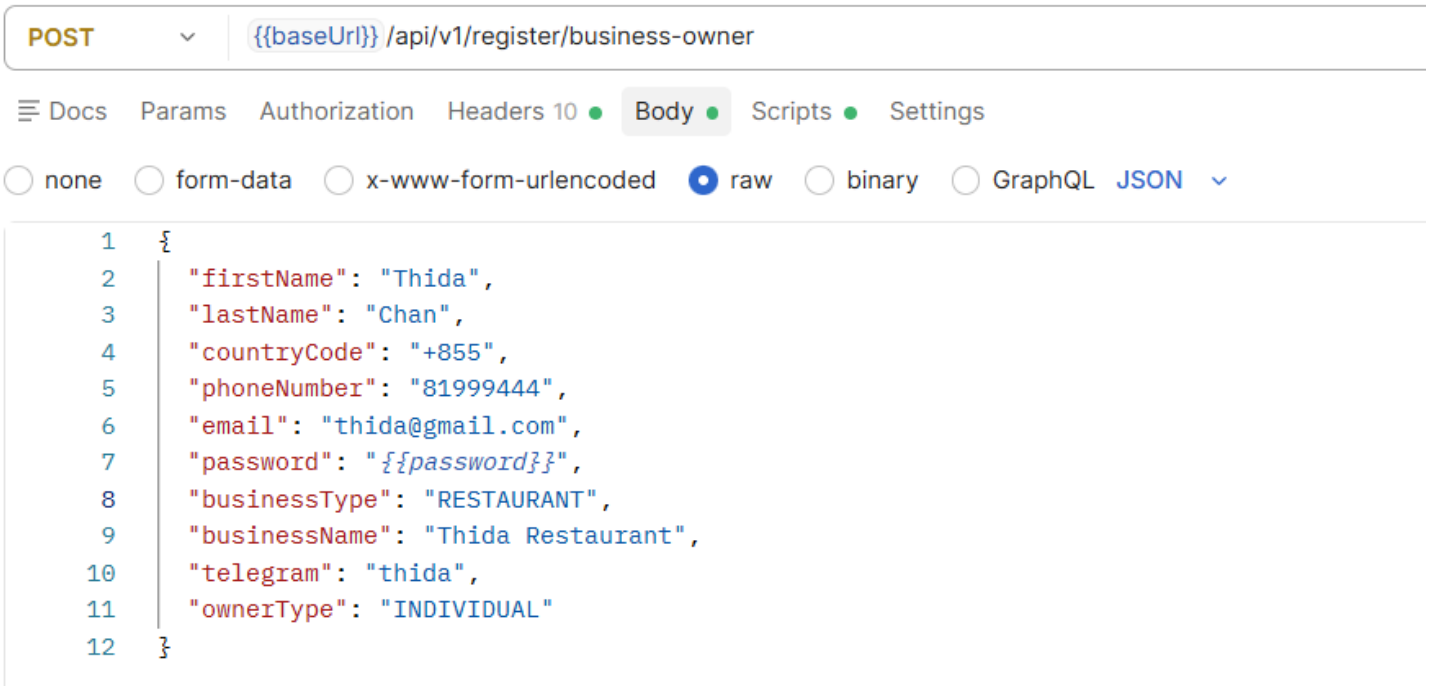

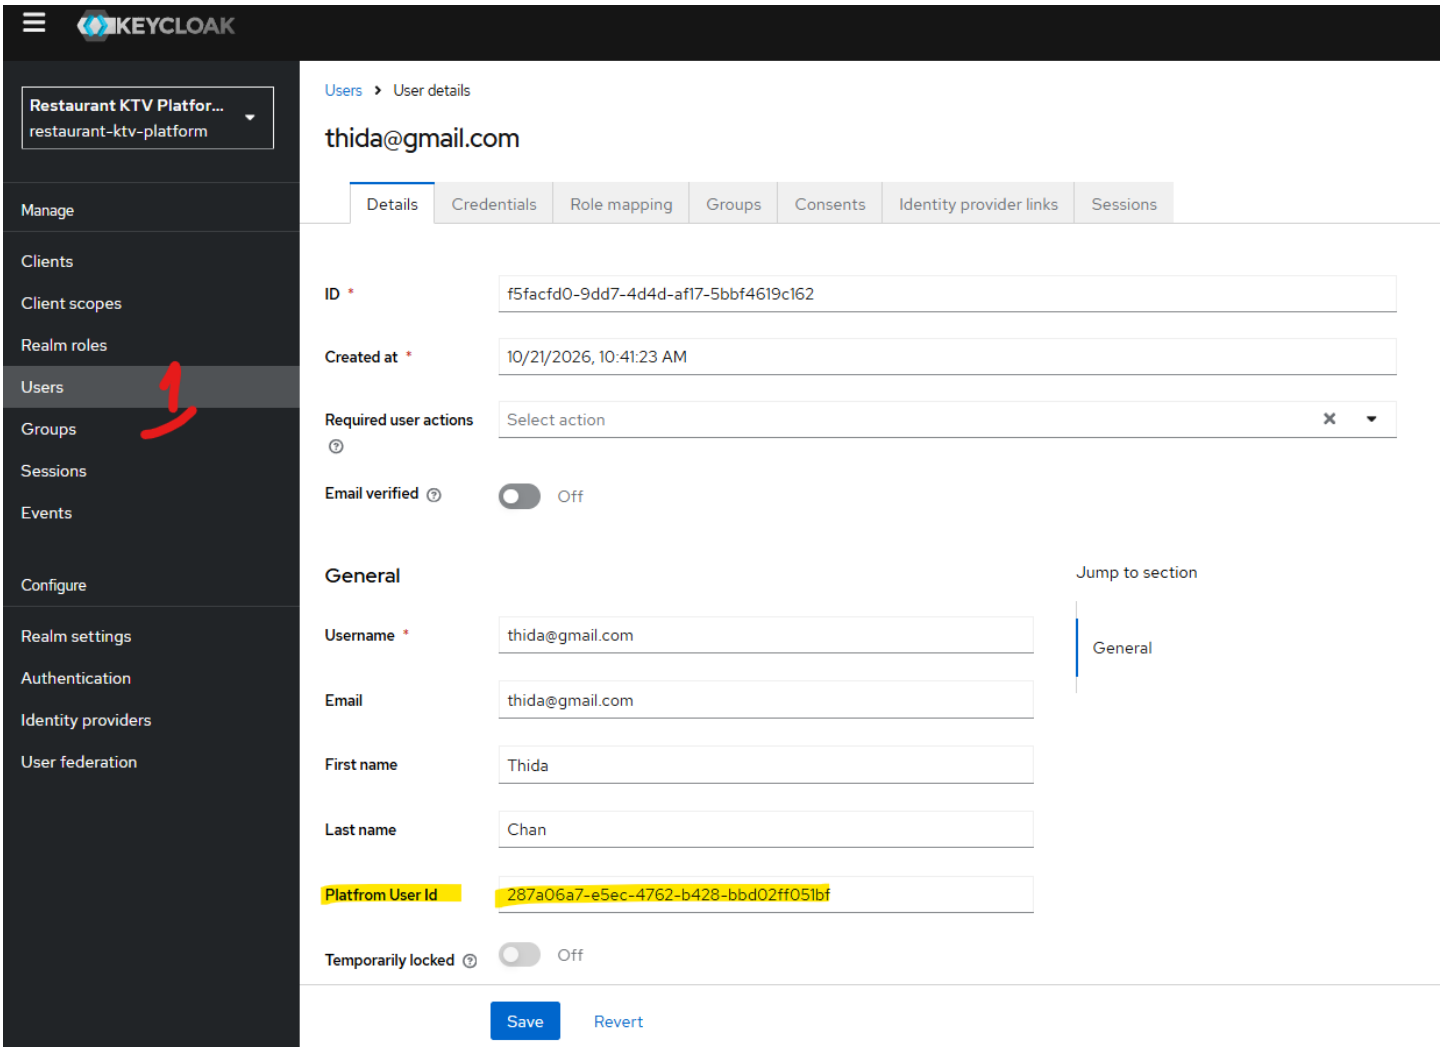

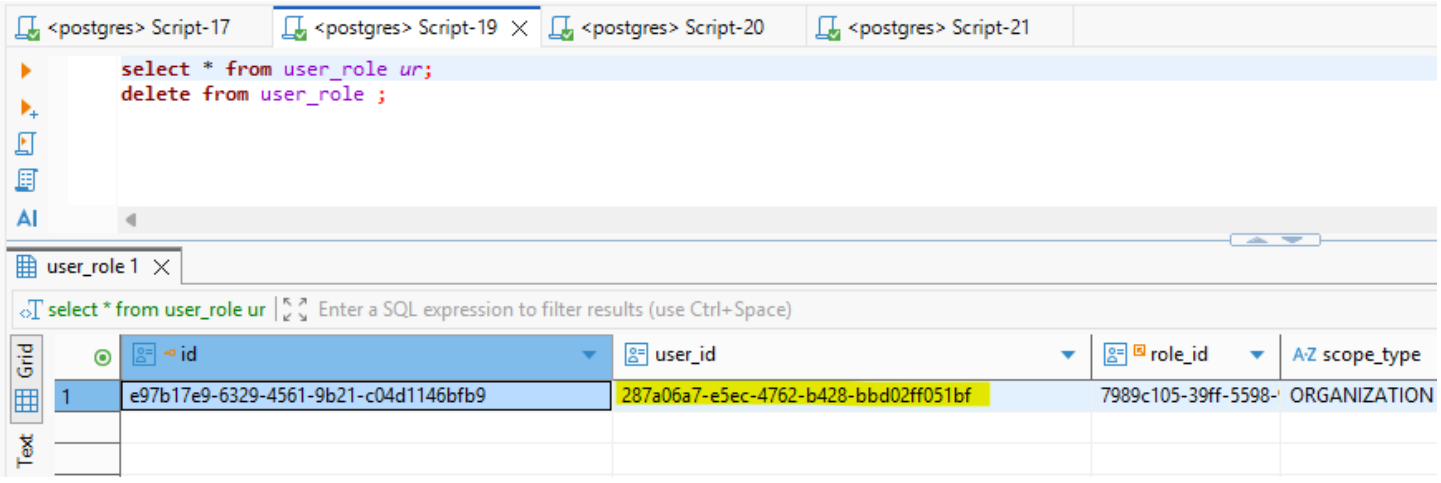

ចឹងមានន័យថា From other server we can get the user_id from only the keyloak no need to create to other service.


តែវាមិនបានភ្ជាប់ ជាមួយនឹង token ទៅតាម JWT នឹងនោះទេ យើងត្រូវធ្វើវាទៀត៖

សួរថា Client មួយណាដែលយើងត្រូវធ្វើការ Login

```
33
34 server:
35   port: ${SERVER_PORT:8089}
36
37 keycloak:
38   base-url: ${KEYCLOAK_BASE_URL:http://localhost:9292}
39   realm: ${KEYCLOAK_REALM:restaurant-ktv-platform}
40
41   admin:
42     client-id: ${KEYCLOAK_ADMIN_CLIENT_ID:user-service}
43     client-secret: ${KEYCLOAK_ADMIN_CLIENT_SECRET:Ea0sBEuJkJSAt34JIIOYrXffbQEbSRSB}
44
45   login:
46     client-id: ${KEYCLOAK_LOGIN_CLIENT_ID:user-login}
47     client-secret: ${KEYCLOAK_LOGIN_CLIENT_SECRET:xUGbftWyuhAmlNciURkaWVO13sAl8GfT}
48
49 #platform:
50 #  clients:
```

ចឹងយើងត្រូវធ្វើការកែទៅលើ User-login ដើម្បីអោយវាធ្វើការ embed then for the authenticate

អោយវាមាន User Id នឹងដែល យើងធ្វើនៅក្នុង Keyloak

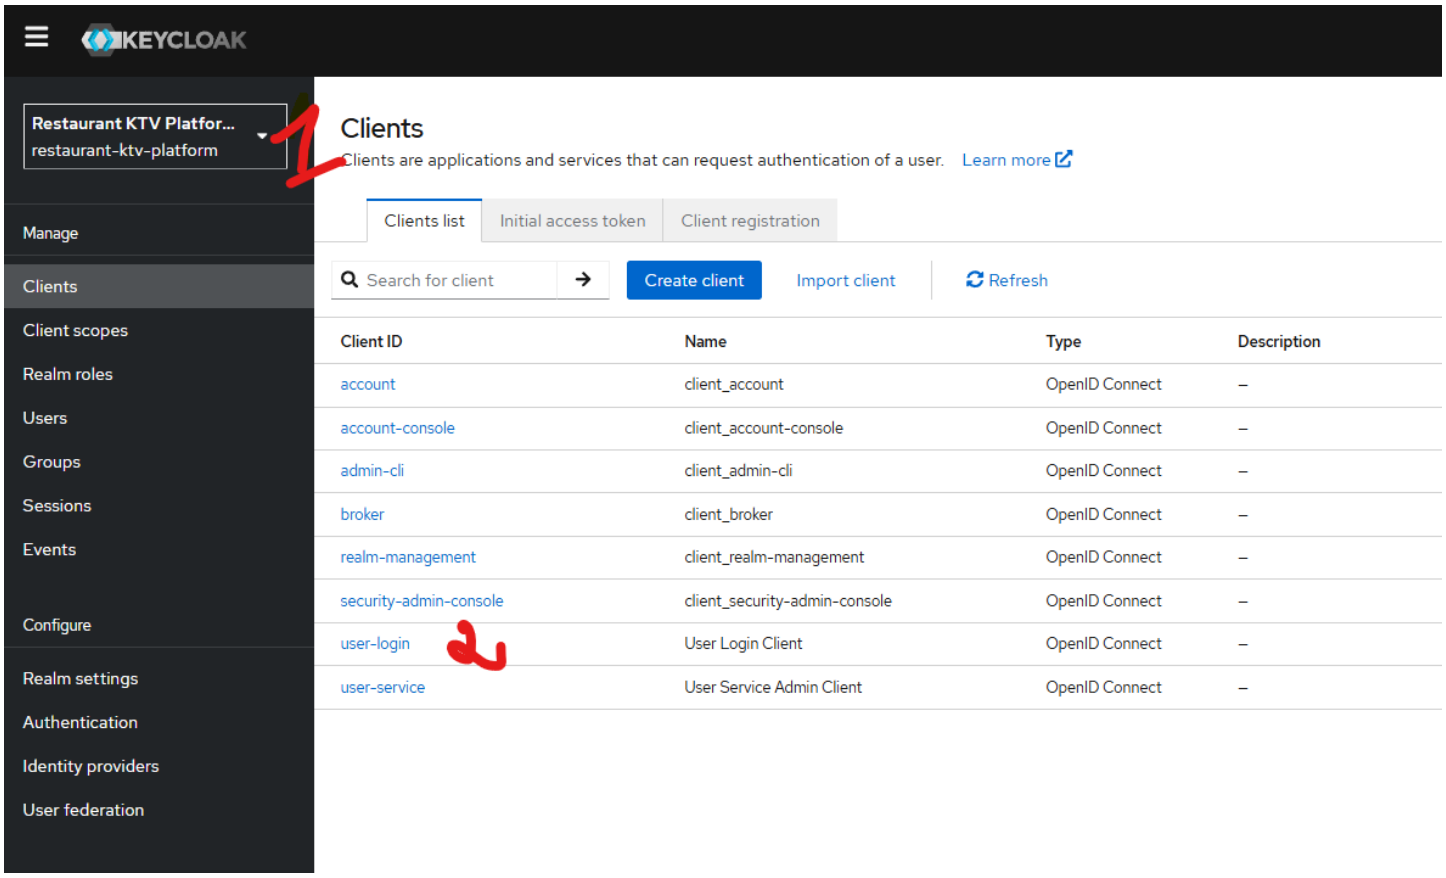

Configure a new mapper

Choose any of the mappings from this table

Claims parameter with value ID Token	Claims specified by Claims parameter with value are put into an ID token.
Group Membership	Map user group membership
Hardcoded claim	Hardcode a claim into the token.
Hardcoded Role	Hardcode a role into the access token.
Nonce backwards compatible	Adds the nonce claim to Access, Refresh and ID token
Organization Membership	Map user Organization membership
Pairwise subject identifier	Calculates a pairwise subject identifier using a salted sha-256 hash and adds it to the 'sub' claim. See OpenID Connect specification for more info about pairwise subject identifiers.
Role Name Mapper	Map an assigned role to a new name or position in the token.
Session State (session_state)	Add Session State (session_state) claim
Subject (sub)	Add Subject (sub) claim
User Address	Maps user address attributes (street, locality, region, postal_code, and country) to the OpenID Connect 'address' claim.
User Attribute	Map a custom user attribute to a token claim.
User Client Role	Map a user client role to a token claim.
User Property	Map a built in user property (email, firstName, lastName) to a token claim.
User Realm Role	Map a user realm role to a token claim.
User Session Note	Map a custom user session note to a token claim.
User's full name	Maps the user's first and last name to the OpenID Connect 'name' claim. Format is <first> + ' ' + <last>

Clients › Client details › Dedicated scopes › Mapper details

Add mapper

If you want more fine-grain control, you can create protocol mapper on this client

Mapper type	User Attribute ✓
Name *	platform_user_id ✓
User Attribute	platform_user_id ✓
Token Claim Name	platform_user_id
Claim JSON Type	String
Add to ID token	On
Add to access token	On ✓ must
Add to lightweight access token	Off
Add to userinfo	On
Add to token introspection	On
Multivalued	Off
Aggregate attribute values	Off

After logging in again


```
      ]
    }
  },
  "scope": "profile email",
  "email_verified": false,
  "name": "Thida Chan",
  "preferred_username": "thida@gmail.com",
  "given_name": "Thida",
  "family_name": "Chan",
  "email": "thida@gmail.com",
  "platform_user_id": "287a06a7-e5ec-4762-b428-bbd02ff051bf"
}
```