
How to move the method from one platform to another platform

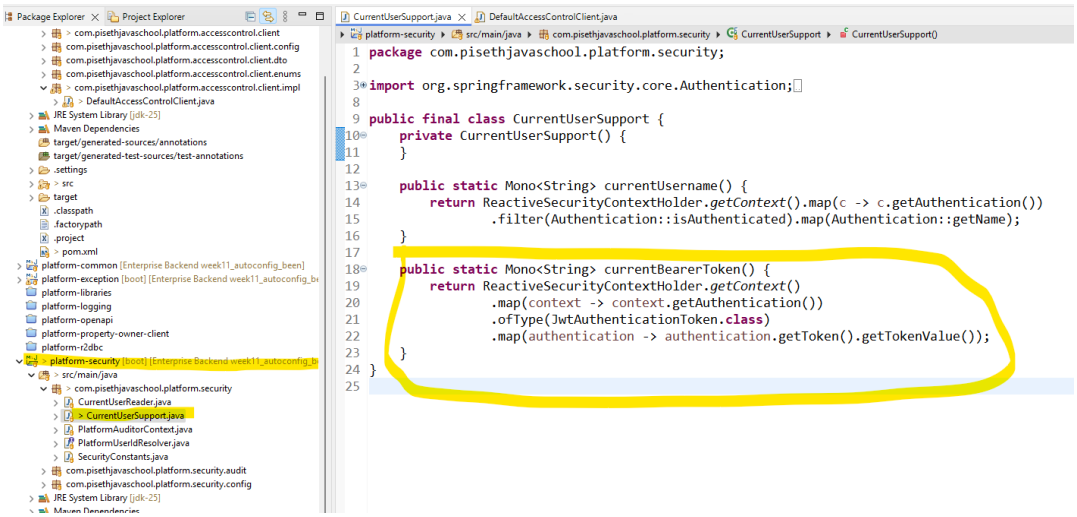

We move the currentBearerToken to the Security platform.
>> mvn clean install to create

- Dependency:

```xml
<dependency>
    <groupId>com.pisethjavaschool.platform</groupId>
    <artifactId>platform-security</artifactId>
    <version>${project.version}</version>
</dependency>
```

Go to where we want to remove the code: but first we need to add the library first to that platform.

```
    }

    @Override
    public Mono<Boolean> hasPermission(UUID userId, String permissionCode, AccessScopeType scopeType, UUID scopeId) {
        var body = new PermissionCheckRequest(userId, permissionCode, scopeType, scopeId);
        return currentBearerToken().defaultIfEmpty("").flatMap(token -> {
            WebClient.RequestBodySpec request = webClient.post().uri(rootPath + "/check-permission");
            if (!token.isBlank()) {
                request.headers(headers -> headers.setBearerAuth(token));
            }
            return request.bodyValue(body).retrieve().bodyToMono(PermissionCheckResponse.class);
        }).map(PermissionCheckResponse::allowed);
    }

    private Mono<String> currentBearerToken() {
        return ReactiveSecurityContextHolder.getContext()
                .map(context -> context.getAuthentication())
                .ofType(JwtAuthenticationToken.class)
                .map(authentication -> authentication.getToken().getTokenValue());
    }
}
```

Then we remove this function : currentBearerToken

```java
@Override
public Mono<Boolean> hasPermission(UUID userId, String permissionCode, AccessScopeType scopeType, UUID scopeId) {
    var body = new PermissionCheckRequest(userId, permissionCode, scopeType, scopeId);
    return CurrentUserSupport.currentBearerToken().defaultIfEmpty("").flatMap(token -> {
        WebClient.RequestBodySpec request = webClient.post().uri(rootPath + "/check-permission");
        if (!token.isBlank()) {
            request.headers(headers -> headers.setBearerAuth(token));
        }
        return request.bodyValue(body).retrieve().bodyToMono(PermissionCheckResponse.class);
    }).map(PermissionCheckResponse::allowed);
}
```

យើងធ្វើការ ហៅ function នឹងមកប្រើដោយធ្វើការ ឈ្មោះ class then . method នឹងតាមក្រោយ។