
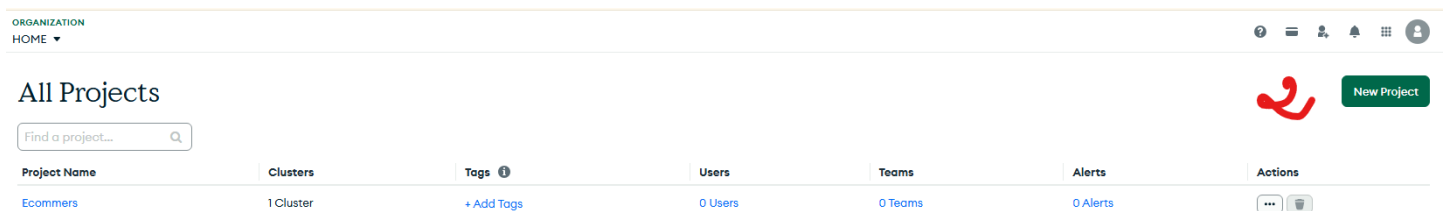
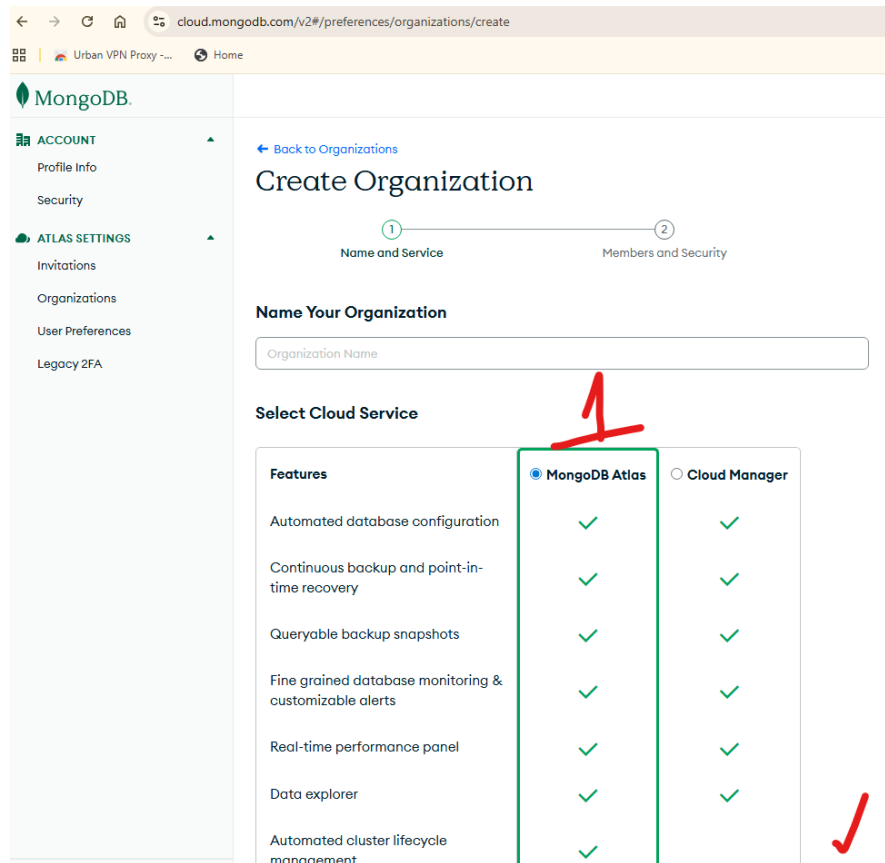


Create MongoDB includes

1-Link :

<https://cloud.mongodb.com/v2#/preferences/organizations>

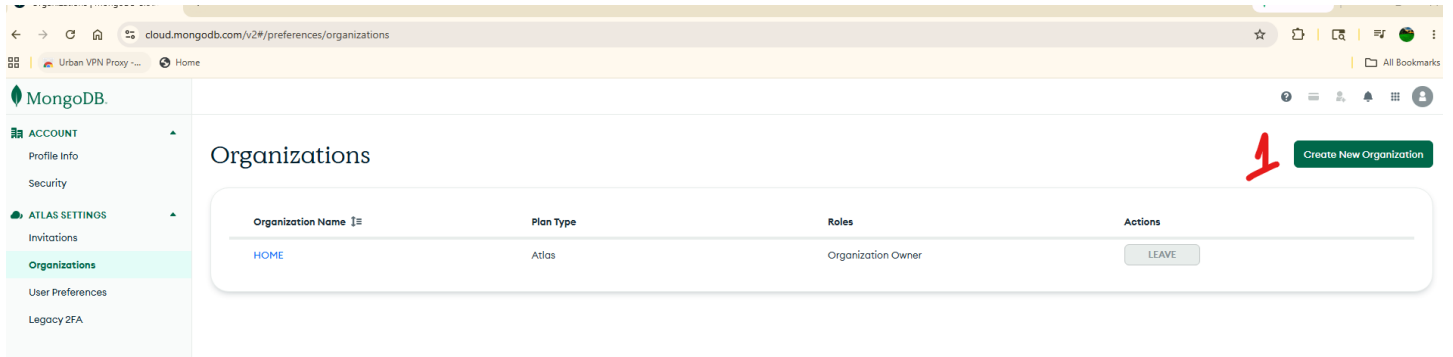

Create a Project

1

2

Name Your ProjectAdd Members

Name Your Project

Project names have to be unique within the organization.

Ecommerr1

Add Tags (Optional)

Use tags to efficiently label and categorize your projects. A project can have a maximum of 50 tags. You can modify tags for the project later. [Learn more](#)

Key	Value	Actions
Select a key or enter your own	: Select a value or enter your own	
+ Add tag		
0 TAGS		

Cancel

Next2

Then we can get the Clusters

MongoDB Atlas

Project Overview

DATABASE

- Clusters1
- Search & Vector Search
- Data Explorer
- Backup

STREAMING DATA

- Stream Processing
- Triggers

SERVICES

- AI Models
- Migration
- Data Federation
- Visualization

SECURITY

- Security Quickstart
- Project Identity & Access
- Database & Network Access
- Activity Feed

ORGANIZATIONHOME

PROJECTEcommers

Ecommers Overview

Clusters

Create cluster

users-db

Connect

Edit configuration

Data Size: 0 B / 512 MB 0%

Browse collections

View monitoring

View Query Insights

+ Add Tag

Application Development

Get connection string

Select

Search

Vector Search

Query & Aggregation

Data Visualization

Your connected applications will appear here along with optimization best practices and features for your drivers. Don't see your apps? [Get updated connection string.](#)

We can connect with Driver: Java, Python etc

Connect to users-db



Connect to your application

1



Drivers

Access your Atlas data using MongoDB's native drivers (e.g. Node.js, Go, etc.)



Access your data through tools



Compass

Explore, modify, and visualize your data with MongoDB's GUI



Connect to users-db



Connecting with MongoDB Driver

1. Select your driver and version

We recommend installing and using the latest driver version.

Driver

1

Java

Version

5.1 or later

2. Install your driver

[View MongoDB Java Driver installation instructions.](#)

3. Add your connection string into your application code

Use this connection string in your application

☒ SRV Connection String

☐ View full code sample

mongodb+srv://vibollong:<db_password>@users-db.ickyu.mongodb.net/?appName=users-db



✓

Replace `<db_password>` with the password for the `vibollong` database user. Ensure any option params are [URL encoded](#).

RESOURCES

[Get started with the Java Driver](#)

[Java Starter Sample App](#)


[Access your Database Users](#)

[Troubleshoot Connections](#)

Go Back

Done

Create User:

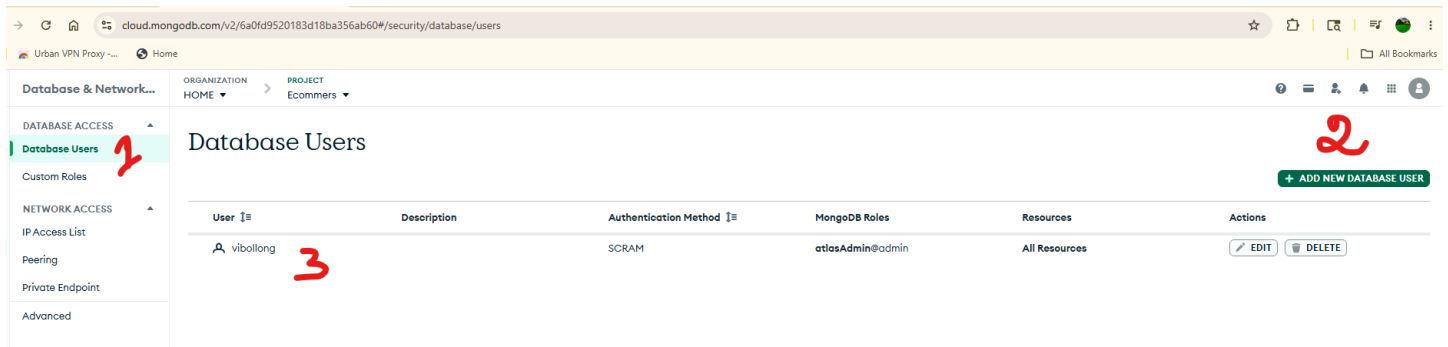

Add New Database User

Create a database user to grant an application or user access to databases and collections in your clusters in this Atlas project. Granular access control can be configured with default privileges or custom roles. You can grant access to an Atlas project or organization using the corresponding [Access Manager](#)

Authentication Method

Password

Certificate

AWS IAM

Federated Auth (MongoDB 7.0 and up)

MongoDB uses [SCRAM](#) as its default authentication method.

Password Authentication

Enter username, e.g. new-user_31

Enter password

SHOW

Autogenerate Secure Password

Copy

User Description

Add an optional description to your user.

Application.yaml

server:

port: 8082

spring:

application:

name: user-service

mongodb:

uri: "mongodb+srv://vibollong:qNnH3fGfubMg0Iv3@users-db.ickye0u.mongodb.net/user-service?retryWrites=true&w=majority&appName=users-db"

Dependancy

```
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-data-mongodb</artifactId>
</dependency>
```

Repository

```
@Repository
public interface UserRepository extends MongoRepository<User, String> {
}
```

Model

```
import lombok.NoArgsConstructor;

@Data
@Builder
@NoArgsConstructor
@AllArgsConstructor
@Document(collection = "users")
public class User {

    @Id
    private String id;

    private String firstName;

    private String lastName;

    @Indexed(unique = true)
    private String email;

    private String phone;

    @Builder.Default
    private UserRole role = UserRole.CUSTOMER;

    private Address address;

    @CreatedDate
    private Instant createdAt;

    @LastModifiedDate
    private Instant updatedAt;
}
```